
Description of the Business Document

This documentation contains file-specific information.

Attributes

Key word	Value
Name	/Sinacofi_C49_F1/Business Documents/ArchivosMomentaneos/C49_Archivo_Datos_Val.bdoc
Last modified	-0400
Label	
Business document type	Flat File
Parent delimiter	Fixed
Parent delimiter value	
Leaf element delimiter	Fixed
Leaf element delimiter value	
Open quote character	
Closed quote character	
Escape character	
Decimal character	
Encoding	iso8859
Trim	None
Truncate	FALSE
Pad reals with a leading and trailing zero	FALSE
Keep decimal separator character	TRUE
Keep decimal separator	TRUE
Keep + sign for positive real numbers	FALSE
Keep + sign for positive integer numbers	FALSE
Keep number of fractional digits	TRUE
Keep number of date characters	TRUE

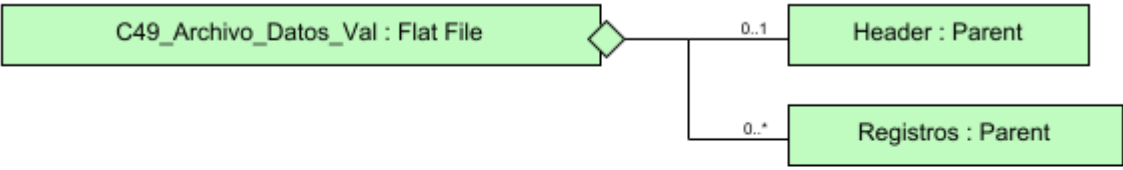
Content

Elements


Validation rules

Dependencies


Flat File : C49_Archivo_Datos_Val

UML Diagram										
Name	Name	Cardinality	Class	Data type	Definition	Default value	Label	Delimiter	Delimiter value	Alternative delimiter value
	Header	0-1					Root	Implicit		
	Registros	0-N						Implicit		

Parent : Header

UML Diagram										
Cardinality	0..1									
Name	Name	Cardinality	Class	Data type	Definition	Default value	Label	Delimiter	Delimiter value	Alternative delimiter value
	Datos	0-1	S - String	string (len)	99999			String	0x0a	!EOF!

Parent : Registros

UML Diagram										
Cardinality	0..*									
Name	Name	Cardinality	Class	Data type	Definition	Default value	Label	Delimiter	Delimiter value	Alternative delimiter value
	Contenido	0-1	S - String	string (len)	99999			String	0x0a	!EOF!

Validation rules

[Elements](#)
[Dependencies](#)

Name	Expression
InstanciarVariables	<pre> %Sinacofi_C49_F1.indice:=index(getAttribute("B2BXGIReceive_Consumpt %Sinacofi_C49_F1.indice2:=index(getAttribute("B2BXGIReceive_Consump %Sinacofi_C49_F1.indice3:= index(getAttribute("B2BXGIReceive_Consum %Sinacofi_C49_F1.tipoDocumentoPrefijo:= getSubString(getAttribute(" %Sinacofi_C49_F1.correlativoPrefijo:= getSubString(getAttribute("B2 %Sinacofi_C49_F1.usuarioNAPrefijo:= getSubString(getAttribute("B2BX %Sinacofi_C49_F1.usuarioPrefijo:= getSubString(%Sinacofi_C49_F1.usua %Sinacofi_C49_F1.TipoArchivo:= "Archivo de datos"; if (1=1) then True </pre>
Validation_V1_code65	<pre> %Sinacofi_C49_F1.CodigoError:= "085"; %Sinacofi_C49_F1.Detalles2:="Lineas: "; %Sinacofi_C49_F1.Detalles3:="Lineas: "; %Sinacofi_C49_F1.indiceLoop:=1; loop on \Registros{ %Sinacofi_C49_F1.indiceLoop:=%Sinacofi_C49_F1.indiceLoop+1; if(Sinacofi_C49_F1.GetLargoRegistroByTD(%Sinacofi_C49_F1.tipoDocume then{ %Sinacofi_C49_F1.Detalles2:=%Sinacofi_C49_F1 }; if (not(getSubString(this\Contenido,11,1) in ("1", then{ %Sinacofi_C49_F1.Detalles3:=%Sinacofi_C49_F1 } }; if (%Sinacofi_C49_F1.Detalles2<>"Lineas: ") then{ %Sinacofi_C49_F1.var_error1:= Sinacofi_C49_F1.InsertErrorTBL %Sinacofi_C49_F1.correlativoPrefijo, "065", %Sinacofi_C49_F1.TipoArchivo & "-" & formatString(getDateAndTime(), "CCYY) }; if (%Sinacofi_C49_F1.Detalles3<>"Lineas: ") then{ %Sinacofi_C49_F1.var_error1:= Sinacofi_C49_F1.InsertErrorTBL %Sinacofi_C49_F1.correlativoPrefijo, "075", %Sinacofi_C49_F1.TipoArchivo & "-" & formatString(getDateAndTime(), "CCYY) }; True </pre>
Validation_code05_V2	<pre> %Sinacofi_C49_F1.CodigoError:= "005"; if(Sinacofi_C49_F1.GetEntidadByCasilla(%Sinacofi_C49_F1.usuarioPrefi then { %Sinacofi_C49_F1.var_error1:= Sinacofi_C49_F1.InsertErrorTBL %Sinacofi_C49_F1.correlativoPrefijo, %Sinacofi_C49_F1.CodigoError, %Sinacofi_C49_F1.TipoArchivo, formatString(getDateAndTime(), "CCYY'-'MM'-'DD hh':') }; True </pre>
	<pre> %Sinacofi_C49_F1.CodigoError:= "074"; %Sinacofi_C49_F1.agno:= convertToI(getSubString(\Header\Datos, 8, 4 </pre>

Validation_code74_V5	<pre> %Sinacofi_C49_F1.mes:= convertToI(getSubString(\Header\Datos, 12, 2 %Sinacofi_C49_F1.dia:= convertToI(getSubString(\Header\Datos, 14, 2 if (%Sinacofi_C49_F1.agno < 1951 or (%Sinacofi_C49_F1.mes < 1 or %Sinacofi_C49_F1.mes > 12) or (%Sinacofi_C49_F1.dia <1) or ((%Sinacofi_C49_F1.mes in (1, 3, 5, 7, 8, 10, 12) and or (%Sinacofi_C49_F1.mes in (4, 6, 9, 11) and (%Sina or (%Sinacofi_C49_F1.mes = 2 and (((%Sinacofi_C49_F1.agno / 4 = convertToI(%Sinacofi_C49_F1.agno /) or ((%Sinacofi_C49_F1.agno / 4 <> convertToI(%Sinacofi_C49_F1.)) then { %Sinacofi_C49_F1.var_error1:= Sinacofi_C49_F1.InsertErrorTBL %Sinacofi_C49_F1.correlativoPrefijo, %Sinacofi_C49_F1.CodigoError, %Sinacofi_C49_F1.TipoArchivo, formatString(getDateAndTime(), "CCYY"-'MM'-'DD hh':'mm':'ss") } }; True </pre>
Validation_container	<pre> if (%Sinacofi_C49_F1.var_error1 <> "") then{ False }else{ True } </pre>

Dependencies

Elements

Validation rules

fct	/Sinacofi_C49_F1/Extended Objects/InsertErrorTBL.fct
var	/Sinacofi_C49_F1/Extended Objects/usuarioPrefijo.var
var	/Sinacofi_C49_F1/Extended Objects/dia.var
var	/Sinacofi_C49_F1/Extended Objects/mes.var
var	/Sinacofi_C49_F1/Extended Objects/correlativoPrefijo.var
var	/Sinacofi_C49_F1/Extended Objects/Detalles3.var
var	/Sinacofi_C49_F1/Extended Objects/CodigoError.var
var	/Sinacofi_C49_F1/Extended Objects/indiceLoop.var
var	/Sinacofi_C49_F1/Extended Objects/indice3.var
var	/Sinacofi_C49_F1/Extended Objects/indice.var
var	/Sinacofi_C49_F1/Extended Objects/agno.var
var	/Sinacofi_C49_F1/Extended Objects/Detalles2.var
var	/Sinacofi_C49_F1/Extended Objects/indice2.var
var	/Sinacofi_C49_F1/Extended Objects/TipoArchivo.var
var	/Sinacofi_C49_F1/Extended Objects/tipoDocumentoPrefijo.var
fct	/Sinacofi_C49_F1/Extended Objects/GetEntidadByCasilla.fct
fct	/Sinacofi_C49_F1/Extended Objects/GetLargoRegistroByTD.fct
var	/Sinacofi_C49_F1/Extended Objects/usuarioNAPrefijo.var
var	/Sinacofi_C49_F1/Extended Objects/var_error1.var

Creation Date: October 7, 2024

Generated with Mapping Services

Axway