POLITECNICO DI MILANO

Department of Electronics, Information, and Bioengineering Computer Science Engineering



 $\begin{array}{c} \textbf{Software Engineering 2} \\ \text{eMall - e-Mobility for All} \end{array}$

Group components: Roberto **CIALINI**Umberto **COLANGELO**Vittorio **LA FERLA**

Academic Year 2022-2023

Contents

1	Introd	uction]
1.1	Purpos	se	1
	1.1.1	Goals	2
1.2	Scope		2
	1.2.1	World Phenomena	•
	1.2.2	Shared Phenomena	•
1.3	Definit	cions, Abbreviations	4
	1.3.1	Definitions	4
	1.3.2	Abbreviations	4
1.4	Revisio	on History	4
1.5	Refere	nce Documents	4
1.6	Docum	nent Structure	4
2	Overal	l description	6
2.1 Product perspective		ct perspective	6
	2.1.1	Scenarios	6
	2.1.2	Class diagram	8
	2.1.3	State Charts	Ć
2.2	Produ	ct functions	11
	2.2.1	Let Drivers know the charging stations nearby, their cost, special	
		offers available and book a charge	11
	2.2.2	Let Drivers start the charging process, be notified when it ends	
		and pay for the service	12
	2.2.3	Let Administrator change the DSO , monitor the performance and	
		statistic for every station and modify energy mix, price and special	
		offers for every station	13
2.3	User c	haracteristics	13
2.4	Assum	aptions, dependencies and constraints	14
	2.4.1	Domain assumptions	14
3	Specifi	c Requirements	15

3.1	Extern	nal Interface Requirements	15
	3.1.1	User Interfaces	15
	3.1.2	Hardware Interfaces	15
	3.1.3	Communication Interfaces	15
3.2	Functi	onal Requirements	17
	3.2.1	Mapping on Goals	19
	3.2.2	Use cases	19
	3.2.3	Use case diagrams	27
	3.2.4	Sequence diagram	30
	3.2.5	Mapping on requirements	46
3.3	Perfor	mance Requirements	46
3.4	Design	a Constraints	46
	3.4.1	Standard compliance	46
	3.4.2	Hardware limitations	47
3.5	Softwa	are System Attributes	47
	3.5.1	Reliability	47
	3.5.2	Availability	47
	3.5.3	Security	48
	3.5.4	Maintainability	48
	3.5.5	Portability	48
4	Forma	l Analysis	49
4.1	Alloy	Code	49
	4.1.1	First model	57
	4.1.2	Second model	57
	4.1.3	Dynamic model	58
5	Effort	spent	59
	5.0.1	Roberto Cialini	59
	5.0.2	Umberto Colangelo	59
	5.0.3	Vittorio La Ferla	59
c	D -f		co

1 Introduction

1.1 Purpose

Nowadays sustainability is one of the most important and debated topics in our society. In fact, in the next few years we are going to deal with a huge green transition to limit our carbon footprint on the planet, such as in the transportation field, which finds itself as one of the main contributors of global warming. In this direction, in recent years the old motor vehicles running on gasoline are leaving space for electric powered vehicles, even though there are several central aspects to deal with in order to let the electric vehicles be competitive with the old vehicle generation.

In this direction, the goal is to create a fully operative and diffused infrastructure for the fast charging of the batteries, which is one of the main limitations for the final customer. In fact, the batteries need to be charged often and nowadays the task of finding an available charging spot is not as easy as it seems.

With this issue in mind, *eMall* is an operating system, itself composed of two subsystems, whose goal is to offer a way to find available charging stations for electric vehicles, offering at the same time to the user the possibility to access to several features such as the reservation of a specific socket at a certain timeframe or the reception of personalised proactive suggestions by the system.

This document will further explain in detail goals and requirements put on the system to be with this purpose of guiding the development.

1.1.1 Goals

Requirements	Description	
G1	Allow Drivers to find available charging stations, the nearest	
	ones, their energy cost per unit (MW/h), any special	
	offer they have, their available sockets and a path to reach	
	the selected one	
G2	Allow Drivers to book the desired charging station for a certain	
	timeframe and possibly cancel it	
G3	Allow Drivers to start and monitor the charging process at a	
	certain station and to be notified when the charging process is	
	finished	
G4	Allow Administrators to track data regarding internal and external status of each charging station	
G5 Allow the Administrators to manually or automatically of		
	each station where to get energy for charging (station battery,	
	DSO, or a mix)	
G6	Allow Administrators to have access to DSOs information about the	
	current price of energy and to decide from which to acquire energy	
G7	Allow Drivers to receive recommendations based on the status of	
	the battery of his active vehicle, the schedule of the user and	
	his current position	

1.2 Scope

While there are several stakeholders to consider, this document is only concerned about two actors: Drivers and Administrators. The Driver is the final user, the one who interacts with the eMSP to have the possibility of booking recharges for his vehicles. Instead the role of the system Administrator mainly concerns to monitor the correct behaviour of the system and to take strategic decisions.

The main system is divided into two subsystems: the *eMSP* and *CPMS*. The *eMPS* is designed to be an interface and to communicate both with the Driver and the Administrator, driving their requests. The *CPMS*, instead, is modelled on the *OCPI 2.2.1* protocol and is used to manage the IT infrastructure of a specific *CPO*. The main task of the *CPMS* is to supply information about its *CPO* charging stations to the *eMSPs* it is linked to, both for the Driver and the Administrator usage.

Although *CPO* and *DSO* are mentioned in this document along with the other entities described before, we will not consider either their internal system or their decision

making.

This application is supposed to work properly in every situation in which are well defined the previously mentioned rules, with no limitation to the metropolitan areas.

1.2.1 World Phenomena

Identifier	Description	
WP1	Charging stations are owned by a <i>CPO</i> , can have a stationary battery	
	and provide energy through sockets of different speeds	
WP2	DSOs provide energy to CPOs stations	
WP3	Drivers use the charging stations to charge their vehicle	
WP4	CPO Administrators manage their CPMS	

1.2.2 Shared Phenomena

Identifier	Description		
SP1	User registers an account		
SP2	Users pays the cost for charging		
SP3	User chooses the charging station he prefers from the available ones		
SP4	Administrators have access to the all the data regarding their <i>CPMS</i>		
SP5	User books for a specified amount of time a socket in a charging		
	station		
SP6	System visualises data about recharging station based on the CPO		
	information		
SP7	User decides to end the charge of the battery		
SP8	System makes recommendation on the best charging station available		
SP9	System sends notification to user		
SP11	Administrators manually or automatically select from which DSO to		
	acquire energy from		
SP11	Administrators manually or automatically select for each station		
	where to get energy		
SP12	System is notified when the battery is fully recharged		

1.3 Definitions, Abbreviations

1.3.1 Definitions

Definitions	Description	
Driver Identifier	To identify a specific driver, this could be an	
	identification number such as her/his SSN	
Car Identifier	To identify a specific car, this could be the	
	licence plate	
Station Identifier	To identify a specific charging station	

1.3.2 Abbreviations

Abbreviations	Definitions
RASD	Requirements Analysis and Specification Document
WP	World Phenomena
SP	Shared Phenomena
GX	Goal number X
DX	Domain assumption number X
RX	Requirements number X
GPS	Global Positioning System
eMall	e-Mobility for All
EV	Electric Vehicle
Driver	Electric vehicle driver
Administrator	CPO administrator

1.4 Revision History

Version 1.1.0

1.5 Reference Documents

The specification document "Assignment RDD AY 2022-2023_v3.pdf"

1.6 Document Structure

This document is composed of six sections, detailed below.

In the first section the problem is introduced together with the goals of the project. Additionally, the scope of the project is specified along with the various phenomena occurring. Lastly, the necessary information to read the report is presented, such as definitions and abbreviations.

Section two contains an overall description of the system, including a detailing of its users and main functions. Moreover there is the class diagram, descriptions of several scenarios, some statecharts and finally the domain assumptions made in this report.

In section three the requirements on the system are specified. This includes functional requirements, non-functional requirements and requirements on external interfaces. Furthermore use cases are described, with accompanying use cases and sequence diagrams. Section three also contains mappings of functional requirements to the goals of the system and to the use cases.

Section four contains a formal analysis with the help of Alloy. Together with the Alloy code, the analysis objective is described.

In section five is shown the total effort spent by each of the project members.

Section six contains the references used.

2 Overall description

2.1 Product perspective

2.1.1 Scenarios

1. Electric vehicle Driver starts using the system

The electric vehicle driver Mike wants to register to the service and have access to the several facilities it offers, such as finding a charging station and charging his vehicle outdoors. He launches the service and chooses to sign up, fulfilling the mandatory information required to access the service (name, surname, email address, password and licence plate of his vehicle) and accepting the localization and calendar access conditions.

2. Electric vehicle Driver setting personalised data

Mike, an electric vehicle driver, once he has registered to the system using his credentials, by selecting his profile and then from the section "Change active vehicle", chooses one of his vehicles and set it to be his Active Vehicle. In this way, the system automatically filters the stations according to the vehicle information, meaning that will show as clickable only the stations that have the socket compatible with his Active Vehicle.

3. Electric vehicle Driver wants to book a charging station

Mike is an electric vehicle driver who needs to charge his car. After he logs in into the system using his user credentials, he has access to the homepage where all the stations available are displayed. The user can also decide to filter the station by selecting the feature he needs the most. Once John has selected the station, he can select an available socket and timeframe. He then clicks on "Book Now" to reserve the slot for a certain timeframe. Jack, another user that needs to charge his vehicle in the same period of time, won't be able to book the same socket and will see it as already engaged.

4. Electric vehicle Driver wants to start the charging process

Lucy, an electric vehicle driver, wants to charge her car. Once she has reached the

parking spot and has plugged in the vehicle, she logs into the system with her user credentials and by clicking on her reservation, in the section "My Reservations", by selecting "Start Charging", she confirms to begin the charging process. Lucy can also monitor in live the progress.

5. Electric vehicle Driver pays for the charge

Mike is logged into the system and has received the notification of the complete charge of his vehicle. Afterwards, he receives the notification of the correct payment, using the Active Payment Method previously selected in his profile.

6. Electric vehicle Driver accepts a recommendation

Mike, after logging into the system, has access to the "My Recommendations" page, where the system recommendations are shown. After selecting a recommendation he likes, he clicks on "Accept Recommendation" to book the corresponding reservation. After that, the reservation will be shown in the "My Reservations" page, along with the others he previously created.

7. CPO Administrator monitoring station status

A *CPO* employee, with station administration tasks, logs into the system using his administrator credentials. In the main page he has access to the stations of his company connected to the system back-end infrastructure. By selecting one of them, he can monitor the status, such as electricity and free slots available, current prices and if the station is properly working. He can also analyse the performance of the station in the last 6 months.

8. CPO Administrator taking decisions

The stations administrator Mike logs into the system using his administrator credentials. After he has selected a charging station, Mike can visualise its performance, can choose the energy mix used to charge the vehicles between the *DSO* and the one retrieved from the stationary battery (if present). Moreover, Mike can modify the *DSO* from which to take energy, analysing the offered price. The administrator can also choose to set these decisions to be automatized by the *CPMS*.

2.1.2 Class diagram

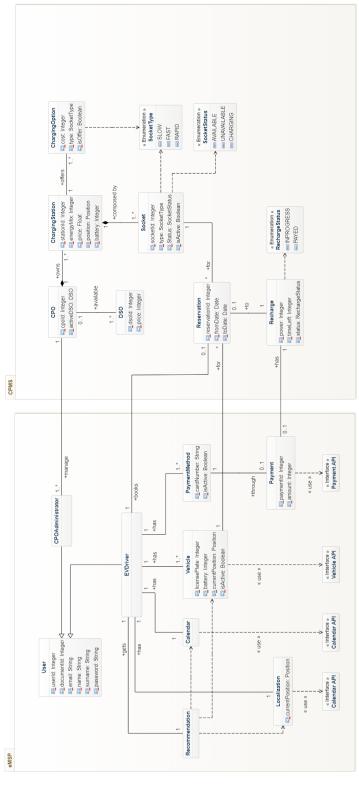


Fig. 1: UML diagram for eMall.

2.1.3 State Charts

1. Sign In and Sign Up

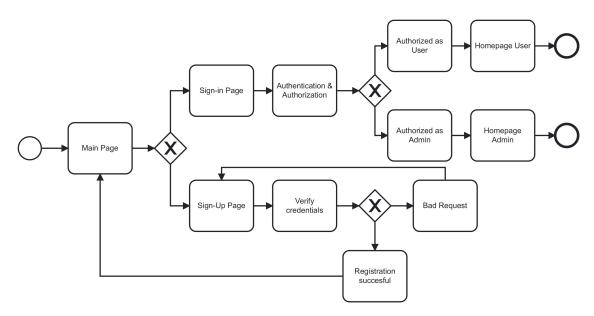


Fig. 2: Sign In and Sign Up.

The state diagram summarises the sign-in and sign-up actions. Once the Driver enters the Main Page, he can decide if he wants to register or to login, while the Administrator can only login. If the user chooses the login, depending on his authorizations, he is redirected to the Driver or Administrator main page.

2. Book a station

The EV Driver can decide which station he wants to book from two different pages. The Home Page shows a list of the available stations that can be sorted by distance, price, while the Map Page displays all the available stations on the map, including the Driver position.

3. Driver reach a station




Fig. 3: Driver book a station



Fig. 4: Reach a station

Once the Driver is logged in, the first page displayed is Station Page. Afterwards, the Driver can set on his device's Maps the path to reach the station, clicking on the devote button on the station he wants to reach.

4. Administrator access to the system

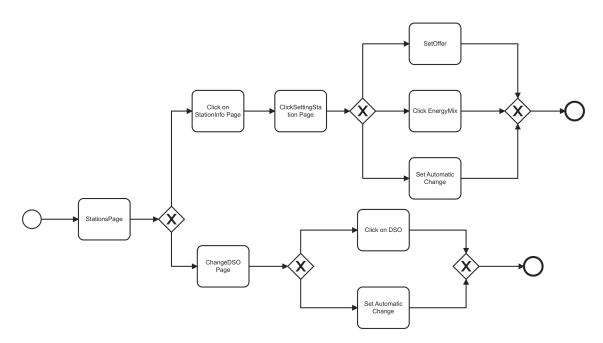


Fig. 5: Administrator access to the system

Here are described all the possible actions that the Administrators can do. The Administrator section has two main pages, the Stations Page where, clicking on a specific station there are displayed the main statistics and information (retrieved from the *CPMS* and processed by the *eMSP*). Then, he can manage the single station settings (offers, energy mix). Otherwise, he can go to the ChangeDSO Page.

2.2 Product functions

In this section the main functionalities of eMall are described in more detail:

2.2.1 Let Drivers know the charging stations nearby, their cost, special offers available and book a charge

One of the most important aspects of the system is the ability of the drivers to know the location of nearby charging stations: this will be achieved throughout the visualisation

of an interactive map shown in the "Map Page", that thanks to the driver's GPS, will show the current user location as well as the real time data regarding the charging stations nearby. In the "Main Page" a list of all available charging stations is shown. The user can sort the charging stations by applying filters to the list, such as cost, travel distance and presence of special offers available. The user will be able to select a charging station to obtain more details regarding it and if it has an available socket, he will be able to book it for a charge in a certain time frame, depending on the ones available. After booking a charge, the user will have a certain period of time to show up at the charging station and start the charging process, otherwise the reservation previously booked will be cancelled. In case a special offer is present, the user will be notified through the presence of a special message on the charging stations promoting the offer. Furthermore, when selecting a charging station, the offer details will be shown.

2.2.2 Let Drivers start the charging process, be notified when it ends and pay for the service

After a driver reaches the station and parks his EV in the designated area, he can connect it to the charging station's socket he previously booked. After selecting the corresponding reservation, the driver can click the "Start Charging" button to start the charging process. After checking that the user has a valid payment method linked to his account, the charging process starts. The user will be able to monitor the current status of the battery and the estimated time left for the charging to complete. The user will be free to stop the charging process anytime through the app. After the charging process ends the payment will be automatically debited from the user's account. When the vehicle battery is completely charged, the user will be notified through a notification on his device and will have a certain period of time to disconnect his EV and leave the charging spot free.

2.2.3 Let Administrator change the DSO, monitor the performance and statistic for every station and modify energy mix, price and special offers for every station

The system is designed to allow a simultaneous interaction between different CPO Administrators with their own *CPMS*, by which are stored and retrieved data about the stations they manage. The Administrator has the possibility to change the *DSO* from which to acquire energy or to let the *CPMS* to automatically set the energy supplier, based on the cost of electricity. Moreover, the Administrator has the possibility to manually or automatically set energy mix, price and special offers for every single station he manages. The Administrator can also visualise informations and performance of a certain station, like the presence of a stationary battery, availability and type of the sockets and other details useful in the decision making process, such as average customers usage, average energy price and average energy mix of the last 6 months.

2.3 User characteristics

The following three actors are considered in the *eMall* systems.

1. Unregistered electric vehicle driver

A driver that needs to register to the eMall platform before being able to use any of its functionalities.

2. Electric vehicle driver

A registered user that uses the system to find the charging stations nearby, their cost and any special offer they have. He can also book a charge for a certain timeframe and monitor the live status of the charging process

3. CPO stations administrator

A registered user, working as stations administrator for a specific *CPO*. He is able to monitor the status of his charging stations, to take decisions about the energy supplier of the stations and to manage the offers shown to the customers for each station.

2.4 Assumptions, dependencies and constraints

2.4.1 Domain assumptions

Identifier	Description		
D1	There exists an API where user credentials can be verified (licence		
	plate,email)		
D2	There exists an API where the correct map and driver device GPS		
	can be retrieved		
D3	There exists an API where updated DSO prices can be retrieved and		
	the DSO can be selected for energy acquirement		
D4	When a Driver disconnects his EV from the socket he utilised, he		
	immediately leaves the parking area.		
D5	Users insert their personally identifiable information into the		
	system		
D6	CPO Administrators have access to an already existing account on		
	eMall		
D7	Users give the system the authorization to access personal data		
	regarding their EV, current position and calendar		
D8	Energy is supplied correctly from DSOs to CPOs charging stations		
D9	Users give the system the authorization to access personal data		
	regarding their EV, current position and calendar		
D10	The Drivers respect the reservations made by showing up at the		
	charging station booked on time.		
D11	All the vehicles are supposed to have a Universal Socket		
	accepted by all the sockets		
D12	Users give the system the authorization to access personal data		
	regarding their EV, current position and calendar		
D13	The Drivers own the vehicles they use		
D14	The sockets, during the charge of a vehicle, can retrieve in real time		
	correct data regarding the current charging speed and battery vehicle		
7.7	status		
D15	Vehicles can only use sockets of the same or lower energy power		
	(vehicles with the rapid charge can use all types, vehicle with the fast		
	charge can only use fast and slow sockets, vehicle with slow charge can		
	only use slow sockets)		

3 Specific Requirements

3.1 External Interface Requirements

3.1.1 User Interfaces

The user interface of *eMall* is both a web and a mobile application that will be used both by EV Drivers and *CPO* Administrators. It should be available as much as possible and easy to use, in particular the mobile app interface, where Drivers search and make reservations for charging slots, has to be fast and user-friendly. On the other side, Administrators are supposed to have office PCs where to work on the system, so the web application has to be optimised and oriented towards data analysis through the use of specific accurate tools.

3.1.2 Hardware Interfaces

The system sets up from the necessity to handle multiple and simultaneous commands from different actors, which are driven in their decisions by the continuous upgrade of specific information from communication sources. Moreover, since the system has to be fully available both on the mobile and on the web application, the only hardware interface requirements are a web browser (or even better a mobile application store) and the possibility to provide geolocalization information to have access to all the offered features. The system also relies on the use of different sensors deployed to obtain data, such as vehicle battery percentage or the internal status of the charging stations. This data are supposed to be managed externally and it is assumed that there are specific APIs to retrieve data for eMall.

3.1.3 Communication Interfaces

The system is based on the management of many information sources to provide lots of its functionalities. Therefore, it is required to communicate with external information providers from where eMall retrieves data or services. In particular, there are different interfaces that eMall exploits, possibly through Web APIs, as previously explained in the assumptions.

1. Retrieval of data on EV battery status

The interface is able to respond with the current status of the battery, if there are malfunctions or not, the battery level both during the charging process and during its usage (in line with the goal of customization and the recommendations the system gives to the user).

2. Retrieval of data on charging station internal status

The interface is able to respond with the current internal status of the charging station, which means the mix of energy used (specifying the percentage from each source), the level of the storage of the stationary battery and the availability of each slot with its main information, such as the power provided (super fast, fast, slow).

3. Retrieval geolocalization data of EV Driver

The interface is able to provide in real time the current position (latitude and longitude) of the user device in the world map.

4. Retrieval of current world map

The interface is able to provide data regarding the map through which the system shows to the user its current location, the location of charging stations and a possible path to reach them.

5. Retrieval of data on EV driver schedule

The interface provides the information about the user's daily schedule, contained in his own calendar. Using this information, the system is able to give proper suggestions, about the best time in which to charge the EV, to the user.

6. Payment authorization and correct completion

The interface deals with the payment process, in particular with the validation of the credit/debit card, the authorization to proceed with the payment (given by the user through his online bank o similar methods) and the effective correctness of the transaction.

Moreover, there are communication protocols needed for the correct forwarding of in-

formation among the different subsystems and the physical infrastructures (charging stations and its components).

1. **OCPI**

This protocol is required in the communication between our subsystems: *eMSP* and *CPMS*. It is mainly used to provide charging station information (socket status and details, location and tariff), to book and to authorise the charging session.

2. **OCPP**

This protocol is required in the communication between *CPMS* and a specific charging station. The main information forwarded are the principal operative commands of the charging session (start/stop and current status) and diagnostic information/updates.

These protocols are supposed to work properly. Furthermore, the OCPP specifications, differently from the OCPI ones, are no longer described and modelled in this document.

3.2 Functional Requirements

Requirement	Description			
R1	The system shall allow an unregistered user to register an account			
R2	The system shall allow a registered Driver to insert one or more			
	EV and to set one of them as active			
R3	The system shall allow a registered Driver to insert and modify			
	one or more valid payment methods			
R4	The system shall allow a registered Driver to visualise the available			
	charging stations in the list view (sorted by the filter he selected)			
	or in the map view (together with his current position)			
R5	The system shall allow a registered Driver to view the available			
	charging stations (sorted by the filter he selected), visualising			
	its <i>CPO</i> owner, the current energy price, the distance from the user			
	location and the estimated time to reach it			
R6	The system shall allow a registered Driver to get information			
(CPO owner, current energy price, distance from the user lo				
	and estimated time to reach it) of a station clicking on it in			
	the map view			
R7	The system shall allow a registered user to book a socket at a			
	certain timeframe			
R8	The system shall allow a registered user to choose the desired			

	type of charging socket (slow, fast, rapid)			
R9	The system shall allow a registered user to view his reservations			
R10	The system shall allow a registered user to get the path to			
	reach a station starting from his reservation view or from the			
	station view (list and map)			
R11	The system shall allow a registered Driver to start the charging			
	process and to stop it			
R12	The system shall allow a registered Driver to view the live status			
	of the charging process and the remaining estimated time			
R13	The system shall notify the registered Driver when the chargin			
	process is finished			
R14	The system shall allow a registered Driver to view system's			
	recommendations			
R15	The system shall allow a registered Driver to accept one of the			
	recommendations			
R16	The system shall allow a registered Driver to cancel a reservation			
R17	The system shall allow a registered Administrator to view the			
	status of his <i>CPO</i> charging stations, including availability, <i>DSO</i> ,			
	energy price (for the CPO) and special offers			
R18	The system shall allow a registered Administrator to view status,			
	type, availability and special offers (if present) of each socket of			
	a certain charging station			
R19 The system shall allow a registered Administrator to view				
	the status of the stationary battery (if present) of a certain			
	charging station The system shall allow a registered Administrator to view the			
R20	The system shall allow a registered Administrator to view the			
	current energy mix (ground, stationary battery) used in			
	the charging process in a certain station			
R21	The system shall allow a registered Administrator to enable the			
	CPMS to automatically select active DSO and energy mix, energy			
	price (for the costumer) and special offers at a certain charging			
	station			
R22	The system shall allow a registered Administrator to manually			
	select active DSO and energy mix, energy price (for the costumer)			
Doo	and special offers at a certain charging station			
R23	The system shall allow a registered Administrator to view statistics			
	for a certain charging station, including average customers usage			
	and in which time slots, average energy price (both for <i>CPO</i> and			
D24	user), average energy mix used The gystem must be able to netify user of execution			
R24	The system must be able to notify user of exception The system must be able to notify user on suggestful action			
R25	The system must be able to notify user on successful action The system must store the history of charging stations performance.			
R26	The system must allow registered Driver to locin			
R27	The system must allow registered Driver to login The system must allow registered Administrator to login			
R28	The system must allow registered Administrator to login			

3.2.1 Mapping on Goals

Goal	Domain assumption	Requirement
G1	D1, D2, D3, D5, D13	R4, R5, R6, R8, R24 R25, R29
G2	D1, D2, D4, D10, D5, D13	R4, R5, R8, R9, R16, R24, R23, R24,
		R27
G3	D7, D8, D9, D11, D12, D13, D14, D15	R7, R9, R10, R22, R23, R24, R27
G4	D3, D6	R17, R18, R19, R20, R21, R22, R25,
		R26, R28
G5	D3, D6	R17, R18, R19, R20, R21, R22, R23,
		R24, R25, R26, R28
G6	D3, D6	R17, R21, R22, R23, R24, R25, R26,
		R28
G7	D1, D2, D3, D5, D13	R2, R14, R15, R16, R24, R25, R27

3.2.2 Use cases

1. Driver registration

d is on the
n
valid pay-
rd and the
to add
the geolo-
ly schedule
L
nows a suc-
latory data
d payment
n to access
ce plate
splaying an

2. User login to eMall

Actor	Driver or Administrator		
Entry conditions	The Driver or the Administrator is on the main page		
	of the		
	system		
Events flow	1. The Driver/Administrator clicks on the "Sign In"		
	2. The Driver/Administrator enters email and pass-		
	word		
	3. The Driver/Administrator clicks on the submit		
	button		
	4. <i>eMall</i> processes the information and redirects the		
	Driver or the Administrator to the relative Stations		
	Page		
Exit conditions	The Driver or the Administrator logs in		
Exceptions	1. The Driver/Administrator does not enter a cor-		
	rect password for the email/authentication code		
	2. The email does not exist in the system		
	3. The Driver enters a non-existing licence plate		
	• In all cases <i>eMall</i> notifies the User displaying an		
	error message		

3. Driver adds new vehicle

Actor	Driver	
Entry conditions	The Driver is logged into the system and is in Sta-	
	tions Page	
Events flow	1. The Driver clicks on UserProfile Page	
	2. The Driver clicks on "Enter new vehicle"	
	3. The Driver enters the licence plate of his vehicle.	
	4. <i>eMall</i> processes the information and shows a suc-	
	cess message	
Exit conditions	The Driver has a new vehicle available	
Exceptions	1. The Driver enters a licence plate that does not	
	exist or is already exists in the database	
	\bullet In this case $eMall$ notifies the Driver displaying an	
	error message	

4. Driver changes active vehicle

Actor	Driver	
Entry conditions	The Driver is logged into the system and is in Stations	
	Page	
Events flow	1. The Driver clicks on UserProfile Page	
	2. The Driver clicks on "Change Active Vehicle"	
	3. The Driver chooses one vehicle from his vehicle list	
	as active	
	4. <i>eMall</i> processes the information and shows a suc-	
	cess message	
Exit conditions	The chosen vehicle is set as the Active Vehicle	
Exceptions	No exception	

5. Driver adds new payment method

Actor	Driver	
Entry conditions	The Driver is logged into the system and is in Sta-	
	tions Page	
Events flow	1. The Driver clicks on UserProfile Page	
	2. The Driver clicks on "Add new payment method"	
	3. The Driver fills the form with the required data	
	4. <i>eMall</i> processes the information and shows a suc-	
	cess message	
Exit conditions	The Driver has a new payment method available	
Exceptions	1. The Driver enters wrong payment data in the	
	form	
	\bullet In all cases $eMall$ notifies the Driver displaying an	
	error message	

6. Driver changes active payment method

Actor	Driver	
Entry conditions	The Driver is logged into the system and is in Sta-	
	tions Page	
Events flow	1. The Driver clicks on UserProfile Page	
	2. The Driver clicks on "Change active payment	
	method"	
	3. The Driver chooses one vehicle from his payment	
	method list as active	
	4. <i>eMall</i> processes the information and shows a suc-	
	cess message	

Exit conditions	The payment method is set as the Active Payment Method
Exceptions	No exception

7. Driver makes a reservation

Actor	Driver		
Entry conditions	The Driver is logged into the system and is in Sta-		
	tions Page		
Events flow	1. The Driver visualises the stations from the sorted		
	list or, clicking on Map Page, from the map view		
	2. The Driver clicks on the station where he wants		
	to book a socket for his vehicle		
	3. The Driver selects the socket (slow, fast) among		
	the available		
	4. The Driver selects the time of the charge		
	5. <i>eMall</i> processes the information and shows a suc-		
	cess message		
Exit conditions	The Driver has a new event in his calendar and in his		
	MyReservations Page, with the relative reservation		
	details (station, timeframe and socket number)		
Exceptions	1. The Driver clicks a station where there are no		
	socket accepted by the Driver's Active Vehicle.		
	\bullet In this case $eMall$ notifies the Driver displaying an		
	error message		

8. Driver cancels a reservation

Actor	Driver	
Entry conditions	The Driver is logged into the system and is in Sta-	
	tions Page and has at least a reservation	
Events flow	1. The Driver goes to MyReservations Page where a	
	list of his reservation is displayed	
	2. The driver clicks on the reservation he wants to	
	cancel	
	3. The Driver clicks on the "Cancel" button	
	4. <i>eMall</i> processes the information and shows a suc-	
	cess message	
Exit conditions	The reservation is removed	
Exceptions	1. The reservation is in less than 15 minutes	

\bullet In this case $eMall$ notifies the Driver displaying an
error message

9. Driver starts the charging process

Actor	Driver	
Entry conditions	The Driver is logged in the system with at least an	
	active reservation	
Events flow	1. The Driver clicks on MyReservations	
	2. The driver clicks on the reservation	
	3. The Driver clicks on "Start charging"	
	4. <i>eMall</i> processes the information and shows a suc-	
	cess message	
Exit conditions	The charging process starts	
Exceptions	1. The socket is not correctly plugged in	
	2. There is not enough energy in the station	
	\bullet In all cases $eMall$ notifies the Driver displaying an	
	error message	

10. Driver view the charging status

Actor	Driver	
Entry conditions	The Driver is logged into the system and is in Sta-	
	tions Page	
Events flow	1. The Driver clicks on MyReservations	
	2. The Driver clicks on one of his reservations	
	3. The Driver clicks on "Charging status"	
	4. <i>eMall</i> processes the information and shows a suc-	
	cess message	
Exit conditions	The Driver visualises the charging status	
Exceptions	1. The charge process has not started yet	
	• In all cases <i>eMall</i> notifies the Driver displaying an	
	error message	

11. Driver reaches a station

A .	D ·	
1 ACTOR	Driver	
110001	211101	

Entry conditions	The Driver is logged into the system and is in Sta-
	tions Page
Events flow	1. The Driver has 3 alternatives: he can click on
	MyReservations Page and then on the reservation or
	he can click on the station from one of the possible
	views (list in Stations Page or map in Map Page)
	2. The Driver clicks on "Reach charging station"
	3. <i>eMall</i> processes the information and shows a suc-
	cess message
Exit conditions	Driving directions are shown on the navigation sys-
	tem on the Driver's device
Exceptions	No exception

12. Driver accepts a recommendation

Actor	Driver
Entry conditions	The Driver is logged into the system and is in Sta-
	tions Page
Events flow	1. The Driver clicks on MyRecommendations Page
	2. The Driver clicks on one of the two recommenda-
	tions displayed (one based on his calendar and the
	other on his vehicle battery status)
	3. The Driver clicks on "Accept Recommendations"
	3. <i>eMall</i> processes the information and shows a suc-
	cess message
Exit conditions	A new reservation is created and added to Driver's
	MyReservations Page and device calendar
Exceptions	No exception

13. Administrator modify the energy mix

Actor	Administrator
Entry conditions	The Administrator is logged into the system and is
	in Stations Page
Events flow	1. The Administrator clicks on the desired station
	2. The Administrator clicks on StationSettings Page
	3. The Administrator manually modify the Ener-
	gyMix or sets the automatic change mode
	3. <i>eMall</i> processes the information and shows a suc-
	cess message
Exit conditions	Station's mix of supply sources for vehicle charges
	changes
Exceptions	There is not enough power to change the mix of sup-
	ply sources, this could be due to lack of energy pro-
	vided by the DSO or the energy in the stationary
	battery is not enough
	ullet In all cases $eMall$ notifies the Driver displaying an
	error message

14. Administrator modify the DSO

Actor	Administrator
Entry conditions	The Administrator is logged into the system and is
	in Stations Page
Events flow	1. The Administrator clicks on DSO Page
	2. The Administrator chooses the <i>DSO</i> from the
	relative list, where they are visualised along with
	their energy price, or decides to set the automatic
	change mode
	3. <i>eMall</i> processes the information and shows a suc-
	cess message
Exit conditions	The DSO is changed
Exceptions	No exception

15. Administrator set an offer

Actor	Administrator
Entry conditions	The Administrator is logged into the system and is
	in Stations Page
Events flow	1. The Administrator clicks on the station where he
	wants to set an offer
	2. The Administrator goes to StationSettings Page
	3. The Administrator clicks on "Set offer"
	3. <i>eMall</i> processes the information and shows a suc-
	cess message
Exit conditions	The station has a new offer on its sockets
Exceptions	No exception

16. Administrator view station information and performance

Actor	Administrator
Entry conditions	The Administrator is logged into the system and is
	in Stations Page
Events flow	1. The Administrator clicks on the station
	2. <i>eMall</i> processes the information and shows the
	data of the station (energy stored in the battery,
	monthly performance, sockets available, etc)

Exit conditions	Station performance, statistics and information are
	shown
Exceptions	No exception

3.2.3 Use case diagrams

1. Unregistered Driver



Fig. 6: Unregistered Driver use case

2. Administrator

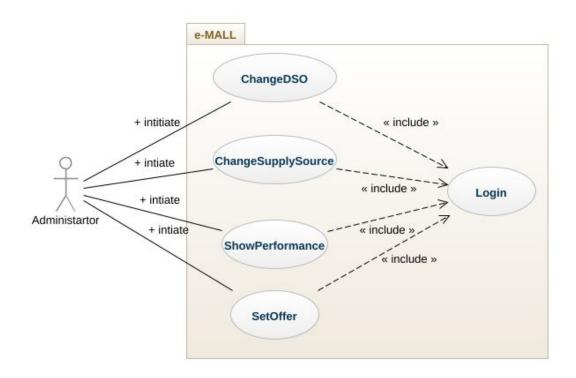


Fig. 7: Administrator use case

3. Driver

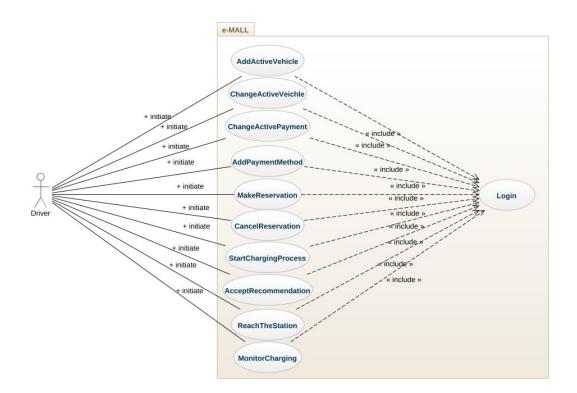


Fig. 8: Driver use case

3.2.4 Sequence diagram

1. Driver registration

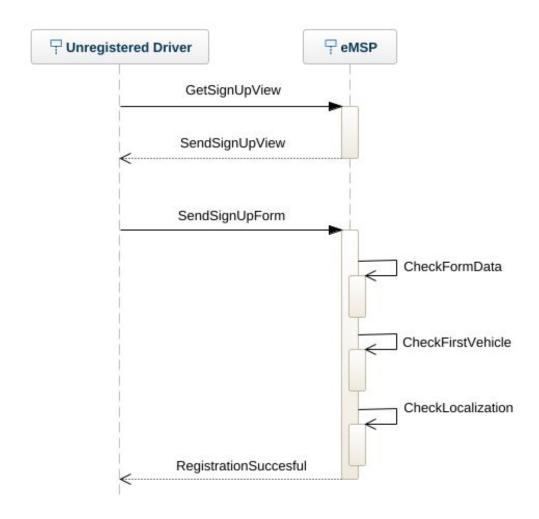


Fig. 9: Sequence diagram of the registration process for a Driver

After the Driver enters the Profile Information he will be asked to enter his vehicle information which will be set as his active vehicle. In CheckFormData is checked if all the information entered are correct. In CheckFirstVeichle it is checked if the licence plate exists. In CheckLocalization it is checked if the device GPS is available.

2. User login to eMall

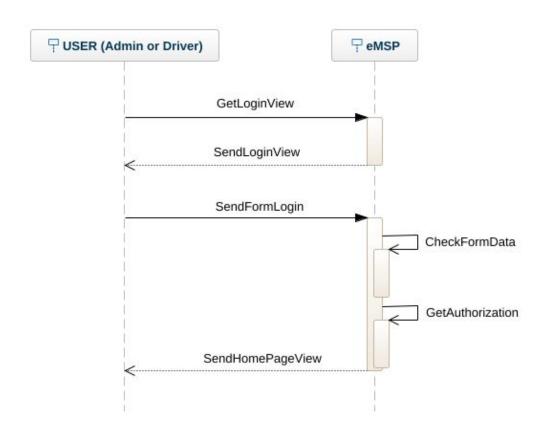


Fig. 10: Sequence diagram of the login to eMall

3. Driver add a new vehicle

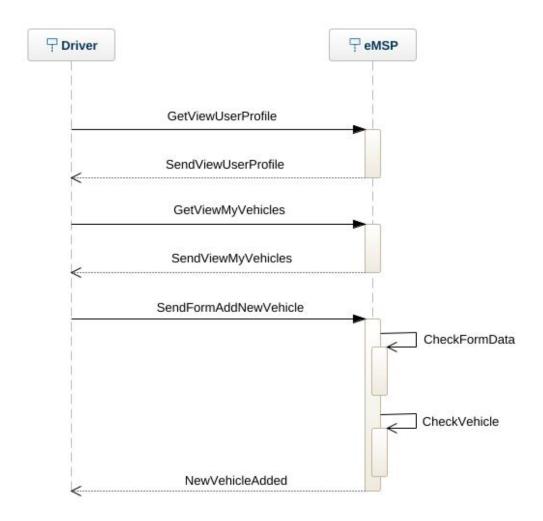


Fig. 11: Sequence diagram of a Driver adding a new EV to his profile

In CheckFormData is checked if the licence plate entered is correct. In CheckVehicle is checked if the vehicle is already present in the eMall database.

4. Driver change active vehicle

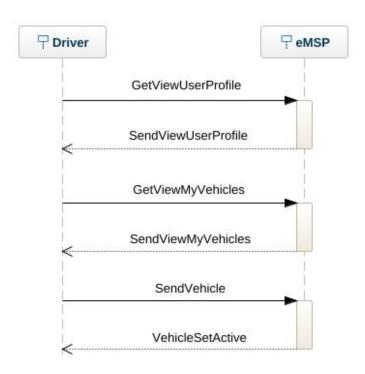


Fig. 12: Sequence diagram of a Driver changing the Active Vehicle

After clicking on "Change Active Vehicle" in the UserProfile Page, the Driver can select his current active Vehicle. The Active Vehicle will be used to show available stations and to link reservations to it. It will be also useful for the system to make custom recommendations.

5. Driver add new payment method

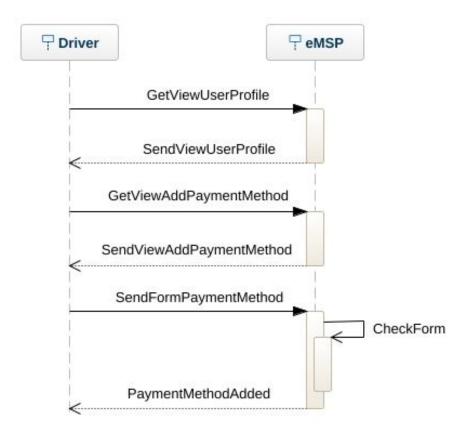


Fig. 13: Sequence diagram of a Driver adding a new payment method to his profile

The Driver clicks on the UserProfile Page and then on "Add payment method". After that, the Driver has to fill the form with all the mandatory data about his payment method and submit it. The *eMSP* with CheckForm checks if the data is correct and notifies the Driver of the successful addition of the new payment method.

6. Driver change active payment method

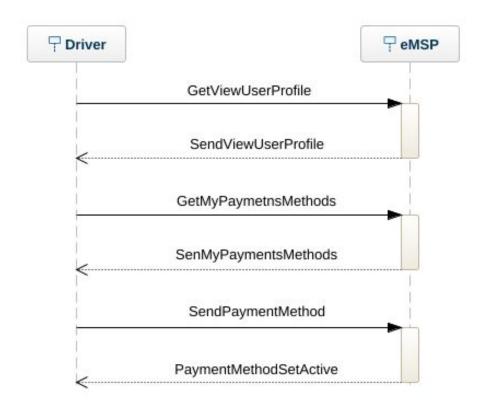


Fig. 14: Sequence diagram of a Driver changing the Active Payment Method

The Driver goes to the UserProfile Page and selects "Change active payment method". A list of Driver's payment methods is shown, afterwards the Driver chooses the payment method he wants to be active and the *eMSP* will proceed to change the Driver's Active Payment Method.

7. Driver make a reservation

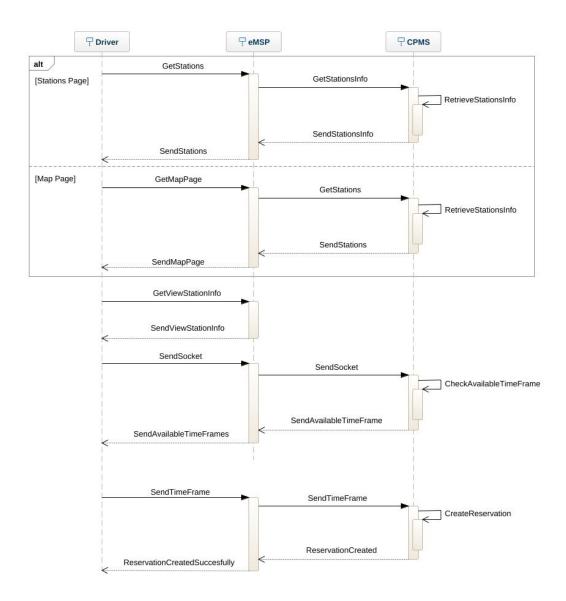


Fig. 15: Sequence diagram of a Driver making a new reservation

The two alternative sequences represent the possibility for the Driver to choose the desired station from the Map Page or from the Stations Page. The *CPMS*, with RetrieveStationInfo, retrieves all the information about the stations it manages. Then the Driver, after selecting the station, clicks on the available socket he wants to book. Afterwards, the system shows the time frames available for that

socket. The user selects the preferred timeframe and eventually the reservation is created.

8. Driver cancel a reservation

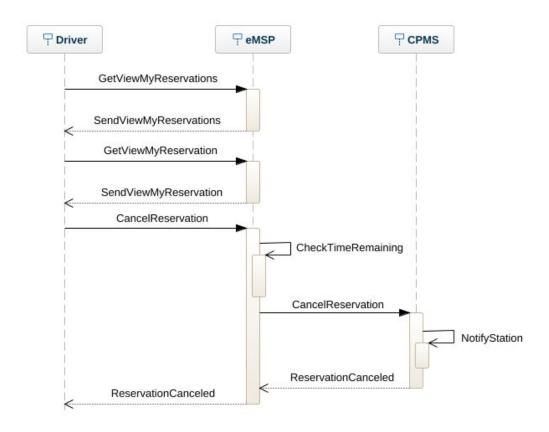


Fig. 16: Sequence diagram of a Driver canceling a reservation

The Driver goes to the MyReservations page where a list of the Driver's reservations is shown, then the Driver clicks on the "CANCEL" button on the reservation he wants to cancel. With CheckTimeRemaining, the *eMSP* checks if the reservation is in less than 15 minutes and eventually deletes it.

9. Driver start the charging process

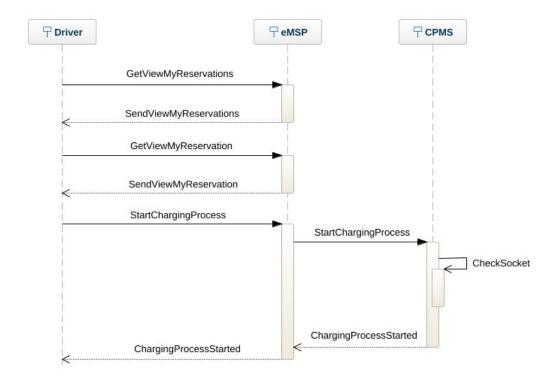


Fig. 17: Sequence diagram of a Driver starting the charging process

The *CPMS* receives the request and, with CheckSocket, verifies if the socket is correctly inserted and if there is energy enough in the station. If so, the station will notify the *CPMS* of the beginning of the recharging process.

10. Driver view charging status

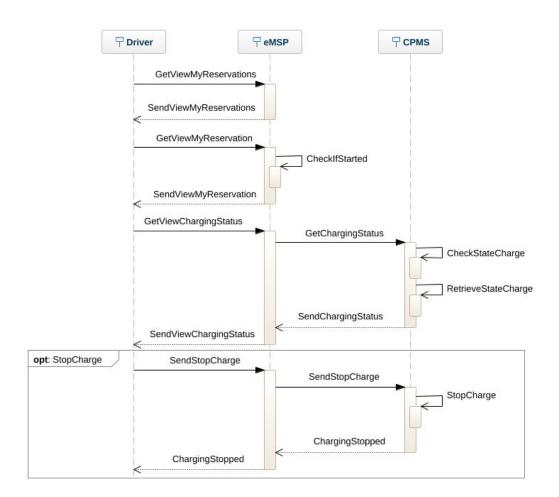


Fig. 18: Sequence diagram of a Driver monitoring the charging process

The Driver goes to MyReservation Page and clicks on the reservation. The eMSP, with CheckIfStarted, checks if the reservation has already started or is about to start. Then, the Driver clicks on "Charging status". The CMPS, with CheckStateCharge, checks if the battery has been fully recharged and if so stops charging. The opt sequence represents the possibility for the Driver to manually stop the charging process.

11. Driver reach a station

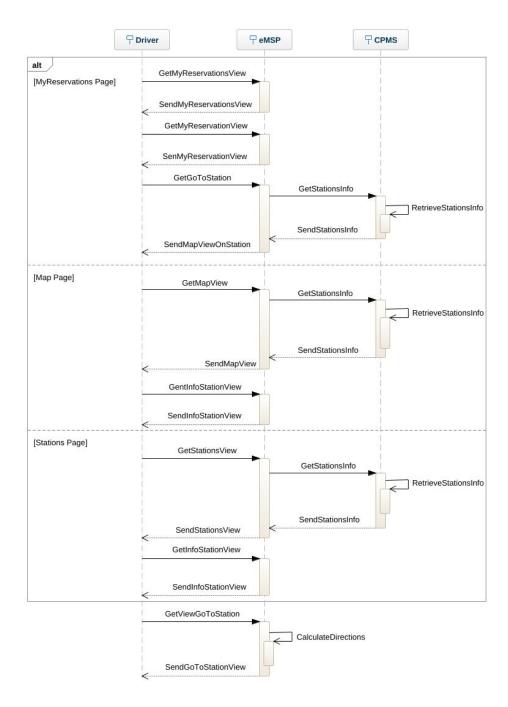


Fig. 19: Sequence diagram of a Driver that wants to reach a charging process

Here are shown the 3 different alternatives that the Driver can follow to get the

directions for the desired station.

12. Administrator modify energy mix

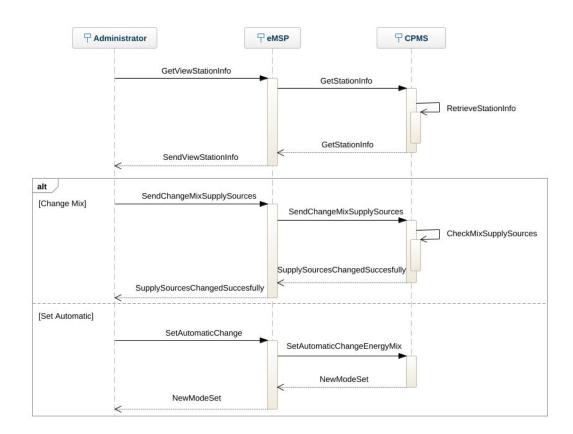


Fig. 20: Sequence diagram of an Administrator modifing the energy mix

The *CPMS* uses RetrieveStationInfo to retrieve all the data about a station. With CheckMixSupplySources, it is checked if there is enough energy to make the desired change. The Energy Mix can be manually set to the desired value or in alternative can be set to be automatically changed by the *CPMS*.

13. Administrator modify DSO

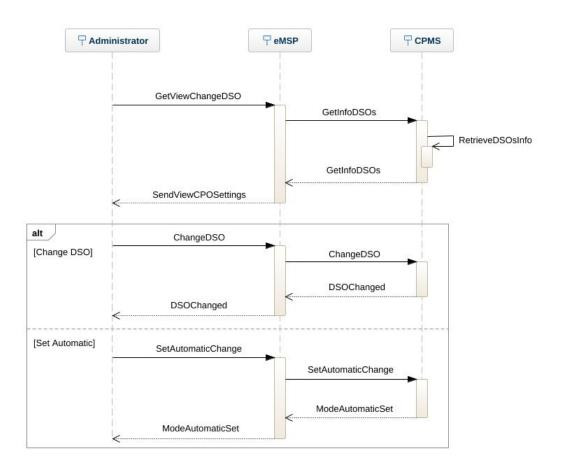


Fig. 21: Sequence diagram of an Administrator that modifies the DSO

With RetrieveDSOsInfo the CPMS will retrieve all the data about his DSOs. The DSO can be manually selected or in alternative can be set to be automatically selected by the CPMS.

14. Administrator set an offer

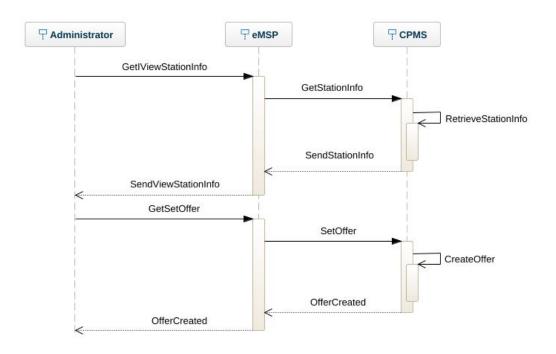


Fig. 22: Sequence diagram of an Administrator setting an offer

The Administrator, after selecting a station, clicks on "Charging Options" and then can either choose to modify the current price or to add a new special offer, for a certain socket type. With CreateOffer the *CPMS* will add the offer to the desired station.

15. Administrator view station information

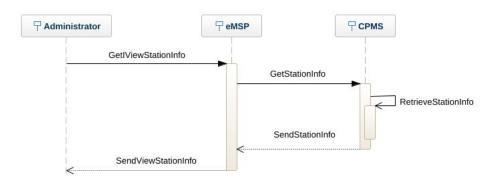


Fig. 23: Sequence diagram of an Administrator checking stations performance

The Administrator selects the desired station from the list in Stations Page. The *CPMS* retrives the data with RetrieveStationInfo and then, the system shows the view with the station information, statistics and performance to the Administrator.

16. Driver Accept a recommendation

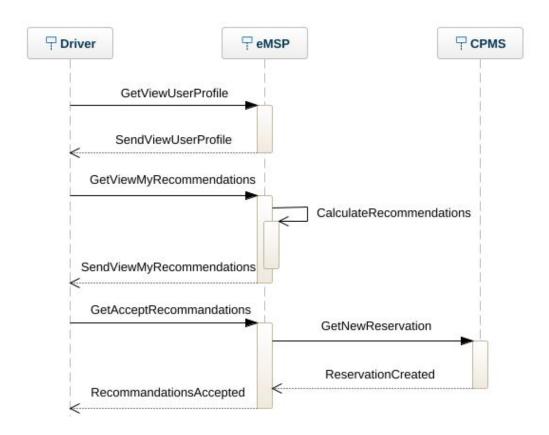


Fig. 24: Sequence diagram of a Driver accepting a recommendation

The Driver goes on the UserProfile Page and clicks on "My Recommendations". The *eMSP* handles the request and retrieves the recommendations made for the Driver. After the Driver clicks on "Accept Recommendation", the new reservation is created and inserted in the database.

3.2.5 Mapping on requirements

Use case	Requirements
Driver registration	R1, R2, R24, R25
User login to eMall	R24, R25, R27, R28
Driver add new vehicle	R2, R24, R25, R27
Driver change active vehicle	R2, R24, R25, R27
Driver add new payment method	R3, R24, R25, R27
Driver change active payment method	R3, R24, R25, R27
Driver make a reservation	R4, R5, R6, R7, R8, R24, R25, R27
Driver cancel a reservation	R9, R16, R24, R25, R27
Driver start the charging process	R9, R11, R24, R25, R27
Driver view charging status	R9, R12, R13, R24, R25, R27
Driver reach a station	R4, R5, R6, R10, R24, R25, R27
Administrator modify energy mix	R17, R20, R21, R22, R23, R24, R25, R28
Administrator modify the DSO	R21, R22, R24, R25, R28
Administrator set an offer	R17, R18, R22, R23, R24, R25, R28
Administrator view station information	R17, R18, R19, R20, R23, R24, R25, R28
Driver accept a recommendation	R14, R15, R24, R25, R27

3.3 Performance Requirements

The system must be reliable to handle an eventual incorrect procedure and must be supported by a fast internet infrastructure that is fundamental to guarantee to the users the possibility to evaluate only the charging stations actually available, without the risk of trying to make a reservation on a socket already booked. It is also extremely important to enable proper recommendations, based on information mostly retrieved by external APIs. This performance goal could be reached relying on an internet provider that ensures the user capacity and speed required.

Secondly, the system should be able to handle many concurrent users, at least 10 000, and many concurrent inputs.

3.4 Design Constraints

3.4.1 Standard compliance

All user data should be treated in compliance with GDPR (or the local privacy law), the authority that defines how the companies that work in the EU should collect, store and handle users' personal data. Moreover, the application should function fully on all widely used web browsers and mobile stores. Lastly, the regulation and guidelines of external APIs must be followed.

3.4.2 Hardware limitations

This system will be made available both as a website and as a mobile application. One of the requirements the hardware has to satisfy is the possibility to access the internet through a web browser (valid method for smartphone or PC) rather than to download the application from the online store for mobiles. Moreover, the hardware of the Driver must have the possibility to create schedules according to the user's duties and his vehicles must be provided with a localization system.

3.5 Software System Attributes

eMall system has to be available 24h/7d, without considering the scheduled maintenance breaks during the year, and both mobile application and website must be reactive and usable.

3.5.1 Reliability

The service has to guarantee a high reliability, so the system has to be available for an adequate period without interruptions. Since the system reliability depends on its subsystems components, both *eMSP* and *CPMS* must respect these parameters. The reliability of external APIs is not considered in this document and is out of system's control. To guarantee this high reliability, there should be scheduled and periodical maintenance interventions to prevent unexpected downtimes. Additionally, a duplicate of the server should be run in parallel to guarantee the service in case of failure. There should also be a backup of each database, *eMSP* and *CPMS*.

3.5.2 Availability

Since eMall service is based on the concept that each user should find the best charging option for his vehicle according to his temporary conditions (schedule, localization, etc...) in the minimum time possible, the system's availability should be as high as pos-

sible, in particular during the most crowded hours. It is supposed to have an availability of 99.9%, which means 9 hours/year of downtime. This goal can be reached handling the complexity of the individual components, having a high quality maintenance and duplicating server and databases, as previously explained in relation to reliability.

3.5.3 Security

The system must ensure a high standard of security since it stores and handles private and critical users' information, such as password, localization and credit card details. To achieve this goal, critical data should be saved on a DB hashed and salted and every input and request by the user must be sanitised. Moreover, there should be an authorization check at every API endpoint within the system.

3.5.4 Maintainability

The system should be easy to maintain and to be modified to correct faults, improve performance or to be adapted to a changed environment. To achieve this goal, the system should be based on one or more software patterns, which (possibly supported by a clear documentation) guarantee and facilitate future extensions of the system, with the possibility to implement new features without the necessity of rethinking the whole concept.

3.5.5 Portability

Since the system can be supported both by mobile application and website, it should be properly designed to be visualised and to preserve its functionalities regardless of the device used (PC, different smartphone models).

4 Formal Analysis

4.1 Alloy Code

The formal analysis of the system is represented through the use of Alloy code in order to verify the consistency of the model presented and the needed constraints.

```
- SIGNATURES —
// Ids, integer values and dates will not be considered for simplicity
open util/boolean
sig Position {}
sig Recommendation {}
sig CPO {
    //cpoId: one CPOId
     availableDSO: some DSO,
     activeDSO: one DSO
sig DSO {
    //dsoId: one DSOId,
    //energyPrice: one Int
}
abstract sig SocketType{}
one sig SLOW extends SocketType {}
one sig FAST extends SocketType {}
one sig RAPID extends SocketType {}
abstract sig SocketStatus {}
one sig AVAILABLE extends SocketStatus {}
one sig UNAVAILABLE extends SocketStatus {}
one sig CHARGING extends SocketStatus {}
abstract sig RechargeStatus {}
one sig INPROGRESS extends RechargeStatus {}
one sig PAYED extends RechargeStatus {}
abstract sig User {
    //userId: one UserId
    //name: one String,
    //surname: one String,
```

```
//documentId: one DocumentId,
    //email: one Email,
    //password: one String
}
sig CPOAdministrator extends User{
    cpo: one CPO
}
sig EVDriver extends User {
    paymentMethods: some PaymentMethod,
    vehicles: some Vehicle,
    recommendation: one Recommendation
}
sig Vehicle {
    //licensePlate: one String,
    //battery: one Int,
    type: one SocketType,
    is Active: one Bool
}
sig Socket {
    //socketId: one socketId,
    type: one SocketType,
    active: one Bool,
    status: one SocketStatus
}
sig ChargingStation {
    //stationId: one StationId,
    //energyMix: one Int,
    //price: one Int,
    //battery: one Int,
    position: one Position,
    cpo: one CPO,
    sockets: some Socket,
    options: some ChargingOption
}
sig PaymentMethod {
    //cardNumber: one String
    isActive: one Bool
}
```

```
sig Payment {
    //paymentId: one PaymentId
    //amount: one Int,
    paymentMethod: one PaymentMethod
}
sig Recharge {
    payment: lone Payment,
    status: one RechargeStatus,
}
sig Reservation {
    //reservationId: ReservationId
    //fromDate: one Date,
    //toDate: one Date,
    socket: one Socket,
    evdriver: one EVDriver,
    vehicle: one Vehicle,
    recharge: lone Recharge
}
sig ChargingOption {
    //cost: one Float,
    type: one SocketType,
    isOffer: one Bool
}
                   FACTS -
fact uniqueSocketsOfChargingStations {
    no disjoint c1, c2: Charging Station | some s: Socket |
         (s in cl.sockets) && (s in cl.sockets)
}
fact uniqueRechargeForReservations {
    no disjoint r1, r2: Reservation | some c: Recharge |
         (c in r1.recharge) && (c in r2.recharge)
}
fact uniqueVehiclesOfEVDrivers {
    no disjoint d1, d2: EVDriver | some v: Vehicle |
         (v in d1. vehicles) && (v in d2. vehicles)
}
```

```
fact uniquePaymentsInRecharges {
    no disjoint r1, r2: Recharge | r1.payment = r2.payment
fact uniquePositions {
    no disjoint s1, s2: Charging Station | s1.position = s2.position
}
fact uniquePaymentMethodsOfEVDrivers {
    no disjoint d1, d2: EVDriver | some p: PaymentMethod |
         (p in d1.paymentMethods) && (p in d2.paymentMethods)
}
fact uniqueChargingOptions {
    no disjoint c1, c2: ChargingStation | one o: ChargingOption |
         (o in c1.options) && (o in c2.options)
}
fact uniqueChargingOptionsInChargingStations {
    all disjoint o1, o2: ChargingOption, c: ChargingStation
         (o1 in c.options && o2 in c.options) implies
         (o1.type != o2.type or o1.isOffer != o2.isOffer)
}
fact uniqueRecommendations {
    no disjoint d1, d2: EVDriver | d1.recommendation = d2.recommendation
fact allCPOHasAdmininistrator {
    all c: CPO | some a: CPOAdministrator | a.cpo = c
}
// All EVDrivers has at least one active vehicle in his vehicles
fact allEVDRiverHasVehicle {
    all u: EVDriver | one v: Vehicle |
        v in u.vehicles && v.isActive = True
}
// All EVDrivers has at least one active payment method
fact allEVDRiverHasPaymentMethod {
    all u: EVDriver | one p: PaymentMethod |
        p in u.paymentMethods && p.isActive = True
}
```

```
// CPOs exists only if they own one or more charging stations
fact allCPOHasChargingStation{
    all c: CPO | some s: ChargingStation | c = s.cpo
// All CPOs has at least one active DSO in his availableDSO
fact allCPOhasDSO {
    all c: CPO | one d: DSO | d = c.activeDSO && d in c.availableDSO
// Reservation associated to vehicle owned by the driver
fact only Vehicle Of Driver In His Reservation {
    all r: Reservation, d: EVDriver, v: Vehicle
         (d = r.evdriver \&\& v = r.vehicle) implies v in d.vehicles
}
// Reservations for a socket can be made only by drivers who owns
// a vehicle of compatible recharging speed
fact allVehicleCompatibleWithSocket {
    all r: Reservation | one v: Vehicle | v = r. vehicle &&
    (v.type = SLOW implies r.socket.type = SLOW) &&
    (v.type = FAST implies r.socket.type = SLOW or r.socket.type = FAST)
}
// All available sockets have an available ChargingOption
// associated to the station
fact only Charging Options For Available Sockets {
    all c: ChargingStation, s: Socket
         s in c.sockets implies (one o: ChargingOption |
              o.type = s.type && o in c.options && o.isOffer = False)
}
// All ChargingOptions are present only if there is
// a corresponding socket of the same speed
fact allChargingOptionHasSocket{
    all c: ChargingStation, o: ChargingOption | o in c.options implies
         (one s: Socket | o.type = s.type && s in c.sockets)
}
// Recharge status is payed only if associated with a payment
fact rechargeStatusPayed {
    all r: Recharge | r.status = PAYED iff
         (one p: Payment | p in r.payment)
}
```

```
// Payments associated to correct PaymentMethod
fact allPaymentAssociatedToDriver {
    all p: Payment | one d: EVDriver, s: Reservation, r: Recharge |
        d = s.evdriver && p.paymentMethod in d.paymentMethods &&
        p = r.payment && r = s.recharge
}
// Recharge is in progress only if the socket is in charging status
fact allRechargeInProgressIfSocketInCharging{
    all r: Recharge, t: Reservation, s: Socket |
         r = t.recharge \&\& s = t.socket \&\&
         r.status = INPROGRESS implies s.status = CHARGING
    all s: Socket | s.status = CHARGING implies
         (one r: Recharge, t: Reservation |
             r = t.recharge \&\& s = t.socket \&\& r.status = INPROGRESS)
}
// Two vehicles can not be recharged at the same time
{\bf fact} \ \ unique Recharge For EVD river \{
    no disjoint r1, r2: Reservation
         r1.evdriver = r2.evdriver && r1.recharge.status = INPROGRESS &&
         r2.recharge.status = INPROGRESS
}
fact allChargingVehiclesActive {
    all r: Recharge, s: Reservation
         r = s.recharge \&\& r.status = INPROGRESS implies
             s.vehicle.isActive = True
}
fact allResevationForAvailableSocket {
    all r: Reservation, s: Socket
         s = r.socket implies s.status != UNAVAILABLE
}
fact allSocketsConnected {
    all s: Socket | one c: ChargingStation | s in c.sockets
}
fact allPaymentMethodsConnected {
    all p : PaymentMethod | one e: EVDriver | p in e.paymentMethods
}
```

```
fact allPaymentsConnected {
    all p : PaymentMethod | one e: EVDriver | p in e.paymentMethods
fact allDSOConnected {
    all d: DSO | some c: CPO | d in c.availableDSO
fact allVehiclesConnected {
    all v: Vehicle | one d: EVDriver | v in d. vehicles
}
fact allChargingOptionsConnected {
    all c: ChargingOption | one s: ChargingStation | c in s.options
fact allRechargesConnected {
    all r: Recharge | one s: Reservation | r in s.recharge
fact allRecommendationsConnected {
    all r: Recommendation | one d: EVDriver | r in d.recommendation
}
fact allPositionsConnected {
    all p: Position | one c: ChargingStation | p in c.position
             -- DYNAMIC MODELING --
pred createReservation [d: EVDriver, v: Vehicle, s: Socket, r: Reservation]
    r.evdriver = d
    r.vehicle = v
    r.socket = s
}
pred addVehicle [d, d': EVDriver, v: Vehicle] {
    d'. vehicles = d. vehicles + v
pred addSocket [c, c': ChargingStation, s: Socket] {
    c'.sockets = c.sockets + s
}
```

run createReservation

```
pred world1 {
        \#EVDriver = 2
        \#ChargingStation = 1
        some s: Socket | s.status = AVAILABLE
        some s: Socket | s.status = CHARGING
        \#Payment >= 1
        \#Vehicle >= 3
        #Reservation >=2
        some c: ChargingOption | c.isOffer = True
}
pred world2 {
        \#DSO>=5
        #ChargingStation >= 5
        \#EVDriver = 0
}
run world1 for 5
run world2 for 5
```

4.1.1 First model

In the first model, corresponding to predicate world1, we focus on the relationships between evdrivers, vehicles, sockets, reservations, recharges and payments. With this module we want to underline the following:

- Every Driver has at least an active payment method and an active vehicle.
- Every recharge, if not in progress, is linked to a unique payment associated to a payment method of the corresponding Driver.
- Every vehicle is associated to a reservation only if it is compatible with the charging speed offered by the chosen socket.
- Charging Stations can provide special offers through additional charging options.

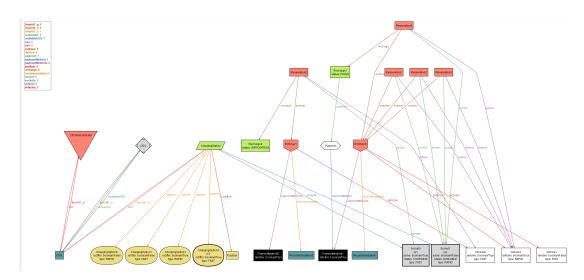


Fig. 25: A world obtained from the first model

4.1.2 Second model

In the second model, corresponding to predicate world2, we focus on the relationships between CPO administrators, dsos, charging stations and charging options. With this module we want to underline the following:

- Every CPO has only an active DSO between all available ones while multiple CPOs can have the same active DSO.
- Every charging station always offers a standard charging option for every type of socket

connected to it.

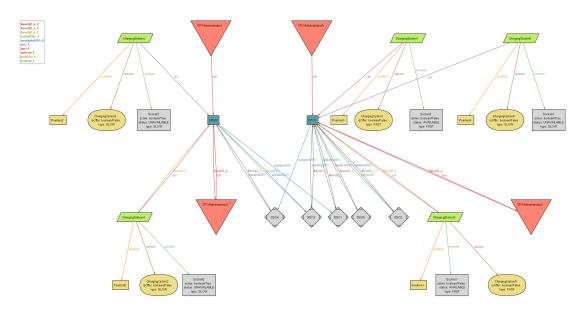


Fig. 26: A world obtained from the second model

4.1.3 Dynamic model

Some dynamic behaviour of the system have also been modelled:

- Creation of a reservation.
- Addition of a vehicle for an evdriver.
- Addition of a socket for a charging station.

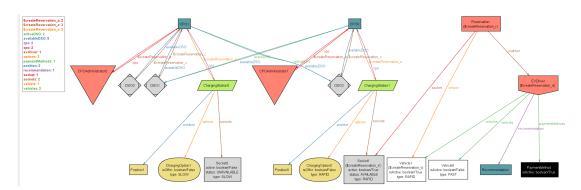


Fig. 27: A world obtained from the dynamic model

5 Effort spent

5.0.1 Roberto Cialini

Section	Time spent
Introduction	6
Overall description	9
Specific requirements	6
Formal analysis	16
Reasoning	14
Total time	51

5.0.2 Umberto Colangelo

Section	Time spent
Introduction	6
Overall description	10
Specific requirements	15
Formal analysis	7
Reasoning	14
Total time	52

5.0.3 Vittorio La Ferla

Section	Time spent
Introduction	5
Overall description	5
Specific requirements	17
Formal analysis	8
Reasoning	14
Total time	49

6 References