keep coding

# BOOTCAMP WEB 20
# MÓDULO HTML5 & SCSS

**Profesor:** Mario Díaz

**Sesión 2:** CSS3 y Selectores

# ¿Qué es CSS?

**Cascading Style Sheets**

- Define la presentación visual del HTML
- Controla colores, tipografía y espaciado
- Permite responsive design y animaciones

## Formas de aplicar CSS

Inline CSS

Internal CSS

External CSS

Buenas prácticas

### Inline CSS

```
<p style="color: blue;">This is a paragraph.</p>
```

### Internal CSS

```
<head>
  <style type = text/css>
    body {background-color: blue;}
    p { color: yellow;}
  </style>
</head>
```

### External CSS

```
<head>
  <link rel="stylesheet" type="text/css" href="style.css'
</head>
```

# Selectores CSS

Selector de etiqueta

Selector de clase

Selector de id

Selectores combinados

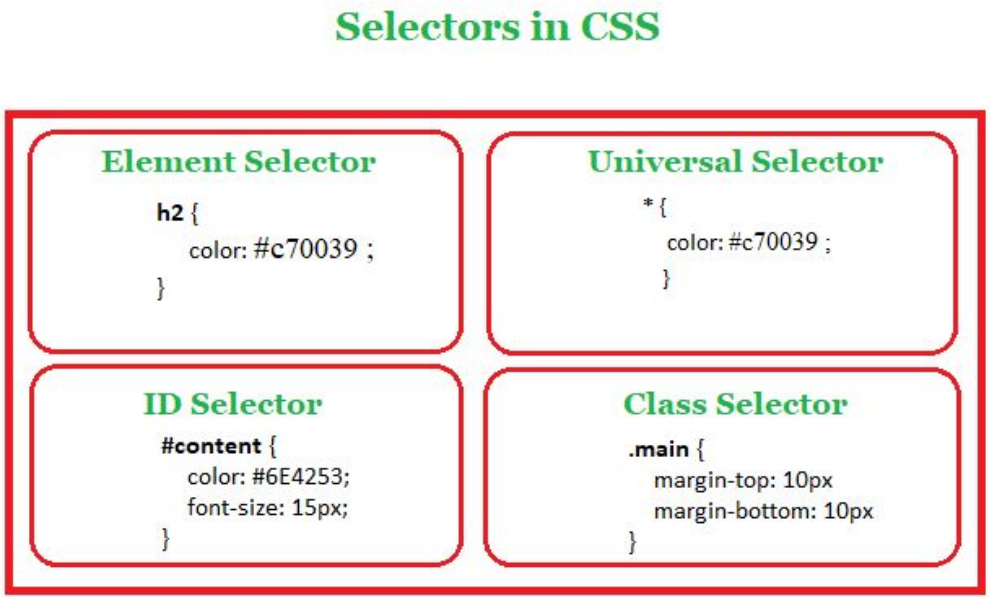

keep coding

# Selectores combinados

| Nombre | Símbolo | Ejemplo | Significado |
|---|---|---|---|
| **Combinador descendiente** | (espacio) | `#page div { }` | Selecciona elementos dentro de otros (cualquier nivel). |
| **Combinador hijo** | `>` | `#page > div { }` | Selecciona elementos hijos directos (primer nivel). |
| **Combinador hermano adyacente** | `+` | `div + div { }` | Selecciona elementos contiguos a otros (mismo nivel). |
| **Combinador hermano general** | `~` | `div ~ div { }` | Selecciona elementos que siguen a otros (mismo nivel). |
| **Combinador universal** | `*` | `#page * { }` | Selecciona todos los elementos (cualquier nivel). |

# Modelo de Caja
# (Box Model)

Content

Padding (margen interior)

Border

Margin

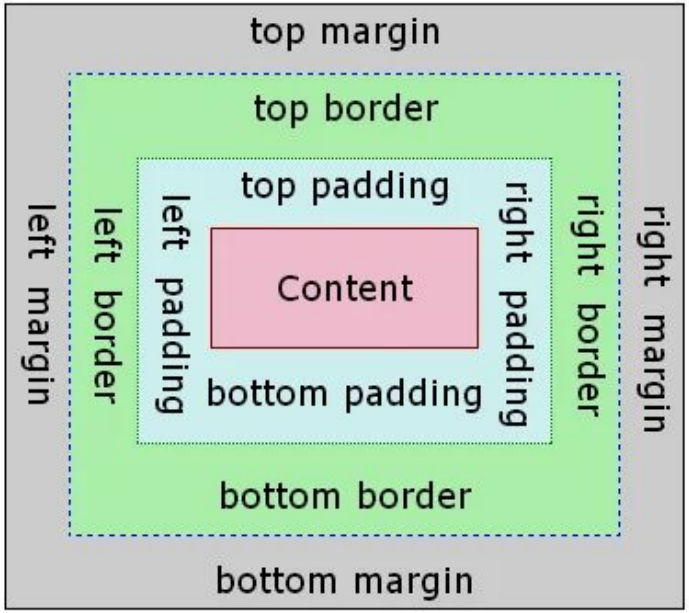

# UNIDADES CSS

## ⭐CSS Units⭐

### px (absolute)

Avoid using `px` for font-sizes. Use mostly for small details like border and shadow.

- fixed in size
- not responsive
- overrides user's browser preferences

### % (relative)

I recommend using percentages for layouts and width/height. For example, laying out links on navbar, placing images inside a div, etc.

- size is defined as percentage of another value (mostly parent element)
- sometimes size is defined as percentage of the element itself

### em (relative)

You can use `em` for font-size and margin/padding. Use `em` when you want to adjust margin/padding based on that element's font-size (if font-size is big, you maybe want bigger spacing).

- changes behavior based on property.
- 1 em = parent font-size
- if parent doesn't have a size, defaults to 16px (body)

### rem (relative)

You can also use `rem` for font-size and margin/padding. `rem` is easier to work with than `em` because it's more consistent.

- relative to root HTML, no matter what (default is 16px)
  - you can change the root HTML size. For example, if you change it to 20px, 1 rem will always be 20px.

### vw/vh (relative)

vw/vh are relative to the width/height of the browser window. 100vw means full width of the screen. Use vw/vh for bigger layouts, like background.

- useful for responsive websites because everything scales

### ch

`ch` is relative to the width of the number 0 of the current font. `ch` is used to size the width of a paragraph. In general, you want a 45-70 character wide column for readability.

- You would use it like this:
  **max-width: 40ch;**
  This sets the width of the column to a maximum of 40 characters per line.

# Tipografía en CSS

font-family

font-size

font-weight

line-height

letter-spacing

# Colores CSS

HEX

RGB

HSL

Contraste accesible







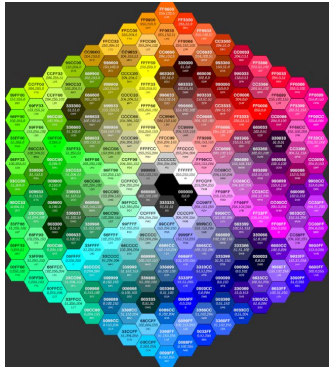

# Display y Layout

Block

Inline

inline-block

Flex

grid

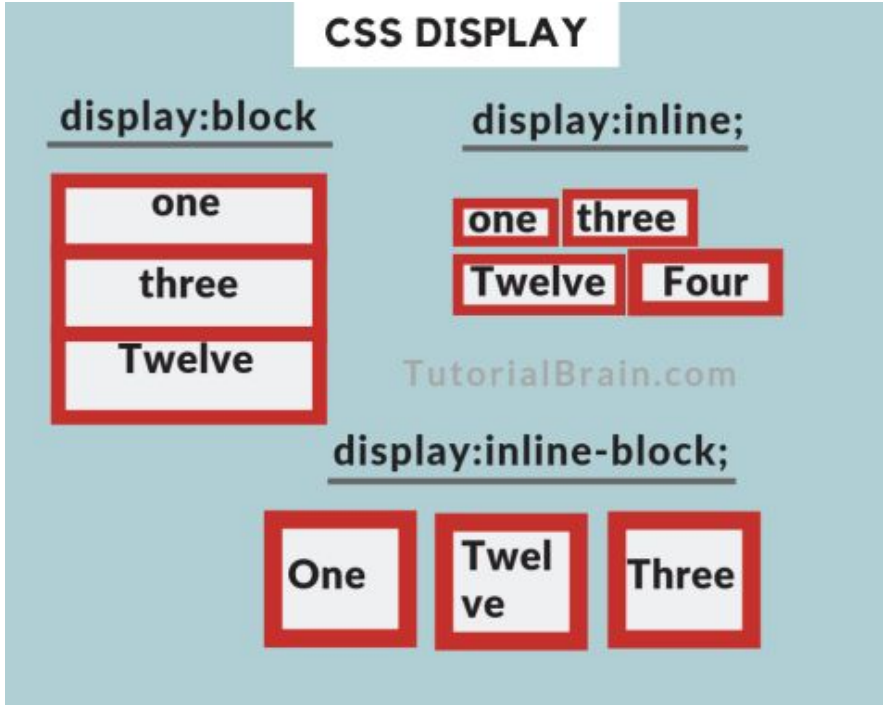

# Buenas prácticas CSS

Separación de responsabilidades

Código limpio

Reutilización

Preparación para SCSS

# Resumen

# Sesión 2

CSS controla presentación

Selectores aplican estilos

Box model estructura layout

Base para layouts modernos

keep coding



www.keepcoding.io cursos@keepcoding.io (+34) 916 33 1779

# TIME TO BREAK !!!!!!

keep coding



www.keepcoding.io cursos@keepcoding.io (+34) 916 33 1779