The five demonstrations came last.

Before the short robot lesson: 436,414 reported hours of borrowed experience.

THE LEARNING STACK / COUNT THE PRIOR

HUMANS	UMI	ROBOTS	DEXTER	LORA
402,730h	10,184h	23,500h	5 demos	per task

The tiny number was the last step.

Reported data mixture; hours are not equivalent in content or quality.

Few-shot adaptation is not blank-slate learning.

436,414 hours before three minutes.

The target robot contributed little task-specific data. The prior did not.

402,730h + 10,184h + 23,500h = 436,414h

before <3 min of target-robot data per task

Human → Egocentric video supplied the largest reported prior.

Interfaces → Handheld-gripper demonstrations covered 2,897 tasks.

Robots → Teleoperation grounded the model in robot execution.

> **Data was relocated—not eliminated.**

S1 · S2 · S3 | NVIDIA pretraining mixture + Dexter-50 adaptation

Five examples of what?

The task concept existed elsewhere. Dexter had not performed it in its own training data.


ALREADY IN THE PRIOR	ADAPTED ON DEXTER
Task concept	**Execution**
Human video	Five teleoperated episodes
Other-robot data	One LoRA adapter per task
Broad pretrained checkpoint	New hands and motion

Five-shot meant five complete target-robot episodes plus a separate fine-tune.

> **The lesson taught a new body how—not a new mind what.**

The adaptation jump was still large.

Average reported success across the selected 50-task set.

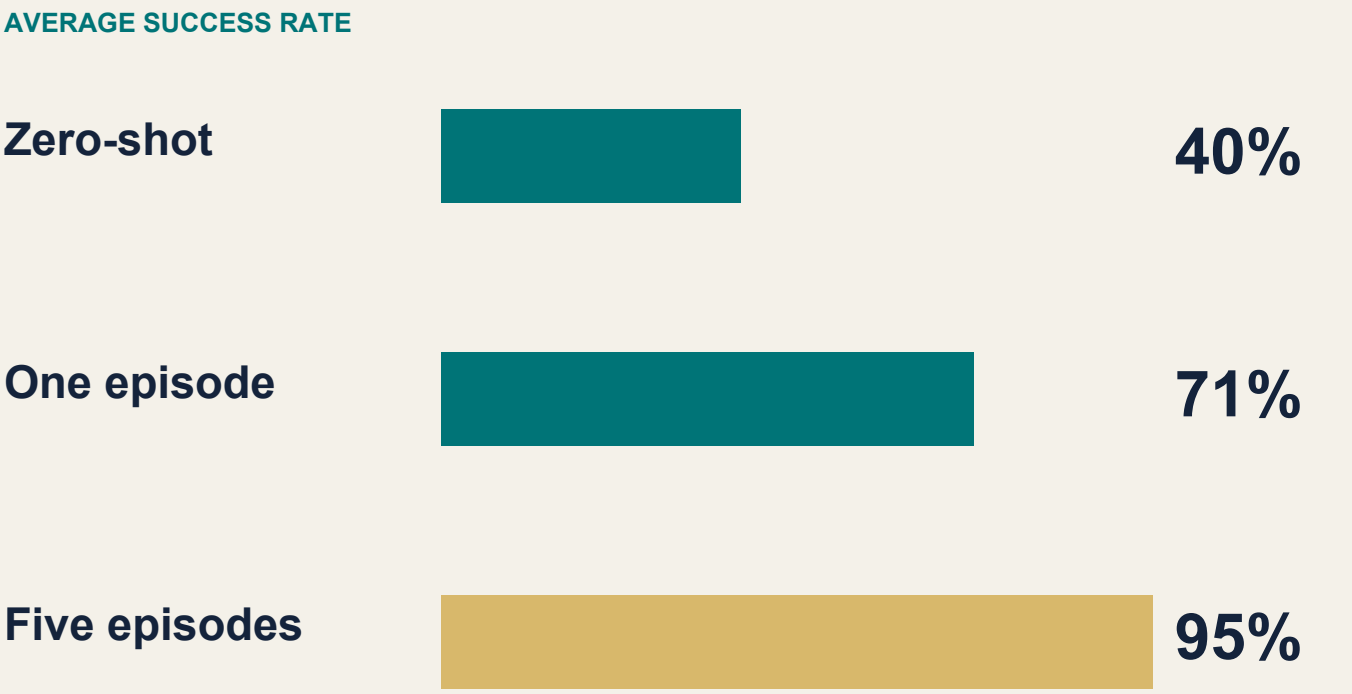

NVIDIA also reports 37 of 50 tasks at 100% after five episodes.

A broad prior became much more effective with little target data.

The benchmark had a learnability gate.

The 50 tasks were those the model learned with five episodes: at least 80% success.

01 **Candidate tasks**
Appear in human or other-robot data.

02 **Five-shot adaptation**
Train a task-specific adapter.

03 **Selection gate**
Retain tasks reaching at least 80%.

04 **Dexter-50**
Report the 50-task average.

05 **External test**
Preregister arbitrary tasks; still UNKNOWN.

Selection does not erase the result. It defines the population the result covers.

> **95% describes a selected learnable set—not arbitrary new work.**

S2 · S3 | Whitepaper Figure 24 caption

Count the hidden work before buying the headline.

A useful five-shot claim needs its prior, unit and selection rule.

QUESTION	PUBLISHED ANSWER	NEXT EVIDENCE
Prior experience?	436,414 reported hours	Comparable data quality
Unit of five?	Complete Dexter episodes	Collection + recovery cost
One model?	Adapter per task	Multi-task retention
Task selection?	≥80% after five	Preregistered task set

The exact Dexter-50 trial count per task was not stated in the relevant section.

> **Ask what happened before the counter started.**

The lesson was short. The education was not.

GR00T 2 suggests broad prior experience can travel into a new robot body.

WEAK QUESTION

How many demonstrations?

What was learned before counting began?

Count the prior. Freeze the task set. Then measure adaptation.

NVIDIA-reported benchmark · Independent replication unavailable

> **Few-shot success is a property of the prior, the task and the test—not the number five alone.**