

Blocks


Set Wheel Speed

Sets the Piobot's wheel speed.

If the wheel speed is positive, the wheel rotates forward, and if the wheel speed is negative, the wheel rotates backward.

For example, if the wheel speed is 100, it rotates forward at a speed of 100, and if the wheel speed is -100, it rotates backward at a speed of 100.

Once the wheel speed is set, the Piobot will keep moving at that speed until you set the wheel speed again.

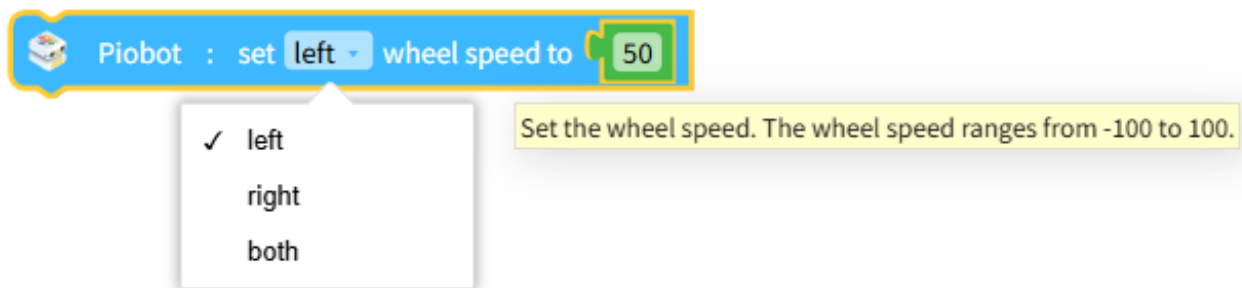

Dropdown Options and Input Values

Name	Type	Description	Range / Type
wheel	Dropdown Option	Wheel type	left, right, both
velocity	Input	Wheel speed	Integer -100 ~ 100, 0: Stop

JavaScript Code

```
// Set left wheel speed to 50
if($('Pio*0:wheel.move').d != 0) {
    $('Pio*0:wheel.move').d = 0;
}
$('Pio*0:wheel.speed.left').d = __getSpeed('Pio*0', 50);

// Set right wheel speed to -50
if($('Pio*0:wheel.move').d != 0) {
    $('Pio*0:wheel.move').d = 0;
}
```

```

}
$('Pio*0:wheel.speed.right').d = __getSpeed('Pio*0', -50);

// Set both wheel speeds to 0
if($('Pio*0:wheel.move').d != 0) {
    $('Pio*0:wheel.move').d = 0;
}
$('Pio*0:wheel.speed.left').d = __getSpeed('Pio*0', 0);
$('Pio*0:wheel.speed.right').d = __getSpeed('Pio*0', 0);

```

Python Code

```

# Set left wheel speed to 50
if __('Pio*0:wheel.move').d != 0:
    __('Pio*0:wheel.move').d = 0
__('Pio*0:wheel.speed.left').d = __getSpeed('Pio*0', 50)

# Set right wheel speed to -50
if __('Pio*0:wheel.move').d != 0:
    __('Pio*0:wheel.move').d = 0
__('Pio*0:wheel.speed.right').d = __getSpeed('Pio*0', -50)

# Set both wheel speeds to 0
if __('Pio*0:wheel.move').d != 0:
    __('Pio*0:wheel.move').d = 0
__('Pio*0:wheel.speed.left').d = __getSpeed('Pio*0', 0)
__('Pio*0:wheel.speed.right').d = __getSpeed('Pio*0', 0)

```

Move by Distance


Sets the distance for the Piobot to move.

If the wheel speed is not set, it will not move.

If the distance value is 0, it will keep moving without stopping at the currently set wheel speed.

If wait is checked, it waits until the movement is completed.

However, if wait is checked, it can only be used inside an async function.

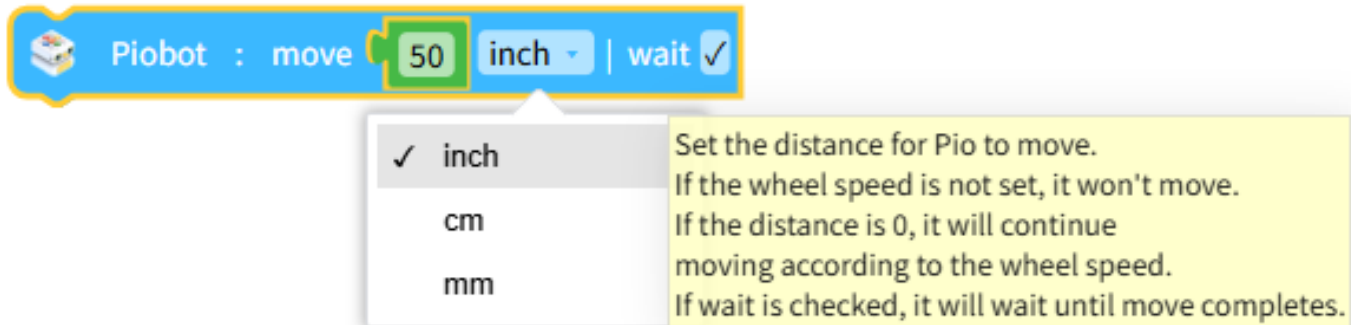

Dropdown Options and Input Values

Name	Type	Description	Range / Type
distance	Input	Distance value	Real number ≥ 0
unit	Dropdown Option	Distance unit	cm, mm, inch

JavaScript Code

```
// Move 50 cm | Wait 0
$('Pio*0:wheel.move').d = __getDistance('Pio*0', 50, 'cm'); // (robot, distance, unit)
await $('Pio*0:wheel.!move').w();

// Move 50 mm | Wait X
$('Pio*0:wheel.move').d = __getDistance('Pio*0', 50, 'mm'); // (robot, distance, unit)

// Move 50 inch | Wait X
$('Pio*0:wheel.move').d = __getDistance('Pio*0', 50, 'inch'); // (robot, distance, unit)
```

Python Code

```
# Move 50 cm | Wait 0
__('Pio*0:wheel.move').d = __getDistance('Pio*0', 50, 'cm') # (robot, distance, unit)
```

```

await __('Pio*0:wheel.move').w()

# Move 50 mm | Wait X
__('Pio*0:wheel.move').d = __getDistance('Pio*0', 50, 'mm') # (robot, distance,
unit)

# Move 50 inch | Wait X
__('Pio*0:wheel.move').d = __getDistance('Pio*0', 50, 'inch') # (robot,
distance, unit)

```



Move by Time

Sets the time for the Piobot to move.

If the wheel speed is not set, it will not move.

If wait is checked, it waits until the movement is completed.

However, if wait is checked, it can only be used inside an async function.

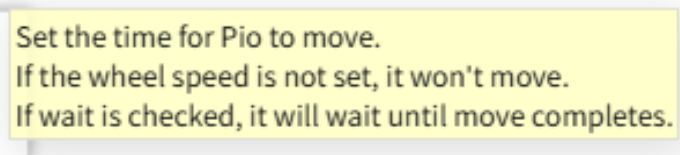

Dropdown Options and Input Values

Name	Type	Description	Range / Type
time	Input	Time value	Real number ≥ 0
unit	Dropdown Option	Time unit	seconds, milliseconds

If the option is set to milliseconds, the entered value is the time value divided by 1000.

JavaScript Code

```
// Move for 5 seconds | Wait 0
await __stopAfterDelay('Pio*0', 5, true); // (robot, time, wait_w)

// Move for 5 milliseconds | Wait X
__stopAfterDelay('Pio*0', 0.005, false); // (robot, time, wait_w)
```

Python Code

```
# Move for 5 seconds | Wait 0
await __stopAfterDelay('Pio*0', 5, True) # (robot, time, wait_w)


# Move for 5 milliseconds | Wait X
__stopAfterDelay('Pio*0', 0.005, False) # (robot, time, wait_w)
```

Turn in Place

Sets the direction and angle for the Piobot to rotate in place.

If wait is checked, it waits until the movement is completed.

However, if wait is checked, it can only be used inside an async function.

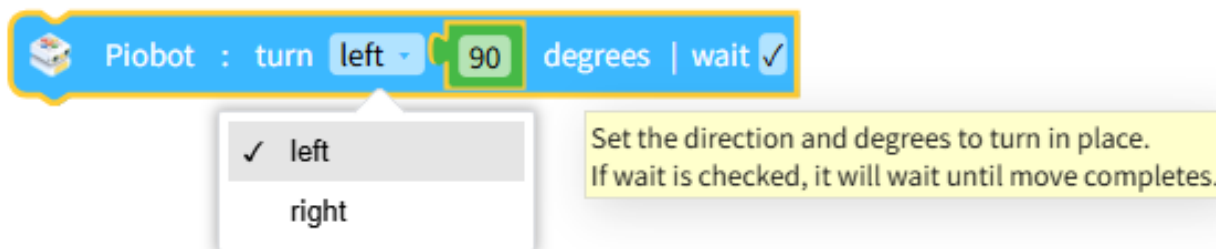

Dropdown Options and Input Values

Name	Type	Description	Range / Type
direction	Dropdown Option	Turn direction	left, right
angle	Input	Turn angle	Integer ≥ 0

JavaScript Code

```
// Turn in place 90 degrees to the left | Wait 0
await __turn_degree_left('Pio*0', 90, true); // (robot, degree, wait_w)

// Turn in place 90 degrees to the right | Wait X
__turn_degree_right('Pio*0', 90, false); // (robot, degree, wait_w)
```

Python Code

```
# Turn in place 90 degrees to the left | Wait 0
await __turn_degree_left('Pio*0', 90, True) # (robot, degree, wait_w)


# Turn in place 90 degrees to the right | Wait X
__turn_degree_right('Pio*0', 90, False) # (robot, degree, wait_w)
```

Change Wheel Speed

Changes the Piobot's wheel speed.

The new wheel speed is the current wheel speed plus the entered value.

The range of the newly set wheel speed is clamped to -100 ~ 100.

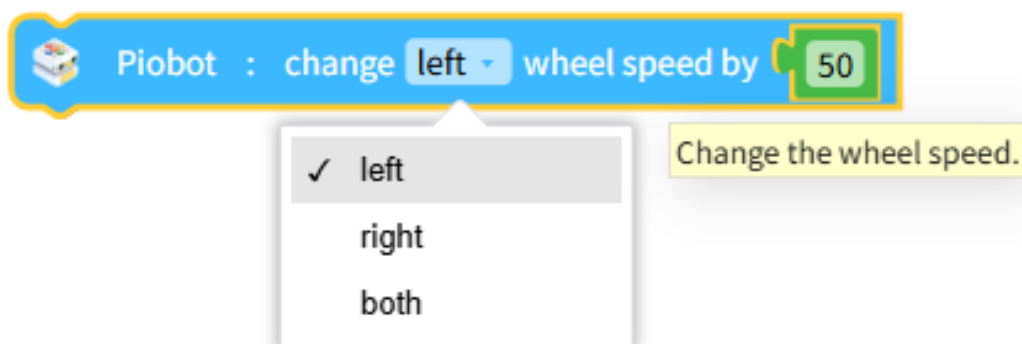

Dropdown Options and Input Values

Name	Type	Description	Range / Type
wheel	Dropdown Option	Wheel type	left, right, both

Name	Type	Description	Range / Type
velocity	Input	Value to add to the current wheel speed	Integer -200 ~ 200, 0: Stop

JavaScript Code

```
// Change left wheel speed by 50
if($('Pio*0:wheel.move').d !== 0) {
    $('Pio*0:wheel.move').d = 0;
}
$('Pio*0:wheel.speed.left').d = $('Pio*0:wheel.speed.left').d +
__getSpeed('Pio*0', 50); // (robot, value)

// Change right wheel speed by 50
if($('Pio*0:wheel.move').d !== 0) {
    $('Pio*0:wheel.move').d = 0;
}
$('Pio*0:wheel.speed.right').d = $('Pio*0:wheel.speed.right').d +
__getSpeed('Pio*0', 50); // (robot, value)

// Change both wheel speeds by 50
if($('Pio*0:wheel.move').d !== 0) {
    $('Pio*0:wheel.move').d = 0;
}
$('Pio*0:wheel.speed.left').d = $('Pio*0:wheel.speed.left').d +
__getSpeed('Pio*0', 50); // (robot, value)
$('Pio*0:wheel.speed.right').d = $('Pio*0:wheel.speed.right').d +
__getSpeed('Pio*0', 50); // (robot, value)
```

Python Code

```
# Change left wheel speed by 50
if __('Pio*0:wheel.move').d != 0:
```

```

__('Pio*0:wheel.move').d = 0
__('Pio*0:wheel.speed.left').d = __('Pio*0:wheel.speed.left').d +
__getSpeed('Pio*0', 50) # (robot, value)


# Change right wheel speed by 50
if __('Pio*0:wheel.move').d != 0:
    __('Pio*0:wheel.move').d = 0
__('Pio*0:wheel.speed.right').d = __('Pio*0:wheel.speed.right').d +
__getSpeed('Pio*0', 50) # (robot, value)

# Change both wheel speeds by 50
if __('Pio*0:wheel.move').d != 0:
    __('Pio*0:wheel.move').d = 0
__('Pio*0:wheel.speed.left').d = __('Pio*0:wheel.speed.left').d +
__getSpeed('Pio*0', 50) # (robot, value)
__('Pio*0:wheel.speed.right').d = __('Pio*0:wheel.speed.right').d +
__getSpeed('Pio*0', 50) # (robot, value)

```

Turn Turbo Mode On / Off

Turns the Piobot's turbo mode on or off.

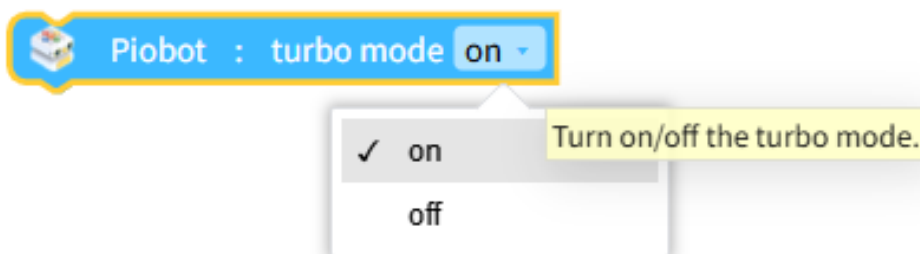

Dropdown Options and Input Values

Name	Type	Description	Range / Type
toggle	Dropdown Option	Turbo toggle	On (true), Off (false)

JavaScript Code

```
// Turn turbo mode on
__turbo('Pio*0', true);

// Turn turbo mode off
__turbo('Pio*0', false);
```


Python Code

```
# Turn turbo mode on
__turbo('Pio*0', True)

# Turn turbo mode off
__turbo('Pio*0', False)
```

Stop

Stops the Piobot's movement.
Both wheel speeds are reset to 0.

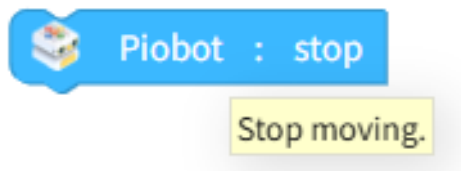

JavaScript Code

```
// Stop Piobot
__stopMove('Pio*0');
```

Python Code

```
# Stop Piobot
__stopMove('Pio*0')
```

Are the Wheels Moving?

Returns whether the Piobot's wheels are moving as **True (1) / False (0)**.



Returns true if wheel is moving, false if it is stopped.

JavaScript Code

```
$( 'Pio*0:wheel.moving' ).d;
```

Python Code



```
__( 'Pio*0:wheel.moving' ).d
```

Move One Tile Forward on the Board

Moves the Piobot one tile on the board.

If wait is checked, it waits until the movement is completed.

However, if wait is checked, it can only be used inside an async function.



Move HamsterS one step at a time on the board as specified.

Dropdown Options and Input Values

Name	Type	Description	Range / Type
direction	Dropdown Option	Move direction	forward, backward, left, right

JavaScript Code

```
// Move one tile forward on the board | Wait 0
await __grid_move_forward('Pio*0', true); // (robot, wait_w)

// Move one tile backward on the board | Wait 0
await __grid_move_backward('Pio*0', true); // (robot, wait_w)

// Move one tile left on the board | Wait X
__grid_move_left('Pio*0', false); // (robot, wait_w)

// Move one tile right on the board | Wait X
__grid_move_right('Pio*0', false); // (robot, wait_w)
```

Python Code

```
# Move one tile forward on the board | Wait 0
await __grid_move_forward('Pio*0', True) # (robot, wait_w)

# Move one tile backward on the board | Wait 0
await __grid_move_backward('Pio*0', True) # (robot, wait_w)

# Move one tile left on the board | Wait X
__grid_move_left('Pio*0', False) # (robot, wait_w)


# Move one tile right on the board | Wait X
__grid_move_right('Pio*0', False) # (robot, wait_w)
```

Turn Once on the Board

Rotates the Piobot on the board by 90 degrees in the specified direction.

If wait is checked, it waits until the movement is completed.

However, if wait is checked, it can only be used inside an async function.

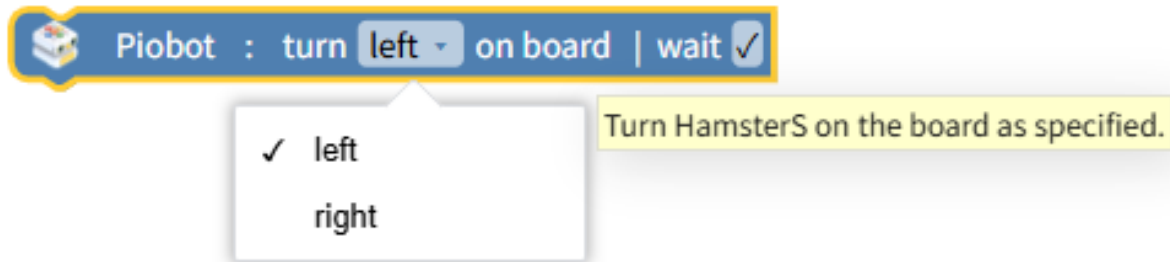

Dropdown Options and Input Values

Name	Type	Description	Range / Type
direction	Dropdown Option	Turn direction	left, right

JavaScript Code

```
// Turn once to the left on the board | Wait 0
await __grid_turn_left('Pio*0', true); // (robot, wait_w)

// Turn once to the right on the board | Wait X
__grid_turn_right('Pio*0', false); // (robot, wait_w)
```

Python Code


```
# Turn once to the left on the board | Wait 0
await __grid_turn_left('Pio*0', True) # (robot, wait_w)

# Turn once to the right on the board | Wait X
__grid_turn_right('Pio*0', False) # (robot, wait_w)
```

Set Neck Rotation Speed

Sets the rotation speed of the Piobot's neck.

The neck speed range is 1 ~ 6.



Set the neck rotation speed. The speed ranges from 1 to 6.

Dropdown Options and Input Values

Name	Type	Description	Range / Type
speed	Input	Neck rotation speed	Real number 1 ~ 6

JavaScript Code

```
// Set Piobot neck rotation speed to 4
$('Pio*0:neck.speed').d = 4;
```


Python Code

```
# Set Piobot neck rotation speed to 4
__('Pio*0:neck.speed').d = 4
```

Set Neck Angle

Sets the target angle for the Piobot's neck rotation.

The neck angle range is -45 ~ 45 degrees.



Set the angle at which Pio's neck will arrive.
The neck angle ranges from -45 to 45.
If wait is checked, it will wait until changing neck angle completes.

Dropdown Options and Input Values

Name	Type	Description	Range / Type
angle	Input	Neck angle	Real number -45 ~ 45

JavaScript Code

```
// Change Piobot neck angle to 10 degrees | Wait 0
$('Pio*0:neck.angle').d = 10;
await $('Pio*0:neck.!angle').w();

// Change Piobot neck angle to -10 degrees | Wait X
$('Pio*0:neck.angle').d = -10;
```


Python Code

```
# Change Piobot neck angle to 10 degrees | Wait 0
__('Pio*0:neck.angle').d = 10
await __('Pio*0:neck.!angle').w()

# Change Piobot neck angle to -10 degrees | Wait X
__('Pio*0:neck.angle').d = -10
```

Is the Neck Moving?

Returns whether the Piobot's neck is moving as **True (1)** / **False (0)**.



Returns true if neck is moving, false if it is stopped.

JavaScript Code

```
$( 'Pio*0:neck.moving' ).d;
```

Python Code

```
__('Pio*0:neck.moving').d
```

Set Eye LED Color

Changes the Piobot's eye LED color.

You can change the eye LED color for the left, right, or both eyes.

 Piobot : set **left** eye color to **black**

 Piobot : set **right** eye color to **black**

 Piobot : set **both** eye color to **black**

Set the eye color.

- ✓ black
- red
- yellow
- green
- cyan
- blue
- magenta
- white

Dropdown Options and Input Values

Name	Type	Description	Range / Type
direction	Dropdown Option	Eye direction	left, right, both
color	Dropdown Option	Color	black ([0, 0, 0]), red ([255, 0, 0]), yellow ([255, 255, 0]), green ([0, 255, 0]), cyan ([0, 255, 255]), blue ([0, 0, 255]), magenta ([255, 0, 255]), white ([255, 255, 255])

JavaScript Code

```
// Set Piobot left eye to black
$('Pio*0:eye.left.rgb').d = [0, 0, 0];

// Set Piobot right eye to red
$('Pio*0:eye.right.rgb').d = [255, 0, 0];

// Set both Piobot eyes to yellow
$('Pio*0:eye.left.rgb').d = [255, 255, 0];
$('Pio*0:eye.right.rgb').d = [255, 255, 0];
```

Python Code

```
# Set Piobot left eye to black
__('Pio*0:eye.left.rgb').d = [0, 0, 0]

# Set Piobot right eye to red
__('Pio*0:eye.right.rgb').d = [255, 0, 0]

# Set both Piobot eyes to yellow
__('Pio*0:eye.left.rgb').d = [255, 255, 0]
```





```
__('Pio*0:eye.right.rgb').d = [255, 255, 0]
```

Set Eye LED Color Using the Color Category Block

Sets the Piobot's eye LED color using a color category block.

You can change the eye LED color for the left, right, or both eyes.



Set the eye color with the blocks in the Color category.

Dropdown Options and Input Values

Name	Type	Description	Range / Type
direction	Dropdown Option	Applied LED direction	left, right, both
color	Input	Eye LED color	RGB array

JavaScript Code

```
// Set Piobot left eye to red
$('Pio*0:eye.left.rgb').d = [255, 0, 0];

// Set Piobot right eye to R:255, G:255, B:255
$('Pio*0:eye.right.rgb').d = [255, 255, 255];

// Set both Piobot eyes to a random color
$('Pio*0:eye.left.rgb').d = __randomColor();
$('Pio*0:eye.right.rgb').d = __randomColor();
```

Python Code

```
# Set Piobot left eye to red
__('Pio*0:eye.left.rgb').d = [255, 0, 0]


# Set Piobot right eye to R:255, G:255, B:255
__('Pio*0:eye.right.rgb').d = [255, 255, 255]

# Set both Piobot eyes to a random color
__('Pio*0:eye.left.rgb').d = __randomColor()
__('Pio*0:eye.right.rgb').d = __randomColor()
```

Change Eye LED Color by the Specified RGB Amount

Changes the Piobot's eye LED color by the specified R, G, B values.

You can set the left, right, or both eye colors.

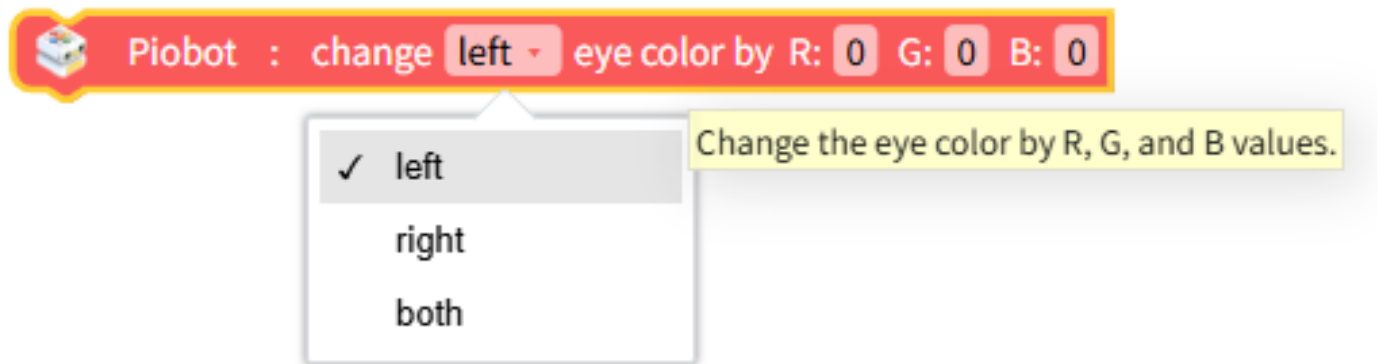

Dropdown Options and Input Values

Name	Type	Description	Range / Type
direction	Dropdown Option	Applied LED direction	left, right, both
color	Input	Delta R, G, B values	Integers for each of R, G, B: -255 ~ 255

JavaScript Code

```
// Change Piobot left eye by R: 1, G: 2, B: 3
$('Pio*0:eye.left.rgb').d = [($('Pio*0:eye.left.rgb').d[0] + 1,
$('Pio*0:eye.left.rgb').d[1] + 2, $('Pio*0:eye.left.rgb').d[2] + 3];

// Change Piobot right eye by R: -1, G: -2, B: -3
$('Pio*0:eye.right.rgb').d = [($('Pio*0:eye.right.rgb').d[0] + -1,
$('Pio*0:eye.right.rgb').d[1] + -2, $('Pio*0:eye.right.rgb').d[2] + -3];

// Change both Piobot eyes by R: 10, G: 20, B: 30
$('Pio*0:eye.left.rgb').d = [($('Pio*0:eye.left.rgb').d[0] + 10,
$('Pio*0:eye.left.rgb').d[1] + 20, $('Pio*0:eye.left.rgb').d[2] + 30];
$('Pio*0:eye.right.rgb').d = [($('Pio*0:eye.right.rgb').d[0] + 10,
$('Pio*0:eye.right.rgb').d[1] + 20, $('Pio*0:eye.right.rgb').d[2] + 30];
```

Python Code

```
# Change Piobot left eye by R: 1, G: 2, B: 3
__('Pio*0:eye.left.rgb').d = [__('Pio*0:eye.left.rgb').d[0] + 1,
__('Pio*0:eye.left.rgb').d[1] + 2, __('Pio*0:eye.left.rgb').d[2] + 3]

# Change Piobot right eye by R: -1, G: -2, B: -3
__('Pio*0:eye.right.rgb').d = [__('Pio*0:eye.right.rgb').d[0] + -1,
__('Pio*0:eye.right.rgb').d[1] + -2, __('Pio*0:eye.right.rgb').d[2] + -3]


# Change both Piobot eyes by R: 10, G: 20, B: 30
__('Pio*0:eye.left.rgb').d = [__('Pio*0:eye.left.rgb').d[0] + 10,
__('Pio*0:eye.left.rgb').d[1] + 20, __('Pio*0:eye.left.rgb').d[2] + 30]
__('Pio*0:eye.right.rgb').d = [__('Pio*0:eye.right.rgb').d[0] + 10,
__('Pio*0:eye.right.rgb').d[1] + 20, __('Pio*0:eye.right.rgb').d[2] + 30]
```

Change Eye Pattern

Changes the Piobot's eye pattern.

You can choose a pattern and set the initial eye colors for each eye when the pattern starts.

However, if you select the rainbow eye pattern, the eye color can only be chosen from Default, Yellow, Cyan, or Magenta.

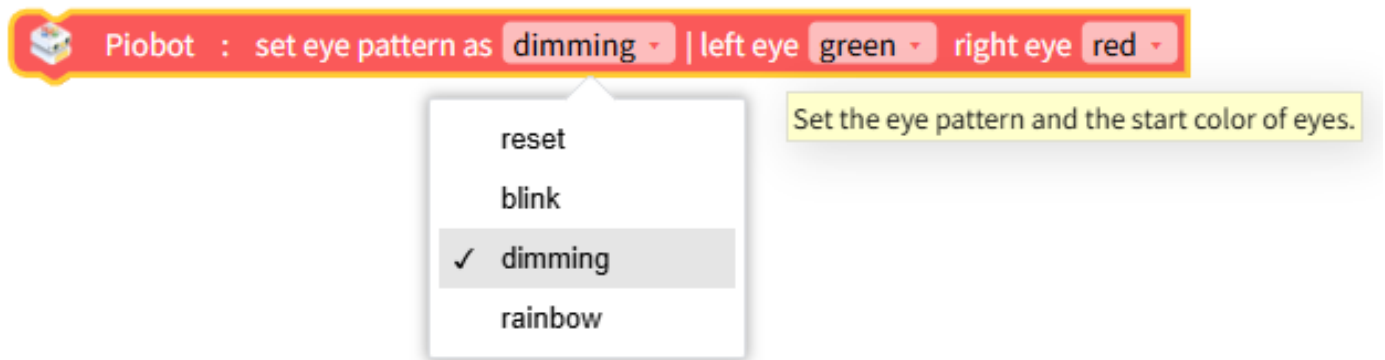

Dropdown Options and Input Values

Name	Type	Description	Range / Type
pattern	Dropdown Option	Eye pattern	reset (0), blink (1), dimming (2), rainbow (3)
color	Dropdown Option	Left/Right eye LED color	Red (1), Yellow (2), Green (3), Cyan (4), Blue (5), Magenta (6), White (7)

JavaScript Code

```
// Set Piobot eye pattern to Blink | Left eye: Red, Right eye: Yellow
$('Pio*0:eye.pattern.mode').d = 1;
$('Pio*0:eye.pattern.parameter').d = [1,0,0,2,0,0];

// Set Piobot eye pattern to Dimming | Left eye: Green, Right eye: Blue
$('Pio*0:eye.pattern.mode').d = 2;
$('Pio*0:eye.pattern.parameter').d = [3,0,0,5,0,0];
```

```
// Set Piobot eye pattern to Rainbow | Left eye: Cyan, Right eye: Magenta
$('Pio*0:eye.pattern.mode').d = 3;
$('Pio*0:eye.pattern.parameter').d = [3,0,0,5,0,0];
```

Python Code

```
# Set Piobot eye pattern to Blink | Left eye: Red, Right eye: Yellow
__('Pio*0:eye.pattern.mode').d = 1
__('Pio*0:eye.pattern.parameter').d = [1,0,0,2,0,0]


# Set Piobot eye pattern to Dimming | Left eye: Green, Right eye: Blue
__('Pio*0:eye.pattern.mode').d = 2
__('Pio*0:eye.pattern.parameter').d = [3,0,0,5,0,0]

# Set Piobot eye pattern to Rainbow | Left eye: Cyan, Right eye: Magenta
__('Pio*0:eye.pattern.mode').d = 3
__('Pio*0:eye.pattern.parameter').d = [3,0,0,5,0,0]
```

Turn Off LED

Turns off the Piobot's eye LED colors.

You can turn off the left, right, or both eye LED colors.

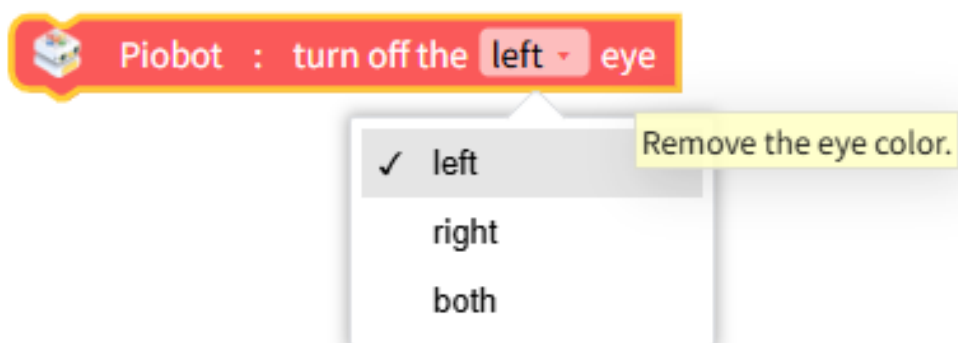

Dropdown Options and Input Values

Name	Type	Description	Range / Type
direction	Dropdown Option	Applied LED direction	left, right, both

JavaScript Code

```
// Turn off Piobot left eye
$('Pio*0:eye.left.rgb').d = [0, 0, 0];

// Turn off Piobot right eye
$('Pio*0:eye.right.rgb').d = [0, 0, 0];

// Turn off both Piobot eyes
$('Pio*0:eye.left.rgb').d = [0, 0, 0];
$('Pio*0:eye.right.rgb').d = [0, 0, 0];
```

Python Code

```
# Turn off Piobot left eye
__('Pio*0:eye.left.rgb').d = [0, 0, 0]

# Turn off Piobot right eye
__('Pio*0:eye.right.rgb').d = [0, 0, 0]

# Turn off both Piobot eyes
__('Pio*0:eye.left.rgb').d = [0, 0, 0]
__('Pio*0:eye.right.rgb').d = [0, 0, 0]
```

Set Buzzer Sound

Sets the Piobot's buzzer to the specified frequency.

The range of achievable frequencies is from 27,5hz to 6553.5hz.

If a value outside the range is entered, the buzzer sound will not be produced.



Piobot : set sound buzz to

Set the buzzer sound with an assigned frequency.
The range of achievable frequencies is from 27.5hz to 6553.5hz.
If a value outside the range is entered,
the buzzer sound will not be produced.

Dropdown Options and Input Values

Name	Type	Description	Range / Type
sound	Input	Buzzer frequency	27.5 ~ 6553.5 (hz)

JavaScript Code

```
// Set buzzer frequency to 1000hz
__stopSound('Pio*0');
$('Pio*0:sound.buzz').d = 1000;
```

Python Code

```
# Set buzzer frequency to 1000hz
__stopSound('Pio*0')
__('Pio*0:sound.buzz').d = 1000
```

Play a Note

Plays the specified musical note on the Piobot.

Piobot : play Do 4 sound note

✓ Do
Do#(Re ♭)
Re
Re#(Mi ♭)
Mi
Fa
Fa#(Sol ♭)
Sol
Sol#(La ♭)
La

Play a specific note.

Dropdown Options and Input Values

Name	Type	Description	Range / Type
note	Dropdown Option	Note	Do, Do#, Re, Re#, Mi, Fa, Fa#, So, So#, La, La#, Si
octave	Dropdown Option	Octave	1 ~ 7

JavaScript Code

```
// Play Do in octave 1
__stopSound('Pio*0');
$('Pio*0:sound.note').d = 4;

// Play Re in octave 1
__stopSound('Pio*0');
$('Pio*0:sound.note').d = 6;
```



```
// Play Do in octave 2
__stopSound('Pio*0');
$('Pio*0:sound.note').d = 16;

// Play Si in octave 7
__stopSound('Pio*0');
$('Pio*0:sound.note').d = 87;
```

Python Code

```
# Play Do in octave 1
__stopSound('Pio*0')
__( 'Pio*0:sound.note').d = 4

# Play Re in octave 1
__stopSound('Pio*0')
__( 'Pio*0:sound.note').d = 6

# Play Do in octave 2
__stopSound('Pio*0')
__( 'Pio*0:sound.note').d = 16

# Play Si in octave 7
__stopSound('Pio*0')
__( 'Pio*0:sound.note').d = 87
```

Play Sound Clip

Plays a specific sound clip on the Piobot.

If wait is checked, it waits until playback is completed.

However, if wait is checked, it can only be used inside an async function.

Piobot : play beep sound clip | wait ☒

- ✓ beep
- beep2
- beep3
- beep_repeat
- beep_random
- beep_random_repeat
- snore
- snore_repeat
- siren
- siren_repeat
- engine

Play a specific sound clip.
If wait is checked, it will wait until playing sound clip completes.

Dropdown Options and Input Values

Name	Type	Description	Range / Type
sound_clip	Dropdown Option	Sound clip	beep(1), beep2(2), beep3(3), beep_repeat(4), beep_random(5), beep_random_repeat(6), snore(7), snore_repeat(8), siren(9), siren_repeat(10), engine(11), engine_repeat(12), fart_a(13), fart_b(14), noise(15), noise_repeat(16), whistle(17), chop(18), chop_repeat(19), melody(20), robot_r2d2(21), connect(22), happy(81)

JavaScript Code

```
// Play beep (1) | Wait 0
__stopSound('Pio*0');
$('Pio*0:sound.clip').d = 1;
await $('Pio*0:sound.!clip').w();

// Play happy (81) | Wait X
__stopSound('Pio*0');
$('Pio*0:sound.clip').d = 81;
```

Python Code

```
# Play beep (1) | Wait 0
__stopSound('Pio*0')
__('Pio*0:sound.clip').d = 1
await __('Pio*0:sound.!clip').w()



# Play happy (81) | Wait X
__stopSound('Pio*0')
__('Pio*0:sound.clip').d = 81
```

Play a Melody

Plays a specific melody on the Piobot.

If wait is checked, it waits until playback is completed.

However, if wait is checked, it can only be used inside an async function.

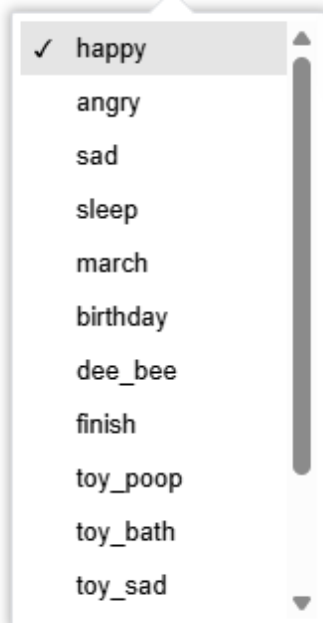

Play a specific melody.
If wait is checked, it will wait until playing melody completes.

Dropdown Options and Input Values

Name	Type	Description	Range / Type
melody	Dropdown Option	Melody	happy(1), angry(2), sad(3), sleep(4), march(5), birthday(6), dee_bee(7), finish(8), toy_poop(9), toy_bath(10), toy_sad(11), toy_happy(12), toy_angry(13), toy_sleep(14)

JavaScript Code

```
// Play toy_happy (12) melody | Wait 0
__stopSound('Pio*0');
$('Pio*0:sound.melody').d = 12;
await $('Pio*0:sound.!melody').w();

// Play sleep (4) melody | Wait X
__stopSound('Pio*0');
$('Pio*0:sound.melody').d = 4;
```


Python Code

```
# Play toy_happy (12) melody | Wait 0
__stopSound('Pio*0')
__('Pio*0:sound.melody').d = 12
await __('Pio*0:sound.!melody').w()

# Play sleep (4) melody | Wait X
__stopSound('Pio*0')
__('Pio*0:sound.melody').d = 4
```

Turn Off Sound

Turns off the Piobot's sound.



JavaScript Code


```
// Turn off Piobot sound  
__stopSound('Pio*0');
```

Python Code

```
# Turn off Piobot sound  
__stopSound('Pio*0')
```

Is Sound Playing?

Returns whether the Piobot's sound is currently playing as **True (1)** / **False (0)**.

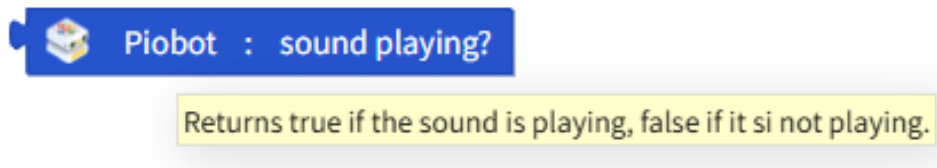

JavaScript Code


```
// Is Piobot sound playing? - true if playing, false otherwise  
$('Pio*0:sound.playing').d;
```

Python Code

```
# Is Piobot sound playing? - True if playing, False otherwise  
__('Pio*0:sound.playing').d
```

Wheel Speed Value

Returns the set wheel speed value of the Piobot.

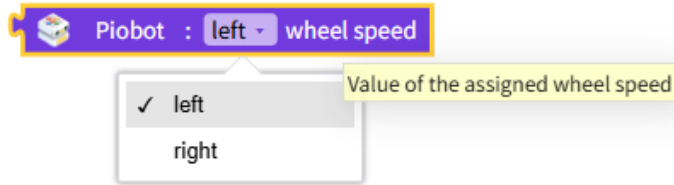

Dropdown Options and Input Values

Name	Type	Description	Range / Type
direction	Dropdown Option	Direction	Left (left), Right (right)

JavaScript Code

```
// Left wheel speed
__getSpeedInput('Pio*0', $('Pio*0:wheel.speed.left').d);

// Right wheel speed
__getSpeedInput('Pio*0', $('Pio*0:wheel.speed.right').d);
```

Python Code

```
# Left wheel speed
__getSpeedInput('Pio*0', __('Pio*0:wheel.speed.left').d)

# Right wheel speed
__getSpeedInput('Pio*0', __('Pio*0:wheel.speed.right').d)
```


Signal Strength Value

Returns the Piobot's signal strength value.

It indicates the signal strength between the robot and the dongle.

The value increases as the distance decreases.

For the stable operation, it is recommended to use within the range of -50dBm ~ -80dBm.
If the signal strength value is closer to 0, the signal is stronger. (e.g. -40 > -90)

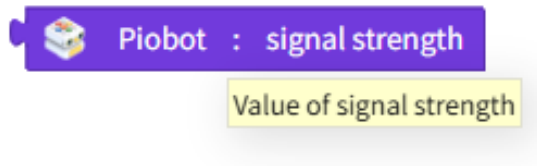

JavaScript Code

```
// Signal strength value  
$('Pio*0:signal_strength').d;
```

Python Code

```
# Signal strength value  
__('Pio*0:signal_strength').d
```


Battery Voltage

Returns the Piobot's battery voltage value.

The volage is approximatedly 4.0V when the battery is fully charged.

It typically operates stably at 3.7V or higher.

Since operating errors may occur if the voltage drops below 3.6V,
charing is strongly recommended.

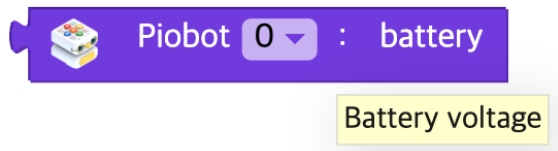

JavaScript Code


```
// Battery voltage value  
$('Pio*0:battery.level').d;
```


Python Code

```
# Battery voltage value
__('Pio*0:battery.level').d
```

Was the Last Pressed Button ~ ?

Returns **True (1)** / **False (0)** depending on the button the user pressed most recently.

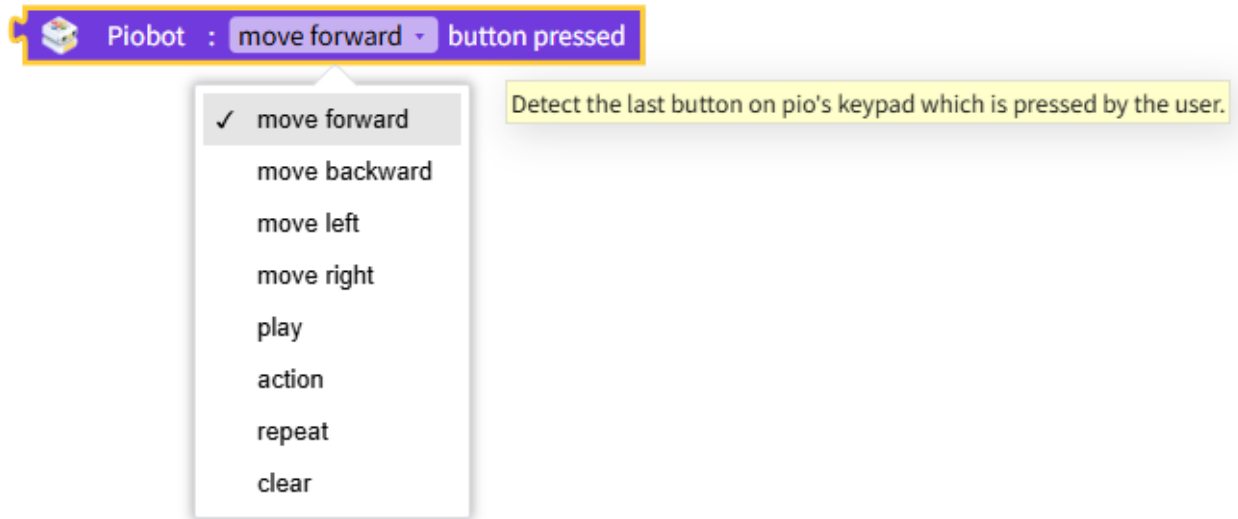

Dropdown Options and Input Values

Name	Type	Description	Range / Type
condition	Dropdown Option	Last pressed button	move forward (2), move backward (4), move left (8), move right (16), play (1), action (32), repeat (64), delete (128)

JavaScript Code

```
// Did the user press the Piobot move forward (2) button?
$('Pio*0:keypad').e && $('Pio*0:keypad').d == 2

// Did the user press the Piobot move backward (4) button?
```

```

$('Pio*0:keypad').e && $('Pio*0:keypad').d == 4

// Did the user press the Piobot move left (8) button?
$('Pio*0:keypad').e && $('Pio*0:keypad').d == 8

// Did the user press the Piobot move right (16) button?
$('Pio*0:keypad').e && $('Pio*0:keypad').d == 16

// Did the user press the Piobot run (1) button?
$('Pio*0:keypad').e && $('Pio*0:keypad').d == 1

// Did the user press the Piobot act (32) button?
$('Pio*0:keypad').e && $('Pio*0:keypad').d == 32

// Did the user press the Piobot repeat (64) button?
$('Pio*0:keypad').e && $('Pio*0:keypad').d == 64

// Did the user press the Piobot delete (128) button?
$('Pio*0:keypad').e && $('Pio*0:keypad').d == 128

```

Python Code

```

# Did the user press the Piobot move forward (2) button?
__('Pio*0:keypad').e and __('Pio*0:keypad').d == 2

# Did the user press the Piobot move backward (4) button?
__('Pio*0:keypad').e and __('Pio*0:keypad').d == 4

# Did the user press the Piobot move left (8) button?
__('Pio*0:keypad').e and __('Pio*0:keypad').d == 8

# Did the user press the Piobot move right (16) button?
__('Pio*0:keypad').e and __('Pio*0:keypad').d == 16

```

```
# Did the user press the Piobot run (1) button?
__('Pio*0:keypad').e and __('Pio*0:keypad').d == 1

# Did the user press the Piobot act (32) button?
__('Pio*0:keypad').e and __('Pio*0:keypad').d == 32

# Did the user press the Piobot repeat (64) button?
__('Pio*0:keypad').e and __('Pio*0:keypad').d == 64

# Did the user press the Piobot delete (128) button?
__('Pio*0:keypad').e and __('Pio*0:keypad').d == 128
```