


Blocks

Set Language

Sets the speech recognition language.

Even if you do not set the language, it will be set automatically.

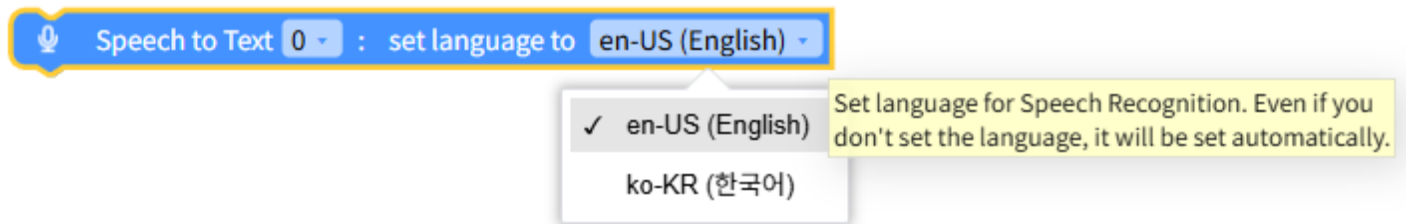

Dropdown Options and Input Values

Name	Type	Description	Range / Type
language	Dropdown Option	Recognition language	en-US (English), ko-KR (Korean)

JavaScript Code

```
// Set speech recognition language to English
$('ASR*0:lang').d = 'en-US';

// Set speech recognition language to Korean
$('ASR*0:lang').d = 'ko-KR';
```


Python Code

```
# Set speech recognition language to English
__('ASR*0:lang').d = 'en-US'

# Set speech recognition language to Korean
__('ASR*0:lang').d = 'ko-KR'
```

Start / Stop Speech Recognition

Starts or stops speech recognition.

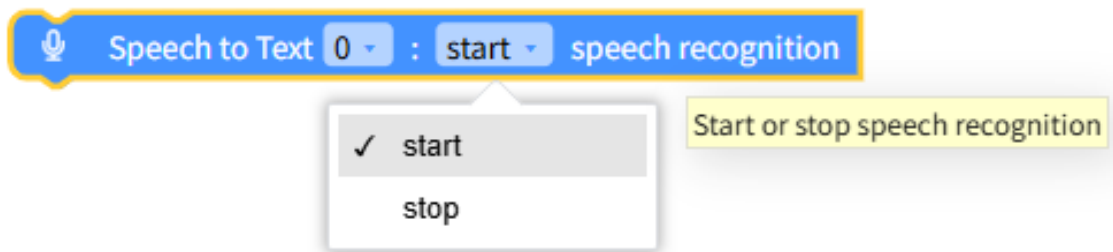

Dropdown Options and Input Values

Name	Type	Description	Range / Type
toggle	Dropdown Option	Speech recognition on/off	Start (1), Stop (0)

JavaScript Code

```
// Start speech recognition
$('ASR*0:listen').d = 1;

// Stop speech recognition
$('ASR*0:listen').d = 0;
```

Python Code

```
# Start speech recognition
__('ASR*0:listen').d = 1

# Stop speech recognition
__('ASR*0:listen').d = 0
```

Speech Recognition Result

Returns the speech recognition result.

 Speech to Text 0 : result

Result of speech recognition

JavaScript Code

```
// Speech recognition result  
$('ASR*0:result').d;
```

Python Code

```
# Speech recognition result  
__('ASR*0:result').d
```

Is Speech Recognition Active?

Returns whether speech recognition is active as **True (1) / False (0)**.

 Speech to Text 0 : recognizing?

whether it is recognizing speech or not

JavaScript Code

```
// Is speech recognition active?  
$('ASR*0:state').d;
```

Python Code

```
# Is speech recognition active?  
__('ASR*0:state').d
```