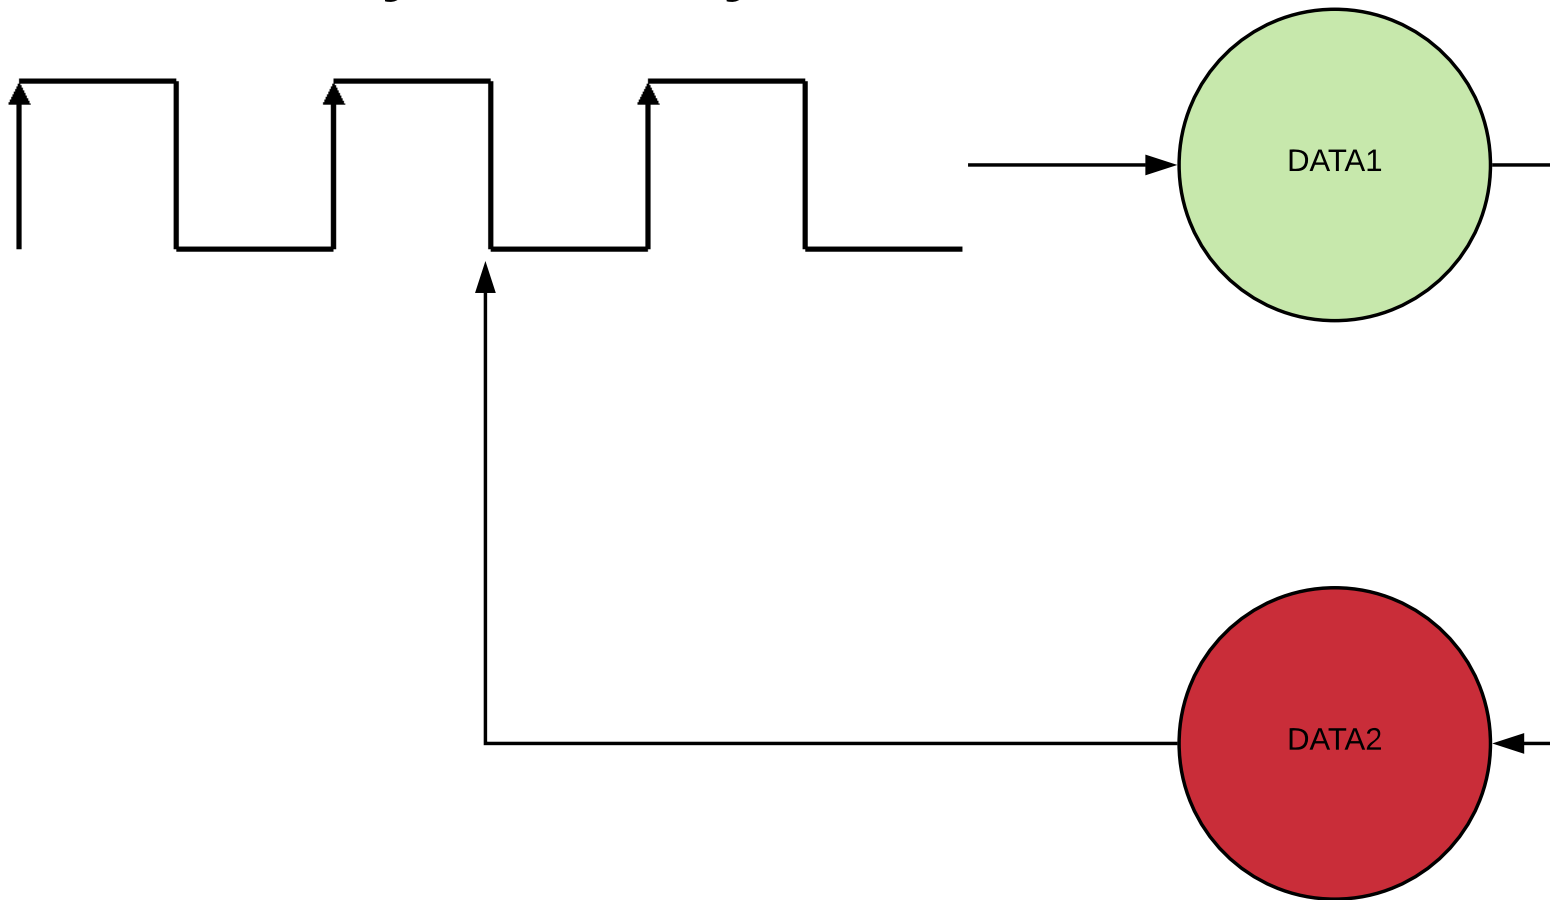pulse generated
when byte is ready

DATA1
starts when
pulse is
generated

DATA1

DATA2