


# dk::osal::OsalConfig Class Reference

```
#include <DKOsalConfig.h>
```

Collaboration diagram for dk::osal::OsalConfig:

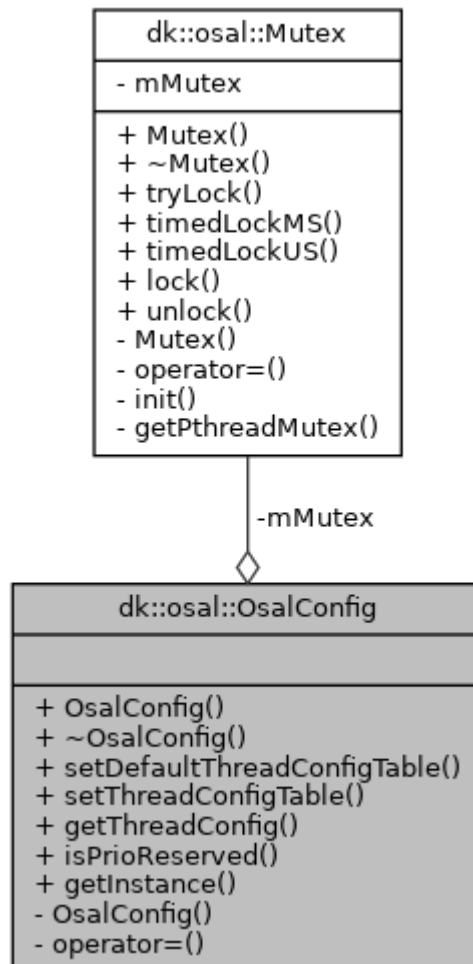

## Public Member Functions

### **OsalConfig ()**

constructor of osalconfig [More...](#)

### **~OsalConfig ()**

Destructor of osalconfig. [More...](#)

### **void setDefaultThreadConfigTable ()**

To set a default thread configuration table. [More...](#)

### **bool setThreadConfigTable (const OSAL\_THREAD\_CONFIG configTbl[], uint32\_t size)**

This should be called from **main()** before threads are created. [More...](#)

### **bool getThreadConfig (const ThreadConfigID id, ThreadPrio &prio, uint32\_t &stackSize) const**

search a thread configuration for the given ID. [More...](#)

### **bool isPrioReserved (ThreadPrio prio) const**

if a thread configuration exists which uses the given priority value. [More...](#)

# Static Public Member Functions

static **OsalConfig** & **getInstance** ()  
function to get instance of **OsalConfig** More...

# Private Member Functions

**OsalConfig** (const **OsalConfig** &)  
**OsalConfig** & **operator=** (const **OsalConfig** &)

# Private Attributes

**Mutex** **mMutex**

# Constructor & Destructor Documentation

## ◆ OsalConfig() [ 1 / 2 ]

dk::osal::OsalConfig::OsalConfig ( )

constructor of osalconfig

## ◆ ~OsalConfig()

dk::osal::OsalConfig::~~OsalConfig ( )

Destructor of osalconfig.

## ◆ OsalConfig() [ 2 / 2 ]

dk::osal::OsalConfig::OsalConfig ( const **OsalConfig** & )

private

# Member Function Documentation

## ◆ getInstance()

static **OsaiConfig** & dk::osal::OsaiConfig::getInstance ( )

static

function to get instance of **OsaiConfig**

#### Returns

reference to **OsaiConfig**.

Requirement ID 751552

### ◆ getThreadConfig()

```
bool dk::osal::OsaiConfig::getThreadConfig ( const ThreadConfigID id,  
                                              ThreadPrio &          prio,  
                                              uint32_t &          stackSize  
                                              )                  const
```

search a thread configuration for the given ID.

#### Parameters


**id** the thread id for which the config is searched.  
**prio** a reference where the found prio is stored in.  
**stackSize** a reference where the found stackSize is stored in.

#### Returns

true if a config for the given id was found.

Requirement ID 751552

Here is the caller graph for this function:



### ◆ isPrioReserved()

```
bool dk::osal::OsaiConfig::isPrioReserved ( ThreadPrio prio ) const
```

if a thread configuration exists which uses the given priority value.

### Parameters


**prio** the thread priority

### Returns

true if a config specified this priority.

Requirement ID 751552

Here is the caller graph for this function:



## ◆ operator=()

```
OsaiConfig& dk::osal::OsaiConfig::operator= ( const OsaiConfig & )
```


private

## ◆ setDefaultThreadConfigTable()

```
void dk::osal::OsaiConfig::setDefaultThreadConfigTable ( )
```

To set a default thread configuration table.

Here is the caller graph for this function:



## ◆ setThreadConfigTable()

```
bool dk::osal::OsalConfig::setThreadConfigTable ( const OSAL_THREAD_CONFIG configTbl[],
                                                    uint32_t size
                                                    )
```

This should be called from **main()** before threads are created.

#### Parameters

**configTbl** a fixed array of **OSAL\_THREAD\_CONFIG** entries. The array must not be modified after this call, since **OsalConfig** accessess it per pointers.


**size** the number of entries in the configTbl[] array

#### Returns

true on sucess.

Requirement ID 751552

Here is the caller graph for this function:



## Member Data Documentation

### ◆ mMutex

**Mutex** dk::osal::OsalConfig::mMutex

mutable private

The documentation for this class was generated from the following files:

- /home/damudhar/29\_8\_audi/cluster-platform/dijkstra/abstraction/osal/src/posix/**DKOsalConfig.h**
- /home/damudhar/29\_8\_audi/cluster-platform/dijkstra/abstraction/osal/src/posix/**DKOsalConfig.cpp**