


DKOsalErrorTypes.h File Reference

#include <cstdint>

Include dependency graph for DKOsalErrorTypes.h:

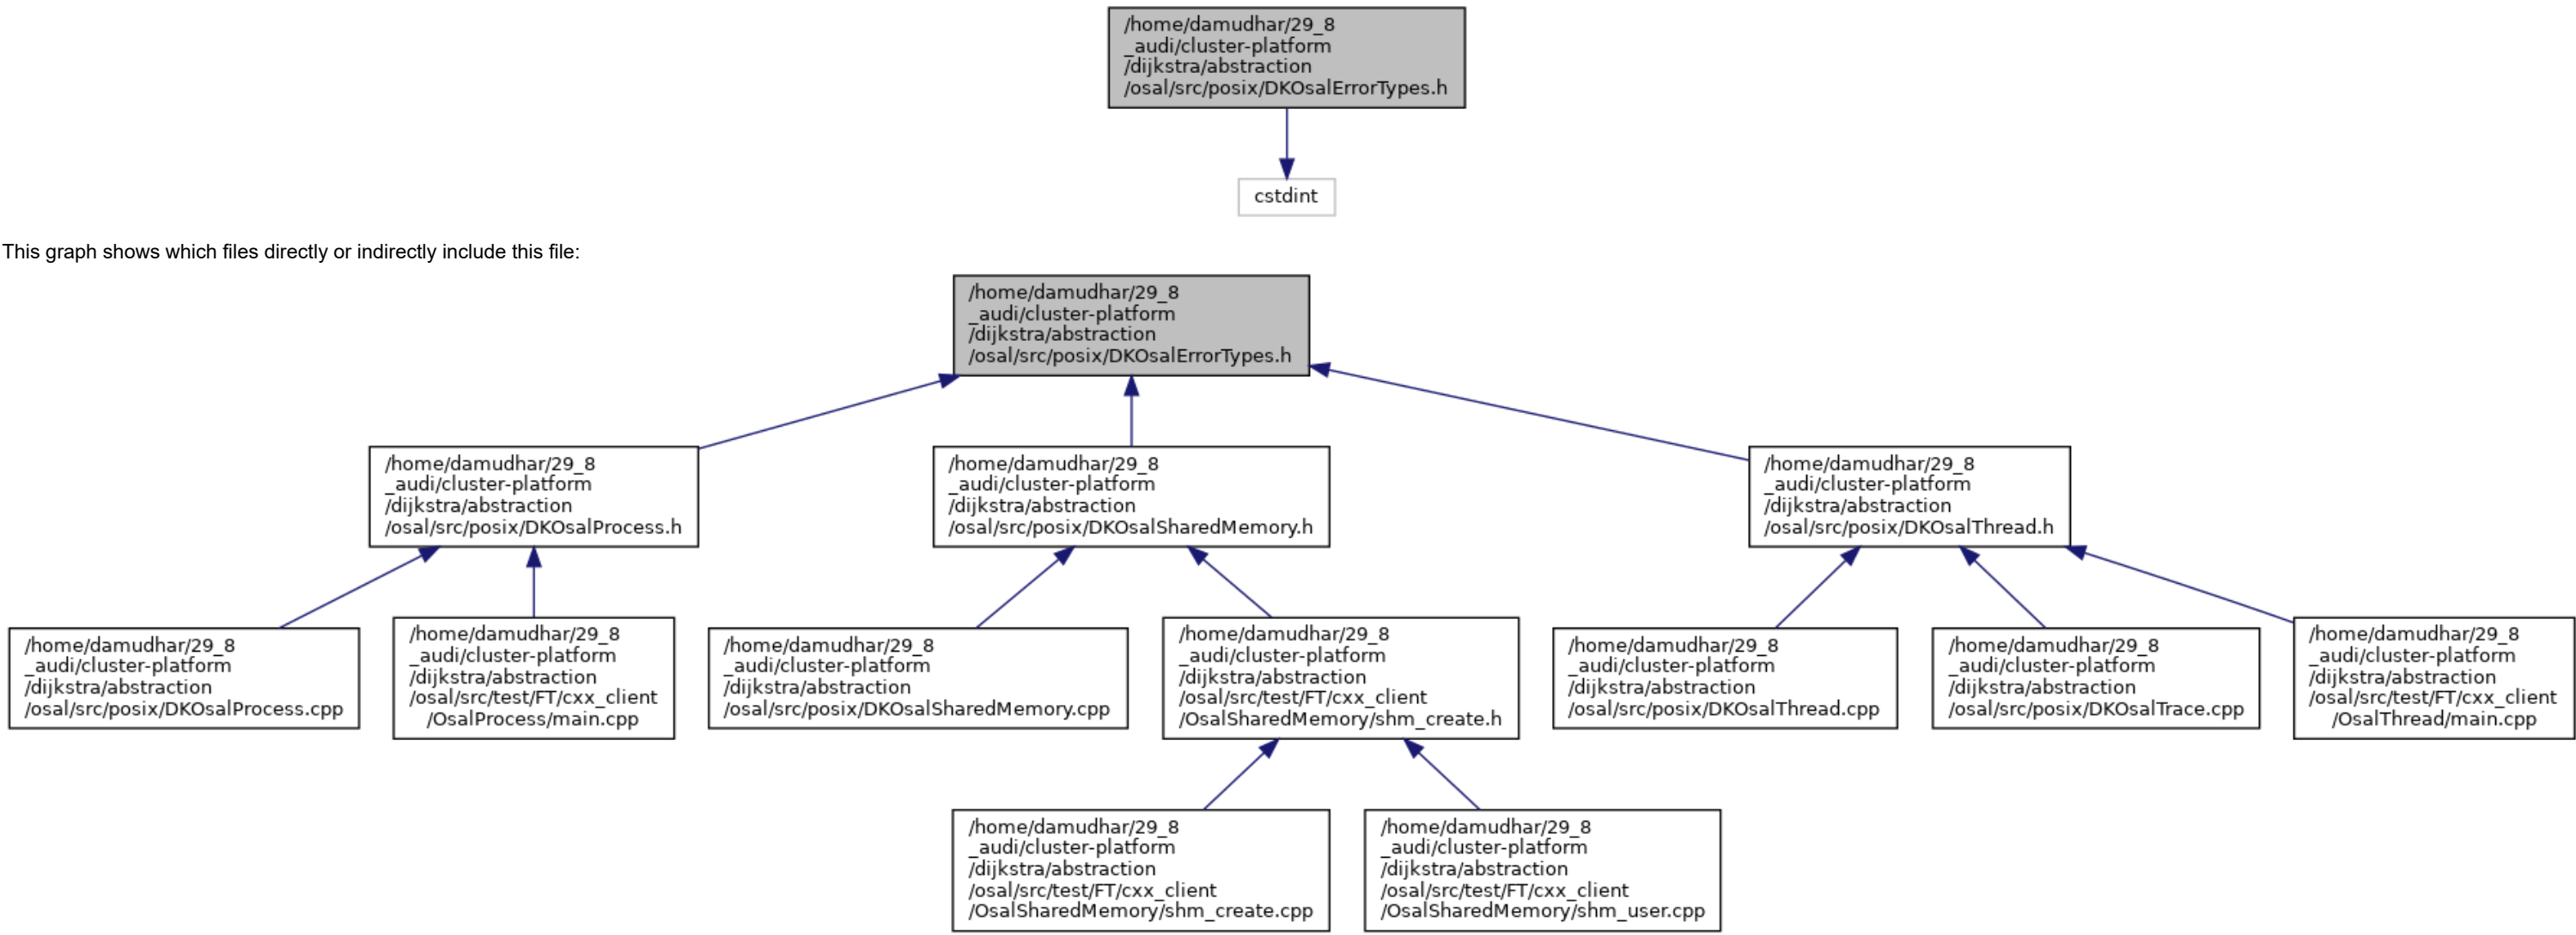

Go to the source code of this file.

Macros

```
#define CIA_RETURN_OK    return OK
#define CIA_RETURN(code)    return code
#define CIA_SUCCEEDED(code)    (code == OK)
#define CIA_FAILED(code)    (code != OK)
```

Typedefs

```
typedef uint32_t    Error
```

Functions

```
const char *    getString (Error error)
    OsalError shall have error codes to be report on any error occurrence. More...
```

Variables

```
const Error    OK = 0
const Error    SEND_ERROR = 1
const Error    TIMEOUT = 2
const Error    OBJECT_FULL = 3
const Error    OBJECT_NOT_FOUND = 4
const Error    UNIMPLEMENTED = 5
const Error    INVALID_STATE = 6
const Error    INVALID_PARAMETER = 7
const Error    OBJECT_IN_USE = 8
const Error    FAILED = 9
const Error    WOULDDBLOCK = 10
const Error    IS_CLOSED = 11
```

Macro Definition Documentation

◆ CIA_FAILED

#define CIA_FAILED (code) (code != OK)

◆ CIA_RETURN

#define CIA_RETURN (code) return code

◆ CIA_RETURN_OK

#define CIA_RETURN_OK return OK

◆ CIA_SUCCEEDED

#define CIA_SUCCEEDED (code) (code == OK)

Typedef Documentation

◆ Error

typedef uint32_t Error

Function Documentation

◆ getString()

const char * getString (Error error)

OsalError shall have error codes to be report on any error occurrence.

requirement ID 751533

◆ FAILED	const Error FAILED = 9
◆ INVALID_PARAMETER	const Error INVALID_PARAMETER = 7
◆ INVALID_STATE	const Error INVALID_STATE = 6
◆ IS_CLOSED	const Error IS_CLOSED = 11
◆ OBJECT_FULL	const Error OBJECT_FULL = 3
◆ OBJECT_IN_USE	const Error OBJECT_IN_USE = 8
◆ OBJECT_NOT_FOUND	const Error OBJECT_NOT_FOUND = 4
◆ OK	const Error OK = 0
◆ SEND_ERROR	const Error SEND_ERROR = 1
◆ TIMEOUT	const Error TIMEOUT = 2
◆ UNIMPLEMENTED	const Error UNIMPLEMENTED = 5
◆ WOULDBLOCK	const Error WOULDBLOCK = 10