



pure virtual function **run()** Child class inheriting the **IRunnable** should implement the method **run()** [More...](#)

#include <DKOsaiRunnable.h>

Inheritance diagram for dk::osal::IRunnable:

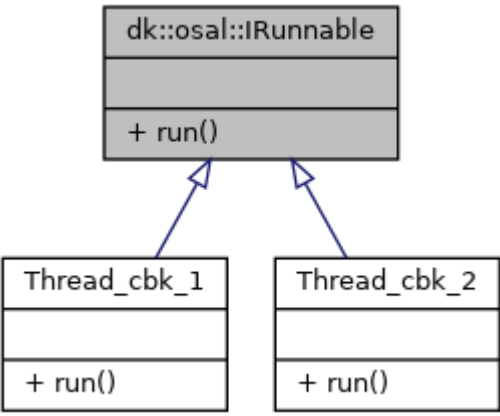

Collaboration diagram for dk::osal::IRunnable:



Public Member Functions

virtual void * **run** ()=0

Detailed Description

pure virtual function **run()** Child class inheriting the **IRunnable** should implement the method **run()**

Member Function Documentation

◆ **run()**

virtual void* dk::osal::IRunnable::run () pure virtual

Implemented in **Thread_cbk_2**, and **Thread_cbk_1**.

The documentation for this class was generated from the following file:

- /home/damudhar/29_8_audi/cluster-platform/dijkstra/abstraction/osal/src/posix/**DKOsaiRunnable.h**