


dk::osal::Process Class Reference

```
#include <DKOsaiProcess.h>
```

Collaboration diagram for dk::osal::Process:



Public Member Functions

	Process ()
	Default Constructor. More...
virtual	~Process ()
	Default Destructor. More...

Static Public Member Functions

static int32_t	createProcess (const char *file_name, char *const argv[])
	function to create the process More...
static uint32_t	getProcessId (void)
	returns the process id of the current process More...
static Error	setenv (const char *name, const char *value, bool overwrite)
	Set an environment variable. More...
static Error	unsetenv (const char *name)
	Delete an environment variable. More...
static const char *	getenv (const char *name)
	Read an environment variable. More...

Constructor & Destructor Documentation

◆ Process()

dk::osal::Process::Process ()

Default Constructor.

requirement ID 751536

◆ ~Process()

dk::osal::Process::~~Process ()

virtual

Default Destructor.

requirement ID 751536

Member Function Documentation

◆ createProcess()

```
static int32_t dk::osal::Process::createProcess ( const char * file_name,  
                                                char *const argv[]  
                                                )
```

static

function to create the process

Parameters

file_name name of the process if the filename is not an absolute path, the environment variable PATH is used to locate the process.


argv[] arguments to be passed when the process starts. NULL terminated array of arguments. Important: the first entry (argv[0]) should point to the process filename.

Returns

pid of child process or -1 on error.

requirement ID 751574

Here is the call graph for this function:

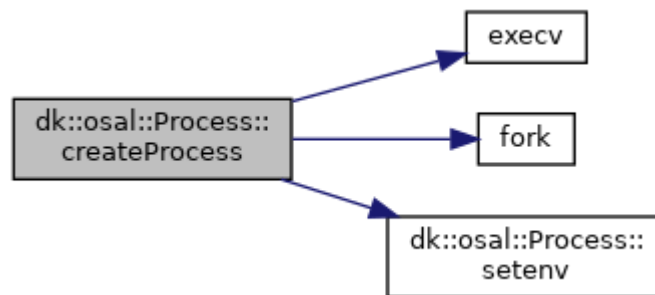

◆ getenv()

```
static const char * dk::osal::Process::getenv ( const char * name )
```

static

Read an environment variable.

Parameters

name Name of the variable.

Returns

CString of the variables value, or NULL if the variable does not exist.

requirement ID 751578

◆ getpid()

```
static uint32_t dk::osal::Process::getProcessId ( void )
```

static


returns the process id of the current process

Returns

process id of the current process

requirement ID 751575

Here is the call graph for this function:



◆ setenv()

```
static Error dk::osal::Process::setenv ( const char * name,  
                                         const char * value,  
                                         bool      overwrite  
                                         )
```

static

Set an environment variable.

Parameters

name Name of the variable

value Value of the variable

overwrite Flag indicating whether an existing variable should be overwritten.

Returns

OK on success, else an error.

requirement ID 751576

Here is the caller graph for this function:



◆ unsetenv()

```
static Error dk::osal::Process::unsetenv ( const char * name )
```

static

Delete an environment variable.

Parameters

name Name of the variable

Returns

OK on success, else an error.

requirement ID 751577

The documentation for this class was generated from the following files:

- /home/damudhar/29_8_audi/cluster-platform/dijkstra/abstraction/osal/src/posix/**DKOsaiProcess.h**
- /home/damudhar/29_8_audi/cluster-platform/dijkstra/abstraction/osal/src/posix/**DKOsaiProcess.cpp**