


DKOsalTrace.h File Reference

```
#include <ctime>
```

Include dependency graph for DKOsalTrace.h:

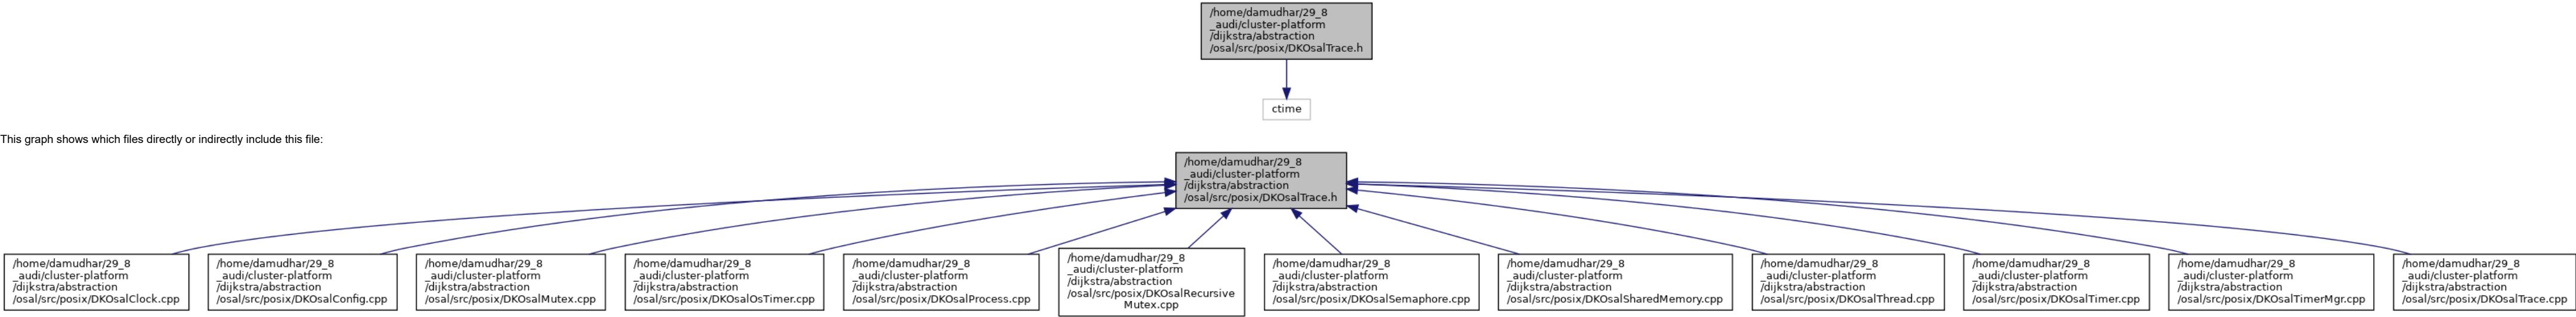

[Go to the source code of this file.](#)

Macros

```
#define OSAL_SCOPE_CONFIG (1<<0)
#define OSAL_SCOPE_THREAD (1<<1)
#define OSAL_SCOPE_PROCESS (1<<2)
#define OSAL_SCOPE_MUTEX (1<<3)
#define OSAL_SCOPE_COND (1<<4)
#define OSAL_SCOPE_SEM (1<<5)
#define OSAL_SCOPE_SHM (1<<6)
#define OSAL_SCOPE_TIMER (1<<7)
#define OSAL_SCOPE_CLOCK (1<<8)
#define OSAL_SCOPE_ALL (0xFFFF)
#define OSAL_ENABLE_DEBUG 0
#define OSAL_ENABLE_WARNING OSAL_SCOPE_ALL
#define OSAL_ENABLE_ERROR OSAL_SCOPE_ALL
#define OSAL_ENABLE_TIMESTAMPS 1 /* set to 0 to avoid printing timestamps with OSAL_* messages */
#define OSAL_DBG(scope, ...) do { } while (0)
#define OSAL_WARN(scope, ...) do { if (scope & (OSAL_ENABLE_WARNING)) osal_warn(__VA_ARGS__); } while (0)
#define OSAL_ERR(scope, ...) do { if (scope & (OSAL_ENABLE_ERROR)) osal_error(__VA_ARGS__); } while (0)
#define OSAL_ABORT() do { osal_abort(); } while (0)
#define OSAL_OUTPUT_GENERIC(PREFIX, PIDTID, MSG, ...)
```

Functions

```
void osal_dbg (const char *fmt,...)
void osal_warn (const char *fmt,...)
void osal_error (const char *fmt,...)
void osal_abort ()
```

Macro Definition Documentation

◆ OSAL_ABORT

```
#define OSAL_ABORT ( ) do { osal_abort(); } while (0)
```

◆ OSAL_DBG

```
#define OSAL_DBG ( scope,
...
) do { } while (0)
```

◆ OSAL_ENABLE_DEBUG

```
#define OSAL_ENABLE_DEBUG 0
```

◆ OSAL_ENABLE_ERROR

```
#define OSAL_ENABLE_ERROR OSAL_SCOPE_ALL
```

◆ OSAL_ENABLE_TIMESTAMPS

```
#define OSAL_ENABLE_TIMESTAMPS 1 /* set to 0 to avoid printing timestamps with OSAL_* messages */
```

◆ OSAL_ENABLE_WARNING

```
#define OSAL_ENABLE_WARNING OSAL_SCOPE_ALL
```

◆ OSAL_ERR

```
#define OSAL_ERR ( scope,
...
) do { if (scope & (OSAL_ENABLE_ERROR)) osal_error(__VA_ARGS__); } while (0)
```

◆ OSAL_OUTPUT_GENERIC

```
#define OSAL_OUTPUT_GENERIC ( PREFIX,
PIDTID,
MSG,
...
)

Value:
do {
    timespec _td;
    int ret = clock_gettime(CLOCK_MONOTONIC,&_td);
    if ( ret != 0 ){
        printf("OSAL ErrorWarn: clock_get time error %d\n", ret);
    }
    printf(PREFIX " %021d:%021d:%.061d [" PIDTID "]" %s", static_cast<long int>(_td.tv_sec / 3600),
static_cast<long int>(_td.tv_sec / 60) % 60, static_cast<long int>(_td.tv_sec % 60),
static_cast<long int>(_td.tv_nsec / 1000), MSG, ##__VA_ARGS__);
} while(0)
```

◆ OSAL_SCOPE_ALL

```
#define OSAL_SCOPE_ALL (0xFFFF)
```

◆ OSAL_SCOPE_CLOCK

```
#define OSAL_SCOPE_CLOCK (1<<8)
```

◆ OSAL_SCOPE_COND

```
#define OSAL_SCOPE_COND (1<<4)
```

◆ OSAL_SCOPE_CONFIG

```
#define OSAL_SCOPE_CONFIG (1<<0)
```

◆ OSAL_SCOPE_MUTEX

```
#define OSAL_SCOPE_MUTEX (1<<3)
```

◆ OSAL_SCOPE_PROCESS

```
#define OSAL_SCOPE_PROCESS (1<<2)
```

◆ OSAL_SCOPE_SEM

```
#define OSAL_SCOPE_SEM (1<<5)
```

◆ OSAL_SCOPE_SHM

```
#define OSAL_SCOPE_SHM (1<<6)
```

◆ OSAL_SCOPE_THREAD

```
#define OSAL_SCOPE_THREAD (1<<1)
```

◆ OSAL_SCOPE_TIMER

```
#define OSAL_SCOPE_TIMER (1<<7)
```

◆ OSAL_WARN

```
#define OSAL_WARN ( scope,
...
) do { if (scope & (OSAL_ENABLE_WARNING)) osal_warn(__VA_ARGS__); } while (0)
```

Function Documentation

◆ osal_abort()

```
void osal_abort ( )
```


◆ osal_dbg()

```
void osal_dbg ( const char * fmt,
...
)
```

◆ osal_error()

```
void osal_error ( const char * fmt,  
                ...  
                )
```

Here is the call graph for this function:

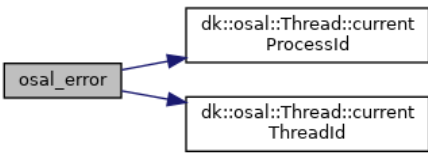

◆ osal_warn()

```
void osal_warn ( const char * fmt,  
                ...  
                )
```

Here is the call graph for this function:

