


CSigUnit_HwInit.c File Reference

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <stdbool.h>
#include <unistd.h>
#include <stdint.h>
#include <math.h>
#include <errno.h>
#include <sys/mman.h>
#include <hw/inout.h>
#include "CSigUnit_HwIf.h"
#include "CSigUnit_Registers.h"
#include "CSigUnit_Debug.h"
```

Include dependency graph for CSigUnit_HwInit.c:

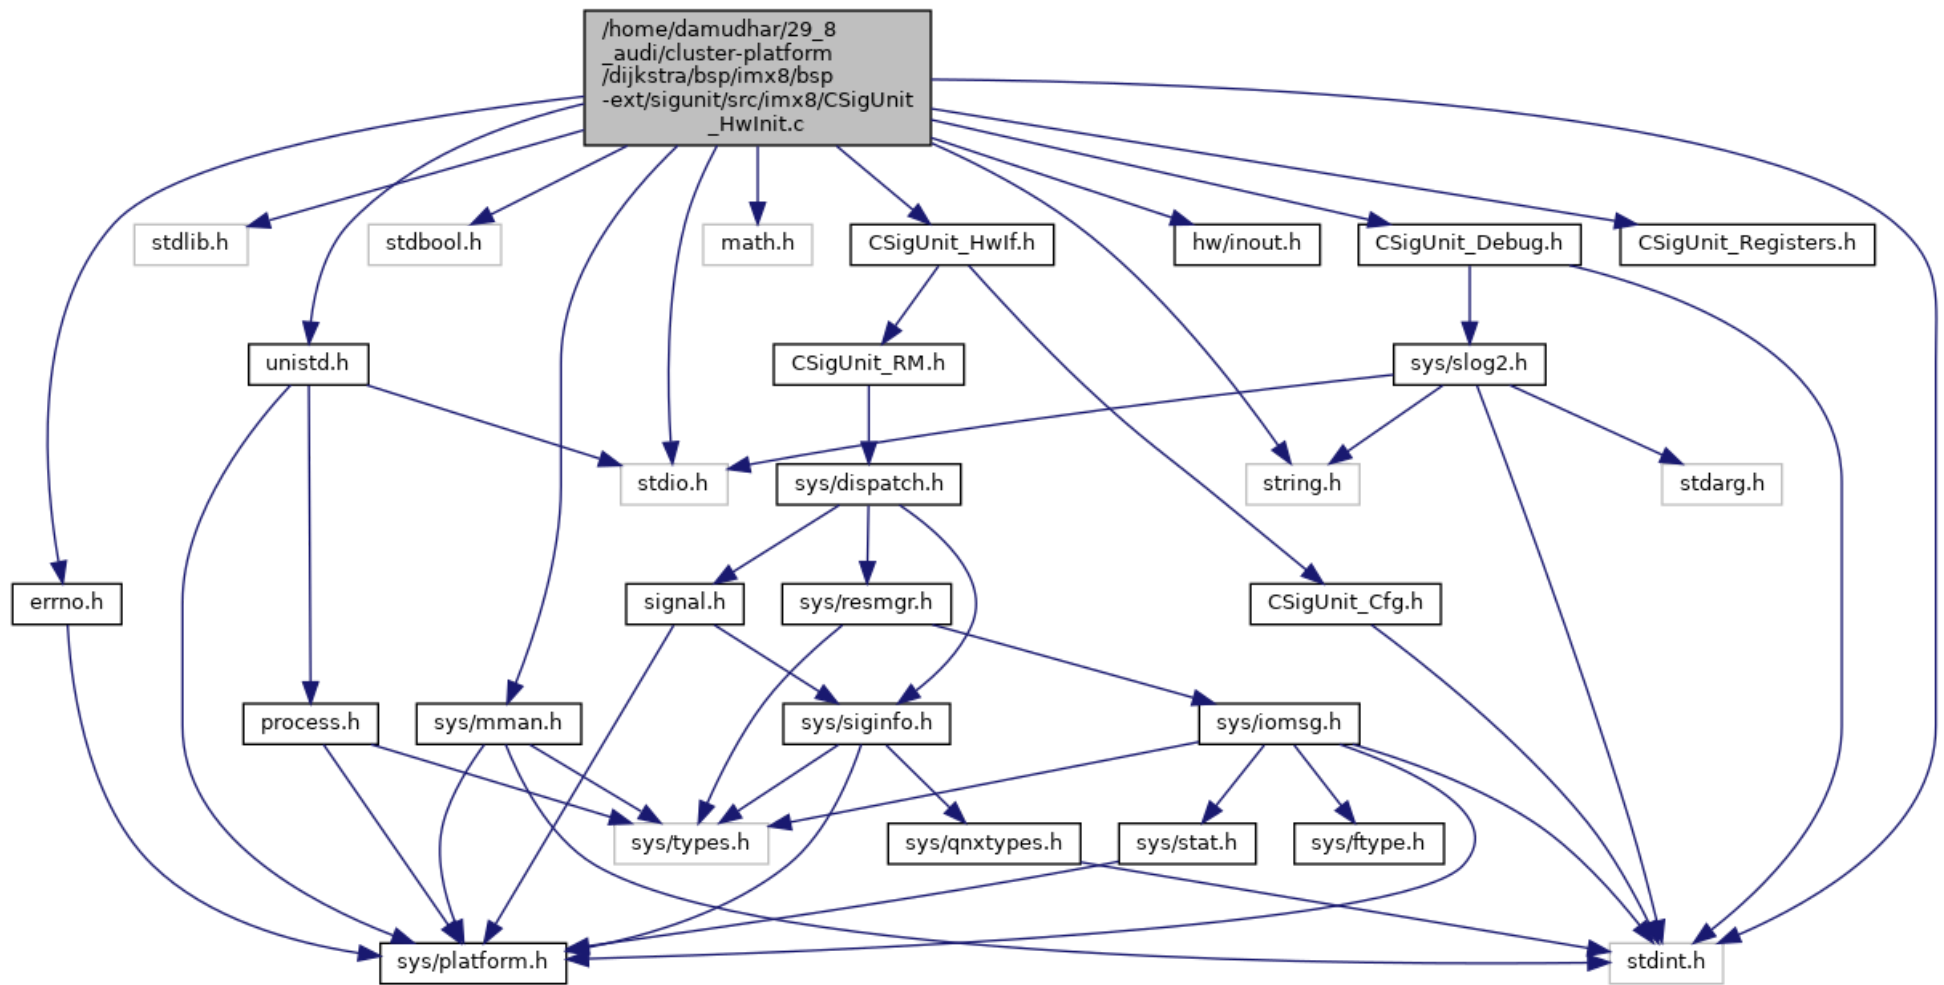

Functions

bool **sigunit_hw_init** (ts_sigunit_dev_t *p_sighwinit_SP)

Function that is called to do IO Mapping with the SigUnit's Base Address. [More...](#)

bool **sigunit_hw_fini** (ts_sigunit_dev_t *p_sighwfini_SP)

Function that is called to do IO UnMapping with the banks having bits set more than 0. [More...](#)

Function Documentation

◆ **sigunit_hw_fini()**

```
bool sigunit_hw_fini ( ts_sigunit_dev_t * p_sighwfini_SP )
```

Function that is called to do IO UnMapping with the banks having bits set more than 0.

Function Name: sig_hw_fini

Parameters

ts_sigunit_dev_t *sighwfini_p


Returns

bool

Here is the call graph for this function:



Here is the caller graph for this function:



◆ sigunit_hw_init()

```
bool sigunit_hw_init ( ts_sigunit_dev_t * p_sighwinit_SP )
```

Function that is called to do IO Mapping with the SigUnit's Base Address.

Function Name: sig_hw_init

Parameters

const ts_sigunit_dev_t *sighwinit_p

Returns

bool

Here is the call graph for this function:



Here is the caller graph for this function:

