


debug.c File Reference

```
#include <stdio.h>
#include <errno.h>
#include "debug.h"
```

Include dependency graph for debug.c:

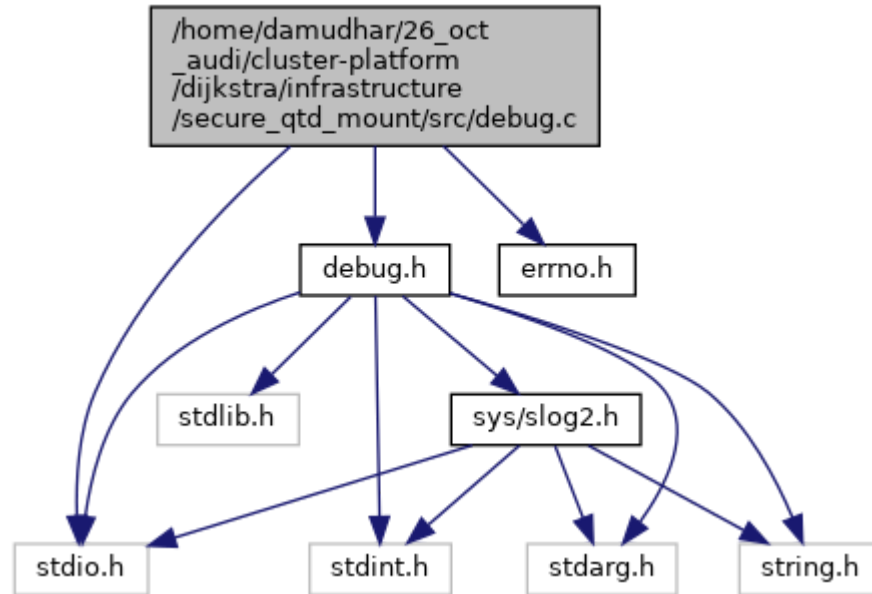

Functions

uint8_t **secure_qtd_mount_enable_logging** (void)

Function that is called to register with slogger2 so that slog2info logs are logged. [More...](#)

Function Documentation

◆ **secure_qtd_mount_enable_logging()**

```
uint8_t secure_qtd_mount_enable_logging ( void )
```

Function that is called to register with slogger2 so that slog2info logs are logged.

Function Name: secure_qtd_mount_enable_logging


Parameters

void

Returns

uint8_t

Here is the call graph for this function:



Here is the caller graph for this function:

