



debug.h File Reference

```
#include <stdio.h>
#include <stdlib.h>
#include <stdint.h>
#include <stdarg.h>
#include <string.h>
#include <sys/slog2.h>
```

Include dependency graph for debug.h:

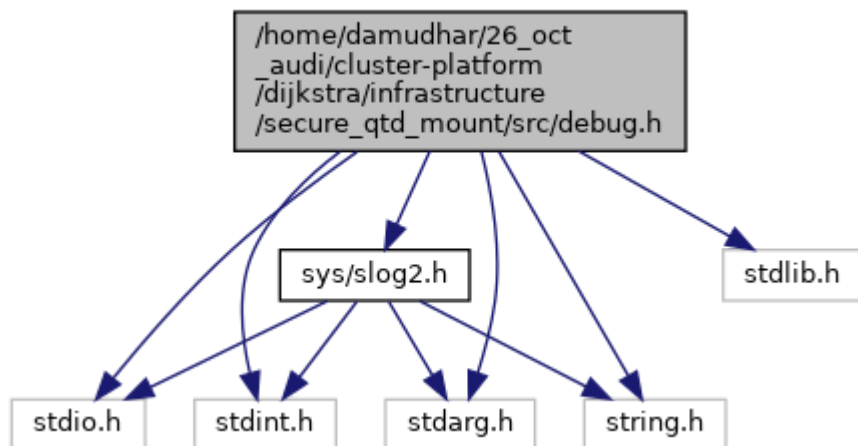

This graph shows which files directly or indirectly include this file:

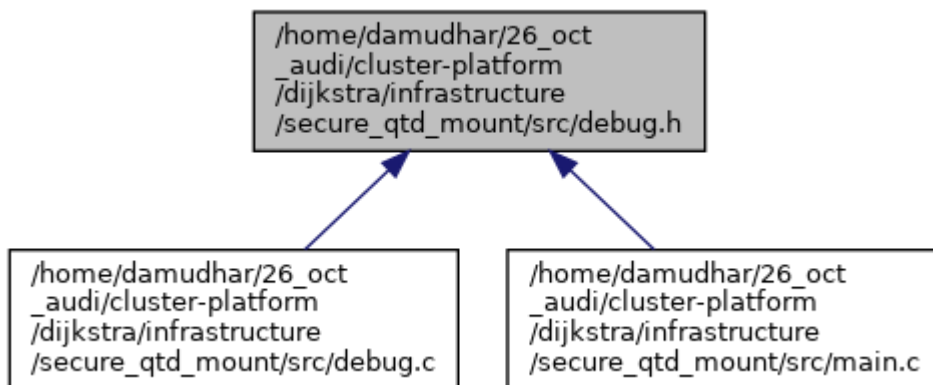

[Go to the source code of this file.](#)

Macros

```
#define IMX_SECURE_QTD_MOUNT_LOG_SLOG2
#define DEBUG_NONE 0x00u
#define DEBUG_VERBOSE 0x01u
#define DEBUG_INFO 0x02u
#define DEBUG_ERR 0x04u
#define DEBUG (DEBUG_ERR)
#define LOGV(fmt, ...)
```

```
#define LOGI(fmt, ...)
```

```
#define LOGE(fmt, ...)
```

Functions

uint8_t **secure_qtd_mount_enable_logging** (void)

Function that is called to register with slogger2 so that slog2info logs are logged. [More...](#)

Variables

slog2_buffer_set_config_t **slog_config**

Standard io header. [More...](#)

slog2_buffer_t **slog2_handle**

Macro Definition Documentation

◆ DEBUG

```
#define DEBUG (DEBUG_ERR)
```

◆ DEBUG_ERR

```
#define DEBUG_ERR 0x04u
```

◆ DEBUG_INFO

```
#define DEBUG_INFO 0x02u
```

◆ DEBUG_NONE

```
#define DEBUG_NONE 0x00u
```

◆ DEBUG_VERBOSE

```
#define DEBUG_VERBOSE 0x01u
```

◆ IMX_SECURE_QTD_MOUNT_LOG_SLOG2

```
#define IMX_SECURE_QTD_MOUNT_LOG_SLOG2
```

◆ LOGE

```
#define LOGE ( fmt,  
              ...  
            )
```

◆ LOGI

```
#define LOGI ( fmt,  
              ...  
            )
```

◆ LOGV

```
#define LOGV ( fmt,  
              ...  
            )
```

Function Documentation

◆ secure_qtd_mount_enable_logging()

```
uint8_t secure_qtd_mount_enable_logging ( void )
```

Function that is called to register with slogger2 so that slog2info logs are logged.

Function Name: secure_qtd_mount_enable_logging


Parameters

void


Returns

uint8_t

Here is the call graph for this function:



Here is the caller graph for this function:



Variable Documentation

◆ slog2_handle

slog2_buffer_t slog2_handle

◆ slog_config

Standard io header.

Standard library header

standard boolean support header

Library supports string operations

Library provides access to the POSIX operating system API

Library defines macros for reporting and retrieving error conditions

Library provides subroutines for file operations

Library provides system logging APIs

Library for mounting/ unmounting QNX file system

Library for json structures and parsing subroutines

Library defines the logging levels

Library defines posix spawn operations