


main.c File Reference

```
#include <stdio.h>
#include <stdlib.h>
#include <stdbool.h>
#include <string.h>
#include <unistd.h>
#include <errno.h>
#include <fcntl.h>
#include <sys/mount.h>
#include "dk_logger.h"
#include "spawn.h"
#include <sys/mman.h>
```

Include dependency graph for main.c:

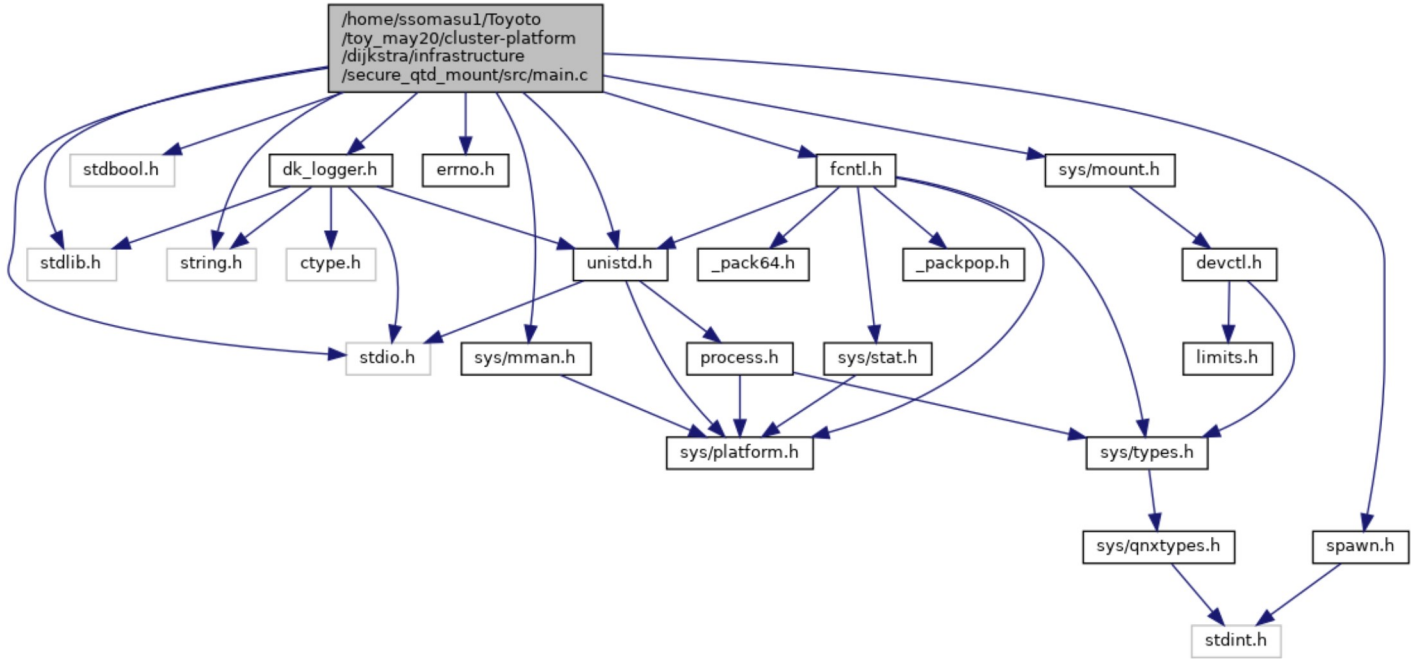

Macros

```
#define EOK 0
    Standard io header. More...

#define BUFF_SIZE 256U

#define TYPE_QTD "qtd\0"

#define TYPE_QNX6 "qnx6\0"

#define FORMAT "format"
```

Typedefs

```
typedef char char8_t
    Typedef for native type of char. More...
```

Functions

```
LOG_DECLARE_CONTEXT (gSecQtdMntLogContext)

static int32_t mount_fs (const char8_t *devPr, const char8_t *fs_type, const char8_t *mnt, const char8_t *option)
    This function opens the /dev/sc path to fetch the partition info through devctl calls. More...

static int32_t parse_config (const char8_t *file)
    int32_t main (int32_t argc, char8_t *const argv[])
    This function performs parsing of JSON configuration file. This reads/decodes configuration params of each partition and decides the mounting operation. More...
```

Macro Definition Documentation

```
#define BUFF_SIZE 256U
```

◆ BUFF_SIZE

◆ EOK

```
#define EOK 0
```

Standard io header.

Standard library header

standard boolean support header

Library supports string operations

Library provides access to the POSIX operating system API

Library defines macros for reporting and retrieving error conditions

Library provides subroutines for file operations

Library provides system logging APIs

Library for mounting/ unmounting QNX file system

Library for json structures and parsing subroutines

Library defines the wait API for Linux

Library defines the logging levels

Library defines posix spawn operations

Library defines mmeory mapping operations

Library defines physical memory operations

◆ FORMAT

```
#define FORMAT "format"
```

◆ TYPE_QNX6

```
#define TYPE_QNX6 "qnx6\0"
```

◆ TYPE_QTD

```
#define TYPE_QTD "qtd\0"
```

Typedef Documentation

◆ char8_t

```
typedef char char8_t
```

Typedef for native type of char.

Function Documentation

◆ LOG_DECLARE_CONTEXT()

```
LOG_DECLARE_CONTEXT ( gSecQtdMntLogContext )
```

◆ main()

```
int32_t main ( int32_t      argc,  
               char8_t *const argv[]  
             )
```

This function performs parsing of JSON configuration file. This reads/decodes configuration params of each partition and decides the mounting operation.

Returns


int32_t to main function

Main function to display the usage and initializes the slog2.

Returns

int32_t (Exception as the return is to KSHELL)

Here is the call graph for this function:

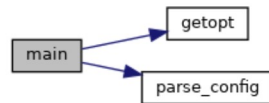

◆ mount_fs()

```
static int32_t mount_fs ( const char8_t * devPr,  
                          const char8_t * fs_type,  
                          const char8_t * mnt,  
                          const char8_t * option  
                        )
```

static

This function opens the /dev/sc path to fetch the partition info through devctl calls.

Returns

int32_t to main function

This function performs bit wise operations to fetch the partition id Based on the id/number the corresponding partition to be mounted is identified

Returns

int32_t to parse_config function

This function performs mounting operation of QTD type file systems In case of failure to mount QTD type, as a recovery action, the partition is formatted to QNX6 and mounted

Returns

int32_t to parse_config function

This function performs mounting operation of QNX6 type file systems

Returns

int32_t to parse_config function

Here is the call graph for this function:



◆ parse_config()

```
static int32_t parse_config ( const char8_t * file )
```

static

Here is the caller graph for this function:

