

Surgical Post-Training: Proximal On-Policy Distillation for Reasoning with Knowledge Retention

Wenye Lin

The University of Hong Kong
linius@connect.hku.hk

Kai Han*

The University of Hong Kong
kaihanx@hku.hk

Abstract

Injecting new reasoning knowledge into Large Language Models (LLMs) via post-training often induces catastrophic forgetting. Recent studies emphasize the importance of on-policy data but suggest that KL-divergence fails to mitigate forgetting. In contrast, we show, both analytically and empirically, that the KL-constrained reward formulation actually plays a critical role in retaining knowledge during post-training. This motivates our Surgical Post-Training (SPoT), a proximal on-policy distillation framework designed to optimize reasoning efficiently while preserving prior knowledge. SPoT consists of (1) a data rectification pipeline employing an Oracle to surgically correct erroneous steps via minimal edits, generating proximal on-policy data; and (2) a reward-based binary cross-entropy objective essential for enhancing reasoning and mitigating forgetting. Empirically, with only 4k rectified math pairs, SPoT improves Qwen3-8B’s accuracy by 6.2% on average across in-domain and out-of-domain tasks, requiring merely 16-minute model training on 8× H800 GPUs. Moreover, SPoT provides a superior initialization for subsequent reinforcement learning, significantly elevating the performance ceiling. Code: <https://github.com/Visual-AI/SPoT>

1 Introduction

While pretraining builds the foundation of Large Language Models (LLMs) (Achiam et al., 2023; Comanici et al., 2025), post-training remains critical for eliciting specific competencies, such as mathematical reasoning (Shao et al., 2024), code generation (Anthropic, 2024), and human alignment (Ouyang et al., 2022; Zhou et al., 2023). Post-training for reasoning primarily follows two paradigms: Supervised Fine-Tuning (SFT) and Reinforcement Learning (RL). While SFT benefits from strong supervision, it induces catastrophic forgetting when injecting new reasoning capabilities (Chu et al., 2025; Huan et al., 2025). On-policy RL methods like Group Relative Policy Optimization (GRPO) (Shao et al., 2024) avoid forgetting and excel on tasks with verifiable outcomes, yet they rely on the base model’s ability to sample correct paths, making them less suited for injecting new knowledge that expands fundamental reasoning boundaries (Yue et al., 2025).

This raises a critical question: **How can we effectively inject external reasoning knowledge into LLMs while mitigating catastrophic forgetting?** Recent studies reveal that *on-policy data* is crucial for mitigating catastrophic forgetting, as it prevents the drastic distributional shifts inherent in off-policy SFT (Chen et al., 2025; Shenfeld et al., 2025). Motivated by this, a growing body of work explores on-policy distillation (Agarwal et al., 2024; Lu & Lab, 2025; Yang et al., 2025; Xiao et al., 2026), where the teacher model provides token-level distributions as dense supervision for the student’s trajectories. While effective, this approach requires identical tokenizers and white-box teachers, precluding cross-family distillation or the use of proprietary models. To circumvent this constraint, we relax the white-box requirement and instead introduce a data rectification pipeline that

*Corresponding author.

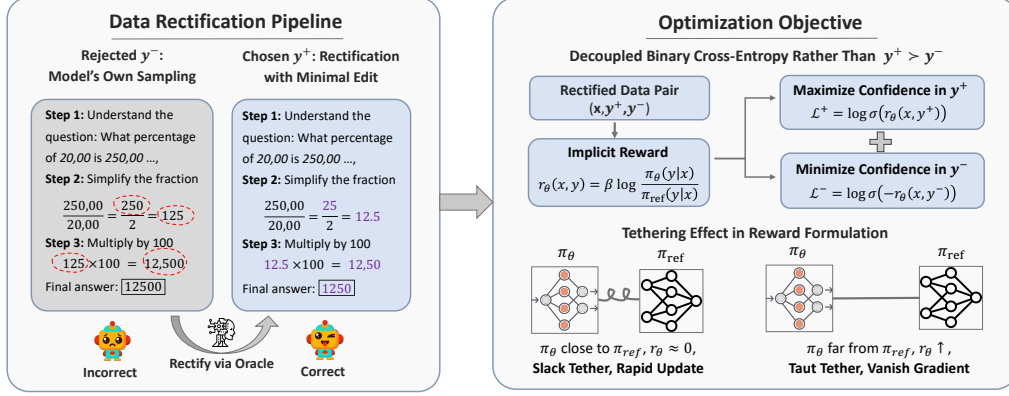


Figure 1: **Illustration of SPOT.** Left: An Oracle surgically corrects reasoning errors, yielding positive samples proximal to the model’s original distribution. Top-Right: Unlike DPO’s relative ranking, we leverage an explicit classification loss that proves more effective for reasoning tasks. Bottom-Right: The tethering effect inherent in our reward definition substantially mitigates catastrophic forgetting.

generates proximal on-policy data without requiring the teacher’s token distributions. Specifically, we employ an Oracle (e.g., a teacher model) to surgically correct erroneous student outputs via minimal edits, yielding positive samples that remain proximal to the model’s original distribution.

However, we find that data proximity is necessary but insufficient. Empirically, SFT on this proximal data *still* incurs forgetting, whereas Direct Preference Optimization (DPO) (Rafailov et al., 2023) does not. To understand the mechanism, we employ a Reward-SFT baseline, a method integrating the DPO reward formulation into SFT. We observe that Reward-SFT effectively retains prior knowledge, confirming that the KL-constraint in the reward definition is the decisive factor: it “tethers” the updated policy to the reference model.

Beyond preserving prior knowledge, the model must also achieve superior gains for in-domain reasoning tasks. We identify two failure modes: (1) the “pull-up” effect (Ren & Sutherland, 2025) inherent in positive-only training (e.g., SFT), which inadvertently raises the likelihood of erroneous responses alongside correct ones; and (2) the *inadequacy of relative ranking* in DPO for reasoning with verifiable correctness.

To address these limitations, we propose Surgical Post-Training (SPOT), a paradigm designed to optimize reasoning efficiently while preserving prior knowledge. SPOT integrates our data rectification pipeline with a reward-based binary cross-entropy objective to maintain the “tethering” effect of the reference model. Unlike the relative ranking in DPO, our objective explicitly maximizes the likelihood of the rectifications while suppressing errors, showing superior gains in reasoning.

In this paper, we make the following contributions. *Firstly*, we demonstrate that beyond on-policy data, implicit regularization is another critical factor in mitigating forgetting, showing that with identical data, SFT fails to generalize whereas DPO retains prior learned knowledge. *Secondly*, we propose SPOT, a proximal on-policy distillation framework that mitigates catastrophic forgetting by synergizing minimal-edit data rectification with a reward-based objective; we identify the “pull-up” effect in positive-only training and the insufficiency of DPO for reasoning, and validate a binary classification objective that provides a denser signal. *Thirdly*, we show that SPOT establishes a superior initialization for subsequent reinforcement learning: compared to applying GRPO directly, initializing GRPO with SPOT checkpoints substantially unlocks higher performance ceilings on in-domain math (+7.2%) and Connect4 (+21.7%), with better general instruction-following capabilities. *Lastly*, to strictly evaluate OOD reasoning without data contamination, we leverage GAMEBoT (Lin et al., 2025) to dynamically construct a Connect4 dataset for reliable evaluation.

2 Data Rectification Pipeline

Our SPOT framework consists of two core components: a *data rectification pipeline* and a *specialized optimization objective* (see Fig. 1). In this section, we detail the first component, which is designed to produce valid reasoning paths proximal to the model’s distribution.

Standard SFT often utilizes offline datasets that diverge significantly from the model’s current policy π_θ , leading to catastrophic forgetting (Chen et al., 2025). Conversely, on-policy methods rely entirely on the model’s intrinsic probability of sampling correct reasoning paths, making them inefficient for hard reasoning tasks. For example, if a model’s pass rate on a specific problem is 1%, obtaining a single correct response requires roughly 100 rollouts in expectation, which is computationally expensive. Furthermore, for problems beyond the model’s current capabilities, self-sampling fails to yield any training signal, making it impossible to learn from those instances (Yu et al., 2025).

To bridge this gap, we propose a *data rectification pipeline* to construct a contrastive dataset $\mathcal{D} = \{(x, y^-, y^+)\}$ where the positive response y^+ only performs necessary corrections to the erroneous logic of the negative response y^- while preserving the model’s original generation style and lexical structure. An example is shown in Fig. 1. The pipeline consists of the following three stages:

Error Elicitation. We first construct a dataset of model failures. Given a question x from the source dataset, we sample a response y^- from the current policy: $y^- \sim \pi_\theta(\cdot|x)$. We evaluate y^- against the ground-truth answer. If the final answer is incorrect, we retain the pair (x, y^-) for rectification.

Oracle-Guided Surgical Rectification. We employ an Oracle (e.g., a human expert or a teacher model) to perform surgical edits. The Oracle is provided with y^- and optionally the ground truth, then instructed to only modify incorrect reasoning steps, while maintaining the original style. After filtering out any outputs with incorrect final answers, we obtain a rectified response y^+ that represents the “nearest valid neighbor” to the erroneous response y^- in the semantic space. To enhance efficiency, we adopt an *offline* setting (i.e., the Oracle is queried once per failure rather than at each training step). We provide the full prompts in Appendix B, and verify the framework’s robustness to a weaker open-source Oracle and to prompt formulation in Appendix D and Appendix E, respectively.

LCS Filtering. To strictly enforce the proximity of the rectified data to the student’s distribution, we apply a structural constraint based on the Longest Common Subsequence (LCS) (Wagner & Fischer, 1974). For every pair (y^-, y^+) , we calculate the change ratio R_{LCS} :

$$R_{LCS}(y^-, y^+) = 1 - \frac{|\text{LCS}(y^-, y^+)|}{|y^+|}, \quad (1)$$

where $|\cdot|$ denotes sequence length. We filter out samples where $R_{LCS} > \gamma$. We set $\gamma = 0.6$ to maximize the retention of training samples while preserving downstream performance (see Appendix F for the rationale and ablation). Appendix G shows the change ratio distributions.

In the resulting dataset, y^- and y^+ in each sample share the majority of their token trajectories, diverging only at decision-critical parts. This is essential for our subsequent optimization, as it allows the gradients to focus on the divergent reasoning tokens.

3 The Reward Is Secretly a Regularizer

Building upon the proximal dataset constructed via the pipeline in Sec. 2, we demonstrate that data proximity alone is insufficient to prevent catastrophic forgetting. We analyze the learning dynamics of SFT versus reward-based methods, showing that the learning objective itself serves as an intrinsic regularizer against forgetting.

3.1 Empirical Observation: The Regularization Gap

We conduct controlled experiments using the English subset of DAPO-Math-17k (Yu et al., 2025). Leveraging our pipeline, we generate 4k contrastive pairs by employing Qwen3-8B as the base policy π_θ and Gemini 2.5 Pro as the Oracle for rectification. We compare the following methods, all trained on $\mathcal{D} = \{(x, y^-, y^+)\}$, and evaluate OOD generalization using IFEval (Zhou et al., 2023): **SFT+**. To distinguish it from standard fine-tuning on raw off-policy data, we refer to Supervised Fine-Tuning performed on the surgically rectified positive samples y^+ as SFT+, which minimizes the same negative log-likelihood as SFT:

$$\mathcal{L}_{\text{SFT}} = -\mathbb{E}_{x, y^+ \sim \mathcal{D}} [\log \pi_\theta(y^+ | x)] \quad (2)$$

DPO. DPO optimizes a policy by leveraging a relative ranking objective derived from an implicit reward $r_\theta(x, y)$. It is defined as the log-ratio between the policy π_θ and the frozen reference model

π_{ref} (initialized with the same parameters as π_{θ}), scaled by a coefficient β :

$$r_{\theta}(x, y) = \beta \log \frac{\pi_{\theta}(y|x)}{\pi_{\text{ref}}(y|x)} \quad (3)$$

DPO maximizes the margin between the chosen response y^+ and the rejected response y^- :

$$\mathcal{L}_{\text{DPO}} = -\mathbb{E}_{x, y^+, y^- \sim \mathcal{D}} [\log \sigma(r_{\theta}(x, y^+) - r_{\theta}(x, y^-))] \quad (4)$$

where $\sigma(z) = 1/(1 + e^{-z})$ is the sigmoid function.

Reward-SFT. We introduce Reward-SFT as a control baseline to isolate the effect of the implicit reward from the influence of negative samples. Unlike SFT, which directly maximizes the token-level likelihood, this objective simply maximizes the probability of the chosen response y^+ being classified as “correct” under the implicit reward formulation:

$$\mathcal{L}_{\text{RW-SFT}} = -\mathbb{E}_{x, y^+ \sim \mathcal{D}} [\log \sigma(r_{\theta}(x, y^+))] \quad (5)$$

Functionally, this treats the optimization as a binary classification task where the model learns to classify y^+ as “high reward” relative to the reference distribution. As illustrated in Fig. 2, we observe a significant divergence in generalization capability. SFT+ suffers from immediate catastrophic forgetting, with IFEval performance decaying monotonically as training progresses. DPO remains stable and even improves slightly. Crucially, similar to SFT+, Reward-SFT does not see negative data, yet it matches the OOD stability of DPO. This finding suggests that the resistance to forgetting stems from *the implicit regularization inherent in the reward formulation*.

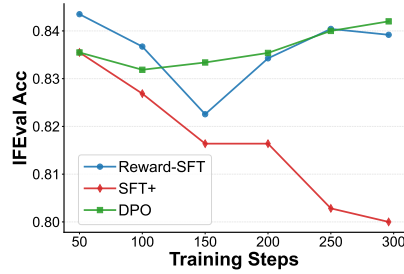


Figure 2: **IFEval acc results (avg@5).** SFT+ forgets instruction following ability, while reward-based methods do not.

3.2 Gradient Analysis: The Mechanics of Tethering

To understand why Reward-SFT prevents forgetting while the standard SFT objective fails, we analyze the gradient dynamics of their respective loss functions. We show that the distinction between these two objectives lies entirely in *the dynamic scaling coefficient of the gradient*.

The gradient for SFT with respect to the model parameters θ is:

$$\nabla_{\theta} \mathcal{L}_{\text{SFT}} = -\nabla_{\theta} \log \pi_{\theta}(y^+|x) \quad (6)$$

Meanwhile, the gradient for Reward-SFT in Eq. (5) includes a dynamic re-weighting coefficient determined by r_{θ} from Eq. (3):

$$\nabla_{\theta} \mathcal{L}_{\text{RW-SFT}} = -\frac{\partial \log \sigma(r)}{\partial r} \nabla_{\theta} r_{\theta}(x, y^+) = -(1 - \sigma(r_{\theta}(x, y^+))) \cdot \beta \nabla_{\theta} \log \pi_{\theta}(y^+|x) \quad (7)$$

Comparing Equations (6) and (7) reveals a fundamental difference in optimization pressure. In standard SFT, the gradient is scaled by a constant factor of 1. Consequently, SFT applies uniform optimization pressure to all samples, regardless of the model’s current competence. Even if the model has assigned high probability to the training sample (e.g., $p(y^+|x) \approx 0.99$), the SFT objective continues to force parameter updates to push the probability toward 1.0. This unbounded optimization compels the model to overwrite its pre-trained features, resulting in significant distribution shift and loss of prior capabilities.

In contrast, Reward-SFT introduces an instance-dependent dynamic scaling coefficient $\lambda(x, y^+) = 1 - \sigma(r_{\theta}(x, y^+))$ (for simplicity, we assume $\beta = 0.1$ in our analysis). We term λ the *Elastic Tether*, as it modulates the “tension” of gradient updates. Functioning as an adaptive regularizer based on the implicit reward, it creates two distinct training modes. **Acquisition (slack tether):** when π_{θ} is close to π_{ref} , the reward $r_{\theta} \approx 0$ and $\lambda \approx 0.5$, allowing rapid adaptation to the preferred distribution. **Saturation (taut tether):** as the model aligns with the target and r_{θ} grows, $\lambda = 1 - \sigma(r_{\theta}) \rightarrow 0$, restricting the policy from deviating excessively from the reference.

Consider a sample where the model has achieved high confidence relative to the reference, yielding a reward of $r_\theta = 10$. The sigmoid function saturates, and the gradient scaling coefficient λ becomes:

$$\lambda = 1 - \sigma(10) = 1 - \frac{1}{1 + e^{-10}} \approx 4.5 \times 10^{-5}$$

In comparison to standard SFT, where the coefficient is fixed at 1.0, the Elastic Tether tightens the constraint by a factor of over 2000. This drastic reduction suppresses the gradient signal, preventing the “over-optimization” that causes the model to drift from its pre-trained knowledge.

The Elastic Tether enables a self-regulating process that halts optimization once the policy has sufficiently diverged from the reference distribution, acting as an *automatic, sample-wise early stopping mechanism*. By tethering the updated policy to the reference model and suppressing updates on well-learned samples, Reward-SFT preserves the pre-trained knowledge in π_{ref} .

These analytical insights are empirically substantiated by the training loss trajectories in Fig. 3 and the reward evolution in Fig. 4. As shown in Fig. 3, the Reward-SFT loss rapidly converges to zero, a direct consequence of the definition in Eq. (5): as $r_\theta(x, y^+)$ increases, $\mathcal{L}_{\text{RW-SFT}}$ approaches zero. In contrast, the SFT objective drives continuous optimization, forcing superfluous parameter updates that degrade general capabilities. Furthermore, the reward trajectories in Fig. 4 align well with our gradient analysis. As r_θ grows, the gradient of Reward-SFT vanishes. Consequently, the reward for chosen responses under Reward-SFT plateaus, whereas the SFT counterpart continues to rise without bound. In contrast to recent work suggesting that KL-divergence fails to mitigate forgetting (Chen et al., 2025; Shenfeld et al., 2025), these analyses corroborate the critical role of KL-constrained reward in retaining knowledge during post-training.

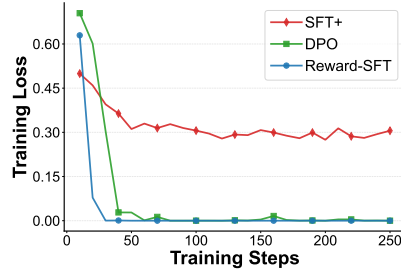


Figure 3: **Training loss curve.** Reward-SFT and DPO converge rapidly; SFT+ remains high due to absolute likelihood maximization.

4 The Surgical Optimization Objective

While preserving prior knowledge is essential, it is insufficient; the model must also achieve substantial in-domain reasoning improvements. This section uncovers the specific failure modes hindering this goal: the “pull-up” effect inherent in positive-only training (e.g., SFT, Reward-SFT) and the inadequacy of relative ranking (DPO) for reasoning with verifiable truth. To bridge this gap, we introduce a reward-based binary cross-entropy objective.

4.1 The “Pull-Up” Effect

While Reward-SFT effectively uses the “Elastic Tether” to prevent forgetting, it shares a key vulnerability with SFT when trained on our surgical rectification data. As shown in the right panel of Fig. 4, although we train only on chosen data y^+ , the likelihood of rejected responses y^- for both SFT+ and Reward-SFT *inadvertently rises relative to the reference model*.

This effect is termed “pull-up” by Ren & Sutherland (2025): under *positive-only* supervision, the model indiscriminately raises the probability mass around the target, reinforcing similar but unwanted responses. In our rectification pipeline, the generated y^+ and y^- share a vast majority of their token trajectories. Formally, let $y^\pm = p \oplus s^\pm$, where p is the shared prefix and $s^\pm$ are the diverging suffixes. The gradient of the positive sample decomposes as $\nabla_\theta \log \pi_\theta(y^+|x) = \nabla_\theta \log \pi_\theta(p|x) + \nabla_\theta \log \pi_\theta(s^+|p, x)$. Because $\nabla_\theta \log \pi_\theta(p|x)$ is a shared prefix term with $\nabla_\theta \log \pi_\theta(y^-|x)$, maximizing the likelihood of y^+ inevitably raises the prefix component of $\log \pi_\theta(y^-|x)$. Consequently, the model fails to establish a sharp decision boundary at the critical point of divergence, underscoring the necessity of negative samples to suppress unwanted generation paths.

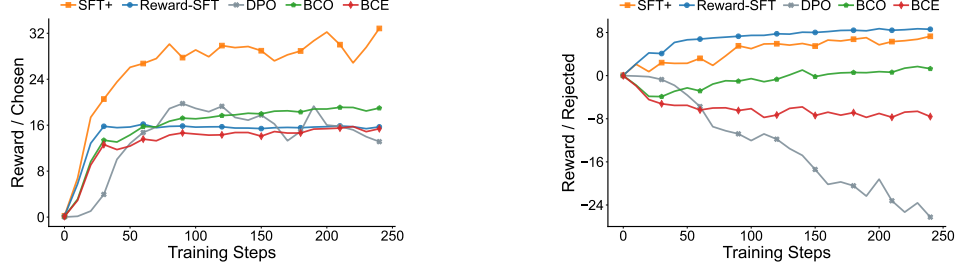


Figure 4: **Evolution of implicit rewards during training.** Left: reward scores for chosen responses; Right: reward scores for rejected responses. The reward measures how much the model’s preference for the chosen response has grown relative to the initial state.

4.2 The Insufficiency of Relative Ranking

Given the need for negative supervision, DPO appears to be a natural candidate. DPO models preference probabilities using the Bradley-Terry model (Bradley & Terry, 1952), minimizing the negative log-likelihood of the margin $M = r_\theta(x, y^+) - r_\theta(x, y^-)$:

$$P(y^+ \succ y^-) = \sigma(r_\theta(x, y^+) - r_\theta(x, y^-)) \quad (8)$$

However, relative ranking is unsuitable for reasoning, where answers are objectively correct or incorrect, unlike subjective tasks (e.g., creative writing) where being “better” suffices. Reasoning requires maximizing the likelihood of the correct response y^+ while suppressing the incorrect y^- . Since gradient descent naturally follows the path of least resistance, the DPO loss can be minimized by decreasing the rejected reward $r(x, y^-)$ while leaving the chosen reward $r(x, y^+)$ stagnant—or even allowing it to drop, provided $r(x, y^-)$ drops faster. This phenomenon has been observed by Rafailov et al. (2024); Pal et al. (2024); Ren & Sutherland (2025), and is corroborated by our results in Fig. 4: in later stages of DPO training, the reward for chosen responses fails to show sustained growth, while the reward for rejected ones decreases drastically. This suggests that DPO tends to optimize the margin by suppressing y^- rather than reinforcing correct logic, rendering it insufficient for reasoning tasks.

4.3 Reward-based Binary Cross Entropy Optimization

To address these limitations, we reframe reasoning optimization as a binary classification task. Unlike DPO’s relative ranking between pairs, our approach decouples the supervision into independent positive and negative terms. We introduce two variants:

SPoT-BCE. By decoupling the DPO objective in Eq. (4), we drive the model to independently maximize confidence in y^+ and minimize confidence for y^- . This results in the standard Binary Cross Entropy (BCE) loss:

$$\mathcal{L}_{\text{SPoT-BCE}} = -\mathbb{E}_{\mathcal{D}}[\log \sigma(r_\theta(x, y^+)) + \log \sigma(-r_\theta(x, y^-))] \quad (9)$$

The implicit reward $r_\theta(x, y)$ here serves as the classification logit. This formulation provides a dense supervision signal while effectively retaining pre-trained knowledge.

SPoT-BCO. While Binary Classifier Optimization (BCO) (Jung et al., 2025) was originally designed for unpaired data (e.g., thumbs-up/down only), we identify it as uniquely suitable for our paired reasoning data. BCO introduces a reward-shift δ to the BCE loss:

$$\mathcal{L}_{\text{SPoT-BCO}} = -\mathbb{E}_{x, y^+, y^- \sim \mathcal{D}}[\log \sigma(r_\theta(x, y^+) - \delta) + \log \sigma(-(r_\theta(x, y^-) - \delta))] \quad (10)$$

where $\delta = \frac{1}{2} \cdot \mathbb{E}_{x, y^+, y^- \sim \mathcal{D}}[r_\theta(x, y^+) + r_\theta(x, y^-)]$. In practice, δ is computed as an exponential moving average of the batch statistics, and a stop-gradient is applied so that δ does not contribute to the backward pass (i.e., δ is treated as a constant when computing $\nabla_{\theta} \mathcal{L}_{\text{SPoT-BCO}}$).

Our contribution lies not in the BCE/BCO loss forms themselves, but in identifying their decoupled structure as uniquely suited to reasoning, where verifiable correctness demands independent reinforcement of y^+ and suppression of y^- ; and the theoretical analysis of δ in the following subsection.

Table 1: **Main results for in-domain reasoning, OOD reasoning, and general instruction following (OOD non-reasoning).** We compare SPoT (with BCO loss) against standard baselines: SFT (rejection-sampled Gemini 2.5 Pro responses), RFT (rejection-sampled self-generated responses), and SFT+ (rectified y^+). Direct SFT leads to performance degradation on both in-domain and OOD tasks. RFT fails to yield clear in-domain improvements and causes OOD regression. While SFT+ improves in-domain reasoning with near-distribution data, it still suffers OOD losses. In contrast, SPoT demonstrates superiority in both in-domain and OOD performance. We report avg@16 for AIME24, AIME25, and AMC23, and avg@5 for the others.

Model	In-domain Reasoning							OOD Reasoning			General	Avg
	AIME24	AIME25	AMC23	Math500	Minerva	Olympia	Avg	GPQA-D	Connect4	Avg	IFEval	
Qwen3-8b	22.0	19.3	66.5	82.8	37.9	52.3	46.8	48.9	10.9	29.9	83.0	47.1
Qwen3-8b+SFT	15.3	13.3	56.0	78.2	38.6	44.3	41.0 $\downarrow 5.8$	39.0	12.0	25.5 $\downarrow 4.4$	79.6 $\downarrow 3.4$	41.8 $\downarrow 5.3$
Qwen3-8b+RFT	27.3	20.0	59.0	83.0	40.4	53.8	47.3 $\uparrow 0.5$	49.1	3.1	26.1 $\downarrow 3.8$	81.5 $\downarrow 1.5$	46.4 $\downarrow 0.7$
Qwen3-8b+SFT+	29.3	24.7	67.3	84.8	42.5	54.5	50.5 $\uparrow 3.7$	47.3	14.1	30.7 $\uparrow 0.8$	80.0 $\downarrow 3.0$	49.4 $\uparrow 2.3$
Qwen3-8b+SPoT	28.0	27.3	71.5	87.4	39.7	58.5	52.1 $\uparrow 5.3$	46.8	36.0	41.4 $\uparrow 1.5$	84.8 $\uparrow 1.8$	53.3 $\uparrow 6.2$
Llama3.1-8b-Instruct	3.3	2.7	19.5	47.0	22.4	16.9	18.6	28.5	5.0	16.8	73.6	24.3
Llama3.1-8b-Instruct+SFT	3.3	2.0	21.5	46.8	19.5	15.1	18.0 $\downarrow 0.6$	29.6	1.7	15.7 $\downarrow 1.1$	62.1 $\downarrow 11.5$	22.4 $\downarrow 1.9$
Llama3.1-8b-Instruct+RFT	3.3	0.0	24.0	46.0	19.1	15.3	18.0 $\downarrow 0.6$	32.3	2.0	17.2 $\uparrow 0.4$	71.2 $\downarrow 2.4$	23.7 $\uparrow 0.6$
Llama3.1-8b-Instruct+SFT+	3.3	0.7	26.0	48.6	25.7	15.3	19.9 $\uparrow 1.3$	31.9	1.5	16.7 $\downarrow 0.1$	68.6 $\downarrow 5.0$	24.6 $\uparrow 0.3$
Llama3.1-8b-Instruct+SPoT	4.0	2.0	27.0	48.6	26.1	16.3	20.7 $\uparrow 2.1$	30.0	7.0	18.5 $\uparrow 1.7$	73.2 $\downarrow 0.4$	26.0 $\uparrow 1.7$

4.4 Theoretical Analysis of δ

The difference between SPoT-BCE and SPoT-BCO lies in the reward shift δ . While Jung et al. (2025) frame δ as providing a tighter upper bound on DPO, we offer a different viewpoint and analyze its specific role in reasoning alignment.

The implicit reward $r_\theta(x, y)$ defined in Eq. (3) is a simplified version of the theoretical optimal reward $r'(x, y)$. The relationship derived from the KL-constrained optimal policy π^* is given by:

$$r'(x, y) = \beta \log \frac{\pi^*(y|x)}{\pi_{\text{ref}}(y|x)} + \beta \log Z(x) \quad (11)$$

where $Z(x)$ is the partition function. While DPO eliminates $\beta \log Z(x)$ via paired subtraction, BCO admits no analogous cancellation. Comparing Eq. (10) with Eq. (11) reveals that the shift term δ serves as a functional proxy for the intractable partition term $\beta \log Z(x)$.

Mitigating Saturation for In-Domain Reasoning. As training progresses, the average implicit reward r_θ may increase (see Fig. 4). In SPoT-BCE ($\delta = 0$), these elevated scores push the sigmoid input into saturation ($\sigma(\cdot) \rightarrow 1$), causing gradients to vanish. This saturation may halt optimization prematurely. By adapting δ via the exponential moving average, SPoT-BCO dynamically adjusts the threshold to enable further updates of the positive term $\log \sigma(r_\theta(x, y^+) - \delta)$, yielding higher rewards for chosen responses than SPoT-BCE (see Fig. 4) and, consequently, better performance on in-domain reasoning tasks.

The Trade-off with OOD Generalization. Meanwhile, the early saturation in SPoT-BCE naturally limits the deviation of π_θ from π_{ref} . By relaxing this constraint, the adaptive shift in SPoT-BCO permits further optimization, leading to a larger KL divergence from the reference model. Consequently, SPoT-BCE retains prior knowledge more faithfully than SPoT-BCO.

4.5 Surgical Post-Training

Surgical Post-Training takes its name from the synergistic design of our data pipeline and optimization objective. (1) Our data pipeline yields a dataset in which y^- and y^+ share the majority of their token trajectories, diverging only at decision-critical parts. (2) For the tokens within the shared prefix of y^+ and y^- , the gradients for the positive and negative terms counteract each other, suppressing updates on these tokens. Consequently, parameter updates concentrate on the *divergent* tokens, acting as a form of “surgery” on the model—precisely correcting the reasoning failure while minimizing impact on the original distribution.

5 Experiments

In this section, we present the experimental results of SPoT, followed by ablation studies that validate the effectiveness of our optimization objective (Sec. 5.2) and our data pipeline (Sec. 5.3). Experiments

Table 2: **Comparison on loss objectives.** We find that SPoT-BCO yields the best overall results. SPoT-BCE is more competitive on keeping general abilities. DPO mitigates catastrophic forgetting but shows no clear improvements for in-domain reasoning. Although DFT Wu et al. (2025) is designed for generalization, we observe a clear degradation on OOD tasks.

Model	In-domain Reasoning							OOD Reasoning			General	Avg
	AIME24	AIME25	AMC23	Math500	Minerva	Olympia	Avg	GPQA-D	Connect4	Avg	IFEval	
SPoT-BCO	28.0	27.3	71.5	87.4	39.7	58.5	52.1 _{±5.3}	46.8	36.0	41.4 _{±11.5}	84.8 _{±1.8}	53.3 _{±6.2}
SPoT-BCE	33.3	25.3	67.0	87.6	40.1	55.4	51.5 _{±4.7}	49.5	31.1	40.3 _{±10.4}	85.8 _{±2.8}	52.8 _{±5.7}
DPO	22.0	19.3	62.5	85.2	40.8	51.6	46.9 _{±0.1}	48.9	31.8	40.4 _{±10.5}	84.7 _{±1.7}	49.6 _{±2.5}
Reward-SFT	<u>20.0</u>	<u>16.7</u>	<u>60.5</u>	83.0	<u>39.0</u>	52.3	<u>45.3</u> _{±1.5}	49.2	35.2	42.2 _{±12.3}	83.7 _{±0.7}	48.9 _{±1.8}
DFT	24.0	23.3	70.5	<u>82.4</u>	40.4	52.4	48.8 _{±2.0}	<u>45.6</u>	<u>3.7</u>	<u>24.7</u> _{±5.2}	<u>79.5</u> _{±3.5}	<u>46.9</u> _{±0.2}

are conducted on the English subset of DAPO-Math-17k (Yu et al., 2025). Full experimental settings are provided in Appendix J.

5.1 Results

We compare SPoT against: (1) **SFT**: supervised fine-tuning on rejection-sampled responses from Gemini 2.5 Pro. (2) **RFT**: rejection sampling fine-tuning using self-generated responses. (3) **SFT+**: supervised fine-tuning on the rectified positive samples y^+ . The main results on Qwen3-8B and Llama-3.1-8B-Instruct are summarized in Tab. 1.

Catastrophic forgetting under SFT. SFT compromises general capabilities and OOD reasoning. This degradation is even more pronounced on Llama-3.1-8B-Instruct, where IFEval accuracy drops by 11.5 points. Furthermore, the drastic distributional shift between Gemini 2.5 Pro and the policy models erodes even in-domain reasoning (e.g., Qwen3-8B drops from 46.8% to 41.0%). The results confirm that unconstrained likelihood maximization on off-policy data shifts the model too aggressively, damaging its prior knowledge.

Proximity alone is insufficient. Despite using “surgical” data proximal to the policy model, SFT+ improves in-domain reasoning yet fails to prevent forgetting on general tasks. Even with more “on-policy” data, RFT yields negligible in-domain improvements but incurs notable forgetting. These results indicate that data proximity alone cannot mitigate the forgetting induced by the SFT objective; without explicit regularization, the model’s broad capabilities inevitably degrade.

SPoT: superior reasoning with retained knowledge. SPoT outperforms all baselines on average across in-domain and OOD metrics on both Qwen3-8B and Llama-3.1-8B-Instruct. Moreover, SPoT even boosts general instruction following on Qwen3-8B. This demonstrates the effectiveness of both our surgical data rectification pipeline and our optimization objective. Additional general-capability results on TruthfulQA and MMLU-Pro are reported in Appendix L.

5.2 Comparison on Loss Objectives

To validate our choice of optimization objective, we compare SPoT-BCO and SPoT-BCE against DPO, Reward-SFT, and DFT (Wu et al., 2025) on Qwen3-8B. The results are shown in Tab. 2. SPoT-BCO yields the best overall average and in-domain reasoning accuracy. The adaptive boundary δ in BCO creates a tighter optimization constraint, pushing the model toward clearer decision boundaries on complex math problems. SPoT-BCE serves as a strong alternative, better preserving general capabilities due to its strict regularization and achieving the highest scores on IFEval (85.8%) and GPQA-D (49.5%). In contrast, while DPO mitigates catastrophic forgetting (IFEval 84.7%), it fails to improve in-domain reasoning. This suggests that relative ranking is insufficient for learning correct reasoning paths. Reward-SFT resists forgetting thanks to regularization, yet its in-domain reasoning declines due to the “pull-up” effect. Finally, despite being designed for generalization, DFT exhibits clear degradation against the raw SFT objective in our experiments. We further compare against the DPO+SFT recipe (Wang et al., 2024) in Appendix M.

5.3 The Effect of the Surgical Rectification Pipeline

We validate the impact of *data proximity* by ablating two key components: the data source and the proximity constraint γ in Sec. 2. The results are summarized in Tab. 3. First, training on “rectified data” significantly outperforms “direct data” (+5.2%). Although SPoT-BCO already mitigates

Table 3: **Ablation study on different data.** “Rectified data” refers to the dataset curated using our surgical rectification pipeline, while “direct data” uses the rejected-sampling direct answers from Gemini 2.5 Pro. γ defines the threshold of change ratio in Equation (1).

Model	In-domain Reasoning							OOD Reasoning			General	Avg
	AIME24	AIME25	AMC23	Math500	Minerva	Olympia	Avg	GPQA-D	Connect4	Avg	IFEval	
2k direct data	20.0	14.7	63.0	81.6	37.5	47.6	44.1 $\downarrow 2.7$	42.6	17.2	29.9 $\downarrow 0.0$	82.6 $\downarrow 0.4$	45.2 $\downarrow 1.9$
2k rectified data, $\gamma = 0.6$	26.0	19.3	67.0	87.8	41.2	52.4	49.0 $\uparrow 2.2$	49.8	26.0	37.9 $\uparrow 8.0$	84.1 $\uparrow 1.1$	50.4 $\uparrow 3.3$
4k rectified data, $\gamma = 1$	27.3	22.7	64.0	87.6	41.5	58.2	50.2 $\uparrow 3.4$	49.2	33.3	41.3 $\uparrow 11.4$	83.6 $\uparrow 0.6$	51.9 $\uparrow 4.8$
4k rectified data, $\gamma = 0.6$	28.0	27.3	71.5	87.4	39.7	58.5	52.1 $\uparrow 3.3$	46.8	36.0	41.4 $\uparrow 11.5$	84.8 $\uparrow 1.8$	53.3 $\uparrow 6.2$

Table 4: **Comparison with GRPO.** SPoT + GRPO: GRPO initialized from SPoT checkpoint.

Method	AIME 2024	AIME 2025	AMC 2023	Connect4	IFEval	Avg
SPoT	28.0 $\uparrow 6.0$	27.3 $\uparrow 8.0$	71.5 $\uparrow 5.0$	36.0 $\uparrow 25.1$	84.8 $\uparrow 1.8$	49.5 $\uparrow 9.2$
GRPO	36.3 $\uparrow 14.3$	28.7 $\uparrow 9.4$	77.5 $\uparrow 11.0$	7.7 $\downarrow 3.2$	81.2 $\downarrow 1.8$	46.3 $\uparrow 6.0$
SPoT + GRPO	41.3 $\uparrow 19.3$	36.7 $\uparrow 17.4$	86.0 $\uparrow 19.5$	29.4 $\uparrow 18.5$	82.1 $\downarrow 0.9$	55.1 $\uparrow 14.8$

catastrophic forgetting on out-of-distribution data (only a 0.4-point IFEval drop), the substantial reasoning gain from rectified data confirms that proximal data is inherently more effective. Second, scaling the dataset size from 2k to 4k yields consistent improvements. Finally, when controlling for the final training set size, the subset filtered with $\gamma = 0.6$ achieves the highest average score (53.2%), surpassing the unfiltered configuration ($\gamma = 1$). This further confirms that enforcing data proximity is critical for maximizing performance.

5.4 Superior Initialization for Reinforcement Learning

To understand how SPoT affects subsequent RL, we evaluate GRPO training initialized from the SPoT checkpoint (Tab. 4). We observe that GRPO yields more in-domain improvements compared to SPoT, but induces some forgetting, evidenced by performance degradation on Connect4 (our contamination-free OOD benchmark) and a 1.8% absolute decrease on IFEval. More importantly, SPoT provides a superior initialization for subsequent RL, significantly elevating the performance ceiling. SPoT + GRPO outperforms GRPO alone across all benchmarks (+7.2% in-domain and +21.7% OOD reasoning), alongside better general instruction-following capabilities. The results demonstrate that SPoT’s knowledge injection establishes a stronger foundation that facilitates subsequent RL exploration.

6 Related Work

Recent studies show that RL mitigates catastrophic forgetting better than SFT by leveraging on-policy data (Shenfeld et al., 2025; Chen et al., 2025). Complementary to this, we highlight the critical role of the KL-constrained reward formulation in DPO for knowledge preservation. However, DPO remains sub-optimal for reasoning tasks (Ren & Sutherland, 2025; Azar et al., 2024). Subsequent works improve DPO via synthetic data refinement (Pal et al., 2024), reference-free objectives (Hong et al., 2024; Meng et al., 2024), iterative variants (Chen et al., 2024; Pang et al., 2024), and step-level supervision (Lai et al., 2024). In contrast, SPoT resolves these issues by introducing a rectification pipeline that produces contrasting pairs and by employing a binary loss in place of the rank-based objective in DPO. Furthermore, unlike on-policy distillation methods, which require logit-level supervision (Agarwal et al., 2024; Lu & Lab, 2025) unavailable from proprietary LLMs, SPoT operates with query-based API access alone, requiring no teacher probabilities. A more comprehensive review, including positioning against MiniLLM, GKD, OPSD, GAD, and KD-RL, is provided in Appendix A.

7 Conclusion and Discussion

We present SPoT, a proximal on-policy distillation framework that combines a *surgical rectification pipeline* with a *binary optimization objective* to efficiently inject reasoning knowledge without catastrophic forgetting. The pipeline produces minimal-edit on-policy supervision by correcting only erroneous steps, preserving the model’s prior token distribution. Theoretically and empirically, we

show that the KL-constrained reward formulation acts as a sample-wise early stopping mechanism that retains knowledge, and that a *binary* objective is critical for rigid reasoning tasks where verifiable truth makes pairwise preferences ill-suited. With only 4k rectified pairs and minutes of training, SPOT delivers consistent gains across in-domain and OOD benchmarks, and substantially raises the performance ceiling of subsequent GRPO, positioning proximal on-policy distillation as a lightweight bridge between SFT and RL.

Limitations and future work. Due to resource constraints, our experiments focus on smaller models (up to 8B) and text-based mathematical reasoning (additional Qwen3-1.7B results in Appendix N). Performance also depends on the Oracle’s capability; we report a sensitivity analysis in Appendix D, leaving a larger-scale study across diverse Oracles for future work. Promising directions include scaling to larger models and extending SPOT to multimodal, code, and agentic domains, where surgical rectification of long, structured trajectories may be especially valuable.

Acknowledgements

This work is supported by Hong Kong Research Grant Council - General Research Fund (Grant No. 17211024) and HKU Seed Fund for PI Research.

References

- Achiam, J., Adler, S., Agarwal, S., Ahmad, L., Akkaya, I., Aleman, F. L., Almeida, D., Altenschmidt, J., Altman, S., Anadkat, S., et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- Agarwal, R., Vieillard, N., Zhou, Y., Stanczyk, P., Garea, S. R., Geist, M., and Bachem, O. On-policy distillation of language models: Learning from self-generated mistakes. In *ICLR*, 2024.
- Anthropic, A. The claude 3 model family: Opus, sonnet, haiku. *Claude-3 Model Card*, 2024.
- Azar, M. G., Guo, Z. D., Piot, B., Munos, R., Rowland, M., Valko, M., and Calandriello, D. A general theoretical paradigm to understand learning from human preferences. In *AISTATS*, 2024.
- Bradley, R. A. and Terry, M. E. Rank analysis of incomplete block designs: I. the method of paired comparisons. *Biometrika*, 39(3/4):324–345, 1952.
- Chen, H., Razin, N., Narasimhan, K., and Chen, D. Retaining by doing: The role of on-policy data in mitigating forgetting. *arXiv preprint arXiv:2510.18874*, 2025.
- Chen, Z., Deng, Y., Yuan, H., Ji, K., and Gu, Q. Self-play fine-tuning converts weak language models to strong language models. In *ICML*, 2024.
- Chu, T., Zhai, Y., Yang, J., Tong, S., Xie, S., Schuurmans, D., Le, Q. V., Levine, S., and Ma, Y. Sft memorizes, rl generalizes: A comparative study of foundation model post-training. In *ICML*, 2025.
- Comanici, G., Bieber, E., Schaekermann, M., Pasupat, I., Sachdeva, N., Dhillon, I., Blistein, M., Ram, O., Zhang, D., Rosen, E., et al. Gemini 2.5: Pushing the frontier with advanced reasoning, multimodality, long context, and next generation agentic capabilities. *arXiv preprint arXiv:2507.06261*, 2025.
- Ethayarajh, K., Xu, W., Muennighoff, N., Jurafsky, D., and Kiela, D. Kto: Model alignment as prospect theoretic optimization. *arXiv preprint arXiv:2402.01306*, 2024.
- Gu, Y., Dong, L., Wei, F., and Huang, M. MiniLLM: Knowledge distillation of large language models. In *ICLR*, 2024.
- He, C., Luo, R., Bai, Y., Hu, S., Thai, Z., Shen, J., Hu, J., Han, X., Huang, Y., Zhang, Y., et al. Olympiadbench: A challenging benchmark for promoting agi with olympiad-level bilingual multimodal scientific problems. In *ACL*, 2024.
- Hendrycks, D., Burns, C., Kadavath, S., Arora, A., Basart, S., Tang, E., Song, D., and Steinhardt, J. Measuring mathematical problem solving with the math dataset. In *NeurIPS Datasets and Benchmarks Track*, 2021.
- Hochlehnert, A., Bhatnagar, H., Udandara, V., Albanie, S., Prabhu, A., and Bethge, M. A sober look at progress in language model reasoning: Pitfalls and paths to reproducibility. In *COLM*, 2025.
- Hong, J., Lee, N., and Thorne, J. Orpo: Monolithic preference optimization without reference model. In *EMNLP*, 2024.

- Huan, M., Li, Y., Zheng, T., Xu, X., Kim, S., Du, M., Poovendran, R., Neubig, G., and Yue, X. Does math reasoning improve general llm capabilities? understanding transferability of llm reasoning. *arXiv preprint arXiv:2507.00432*, 2025.
- Jung, S., Han, G., Nam, D. W., and On, K.-W. Binary classifier optimization for large language model alignment. In *ACL*, 2025.
- Kim, Y. and Rush, A. M. Sequence-level knowledge distillation. In *EMNLP*, 2016.
- Lai, X., Tian, Z., Chen, Y., Yang, S., Peng, X., and Jia, J. Step-dpo: Step-wise preference optimization for long-chain reasoning of llms. *arXiv preprint arXiv:2406.18629*, 2024.
- Lewkowycz, A., Andreassen, A., Dohan, D., Dyer, E., Michalewski, H., Ramasesh, V., Slone, A., Anil, C., Schlag, I., Gutman-Solo, T., et al. Solving quantitative reasoning problems with language models. In *NeurIPS*, 2022.
- Li, Y., Zuo, Y., He, B., Zhang, J., Xiao, C., Qian, C., Yu, T., Gao, H.-a., Yang, W., Liu, Z., and Ding, N. Rethinking on-policy distillation of large language models: Phenomenology, mechanism, and recipe. *arXiv preprint arXiv:2604.13016*, 2026.
- Lin, W., Roberts, J., Yang, Y., Albanie, S., Lu, Z., and Han, K. Gamebot: Transparent assessment of llm reasoning in games. In *ACL*, 2025.
- Lu, K. and Lab, T. M. On-policy distillation. *Thinking Machines Lab: Connectionism*, 2025. doi: 10.64434/tml.20251026. <https://thinkingmachines.ai/blog/on-policy-distillation>.
- Meng, Y., Xia, M., and Chen, D. Simpo: Simple preference optimization with a reference-free reward. In *NeurIPS*, 2024.
- Mukherjee, S., Yuan, L., Hakkani-Tur, D., and Peng, H. Reinforcement learning finetunes small subnetworks in large language models. *arXiv preprint arXiv:2505.11711*, 2025.
- Ouyang, L., Wu, J., Jiang, X., Almeida, D., Wainwright, C., Mishkin, P., Zhang, C., Agarwal, S., Slama, K., Ray, A., et al. Training language models to follow instructions with human feedback. In *NeurIPS*, 2022.
- Pal, A., Karkhanis, D., Dooley, S., Roberts, M., Naidu, S., and White, C. Smaug: Fixing failure modes of preference optimisation with dpo-positive. *arXiv preprint arXiv:2402.13228*, 2024.
- Pang, R. Y., Yuan, W., He, H., Cho, K., Sukhbaatar, S., and Weston, J. Iterative reasoning preference optimization. In *NeurIPS*, 2024.
- Rafailov, R., Sharma, A., Mitchell, E., Manning, C. D., Ermon, S., and Finn, C. Direct preference optimization: Your language model is secretly a reward model. In *NeurIPS*, 2023.
- Rafailov, R., Hejna, J., Park, R., and Finn, C. From r to q*: Your language model is secretly a q-function. In *COLM*, 2024.
- Rein, D., Hou, B. L., Stickland, A. C., Petty, J., Pang, R. Y., Dirani, J., Michael, J., and Bowman, S. R. Gpqa: A graduate-level google-proof q&a benchmark. In *COLM*, 2024.
- Ren, Y. and Sutherland, D. J. Learning dynamics of llm finetuning. In *ICLR*, 2025.
- Shao, Z., Wang, P., Zhu, Q., Xu, R., Song, J., Bi, X., Zhang, H., Zhang, M., Li, Y., Wu, Y., et al. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.
- Shenfeld, I., Pari, J., and Agrawal, P. RL’s razor: Why online reinforcement learning forgets less. *arXiv preprint arXiv:2509.04259*, 2025.
- Song, M. and Zheng, M. A survey of on-policy distillation for large language models. *arXiv preprint arXiv:2604.00626*, 2026.
- Wagner, R. A. and Fischer, M. J. The string-to-string correction problem. *JACM*, 21(1):168–173, 1974.
- Wang, W., Chen, Z., Wang, W., Cao, Y., Liu, Y., Gao, Z., Zhu, J., Zhu, X., Lu, L., Qiao, Y., et al. Enhancing the reasoning ability of multimodal large language models via mixed preference optimization. *arXiv preprint arXiv:2411.10442*, 2024.
- Wu, Y., Zhou, Y., Ziheng, Z., Peng, Y., Ye, X., Hu, X., Zhu, W., Qi, L., Yang, M.-H., and Yang, X. On the generalization of sft: A reinforcement learning perspective with reward rectification. *arXiv preprint arXiv:2508.05629*, 2025.
- Xiao, B., Xia, B., Yang, B., Gao, B., Shen, B., Zhang, C., He, C., Lou, C., Luo, F., Wang, G., et al. MIMO-v2-flash technical report. *arXiv preprint arXiv:2601.02780*, 2026.
- Xu, H., Zhu, Q., Deng, H., Li, J., Hou, L., Wang, Y., Shang, L., Xu, R., and Mi, F. KDRL: Post-training reasoning LLMs via unified knowledge distillation and reinforcement learning. *arXiv preprint arXiv:2506.02208*, 2025.

- Yang, A., Li, A., Yang, B., Zhang, B., Hui, B., Zheng, B., Yu, B., Gao, C., Huang, C., Lv, C., et al. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*, 2025.
- Ye, T., Dong, L., Chi, Z., Wu, X., Huang, S., and Wei, F. Black-box on-policy distillation of large language models. *arXiv preprint arXiv:2511.10643*, 2025.
- Yu, Q., Zhang, Z., Zhu, R., Yuan, Y., Zuo, X., Yue, Y., Dai, W., Fan, T., Liu, G., Liu, L., et al. Dapo: An open-source llm reinforcement learning system at scale. *arXiv preprint arXiv:2503.14476*, 2025.
- Yue, Y., Chen, Z., Lu, R., Zhao, A., Wang, Z., Song, S., and Huang, G. Does reinforcement learning really incentivize reasoning capacity in llms beyond the base model? *arXiv preprint arXiv:2504.13837*, 2025.
- Zhao, S., Xie, Z., Liu, M., Huang, J., Pang, G., Chen, F., and Grover, A. Self-distilled reasoner: On-policy self-distillation for large language models. *arXiv preprint arXiv:2601.18734*, 2026.
- Zhou, J., Lu, T., Mishra, S., Brahma, S., Basu, S., Luan, Y., Zhou, D., and Hou, L. Instruction-following evaluation for large language models. *arXiv preprint arXiv:2311.07911*, 2023.

A Extended Related Work

Catastrophic Forgetting. Recent work highlights a divergence between SFT and RL: while SFT is prone to overfitting and catastrophic forgetting, RL demonstrates superior generalization (Chu et al., 2025; Huan et al., 2025). To explain this, Mukherjee et al. (2025) observed that RL updates are typically sparse, affecting only specific parameter subnetworks, whereas SFT triggers dense, global updates. Alternatively, Shenfeld et al. (2025) and Chen et al. (2025) argued that on-policy data generation—rather than the optimization objective—is the primary driver of knowledge retention. However, our analysis in Sec. 3 suggests that the optimization objective remains critical: specifically, the implicit regularization (KL-constraint) inherent in reward-based objectives is essential for preserving prior knowledge.

DPO for Reasoning. DPO tends to overly penalize rejected responses rather than strengthening the chosen ones (Ren & Sutherland, 2025; Azar et al., 2024; Pal et al., 2024), making it sub-optimal for reasoning. To mitigate this, several variants have emerged: Azar et al. (2024) introduced IPO to regularize against overfitting; Pal et al. (2024) and Meng et al. (2024) encouraged a larger margin to incentivize learning from positive examples; and others (Hong et al., 2024; Wang et al., 2024) integrated SFT objectives to reinforce preferred responses.

Furthermore, methods such as KTO (Ethayarajh et al., 2024) and BCO (Jung et al., 2025) use unpaired or binary feedback to reduce annotation costs. While BCO was originally designed for data efficiency, we show, both analytically and empirically, that its loss structure is uniquely suited to address the ranking inefficiencies of DPO while mitigating catastrophic forgetting during post-training for reasoning.

Beyond general alignment, other works also leverage DPO to enhance reasoning capabilities. Chen et al. (2024) and Pang et al. (2024) employed iterative self-improvement, distinguishing model generations from human data. Lai et al. (2024) introduced Step-DPO, which includes a data rectification pipeline for precise step-level feedback. SPOT distinguishes itself from Step-DPO in two critical aspects. First, while Step-DPO relies on self-correction—limited by the model’s intrinsic capabilities—we employ an Oracle-guided correction pipeline. Second, whereas Step-DPO retains the standard DPO objective, SPOT uses a reward-based binary cross-entropy objective. This approach more effectively addresses the sub-optimality of DPO for reasoning while mitigating forgetting in the post-training phase.

On-Policy Distillation. SPOT can be viewed as a form of on-policy distillation (OPD), in which the student is trained to recover from its own self-generated mistakes under teacher supervision (Agarwal et al., 2024; Gu et al., 2024). Recent analyses (Li et al., 2026; Song & Zheng, 2026) and large-scale practice (Yang et al., 2025; Lu & Lab, 2025) confirm that OPD delivers substantial reasoning enhancements with high computational efficiency, validating the on-policy-with-dense-supervision recipe. However, these approaches rely on logit-level supervision from the teacher, which is unavailable for the strongest proprietary models accessible only via inference APIs. Existing black-box workarounds either fall back to off-policy SEQKD (Kim & Rush, 2016) on teacher-generated text, or, more recently, replace the missing logit signal with an adversarially trained on-policy reward model (Ye et al., 2025). Orthogonally, OPSD (Zhao et al., 2026) dispenses with an external teacher altogether by letting a single model play both roles under different conditioning contexts.

SPOT sits in this design space at a deliberately different point. First, it operates strictly under *query-based API access*—requiring neither teacher logits nor a learned discriminator—which makes it directly compatible with frontier proprietary teachers and sidesteps the well-known instability of adversarial training in Ye et al. (2025). Second, in place of the standard divergence-matching loss, SPOT adopts a *regularized binary cross-entropy* objective explicitly designed to mitigate catastrophic forgetting; this avoids the RL/KL trade-off that Xu et al. (2025) report as hyperparameter-sensitive, and, unlike Zhao et al. (2026), admits genuinely stronger external teachers rather than constraining the student to its own conditional distribution.

B Rectification Prompt

Rectification Prompt Without Ground Truth

Act as a helpful teaching assistant. Your goal is to revise a student model's answer to make it correct, while maintaining the student model's original writing style, tone, and formatting. The final result should look as if the student model had solved the problem correctly on its first try.

You should first solve the problem independently and do the following:

1. Identify the correct parts of the student model's answer and keep them.
2. Replace the incorrect parts with correct reasoning.
3. Carefully match the student model's original writing style, including their tone, vocabulary, formatting and sentence structure.

****IMPORTANT OUTPUT FORMAT:****

1. First output ``=== CORRECTED STARTED ===' followed by the corrected answer
2. Ends with the corrected answer in the format: 'Therefore, the final answer is: $\boxed{\text{ANSWER}}$.'
3. Then output ``=== CORRECTED ENDED ===' at the end of the corrected trace
4. Do not output meta-phrases like "Here is the corrected version"

Rectification Prompt With Ground Truth

Act as a helpful teaching assistant. Your goal is to revise a student model's answer to make it correct, while maintaining the student model's original writing style, tone, and formatting. The final result should look as if the student model had solved the problem correctly on its first try.

You should compare the student model's answer with the Reference Ground Truth and do the following:

1. Identify the correct parts of the student model's answer and keep them.
2. Replace the incorrect parts with correct reasoning.
3. Carefully match the student model's original writing style, including their tone, vocabulary, and sentence structure.

****IMPORTANT OUTPUT FORMAT:****

1. First output ``=== CORRECTED STARTED ===' followed by the corrected answer
2. Ends with the corrected answer in the format: 'Therefore, the final answer is: $\boxed{\text{ANSWER}}$.'
3. Then output ``=== CORRECTED ENDED ===' at the end of the corrected trace
4. Do not output meta-phrases like "Here is the corrected version"

C Rectification Samples

```
1 To solve the problem of how many different rectangles with sides parallel to the grid
can be formed by connecting four of the dots in a 4x4 square array of dots,
we can approach it step by step.

Step 1: Understand the Grid
We are given a 4x4 square array of dots, which means there are 4 rows and 4 columns of dots.
The dots are arranged in a grid with horizontal and vertical spacing.
A rectangle is formed by choosing two distinct horizontal lines and two distinct vertical lines that form the sides of the rectangle.
So, the problem reduces to: How many ways can we choose 2 horizontal lines and 2 vertical lines from the grid?

Step 2: Count the Number of Horizontal and Vertical Lines
In a 4x4 grid of dots, there are 4 horizontal lines (since 4 dots mean 3 spaces between them, and we count the top and bottom lines as well).
Similarly, there are 4 vertical lines.
We are choosing 2 lines from 4 in both directions.

Step 3: Use Combinations
The number of ways to choose 2 lines from 4 is given by the combination formula:

$$\binom{4}{2} = \frac{4!}{2!2!} = 6$$

So, we can choose 6 pairs of horizontal lines and 6 pairs of vertical lines.
Each pair of horizontal and vertical lines defines a unique rectangle.

Step 4: Multiply the Combinations
To find the total number of rectangles:

$$\text{Total rectangles} = \binom{4}{2} \times \binom{4}{2} = 6 \times 6 = 36$$

Final Answer: Therefore, the final answer is:  $\boxed{36}$ 
```

```
1 To solve the problem of how many different rectangles with sides parallel to the grid
can be formed by connecting four of the dots in a 4x4 square array of dots,
we can approach it step by step.

Step 1: Understand the Grid
We are given a 4x4 square array of dots, which means there are 4 rows and 4 columns of dots.
The dots are arranged in a grid with horizontal and vertical spacing.
A rectangle is formed by choosing two distinct horizontal lines and two distinct vertical lines that form the sides of the rectangle.
So, the problem reduces to: How many ways can we choose 2 horizontal lines and 2 vertical lines from the grid?

Step 2: Count the Number of Horizontal and Vertical Lines
In a 4x4 grid of dots, there are 4 horizontal lines (since 4 dots mean 3 spaces between them, and we count the top and bottom lines as well).
Similarly, there are 4 vertical lines.
We are choosing 2 lines from 4 in both directions.

Step 3: Use Combinations
The number of ways to choose 2 lines from 4 is given by the combination formula:

$$\binom{4}{2} = \frac{4!}{2!2!} = 6$$

So, we can choose 6 pairs of horizontal lines and 6 pairs of vertical lines.
Each pair of horizontal and vertical lines defines a unique rectangle.

Step 4: Multiply the Combinations
To find the total number of rectangles:

$$\text{Total rectangles} = \binom{4}{2} \times \binom{4}{2} = 6 \times 6 = 36$$

Final Answer: Therefore, the final answer is:  $\boxed{36}$ 
```

Figure 5: Random Rectification Example 1. Left: answer from Qwen3-8B; Right: rectification by Gemini 2.5 Pro.

1 We are given the following information about triangle $\triangle ABC$: The total area of triangle $\triangle ABC$ is 15 . The area of triangle $\triangle ABE$ is 5 . The area of triangle $\triangle ACD$ is 10 . Points D , E , and F lie on sides AB , AC , and BC respectively. Lines AF , BE , and CD intersect at a common point G inside the triangle. We are to find the area of triangle $\triangle ABF$.

Step 1: Use Area Ratios to Determine Ratios of Segments. Let $\frac{AD}{AB} = x$, so $\frac{DB}{AB} = 1 - x$. Let $\frac{AE}{AC} = y$, so $\frac{EC}{AC} = 1 - y$. Let $\frac{BF}{BC} = z$, so $\frac{FC}{BC} = 1 - z$. We are given: Area of $\triangle ABE = 5$. Area of $\triangle ACD = 10$. Area of $\triangle ABC = 15$.

Step 2: Use Area Ratios with Base and Height. Area of $\triangle ABE$ is 5 . Since $\triangle ABE$ and $\triangle ABC$ share the same base AB , their areas are proportional to their heights from E to AB and C to AB , respectively. $\frac{\text{Area of } \triangle ABE}{\text{Area of } \triangle ABC} = \frac{y}{1}$. $\frac{5}{15} = \frac{y}{1}$. $y = \frac{1}{3}$. Similarly, $\frac{\text{Area of } \triangle ACD}{\text{Area of } \triangle ABC} = \frac{x}{1}$. $\frac{10}{15} = \frac{x}{1}$. $x = \frac{2}{3}$.

Step 3: Use Ceva's Theorem (or Area Ratios). We are told that lines AF , BE , and CD intersect at a common point G . This implies that the cevians AF , BE , and CD are concurrent. $\frac{AD}{DB} \cdot \frac{BE}{EC} \cdot \frac{CF}{FA} = 1$. $\frac{2/3}{1/3} \cdot \frac{z}{1-z} \cdot \frac{1-y}{y} = 1$. $2 \cdot \frac{z}{1-z} \cdot \frac{1-1/3}{1/3} = 1$. $2 \cdot \frac{z}{1-z} \cdot 2 = 1$. $4z = 1 - z$. $5z = 1$. $z = \frac{1}{5}$.

Step 4: Compute Area of $\triangle ABF$. Now, triangle $\triangle ABF$ and triangle $\triangle ABC$ share the same height from vertex A to the line containing their bases BF and BC . Their areas are therefore proportional to the lengths of their bases. $\frac{\text{Area of } \triangle ABF}{\text{Area of } \triangle ABC} = \frac{BF}{BC} = z = \frac{1}{5}$. $\frac{\text{Area of } \triangle ABF}{15} = \frac{1}{5}$. $\text{Area of } \triangle ABF = 3$.

Final Answer: 3 .

1 We are given the following information about triangle $\triangle ABC$: The total area of triangle $\triangle ABC$ is 15 . The area of triangle $\triangle ABE$ is 5 . The area of triangle $\triangle ACD$ is 10 . Points D , E , and F lie on sides AB , AC , and BC respectively. Lines AF , BE , and CD intersect at a common point G inside the triangle. We are to find the area of triangle $\triangle ABF$.

Step 1: Use Area Ratios to Determine Ratios of Segments. Let $\frac{AD}{AB} = x$, so $\frac{DB}{AB} = 1 - x$. Let $\frac{AE}{AC} = y$, so $\frac{EC}{AC} = 1 - y$. Let $\frac{BF}{BC} = z$, so $\frac{FC}{BC} = 1 - z$. We are given: Area of $\triangle ABE = 5$. Area of $\triangle ACD = 10$. Area of $\triangle ABC = 15$.

Step 2: Use Area Ratios with Base and Height. Area of $\triangle ABE$ is 5 . Since $\triangle ABE$ and $\triangle ABC$ share the same height from vertex E to the line containing base AB , their areas are proportional to their bases AE and AC . $\frac{\text{Area of } \triangle ABE}{\text{Area of } \triangle ABC} = \frac{AE}{AC} = y$. $\frac{5}{15} = y$. $y = \frac{1}{3}$. Similarly, $\frac{\text{Area of } \triangle ACD}{\text{Area of } \triangle ABC} = \frac{AD}{AB} = x$. $\frac{10}{15} = x$. $x = \frac{2}{3}$.

Step 3: Use Ceva's Theorem. We are told that lines AF , BE , and CD intersect at a common point G . This implies that the cevians AF , BE , and CD are concurrent. $\frac{AD}{DB} \cdot \frac{BE}{EC} \cdot \frac{CF}{FA} = 1$. $\frac{2/3}{1/3} \cdot \frac{z}{1-z} \cdot \frac{1-y}{y} = 1$. $2 \cdot \frac{z}{1-z} \cdot \frac{1-1/3}{1/3} = 1$. $4z = 1 - z$. $5z = 1$. $z = \frac{1}{5}$.

Step 4: Compute Area of $\triangle ABF$. Now, triangle $\triangle ABF$ and triangle $\triangle ABC$ share the same height from vertex A to the line containing their bases BF and BC . Their areas are therefore proportional to the lengths of their bases. $\frac{\text{Area of } \triangle ABF}{\text{Area of } \triangle ABC} = \frac{BF}{BC} = z = \frac{1}{5}$. $\frac{\text{Area of } \triangle ABF}{15} = \frac{1}{5}$. $\text{Area of } \triangle ABF = 3$.

Final Answer: 3 .

Figure 6: Random Rectification Example 2. Left: answer from Qwen3-8B; Right: rectification by Gemini 2.5 Pro.

1 We are given two conditions involving the amounts of money that A and B have: $5A + B = 51$. $3A - B = 21$. We are to find the smallest integer values of A and B that satisfy these conditions, and then report the answer in the form $a > m$, $b > n$, and compute $m + n$.

Step 1: Solve the system of equations. $5A + B = 51$. $3A - B = 21$. Adding the two equations: $8A = 72$. $A = 9$. Substituting $A = 9$ into $5A + B = 51$: $45 + B = 51$. $B = 6$.

Step 2: Write the answer in the required form. $A = 9$, $B = 6$. The answer is: $9 > 9$, $6 > 6$.

Final Answer: $9 > 9$, $6 > 6$.

1 We are given two conditions involving the amounts of money that A and B have: $5A + B = 51$. $3A - B = 21$. We are to find the smallest integer values of A and B that satisfy these conditions, and then report the answer in the form $a > m$, $b > n$, and compute $m + n$.

Step 1: Solve the system of equations. $5A + B = 51$. $3A - B = 21$. Adding the two equations: $8A = 72$. $A = 9$. Substituting $A = 9$ into $5A + B = 51$: $45 + B = 51$. $B = 6$.

Step 2: Write the answer in the required form. $A = 9$, $B = 6$. The answer is: $9 > 9$, $6 > 6$.

Final Answer: $9 > 9$, $6 > 6$.

Figure 7: Random Rectification Example 3. Left: answer from Qwen3-8B; Right: rectification by Gemini 2.5 Pro.

1 We are given two geometric sequences:\n\n First sequence: \$16, a_1, a_2, \dots\$ Second sequence: \$56, b_1, b_2, \dots\$ Both sequences have the same common nonzero ratio, say \$r\$. We are also given: \$a_{2023} = b_{2020}\$. We are to compute: \$a_6 - a_6\$.\n\n Step 1: Express terms of the sequences.\n\n Let \$a_n\$ be the \$n\$th term of the first sequence. Then \$a_n = 16 \cdot r^{n-1}\$. Similarly, let \$b_n\$ be the \$n\$th term of the second sequence. Then \$b_n = 56 \cdot r^{n-1}\$.\n\n Step 2: Use the given condition \$a_{2023} = b_{2020}\$ to find \$r\$.\n\n We have \$16 \cdot r^{2022} = 56 \cdot r^{2019}\$. Dividing both sides by \$r^{2019}\$ (since \$r \neq 0\$), we get \$16 \cdot r^3 = 56\$. Solving for \$r\$, we find \$r^3 = \frac{56}{16} = \frac{7}{2}\$. Thus \$r = \sqrt[3]{\frac{7}{2}}\$.\n\n Step 3: Compute \$a_6 - a_6\$.\n\n We now compute the 6th terms of both sequences. For the first sequence, \$a_6 = 16 \cdot r^5\$. For the second sequence, \$b_6 = 56 \cdot r^5\$. The difference is \$a_6 - b_6 = 16 \cdot r^5 - 56 \cdot r^5 = -40 \cdot r^5\$. Substituting \$r^3 = \frac{7}{2}\$, we get \$r^5 = r^3 \cdot r^2 = \frac{7}{2} \cdot r^2\$. Thus \$a_6 - b_6 = -40 \cdot \frac{7}{2} \cdot r^2 = -140 \cdot r^2\$. Since \$r^3 = \frac{7}{2}\$, we have \$r^2 = \left(\frac{7}{2}\right)^{\frac{2}{3}}\$. Therefore, \$a_6 - b_6 = -140 \cdot \left(\frac{7}{2}\right)^{\frac{2}{3}}\$. This is the final expression. If a numerical value is required, we can compute it numerically, but the question asks to compute \$a_6 - a_6\$, and we have done so in terms of \$r\$, so the final answer is: \$-140 \cdot \left(\frac{7}{2}\right)^{\frac{2}{3}}\$.\n\n Therefore, the final answer is: \$\boxed{-140 \cdot \left(\frac{7}{2}\right)^{\frac{2}{3}}}\$.

1 We are given two geometric sequences:\n\n First sequence: \$16, a_1, a_2, \dots\$ Second sequence: \$56, b_1, b_2, \dots\$ Both sequences have the same common nonzero ratio, say \$r\$. We are also given: \$a_{2023} = b_{2020}\$. We are to compute: \$a_6 - a_6\$.\n\n Step 1: Express terms of the sequences.\n\n Let \$a_n\$ be the \$n\$th term of the first sequence. Then \$a_n = 16 \cdot r^{n-1}\$. Similarly, let \$b_n\$ be the \$n\$th term of the second sequence. Then \$b_n = 56 \cdot r^{n-1}\$.\n\n Step 2: Use the given condition \$a_{2023} = b_{2020}\$ to find \$r\$.\n\n We have \$16 \cdot r^{2022} = 56 \cdot r^{2019}\$. Dividing both sides by \$r^{2019}\$ (since \$r \neq 0\$), we get \$16 \cdot r^3 = 56\$. Solving for \$r\$, we find \$r^3 = \frac{56}{16} = \frac{7}{2}\$. Thus \$r = \sqrt[3]{\frac{7}{2}}\$.\n\n Step 3: Compute \$a_6 - a_6\$.\n\n We now compute the 6th terms of both sequences. For the first sequence, \$a_6 = 16 \cdot r^5\$. For the second sequence, \$b_6 = 56 \cdot r^5\$. The difference is \$a_6 - b_6 = 16 \cdot r^5 - 56 \cdot r^5 = -40 \cdot r^5\$. Substituting \$r^3 = \frac{7}{2}\$, we get \$r^5 = r^3 \cdot r^2 = \frac{7}{2} \cdot r^2\$. Thus \$a_6 - b_6 = -40 \cdot \frac{7}{2} \cdot r^2 = -140 \cdot r^2\$. Since \$r^3 = \frac{7}{2}\$, we have \$r^2 = \left(\frac{7}{2}\right)^{\frac{2}{3}}\$. Therefore, \$a_6 - b_6 = -140 \cdot \left(\frac{7}{2}\right)^{\frac{2}{3}}\$. This is the final expression. If a numerical value is required, we can compute it numerically, but the question asks to compute \$a_6 - a_6\$, and we have done so in terms of \$r\$, so the final answer is: \$-140 \cdot \left(\frac{7}{2}\right)^{\frac{2}{3}}\$.\n\n Therefore, the final answer is: \$\boxed{-140 \cdot \left(\frac{7}{2}\right)^{\frac{2}{3}}}\$.

Figure 8: **Random Rectification Example 4.** Left: answer from Qwen3-8B; Right: rectification by Gemini 2.5 Pro.

D Sensitivity to Oracle Capability

We replace the default Oracle (Gemini 2.5 Pro) with the weaker open-source Qwen3-30B-A3B-2507; SPoT remains effective (Tab. 5).

Table 5: SPoT with a weaker open-source Oracle (Qwen3-30B-A3B-2507) on Qwen3-8B. Even without a frontier API, the framework yields consistent gains.

Model	AIME24	AIME25	AMC23	Connect4	IFEval
Base	22.0	19.3	66.5	10.9	83.0
SPoT (Qwen3-30B-A3B Oracle)	25.6	22.5	67.0	26.9	82.9

E Prompt Sensitivity of the Oracle

To verify that the gains are not artifacts of careful prompt engineering, we replace our default rectification prompt with a deliberately simplified variant:

“Revise a student model’s answer to make it correct, while maintaining the student model’s original writing style, tone, and formatting. Identify the correct parts and keep them, and replace the incorrect parts with correct reasoning. Only output the corrected answer.”

We re-curate 2k pairs with the simplified prompt and re-train under identical hyperparameters. The two prompts produce nearly identical performance across all benchmarks (Tab. 6), indicating that the framework’s effectiveness is not dependent on a specific prompt formulation.

Table 6: Prompt sensitivity of the Oracle on Qwen3-8B (2k pairs). Performance is robust to prompt variation.

Prompt	AIME24	AIME25	AMC23	Connect4	IFEval
Default	26.0	19.3	67.0	26.0	84.1
Simplified	26.5	18.7	66.5	27.0	84.1

F Rationale for the LCS Filtering Threshold

The LCS-based filter governs an intrinsic trade-off between curation efficiency and the on-policy constraint:

- A *strict* threshold (e.g., 0.5) yields more on-policy data but discards a large fraction of candidate pairs, making valid pairs more expensive to gather.
- A *loose* threshold (e.g., 0.7) retains more pairs at the risk of admitting off-policy data.

We empirically find 0.6 to be the sweet spot between curation efficiency and on-policy fidelity. Starting from 6,171 error samples generated by Qwen3-8B, we ablate the filtering threshold and report results in Tab. 7.

Table 7: Effect of the LCS filtering threshold on Qwen3-8B. The threshold 0.6 used in the main paper balances the trade-off.

Setting	AIME24	AIME25	AMC23	Connect4	IFEval
Base	22.0	19.3	66.5	10.9	83.0
SPoT, $\tau=0.5$ (1,998 pairs)	19.3	22.0	64.0	23.7	84.5
SPoT, $\tau=0.7$ (3,646 pairs)	26.0	22.0	67.0	27.9	82.3

Why a surface-level proxy suffices. A more rigorous measure of distributional proximity between rectified text and the student’s own distribution would be the student’s perplexity (PPL) on the rectified

sequence. However, computing PPL requires a full forward pass per candidate. We thus adopt LCS as a cheap surface-level proxy, with the intuition that sequences whose tokens closely follow the student’s sampling trajectory should also exhibit lower PPL under the student. To substantiate this, we computed the actual PPL on randomly sampled rectified pairs, partitioned by their LCS-based difference ratio:

- 1k pairs with change ratio < 0.6 (more on-policy by LCS): mean PPL = 1.60.
- 1k pairs with change ratio > 0.6 (less on-policy by LCS): mean PPL = 1.95.

The relationship confirms that LCS is an effective proxy for student-side perplexity at curation time.

G Change Ratio of Rectification

We visualize the distributions of change ratio, which measures the proportion of the reasoning chain that was modified during rectification. We calculate this ratio based on the edit distance between the original and rectified responses. The results are shown in Fig. 9.

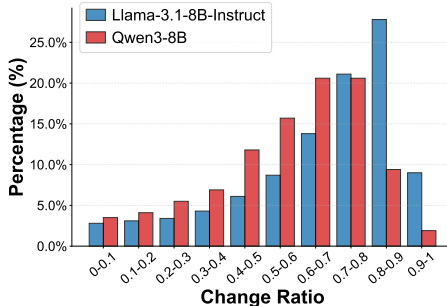


Figure 9: **Distributions of change ratio.** A higher change ratio indicates that reasoning failures occur earlier in the reasoning chain. The distribution shape is determined by the model ability and the data difficulty together.

H Cost and Efficiency Analysis

Oracle API cost. Curating the full 4k rectified pairs with Gemini 2.5 Pro (priced at \$10/1M output tokens) cost approximately \$278 in total and completed in roughly 40 minutes when run in parallel with student self-sampling. To eliminate reproducibility hurdles, we will release the full pipeline, including all curated training data, the curation and training codebases, model checkpoints, and evaluation scripts.

Wall-clock and GPU-hour comparison with GRPO. We compare end-to-end training cost between GRPO and SPoT on Qwen3-8B under identical hardware ($8\times$ H800 80GB) in Tab. 8. SPoT is efficient, as it requires only one rollout per sample.

Table 8: Wall-clock and GPU-hour for GRPO and SPoT on Qwen3-8B. Teacher rectification is parallel with student sampling and therefore does not appear as a separate term.

Component	GRPO	SPoT
Total time	~13 h	~1 h
Sampling	5.56 h	43 min
Policy training	5.12 h	16 min
Reference log-prob	2.25 h	(in training)
Teacher rectification	—	overlapped with sampling
Total GPU hours	~104	~8

I Detailed Results with Standard Deviations

To ensure the statistical significance of our experiments, we report the detailed performance of all models alongside their standard deviations in Table 9. For all generative evaluations, the error bars (standard deviations) are calculated across k independent sampling runs. Specifically, we compute the standard deviation over $k = 16$ runs for AIME24, AIME25, and AMC23, and over $k = 5$ runs for the remaining datasets.

Table 9: **Detailed results with standard deviations.** This table corresponds to the main results presented, additionally reporting the standard deviations to demonstrate statistical significance. The standard deviations are calculated across independent sampling runs ($k = 16$ for AIME24, AIME25, and AMC23, and $k = 5$ for the others). The average summary columns are omitted here for brevity.

Model	In-domain Reasoning						OOD Reasoning		General
	AIME24	AIME25	AMC23	Math500	Minerva	Olympia	GPQA-D	Connect4	IFEval
Qwen3-8b	22.0 $\pm$ 1.7	19.3 $\pm$ 1.2	66.5 $\pm$ 1.7	82.8 $\pm$ 0.4	37.9 $\pm$ 0.6	52.3 $\pm$ 0.5	48.9 $\pm$ 0.7	10.9 $\pm$ 1.4	83.0 $\pm$ 0.3
Qwen3-8b+SFT	15.3 $\pm$ 1.7	13.3 $\pm$ 1.4	56.0 $\pm$ 1.7	78.2 $\pm$ 0.5	38.6 $\pm$ 0.7	44.3 $\pm$ 0.6	39.0 $\pm$ 1.6	12.0 $\pm$ 1.5	79.6 $\pm$ 0.4
Qwen3-8b+RFT	27.3 $\pm$ 1.4	20.0 $\pm$ 1.6	59.0 $\pm$ 2.0	83.0 $\pm$ 0.4	40.4 $\pm$ 0.6	53.8 $\pm$ 0.5	49.1 $\pm$ 0.9	3.1 $\pm$ 1.1	81.5 $\pm$ 0.5
Qwen3-8b+SFT+	29.3 $\pm$ 0.8	24.7 $\pm$ 0.8	67.3 $\pm$ 3.0	84.8 $\pm$ 0.4	42.5 $\pm$ 0.5	54.5 $\pm$ 0.5	47.3 $\pm$ 1.2	14.1 $\pm$ 1.3	80.0 $\pm$ 0.6
Qwen3-8b+SPoT	28.0 $\pm$ 1.1	27.3 $\pm$ 1.1	71.5 $\pm$ 1.3	87.4 $\pm$ 0.5	39.7 $\pm$ 0.5	58.5 $\pm$ 0.7	46.8 $\pm$ 0.5	36.0 $\pm$ 1.8	84.8 $\pm$ 0.4

J Experiment Setting

Models and Datasets. We adopt Qwen3-8B and Llama3.1-8B-Instruct as the policy models for training. We intentionally choose instruction-tuned models over base models, since these already post-trained models are more susceptible to catastrophic forgetting (Lu & Lab, 2025). If SPoT retains these models’ prior knowledge during subsequent training, it validates the robustness of our approach. For Qwen3-8B, we enforce a non-thinking mode by explicitly inserting an empty thinking block (“<think>\n\n</think>\n\n”). We leverage Gemini 2.5 Pro as the Oracle for rectification.

Experiments are conducted using the English subset of DAPO-Math-17k (Yu et al., 2025). Leveraging our pipeline, we generate 4k contrastive pairs for Qwen3-8B. For Llama3.1-8B-Instruct model, we randomly sample 1.5k pairs, matching the number of correct responses the model could inherently generate, to ensure a fair comparison with Rejection sampling Fine-Tuning (RFT). All methods are compared using the same amount of training data. **Evaluation.** We evaluate performance across: *in-domain reasoning*, including AIME24, AIME25, AMC23, Math500 (Hendrycks et al., 2021), Minerva (Lewkowycz et al., 2022), and Olympia (He et al., 2024); *OOD reasoning*, including GPQA-Diamond (GPQA-D) (Rein et al., 2024) and Connect4, and *general instruction following* using IFEval (Zhou et al., 2023). To strictly evaluate OOD reasoning without data contamination, we leverage GAMEBoT (Lin et al., 2025) to dynamically construct the Connect4 dataset (see Appendix K). For reproducibility and fairness, we adopt the evaluation prompts from SoberEval (Hochlehnert et al., 2025). We search for the optimal evaluation hyperparameters for the base models and apply them consistently across all compared methods.

Hyperparameters. For data generation and evaluation, we employ a temperature of 0.7 and top- p of 0.8, with a maximum token limit of 32,768. We train all models for 2 epochs with a context length of 8,192 and $\beta = 0.1$. To ensure a fair comparison, we systematically tune the hyperparameters for the baselines. Regarding learning rates, SPoT utilizes 1×10^{-6} for Qwen3-8B and 2×10^{-7} for Llama3.1-8B-Instruct. For SFT, RFT, and SFT+, we use learning rates of 5×10^{-6} (Qwen3-8B) and 1×10^{-6} (Llama3.1-8B-Instruct). The batch size is set to 32 for all the methods.

RL Experiment Setting. For the RL experiment in Sec. 5.4, we adopt GRPO (Shao et al., 2024) implemented in ver1 v0.6.0 with vLLM v0.9.0 as the rollout backend. We use 4k English subset of DAPO-Math-17k for RL training. All runs are conducted on a single node with $8 \times$ H800 (80GB) GPUs. For each prompt we draw a group of $n=8$ rollouts at temperature 1.0. The training batch size is 256 with a mini-batch size of 64, and we train for 10 epochs with a learning rate of 1×10^{-6} . For Qwen3-8B we keep the non-thinking mode by passing `enable_thinking=False` to the chat template, consistent with the SPoT setup. We set the response length limit to 4096 to fit in memory.

K Connect4 Task

Game Rules. Connect4 is a two-player game of perfect information played on a vertical grid of dimension 6×7 . Players alternate turns dropping distinct pieces into one of the seven columns, where the piece occupies the lowest available row within that column due to simulated gravity. The objective is to form a contiguous line of four pieces either vertically, horizontally, or diagonally. It requires the LLM to *parse the board state*, *execute lookahead planning*, and *identify winning topologies*. With a state-space complexity of approximately 4.5×10^{12} legal positions, Connect4 offers a non-trivial, deterministic environment ideal for generating synthetic states to evaluate LLMs without data contamination. **Dynamic Dataset Construction.** To strictly evaluate OOD reasoning without the risk of data contamination in static benchmarks, we leverage the GAMEBoT framework (Lin et al., 2025). While GAMEBoT supports full-game simulations, interactive evaluation is often inefficient and difficult to reproduce. Instead, we dynamically construct a static dataset of reasoning tasks rooted in Connect4. To ensure the model relies on symbolic reasoning, the board state is serialized into a text-based format (e.g., a list of coordinates).

The construction process involves:

- **State Generation:** We utilize two randomized agents to simulate gameplay, generating a diverse distribution of board states ranging from balanced positions to critical tactical scenarios.
- **Filtering and Balancing:** We filter out duplicate states. Furthermore, to prevent LLMs from inflating scores by consistently predicting “no winning moves” (due to label imbalance), we downsample states with empty answers, maintaining them at a maximum ratio of 20% of the dataset.
- **Dataset Compilation:** For efficient evaluation, we construct a final dataset comprising 500 distinct instances.

Evaluation Protocol. For each instance, LLMs are prompted to solve two problems in a query:

- *Are there any potential winning moves to form 4-in-a-row for you? Output all winning moves.*
- *Are there any potential winning moves to form 4-in-a-row for your opponent? Output all winning moves.*

Ground truth is computed using a perfect solver within GAMEBoT. We parse the model’s Chain-of-Thought (CoT) to extract the final answers and verify them against the game engine’s ground truth.

L Additional Evaluation

A central design goal of SPoT is to inject new knowledge without degrading the model’s prior abilities. Beyond the benchmarks reported in the main text, we further evaluate on TruthfulQA and a 500-sample subset of MMLU-Pro (Tab. 10). The results suggest that on-policy rectification introduces useful knowledge without overwriting general competencies.

Table 10: General-capability evaluations on Qwen3-8B. SPoT preserves truthfulness and improves on MMLU-Pro.

Model	TruthfulQA	MMLU-Pro (500 subset)
Qwen3-8B Base	68.39	51.2
Qwen3-8B + SPoT	67.90	55.2

M Comparison with DPO+SFT

We additionally compare SPoT against the DPO+SFT recipe (Wang et al., 2024), which combines preference optimization with supervised fine-tuning. Under the same setting on Qwen3-8B (Tab. 11), SPoT outperforms DPO+SFT on every benchmark.

Table 11: Comparison with DPO+SFT (Wang et al., 2024) on Qwen3-8B. SPoT dominates across in-domain math, OOD reasoning, and instruction following.

Model	AIME24	AIME25	AMC23	Connect4	IFEval
Base	22.0	19.3	66.5	10.9	83.0
DPO+SFT (Wang et al., 2024)	24.6	18.9	66.5	21.9	81.5
SPoT (Ours)	26.0	19.3	67.0	26.0	84.1

N Experiment on Qwen3-1.7B

We additionally apply SPoT to Qwen3-1.7B (Tab. 12). SPoT yields consistent gains across in-domain math and IFEval, indicating that the rectification-based recipe transfers to smaller capacities. Connect4 is too difficult for both Base and SPoT at this scale, indicating that the model lacks the reasoning capacity for the task rather than reflecting a failure of the training recipe.

Table 12: SPoT on Qwen3-1.7B. The recipe transfers to smaller models.

Model	AIME24	AIME25	AMC23	IFEval	Connect4
Base	12.67	9.33	41.00	67.64	0.00
SPoT	14.67	13.33	46.00	68.30	0.00