

IO-SVD: INPUT-OUTPUT WHITENED SVD FOR ADAPTIVE-RANK LLM COMPRESSION

Ali Abbasi

Vanderbilt University
ali.abbasi@vanderbilt.edu

Chayne Thrash*

Vanderbilt University
chayne.thrash@vanderbilt.edu

Haoran Qin*

Vanderbilt University
haoran.qin@vanderbilt.edu

Hamed Pirsiavash

University of California, Davis
hpirsiav@ucdavis.edu

Soheil Kolouri

Vanderbilt University
soheil.kolouri@vanderbilt.edu

ABSTRACT

Large language models deliver strong performance across language and reasoning tasks, but their storage and compute costs remain major barriers to deployment in resource-constrained and latency-sensitive settings. SVD-based post-training compression offers a hardware-agnostic way to reduce model size and improve inference efficiency through low-rank factorization. However, existing methods often rely on input-only whitening spaces, homogeneous rank allocation, or loss-agnostic allocation heuristics, limiting their ability to preserve model quality under aggressive compression. We propose Input-Output Whitenened SVD (IO-SVD), a post-training compression method that forms a KL-aware double-sided whitening space for model weights. Using a second-order expansion of the KL loss over the top- K token probabilities, IO-SVD constructs an output-side metric that captures predictive sensitivity, while input whitening captures activation statistics. We further introduce an efficient heterogeneous rank-allocation strategy that scores whitened singular components using first-order calibration loss estimates and prunes the least sensitive components under a global budget. Inspired by prior work that combines SVD truncation with quantization, we improve hybrid SVD-quantization compression through loss-aware remapping, which selects low-rank factor rows for 8-bit quantization based on the predicted loss change incurred by quantizing them. Extensive experiments across diverse LLM and VLM families, and inference-time analysis shows that IO-SVD compresses LLMs with minimal performance degradation while delivering practical inference speedups. Code is available at <https://github.com/mint-vu/IO-SVD.git>

1 Introduction

Large language models (LLMs) have achieved strong performance across natural language understanding, reasoning, and code generation, but their storage and computational costs limit deployment in latency-sensitive settings such as robotics, edge computing, and interactive systems. These constraints motivate post-training compression methods that improve inference efficiency without costly retraining or changes to pretraining pipelines.

Existing compression methods include quantization, pruning, and knowledge distillation. Quantization is effective in practice [9, 13, 44, 5, 37, 34], but its efficiency often depends on specialized hardware support and optimized low-bit kernels [29, 47, 21, 14]. Pruning removes parameters based on importance metrics [12, 11, 23, 36], but can struggle to match other methods at high compression ratios [7]. Knowledge distillation transfers knowledge from a large teacher to a smaller student [16, 15, 2], but typically requires costly gradient-based training and may degrade under large teacher-student architectural or tokenizer gaps [32, 28, 35]. These limitations motivate post-training alternatives that are broadly deployable and require no retraining.

SVD-based compression offers a post-training alternative to quantization for LLMs [17, 45, 42, 41, 30, 6, 1, 20]. By replacing dense weight matrices with low-rank factors, it can reduce floating-point operations, while remaining hardware-agnostic and avoiding specialized kernels. Prior methods have progressed from weight-space or layer-output reconstruction [17] to input-aware whitening based on activation statistics [45, 42, 41, 30]. However, these objectives

*Equal contribution.

remain local: they do not directly model how layer perturbations affect the model’s predictive distribution. Recent and concurrent works on double-sided whitening incorporate both input and output statistics [6, 20]; we build on this direction by deriving the output-side metric from a KL divergence to the uncompressed model’s predictive distribution.

In addition to the choice of truncation space, rank allocation constitutes an orthogonal design dimension in SVD-based compression. Several approaches adopt simple or predefined allocation strategies across layers [42, 17], without fully accounting for the heterogeneous sensitivity of different components. This can limit the effectiveness of compression, particularly at high compression ratios where careful distribution of capacity becomes critical. More recently, Dobi-SVD [30] proposes an explicit optimization framework to determine the optimal truncation point for each linear layer. While effective, this approach relies on gradient-based optimization and can be computationally expensive and time-consuming to solve in practice. As a result, there remains a need for efficient and scalable surrogates of layer sensitivity that can guide rank allocation without incurring significant computational overhead.

Pure low-rank compression becomes increasingly lossy at aggressive compression ratios because it must discard much of the singular spectrum. Dobi-SVD mitigates this issue by combining truncation with quantization through a remapping strategy [30]. However, its heuristic selection of components for quantization is agnostic to quantization-induced error and its impact on the task objective. We therefore introduce a loss-aware remapping strategy for hybrid SVD compression.

We make three contributions:

- **KL-aware input-output whitening.** We derive a double-sided whitening objective from a second-order KL approximation, capturing both input activation geometry and output-side predictive sensitivity.
- **Loss-aware adaptive compression.** We introduce an efficient heterogeneous rank-allocation strategy that greedily removes whitened singular components with the smallest predicted calibration-loss impact under a global budget, and extend this loss-aware criterion to hybrid SVD–quantization by selecting low-rank factor rows for 8-bit quantization based on predicted quantization-induced loss.
- **Extensive evaluation across models and hardware.** We validate our method across a diverse set of LLM and VLM families, covering model sizes up to 13B parameters, with inference-time analysis demonstrating effectiveness beyond text-only models and practical efficiency across deployment settings.

2 Related Work

Compression of Large Language Models. The increasing scale of large language models (LLMs) has substantially improved performance, but also creates significant memory and computational costs that complicate deployment. This has motivated a broad class of post-training compression methods that reduce model size without full retraining, including pruning, quantization, and low-rank factorization. Optimal Brain Compression (OBC) [12] performs greedy post-hoc pruning and quantization by minimizing a second-order reconstruction objective on a small calibration set, but does not scale directly to modern LLMs due to the cost of repeated inverse-Hessian computations. SparseGPT [11] adapts this idea to very large models using blockwise approximations, while LLM-Pruner [23] performs structured pruning based on neuron connectivity and Wanda [36] proposes a one-shot pruning criterion combining weight magnitude and activation statistics. Quantization methods similarly rely on calibration data and approximate second-order or activation-aware objectives: LLM.int8() [9] uses mixed precision to handle activation outliers, SmoothQuant [44] rescales weights and activations to mitigate outliers, GPTQ/OPTQ [13] adapts OBC using row-wise updates and block Hessian approximations, and QuIP [5, 37] improves quantization through incoherence processing. Although pruning and quantization can achieve strong compression, their realized speedups often depend on hardware support and specialized kernels. Low-rank compression offers a complementary path because replacing dense linear layers with products of smaller matrices can directly reduce arithmetic cost under standard matrix multiplication kernels.

SVD-based Compression of Large Language Models. Singular Value Decomposition (SVD) based compression has recently become a popular approach for LLMs because it is simple, post-training, and can provide inference speedups through explicit low-rank factorization. The most basic approach approximates a weight matrix W by its rank- r truncated SVD, thereby finding a compressed representation which minimizes differences in the reconstructed weights. However, this objective does not account for how the layer is used by the model. FWSVD [17] introduced an importance-weighted SVD approach for LLMs, using Fisher information to weight parameters before factorization. Subsequent methods have primarily focused on making SVD compression activation-aware. ASVD [45] rescales weight matrices using diagonal statistics derived from input activation magnitudes prior to SVD truncation. SVD-LLM [42] instead directly minimizes layerwise activation reconstruction error by incorporating a whitening matrix computed from the Cholesky factorization of the input activation covariance. SVD-LLM further improves accuracy through a small LoRA [18, 40] residual recovery step. SVD-LLMv2 [41] extends this framework with heterogeneous layerwise rank allocation based on estimates of truncation-induced loss, and Dobi-SVD [30] optimizes layerwise ranks through backpropagation while computing truncated approximations using incremental PCA. Zero-sum SVD [1] directly minimizes activation reconstruction error while pruning singular values such that the predicted loss change is near zero.

Most existing SVD-based LLM compression methods are therefore one-sided: they adapt the low-rank approximation to the input activation distribution, but do not directly model the sensitivity of the network to errors in different output directions. In contrast, a more general second-order view suggests minimizing a double-sided objective captures both the input and output-side or loss-side sensitivity. This form arises naturally when approximating the local loss increase induced by perturbing a weight matrix, since the Hessian or Fisher block associated with a matrix-shaped parameter can often be approximated by Kronecker-factored curvature terms. Prior work has used this idea in double-sided SVD compression utilizing a Kronecker factorization of the network Hessian [6]. Related ideas also appear outside the SVD-compression literature, where Kronecker-factored second-order approximations are used as compression objectives [38]. These approaches suggest that one-sided activation reconstruction captures only part of the relevant error geometry: two approximations with the same input reconstruction error may have very different effects on the downstream loss depending on the output directions in which the error lies.

Our method builds on this double-sided perspective. Like SVD-LLM [42, 41], we perform post-training, activation-aware low-rank compression of LLM weight matrices. However, rather than optimizing only a right-preconditioned reconstruction objective based on input activations, we approximate each layer using a double-sided objective that accounts for both input statistics and output-side sensitivity. This prioritizes directions important to the local model geometry rather than merely explaining weight or activation variance.

3 Method

IO-SVD compresses each target linear layer using a KL-aware, input-output whitenened SVD objective. The method has three components: (i) a double-sided whitening space derived from the predictive KL divergence between the original and compressed models, (ii) global rank allocation based on singular-component loss sensitivity, and (iii) loss-aware remapping for hybrid SVD–quantization compression.

3.1 KL-aware input-output whitenened SVD

For a target linear layer W_ℓ , let $h_t = W_\ell x_t$, $\Delta W_\ell = W_\ell - \hat{W}_\ell$, and $\delta h_t = \Delta W_\ell x_t$. Let $z_t \in \mathbb{R}^V$ denote the uncompressed logits at token t , and let $p_t = \text{softmax}(z_t)$. We seek compressed parameters $\hat{\theta}$ that preserve the predictive distribution of the original model:

$$\mathcal{J}(\hat{\theta}) = \mathbb{E}_{(x,y)} \left[\sum_{t=1}^T \text{KL}(p_\theta(\cdot \mid x, y_{<t}) \parallel p_{\hat{\theta}}(\cdot \mid x, y_{<t})) \right]. \quad (1)$$

To obtain a tractable layerwise objective, we approximate the token-level KL around the uncompressed logits with its second order Taylor expansion:

$$\text{KL}(p_t \parallel \text{softmax}(z_t + \delta z_t)) = \frac{1}{2} \delta z_t^\top H_t \delta z_t + O(\|\delta z_t\|^3), \quad H_t = \text{Diag}(p_t) - p_t p_t^\top. \quad (2)$$

The derivation is given in Appendix B.1. Let $J_t = \partial z_t / \partial h_t$. Using the linearization $\delta z_t \approx J_t \Delta W_\ell x_t$, we obtain

$$\Delta \mathcal{J}_{\ell,t} \approx \frac{1}{2} x_t^\top \Delta W_\ell^\top C_{\text{token},t} \Delta W_\ell x_t, \quad C_{\text{token},t} = J_t^\top H_t J_t. \quad (3)$$

Averaging over calibration tokens and applying a moment-decoupling approximation yields

$$\Delta \mathcal{J}_\ell \approx \frac{1}{2} \left\| C_\ell^{1/2} (W_\ell - \hat{W}_\ell) R_\ell^{1/2} \right\|_F^2, \quad R_\ell = \mathbb{E}_t[x_t x_t^\top], \quad C_\ell = \mathbb{E}_t[C_{\text{token},t}]. \quad (4)$$

Here, R_ℓ captures input activation geometry, while C_ℓ captures output-side predictive sensitivity. The trace-to-Frobenius reduction is shown in Appendix B.2. In practice, we use damped estimates $\bar{R}_\ell = R_\ell + \lambda_R I$ and $\bar{C}_\ell = C_\ell + \lambda_C I$ when computing matrix square roots and inverse square roots; for notational simplicity, we omit the bars below.

Define the doubly whitenened matrix

$$B_\ell = C_\ell^{1/2} W_\ell R_\ell^{1/2}. \quad (5)$$

With damped positive-definite estimates of R_ℓ and C_ℓ , the whitening maps are invertible and preserve rank, so the layerwise compression problem becomes

$$\min_{\text{rank}(\hat{B}_\ell) \leq r_\ell} \|B_\ell - \hat{B}_\ell\|_F^2, \quad (6)$$

where $\hat{B}_\ell = C_\ell^{1/2} \hat{W}_\ell R_\ell^{1/2}$. By the Eckart–Young–Mirsky theorem [10, 27], the solution is the rank- r_ℓ truncated SVD

$$\hat{B}_\ell^* = U_{\ell,r} \Sigma_{\ell,r} V_{\ell,r}^\top. \quad (7)$$

Undoing the whitening gives

$$\hat{W}_\ell^* = C_\ell^{-1/2} U_{\ell,r} \Sigma_{\ell,r} \left(R_\ell^{-1/2} V_{\ell,r} \right)^\top. \quad (8)$$

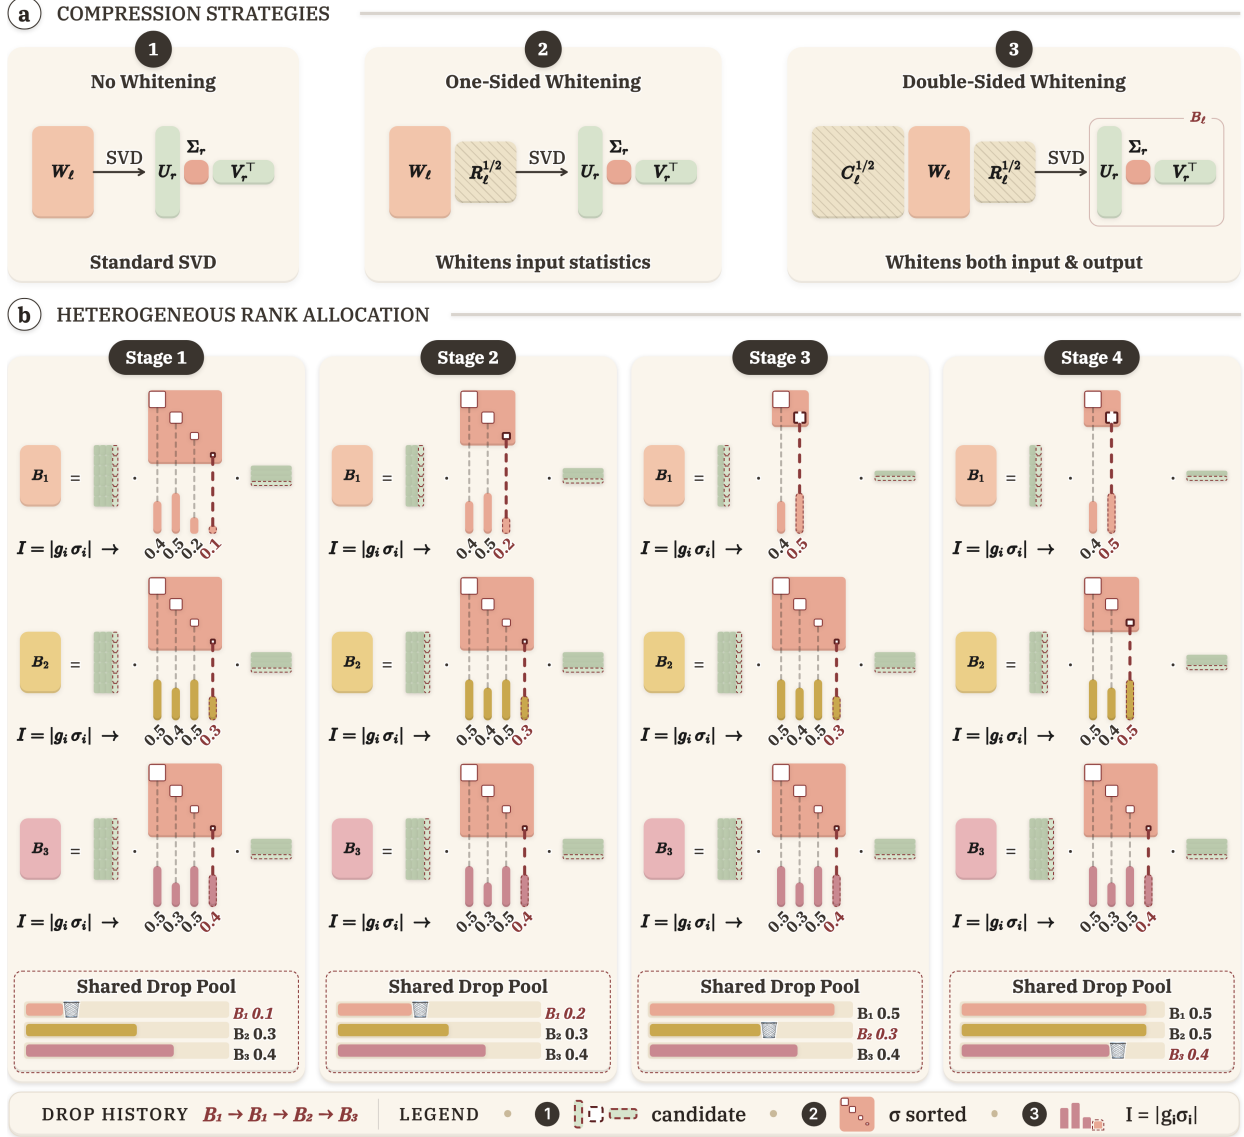


Figure 1: Overview of IO-SVD. **(a)** Comparison of whitening strategies: standard SVD reconstructs the weight directly, one-sided whitening incorporates only input activation statistics, and double-sided whitening incorporates both input statistics and output-side sensitivity before SVD. **(b)** Heterogeneous rank allocation. For each whitened matrix B , singular components are sorted by singular-value magnitude, and the smallest remaining singular value in each matrix becomes that matrix’s drop candidate. These candidates are placed in a shared drop pool and selected by the loss-sensitivity score $I = |g_i \sigma_i|$. In Stage 1, the candidate from B_1 has the smallest score and is dropped. In Stage 2, B_1 exposes its next-smallest remaining singular value, which is again selected and dropped. In Stage 3, after updating the shared pool, the lowest-score candidate comes from B_2 and is removed. Stage 4 shows the resulting drop history, $B_1 \rightarrow B_1 \rightarrow B_2$ (B_3 is next), demonstrating that IO-SVD preserves the spectral order within each matrix while producing adaptive ranks across layers.

Efficiently computing C_ℓ . Directly forming $C_{\text{token},t} = J_t^\top H_t J_t$ is impractical because H_t and J_t scale with the vocabulary size. We therefore approximate the KL curvature on the top- K support of the uncompressed model, renormalize probabilities on this support, and accumulate C_ℓ using vector-Jacobian products with backward hooks. This avoids materializing H_t , J_t , or $J_t^\top H_t J_t$. The full top- K factorization and implementation details are given in Appendix C, and an ablation over the choice of k is given in Section 4.2.

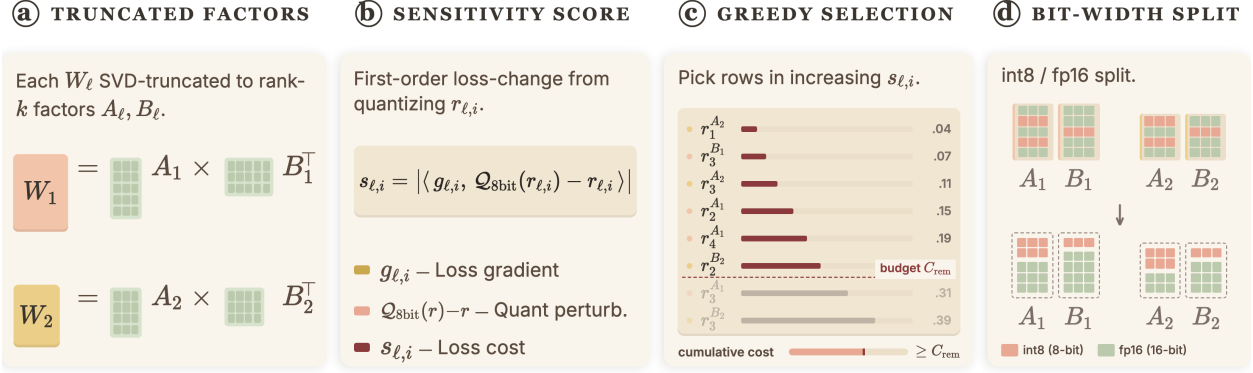


Figure 2: Loss-aware remapping: **(a)** SVD-truncate each weight to rank k ; **(b)** score factor rows by first-order calibration-loss change under int8 quantization; **(c)** greedily keep low-score rows in int8 until meeting C_{rem} ; **(d)** assign the remaining rows to fp16.

3.2 Adaptive rank allocation

The SVD solution above assumes fixed per-layer ranks. Under a global compression budget, we instead allocate ranks by estimating the calibration-loss impact of removing individual whitenized singular components.

Let $B_\ell = U_\ell \Sigma_\ell V_\ell^\top = \sum_i \sigma_{\ell,i} u_{\ell,i} v_{\ell,i}^\top$, and $\mathcal{L}$ be the calibration loss, and $G_\ell = \partial \mathcal{L} / \partial W_\ell$. The corresponding whitenized gradient is

$$\tilde{G}_\ell = C_\ell^{-1/2} G_\ell R_\ell^{-1/2}. \quad (9)$$

The first-order derivative with respect to the i -th singular value is $g_{\ell,i} = u_{\ell,i}^\top \tilde{G}_\ell v_{\ell,i}$. Dropping this component sets $\Delta \sigma_{\ell,i} = -\sigma_{\ell,i}$, so we score its importance by

$$I_{\ell,i} = |g_{\ell,i} \sigma_{\ell,i}|. \quad (10)$$

The derivation of this score is provided in Appendix D.

We greedily remove the lowest-scoring eligible tail component across all layers until the target global parameter budget is reached. After a component is removed from a layer, the next-smallest retained component from that layer becomes eligible, preserving the truncated-SVD structure. The budget is tracked using the layer-specific storage gain defined in Appendix A. This procedure induces heterogeneous ranks $\{r_\ell\}$ without iterative rank optimization.

3.3 Loss-aware remapping for hybrid compression

Standard SVD compression ties storage reduction to rank reduction: a rank- k factorization of $W \in \mathbb{R}^{m \times n}$ stores $k(m+n)$ parameters, so aggressive parameter budgets force aggressive spectral truncation. Dobi-SVD [30] mitigates this issue by remapping low-rank factors and storing selected rows in low precision. However, its row-selection rule is fixed and structural, rather than based on quantization error or loss impact.

We replace this fixed rule with a loss-aware row-selection criterion. After SVD truncation, write each compressed module as

$$\hat{W}_\ell = A_\ell D_\ell^\top, \quad (11)$$

where A_ℓ and D_ℓ are the retained low-rank factors. Let $r_{\ell,i}$ denote a candidate row from either factor, and let $\mathcal{Q}_8(\cdot)$ be the 8-bit quantize-dequantize operator. Quantizing this row induces

$$\Delta r_{\ell,i} = \mathcal{Q}_8(r_{\ell,i}) - r_{\ell,i}. \quad (12)$$

Using calibration data, we compute the row gradient $\gamma_{\ell,i} = \frac{\partial \mathcal{L}_{\text{cal}}}{\partial r_{\ell,i}}$, and score the predicted quantization-induced loss by $s_{\ell,i} = |\langle \gamma_{\ell,i}, \mathcal{Q}_8(r_{\ell,i}) - r_{\ell,i} \rangle|$.

Given the remaining compression budget after SVD truncation, we place all candidate rows into a shared pool and greedily select rows with the smallest predicted loss cost, or cost per saved parameter when row sizes differ: $\sum_{(\ell,i) \in \mathcal{S}} c_{\ell,i} \geq C_{\text{rem}}$, and $C_{\text{rem}} = \max\{0, C_{\text{target}} - C_{\text{svd}}\}$.

Rows in $\mathcal{S}$ are stored in 8-bit precision, along with their indices. This preserves the storage benefit of Dobi-SVD-style remapping while making row selection sensitive to both quantization error and task-loss impact. Additional details are given in Appendix E.

Table 1: IO-SVD vs. SVD-based compression methods on LLaMA-7B across maintenance ratios (0.8/0.6/0.4). Lower is better for PPL; best is in bold. (*) indicates results with Dobi-SVD-style remapping enabled. ([‡]) denotes IO-SVD with our loss-aware remapping. ([†]) denotes HQ (Half-prune+Quant), which we use in place of remapping at pruning $\geq 50\%$.

Ratio	Method	PPL ↓			Acc ↑							Avg. ↑
		Wiki2	PTB	C4	Openb.	ARC_e	ARC_c	WinoG.	HellaS.	PIQA	MathQA	
1.0	Baseline	5.68	8.35	7.34	0.34	0.75	0.42	0.70	0.57	0.79	0.28	0.55
0.8	ASVD	11.14	16.55	15.93	0.25	0.53	0.27	0.64	0.41	0.68	0.24	0.43
	SVD-LLM	7.94	16.22	15.84	0.22	0.58	0.29	0.63	0.43	0.69	0.24	0.44
	Dobi-SVD	8.54	14.83	10.01	0.26	0.59	0.31	0.66	0.44	0.70	0.23	0.46
	ZS-SVD	6.74	11.87	10.74	0.31	0.70	0.37	0.68	0.49	0.74	0.24	0.50
	IO-SVD	6.41	10.93	9.82	0.30	0.71	0.35	0.69	0.50	0.74	0.24	0.50
	Dobi-SVD*	6.08	15.39	7.83	0.27	0.65	0.37	0.68	0.54	0.77	0.27	0.51
	ZS-SVD*	5.90	8.81	7.95	0.35	0.74	0.41	0.70	0.56	0.78	0.26	0.54
	IO-SVD [‡]	5.59	8.56	7.62	0.34	0.75	0.40	0.70	0.56	0.78	0.26	0.54
0.6	ASVD	1407	3292	1109	0.13	0.28	0.22	0.48	0.26	0.55	0.19	0.30
	SVD-LLM	13.11	63.75	49.83	0.19	0.42	0.25	0.58	0.33	0.60	0.21	0.37
	Dobi-SVD	13.54	46.38	23.54	0.22	0.41	0.27	0.58	0.34	0.61	0.23	0.38
	ZS-SVD	11.44	43.19	34.13	0.23	0.52	0.26	0.62	0.35	0.64	0.22	0.41
	IO-SVD	9.84	28.84	27.15	0.22	0.55	0.25	0.62	0.37	0.64	0.22	0.41
	Dobi-SVD*	8.12	43.85	12.63	0.28	0.65	0.32	0.62	0.45	0.72	0.25	0.47
	ZS-SVD*	6.96	12.72	11.52	0.32	0.71	0.36	0.68	0.48	0.74	0.24	0.50
	IO-SVD [‡]	6.27	10.89	10.15	0.31	0.69	0.35	0.68	0.50	0.74	0.26	0.50
0.4	ASVD	57057	45218	43036	0.12	0.26	0.21	0.49	0.26	0.53	0.18	0.29
	SVD-LLM	53.74	438.58	345.49	0.14	0.28	0.22	0.50	0.27	0.55	0.21	0.31
	Dobi-SVD	46.18	238.91	190.62	0.15	0.31	0.20	0.52	0.28	0.54	0.22	0.32
	ZS-SVD	45.17	334.85	212.57	0.15	0.31	0.21	0.54	0.28	0.55	0.21	0.32
	IO-SVD	27.70	189.53	136.42	0.13	0.31	0.19	0.53	0.28	0.55	0.21	0.31
	Dobi-SVD*	9.95	67.62	17.94	0.23	0.52	0.24	0.56	0.38	0.65	0.23	0.40
	ZS-SVD [†]	6.73	11.78	10.69	0.29	0.72	0.38	0.68	0.49	0.75	0.25	0.51
	IO-SVD [†]	6.41	10.82	9.79	0.30	0.70	0.36	0.67	0.50	0.75	0.25	0.51

Table 2: Accuracy evaluation of different methods under FP16.

Model.	Method	ScienceQA-IMG $\uparrow$					SEED-Bench $\uparrow$					Avg. $\uparrow$
		ratio: 90%	ratio: 80%	ratio: 70%	ratio: 60%	ratio: 50%	ratio: 90%	ratio: 80%	ratio: 70%	ratio: 60%	ratio: 50%	
LLaVA1.5 7B	ASVD	49.93	50.12	47.10	36.69	19.19	54.27	53.53	48.35	37.17	24.17	42.05
	SVD-LLM	65.44	63.71	61.92	57.41	55.53	57.89	57.50	55.33	54.64	55.31	58.47
	QSVD	67.72	68.22	67.08	65.05	62.37	59.84	59.07	59.78	59.00	58.23	62.64
	WSVD	68.17	67.72	67.28	65.89	65.49	60.10	60.17	59.89	60.18	60.46	63.54
	Ours	67.92	68.07	68.17	66.73	65.99	60.29	60.32	60.22	60.15	60.64	63.85
	FP16	Accuracy: 68.01					Accuracy: 60.18					64.10
LLaVA1.5 13B	ASVD	71.39	71.59	70.00	70.25	69.51	61.92	61.91	61.54	61.51	60.71	66.03
	SVD-LLM	71.05	70.85	70.30	70.35	70.30	62.28	62.34	62.25	62.08	63.01	66.48
	QSVD	71.89	71.99	71.49	71.54	71.39	62.61	62.64	62.82	62.63	62.52	67.15
	WSVD	71.99	71.84	72.53	71.59	71.44	62.52	62.68	62.38	62.37	62.37	67.17
	Ours	71.79	72.14	72.29	72.14	72.68	62.64	62.49	62.46	62.45	62.29	67.34
	FP16	Accuracy: 71.83					Accuracy: 62.53					67.18
SmolVLM 2B		ratio: 90%	ratio: 80%	ratio: 70%			ratio: 90%	ratio: 80%	ratio: 70%			
	ASVD	29.30	3.97	0.20			17.85	1.50	0.95			8.96
	SVD-LLM	40.06	17.20	3.82			32.49	15.89	4.60			19.01
	QSVD	77.00	62.77	42.59			64.80	50.46	36.24			55.64
	WSVD	76.30	71.74	60.93			65.78	63.29	54.45			65.42
	Ours	83.34	82.65	82.30			68.36	68.65	68.15			75.58
	FP16	Accuracy: 84.53					Accuracy: 68.47					76.53

Table 3: Perplexity (PPL, $\downarrow$) on WikiText-2 and average accuracy (Acc, $\uparrow$) on six commonsense reasoning datasets (excluding arc_c) for OPT-6.7B, Vicuna-7B, and LLaMA-13B at 20% pruning.

Method	OPT-6.7B		Vicuna-7B		LLaMA-13B	
	PPL	Acc	PPL	Acc	PPL	Acc
Original	10.86	0.52	6.78	0.56	5.09	0.59
SVD	66275	0.03	18644	0.05	946.31	0.21
FWSVD	14559	0.06	2758	0.09	15.98	0.43
ASVD	82.00	0.32	16.23	0.33	6.74	0.54
SVDLLM	16.04	0.41	8.41	0.51	6.43	0.55
ZS-SVD	11.40	0.51	8.08	0.54	5.84	0.56
IO-SVD	11.10	0.51	7.36	0.53	5.60	0.56

Table 4: Ablation over whitening curvature and rank allocation on LLaMA-7B, calibrated on WikiText2. WikiText2 PPL across pruning ratios; lower is better.

Curvature	Het. rank?	Ratio 0.8	Ratio 0.6	Ratio 0.4
Input-only (SVD-LLM)	$\times$	7.95	13.11	53.74
Double-sided (OBD-LLM)	$\times$	7.36	11.34	32.95
Double-sided (Ours)	$\times$	7.31	11.20	32.09
Input-only (SVD-LLM)	$\checkmark$	6.72	11.65	62.76
Double-sided (OBD-LLM)	$\checkmark$	6.45	9.90	28.19
Double-sided (Ours)	$\checkmark$	6.41	9.84	27.70

Table 5: Commonsense reasoning results on LLaMA-2-7B. IO-SVD and its remapped variants are compared with pruning and SVD-based baselines at compression ratios 0.6 and 0.4, higher is better.

Ratio	Method	Acc $\uparrow$					Avg $\uparrow$
		PIQA	Hell	Win	ARC_e	ARC_c	
1.0	Baseline	0.78	0.57	0.69	0.76	0.43	0.65
0.6	LLM-Pruner	0.70	0.41	0.53	0.53	0.27	0.48
	SliceGPT	0.65	0.57	0.60	0.43	0.32	0.51
	Bonsai	0.72	0.45	0.58	0.59	0.30	0.53
	Wanda-sp	0.70	0.42	0.53	0.57	0.29	0.50
	SVD-LLM	0.56	0.30	0.57	0.39	0.21	0.41
	ZS-SVD	0.63	0.34	0.60	0.46	0.25	0.45
	IO-SVD	0.61	0.33	0.59	0.51	0.23	0.45
	Dobi-SVD*	0.72	0.45	0.64	0.67	0.31	0.56
	ZS-SVD*	0.72	0.46	0.67	0.66	0.33	0.57
	IO-SVD [†]	0.74	0.47	0.67	0.73	0.38	0.60
0.4	SVD-LLM	0.54	0.27	0.48	0.26	0.20	0.35
	ZS-SVD	0.54	0.27	0.52	0.29	0.19	0.36
	IO-SVD	0.54	0.28	0.52	0.30	0.19	0.37
	Dobi-SVD*	0.67	0.38	0.57	0.55	0.26	0.49
	ZS-SVD [†]	0.73	0.48	0.68	0.70	0.36	0.59
	IO-SVD [†]	0.73	0.48	0.65	0.71	0.37	0.59

4 Experiments

To evaluate both generative modeling quality and task-level behavior, we report perplexity on WikiText2 [25], Penn Treebank [24], and C4 [31], as well as zero-shot accuracy on OpenBookQA [26], ARC-Easy, ARC-Challenge [8], WinoGrande [33], HellaSwag [46], PIQA [4], and MathQA [3]. Following the standard setup in prior SVD-based LLM compression work, we apply compression to the primary transformer linear projections, including the query, key, value, and output attention projections, as well as the MLP layers. For calibration, we use 256 randomly sampled WikiText2 sequences with sequence length 2048, consistent with prior studies [42, 30, 1].

4.1 Results

Table 1 compares IO-SVD against SVD-based compression baselines, including ASVD [45], SVD-LLM [42], Dobi-SVD [30], and ZS-SVD [1], under maintenance ratios of 80%, 60%, and 40%. Across these settings, IO-SVD consistently improves over the baselines on perplexity, both on in-distribution evaluation and out-of-distribution datasets. On downstream zero-shot commonsense reasoning tasks, IO-SVD also achieves comparable or better accuracy than prior methods.

The results below the horizontal bar in Table 1 report remapping comparisons, where vanilla remapped variants of existing methods are compared against our loss-aware remapping strategy (denoted by markers in the table). Consistent with the observation in ZS-SVD [1], for pruning ratios above 50% (0.4 ratio in Table 1 $\rightarrow$ 60% pruning), we use half-prune quantization (HQ): first applying SVD truncation at twice the target maintenance ratio, then using 8-bit quantization to reach the final budget. A more detailed ablation over remapping strategies is provided in Section 4.2.

Table 2 reports VLM compression results on LLaVA-1.5 7B, LLaVA-1.5 13B, and SmolVLM 2B. We use 256 randomly sampled ScienceQA-IMG sequences with length 2048 as calibration data, and evaluate the compressed models on ScienceQA-IMG [22] and SEED-Bench [19]. We vary the parameter retention ratio across 90%, 80%, 70%, 60%, and 50% where applicable, and compare against ASVD [45], SVD-LLM [42], QSVD [43], and WSVD [39]. Consistent with QSVD and WSVD, which are VLM-specific compression methods, we apply truncation only to the query, key, and value attention projections. Across models and retention ratios, IO-SVD achieves the best average accuracy among compressed methods, with particularly strong gains on SmolVLM 2B, where it remains close to the FP16 model while substantially outperforming prior SVD-based baselines.

Tables 3 and 5 further evaluate IO-SVD across model families and pruning settings. In the cross-architecture study (Table 3), we test OPT-6.7B, Vicuna-7B, and LLaMA-13B at 20% pruning, covering different LLM families and model scales. IO-SVD achieves the lowest perplexity across all three models and matches or improves the average commonsense accuracy compared with the strongest SVD-based baselines, showing that the method is not tied to a single architecture. Table 5 evaluates LLaMA-2-7B on commonsense reasoning benchmarks and compares against both pruning and SVD-based compression methods. At the reported compression ratios, vanilla IO-SVD performs better

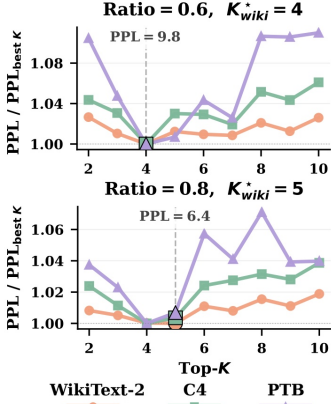


Figure 3: Top-K ablation for output-side KL curvature. Normalized perplexity on wiki2, C4, PTB

Table 6: Effect of standard and loss-aware remapping on LLaMA-7B. Perplexity on wiki2, C4, and PTB at compression ratios 0.8 and 0.6, lower is better.

Method	Quant mode	Ratio 0.8			Ratio 0.6		
		Wiki↓	C4↓	PTB↓	Wiki↓	C4↓	PTB↓
SVD-LLM	compressed	7.94	15.84	16.22	13.11	49.83	63.75
	+ remap*	5.86	7.82	8.82	6.98	11.59	12.88
	+ loss-aware [‡]	5.66	7.78	8.71	6.69	11.39	12.46
ZS-SVD	compressed	6.74	10.74	11.87	11.44	34.13	43.19
	+ remap*	5.90	7.95	8.81	6.96	11.52	12.72
	+ loss-aware [‡]	5.69	7.92	8.78	6.69	11.46	12.80
IO-SVD (Ours)	compressed	6.41	9.82	10.93	9.84	27.15	28.84
	+ remap*	5.76	7.61	8.59	6.48	10.24	10.95
	+ loss-aware [‡]	5.59	7.62	8.56	6.27	10.15	10.89

than or on par with prior SVD methods, while the loss-aware remapping variant substantially outperforms pruning baselines in average accuracy.

4.2 Ablation studies

Effect of top- k : Figure 3 ablates the effect of the top- K value used to construct the output-side KL curvature. Specifically, we sweep K using WikiText-2 as the selection set, then evaluate the resulting compressed models on the evaluation sets of WikiText-2, PTB, and C4. For better visibility, the plot reports normalized perplexity on the y-axis, measured as the ratio between the perplexity at each K and the best perplexity obtained on WikiText-2. We observe a clear sweet spot for K . Importantly, the best K selected on WikiText-2 transfers well across datasets, suggesting that the top- K curvature estimate generalizes across evaluation datasets.

Whitening space and rank allocation: Table 4 studies the effect of the whitening space and rank-allocation strategy. We compare three whitening choices: input-only whitening as in SVD-LLM, double-sided Kronecker whitening as in OBD-LLM, and our double-sided KL whitening, each under homogeneous and heterogeneous rank allocation. Heterogeneous allocation improves performance in most settings, indicating that a fixed rank assignment is generally suboptimal when different layers exhibit different sensitivity to compression. Among the whitening spaces, double-sided methods consistently outperform input-only whitening, especially at more aggressive pruning ratios, highlighting the benefit of incorporating output-side sensitivity. The best results are achieved by combining heterogeneous rank allocation with our double-sided KL whitening, which obtains the lowest perplexity across all reported compression settings.

Remapping applied to our method: Table 6 evaluates remapping on LLaMA-7B at compression ratios of 80% and 60% (pruning rates: 20% and 40%). We evaluate on WikiText2, C4, and PTB, and compare vanilla compression, standard remapping, and our loss-aware remapping across SVD-LLM, ZS-SVD, and IO-SVD. Consistent with prior findings on hybrid SVD-quantization compression [30, 1], remapping improves over the vanilla compressed models, showing that selective quantization helps recover performance after SVD truncation. Our loss-aware remapping further improves over standard remapping in most settings by choosing rows based on predicted calibration-loss impact, with IO-SVD achieving the best or near-best perplexity across datasets and compression ratios.

4.2.1 Inference speed and memory

Figure 4 reports decode-time efficiency of IO-SVD against the dense baseline at the same compression budget used in our perplexity and accuracy experiments. We measure both end-to-end throughput in tokens per second and the peak GPU memory footprint, broken down into weight storage, KV cache, and other runtime activations. All inference experiments are conducted on a single NVIDIA RTX PRO 6000 Blackwell Max-Q workstation GPU with 96 GB VRAM.

Decode throughput. IO-SVD without any KV-cache optimization already removes a portion of the per-step compute and yields a small improvement over the dense baseline (483 vs. 470 tok/s, $1.03\times$). Combining IO-SVD with V-cache compression raises throughput to 1392 tok/s ($2.96\times$), and adding KV-cache compression pushes it further to 2043 tok/s ($4.34\times$). The progression demonstrates that the speedup of IO-SVD is amplified once memory bandwidth on the cache is reduced, rather than coming purely from the lower-rank weight matrices.

Peak GPU memory. The dense baseline consumes 77.6 GB, dominated by a 64.0 GB KV cache and a 12.6 GB weight tensor. IO-SVD without cache optimization shrinks the weight footprint to 5.4 GB but leaves the KV cache untouched at 64.0 GB, giving a 70.4 GB peak. Adding V-cache compression reduces the cache to 38.8 GB and yields a 50.3 GB peak, while combining V- and KV-cache compression reduces the cache further to 11.6 GB, for a 23.1 GB total. Across all four configurations, the weight memory remains 5.4 GB, indicating that the additional savings come almost entirely from the cache. Together, these results show that IO-SVD is not only accuracy-competitive but also delivers practical inference speedups and substantially smaller memory footprints, making it amenable to deployment on resource-constrained hardware.

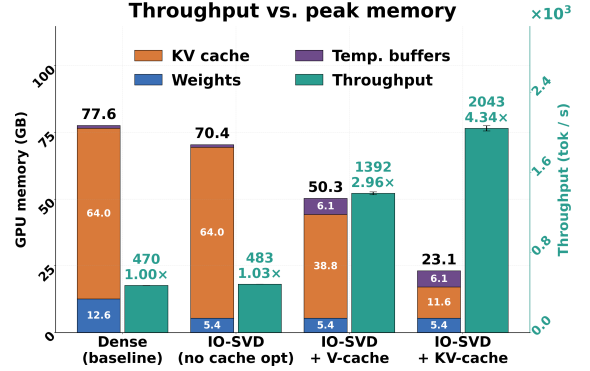


Figure 4: Throughput vs. peak memory on LLaMA-2-7B (batch 64, seq 1024+1024).

Memory compression for decoding speed: IO-SVD can reduce inference-time memory traffic by compressing the KV cache. For a compressed key or value projection in layer ℓ , let $\tilde{W}_\ell = A_\ell D_\ell^\top$, following the notation in Section 3.3. Instead of storing the full-dimensional projection $\hat{h}_t = \tilde{W}_\ell x_t = A_\ell(D_\ell^\top x_t)$, we cache the low-dimensional latent vector $z_t = D_\ell^\top x_t$, whose dimension is the retained rank r_ℓ . This reduces KV-cache size and memory-bandwidth requirements during autoregressive decoding, where each new token requires reading the accumulated cache. Although this introduces additional compute for the up-projection through A_ℓ during attention, the tradeoff is favorable when decoding is memory-bandwidth bound, enabling practical speedups in long-context or memory-constrained settings. Figure 4 shows the throughput and memory footprint of the model when compressing V or KV cache.

5 Conclusion and limitations

We presented IO-SVD, a post-training compression method that uses KL-aware double-sided whitening, adaptive rank allocation, and loss-aware remapping to improve SVD-based LLM and VLM compression. Experiments show that IO-SVD better preserves perplexity and downstream accuracy than prior SVD-based methods, especially under aggressive compression. Future work should study calibration sensitivity, improve curvature-estimation efficiency, and evaluate IO-SVD across broader models, tasks, and deployment settings.

IO-SVD has several limitations that suggest useful future directions. First, the method estimates output-side curvature using a top-K token approximation, which may not fully capture sensitivity from the long tail of the vocabulary. Second, the adaptive rank allocation is based on a greedy component-removal strategy; while efficient, it may not always find the globally optimal rank distribution. Finally, IO-SVD is evaluated up to 13B-parameter models, so further validation on larger-scale models would strengthen the evidence for scalability.

References

- [1] Ali Abbasi, Chayne Thrash, Haoran Qin, Shansita Sharma, Sepehr Seifi, and Soheil Kolouri. Zero sum svd: Balancing loss sensitivity for low rank llm compression, 2026. URL <https://arxiv.org/abs/2602.02848>.
- [2] Rishabh Agarwal, Nino Vieillard, Yongchao Zhou, Piotr Stanczyk, Sabela Ramos Garea, Matthieu Geist, and Olivier Bachem. On-policy distillation of language models: Learning from self-generated mistakes. In *The Twelfth International Conference on Learning Representations*, 2024.
- [3] Aida Amini, Saadia Gabriel, Shanchuan Lin, Rik Koncel-Kedziorski, Yejin Choi, and Hannaneh Hajishirzi. MathQA: Towards interpretable math word problem solving with operation-based formalisms. In Jill Burstein, Christy Doran, and Tamar Solorio, editors, *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 2357–2367, Minneapolis, Minnesota, June 2019. Association for Computational Linguistics. doi: 10.18653/v1/N19-1245. URL <https://aclanthology.org/N19-1245/>.
- [4] Yonatan Bisk, Rowan Zellers, Ronan Le Bras, Jianfeng Gao, and Yejin Choi. PIQA: Reasoning about physical commonsense in natural language. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 7432–7439, 2020. doi: 10.1609/aaai.v34i05.6239.
- [5] Jerry Chee, Yaohui Cai, Volodymyr Kuleshov, and Christopher De Sa. QuIP: 2-bit quantization of large language models with guarantees. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023. URL <https://openreview.net/forum?id=xrk9g5vcXR>.
- [6] Viktoriia Chekalina, Daniil Moskovskiy, Daria Cherniuk, Maxim Kurkin, Andrey Kuznetsov, and Evgeny Frolov. Generalized fisher-weighted svd: Scalable kronecker-factored fisher approximation for compressing large language models, 2025. URL <https://arxiv.org/abs/2505.17974>.
- [7] Hongrong Cheng, Miao Zhang, and Javen Qinfeng Shi. A survey on deep neural network pruning: Taxonomy, comparison, analysis, and recommendations. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 46(12):10558–10578, 2024.
- [8] Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. Think you have solved question answering? try arc, the ai2 reasoning challenge, 2018. URL <https://arxiv.org/abs/1803.05457>.
- [9] Tim Dettmers, Mike Lewis, Younes Belkada, and Luke Zettlemoyer. Llm.int8(): 8-bit matrix multiplication for transformers at scale. In *Proceedings of the 36th International Conference on Neural Information Processing Systems, NIPS ’22*, Red Hook, NY, USA, 2022. Curran Associates Inc. ISBN 9781713871088.
- [10] Carl Eckart and Gale Young. The approximation of one matrix by another of lower rank. *Psychometrika*, 1(3): 211–218, 1936.
- [11] Elias Frantar and Dan Alistarh. Sparsegpt: massive language models can be accurately pruned in one-shot. In *Proceedings of the 40th International Conference on Machine Learning, ICML’23*. JMLR.org, 2023.
- [12] Elias Frantar, Sidak Pal Singh, and Dan Alistarh. Optimal brain compression: a framework for accurate post-training quantization and pruning. In *Proceedings of the 36th International Conference on Neural Information Processing Systems, NIPS ’22*, Red Hook, NY, USA, 2022. Curran Associates Inc. ISBN 9781713871088.
- [13] Elias Frantar, Saleh Ashkboos, Torsten Hoefler, and Dan Alistarh. OPTQ: Accurate quantization for generative pre-trained transformers. In *The Eleventh International Conference on Learning Representations*, 2023. URL <https://openreview.net/forum?id=tcbBPnfwxS>.
- [14] Elias Frantar, Roberto L Castro, Jiale Chen, Torsten Hoefler, and Dan Alistarh. Marlin: Mixed-precision autoregressive parallel inference on large language models. In *Proceedings of the 30th ACM SIGPLAN Annual Symposium on Principles and Practice of Parallel Programming*, pages 239–251, 2025.
- [15] Yuxian Gu, Li Dong, Furu Wei, and Minlie Huang. Minillm: Knowledge distillation of large language models. In *The Twelfth International Conference on Learning Representations*, 2024.
- [16] Geoffrey Hinton, Oriol Vinyals, and Jeff Dean. Distilling the knowledge in a neural network. *arXiv preprint arXiv:1503.02531*, 2015.
- [17] Yen-Chang Hsu, Ting Hua, Sungen Chang, Qian Lou, Yilin Shen, and Hongxia Jin. Language model compression with weighted low-rank factorization. In *International Conference on Learning Representations*, 2022. URL <https://openreview.net/forum?id=uPv9Y3gmAI5>.
- [18] Edward J Hu, yelong shen, Phillip Wallis, Zeyuan Allen-Zhu, Yanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-rank adaptation of large language models. In *International Conference on Learning Representations*, 2022. URL <https://openreview.net/forum?id=nZeVKeeFYf9>.

- [19] Bohao Li, Yuying Ge, Yixiao Ge, Guangzhi Wang, Rui Wang, Ruimao Zhang, and Ying Shan. Seed-bench: Benchmarking multimodal large language models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13299–13308, 2024.
- [20] Yuhang Li, Donghyun Lee, Ruokai Yin, and Priyadarshini Panda. Optimal brain decomposition for accurate llm low-rank approximation. *arXiv preprint arXiv:2604.00821*, 2026.
- [21] Yujun Lin, Haotian Tang, Shang Yang, Zhekai Zhang, Guangxuan Xiao, Chuang Gan, and Song Han. Qserve: W4a8kv4 quantization and system co-design for efficient llm serving. *arXiv preprint arXiv:2405.04532*, 2024.
- [22] Pan Lu, Swaroop Mishra, Tony Xia, Liang Qiu, Kai-Wei Chang, Song-Chun Zhu, Oyvind Tafjord, Peter Clark, and Ashwin Kalyan. Learn to explain: Multimodal reasoning via thought chains for science question answering. In *The 36th Conference on Neural Information Processing Systems (NeurIPS)*, 2022.
- [23] Xinyin Ma, Gongfan Fang, and Xinchao Wang. LLM-Pruner: On the structural pruning of large language models. *Advances in Neural Information Processing Systems*, 36:21702–21720, 2023.
- [24] Mitchell P. Marcus, Beatrice Santorini, and Mary Ann Marcinkiewicz. Building a large annotated corpus of English: The Penn Treebank. *Computational Linguistics*, 19(2):313–330, 1993. URL <https://aclanthology.org/J93-2004/>.
- [25] Stephen Merity, Caiming Xiong, James Bradbury, and Richard Socher. Pointer sentinel mixture models. In *International Conference on Learning Representations*, 2017. URL <https://openreview.net/forum?id=Byj72udxe>.
- [26] Todor Mihaylov, Peter Clark, Tushar Khot, and Ashish Sabharwal. Can a suit of armor conduct electricity? a new dataset for open book question answering. In Ellen Riloff, David Chiang, Julia Hockenmaier, and Jun’ichi Tsujii, editors, *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2381–2391, Brussels, Belgium, October-November 2018. Association for Computational Linguistics. doi: 10.18653/v1/D18-1260. URL <https://aclanthology.org/D18-1260/>.
- [27] Leon Mirsky. Symmetric gauge functions and unitarily invariant norms. *The Quarterly Journal of Mathematics*, 11(1):50–59, 1960.
- [28] Truong Nguyen, Phi Van Dat, Ngan Nguyen, Linh Ngo Van, Trung Le, and Thanh Hong Nguyen. Ctpd: Cross tokenizer preference distillation. *arXiv preprint arXiv:2601.11865*, 2026.
- [29] Gunho Park, Baeseong Park, Minsub Kim, Sungjae Lee, Jeonghoon Kim, Beomseok Kwon, Se Jung Kwon, Byeongwook Kim, Youngjoo Lee, and Dongsoo Lee. Lut-gemm: Quantized matrix multiplication based on luts for efficient inference in large-scale generative language models. *arXiv preprint arXiv:2206.09557*, 2022.
- [30] Wang Qinsi, Jinghan Ke, Masayoshi Tomizuka, Kurt Keutzer, and Chenfeng Xu. Dobi-SVD: Differentiable SVD for LLM compression and some new perspectives. In *The Thirteenth International Conference on Learning Representations*, 2025. URL <https://openreview.net/forum?id=kws76i5XB8>.
- [31] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *J. Mach. Learn. Res.*, 21(1), January 2020. ISSN 1532-4435.
- [32] Jun Rao, Xv Meng, Liang Ding, Shuhan Qi, Xuebo Liu, Min Zhang, and Dacheng Tao. Parameter-efficient and student-friendly knowledge distillation. *IEEE Transactions on Multimedia*, 26:4230–4241, 2023.
- [33] Keisuke Sakaguchi, Ronan Le Bras, Chandra Bhagavatula, and Yejin Choi. Winogrande: an adversarial winograd schema challenge at scale. *Commun. ACM*, 64(9):99–106, August 2021. ISSN 0001-0782. doi: 10.1145/3474381. URL <https://doi.org/10.1145/3474381>.
- [34] Wenqi Shao, Mengzhao Chen, Zhaoyang Zhang, Peng Xu, Lirui Zhao, Zhiqian Li, Kaipeng Zhang, Peng Gao, Yu Qiao, and Ping Luo. Omniquant: Omnidirectionally calibrated quantization for large language models. In *The Twelfth International Conference on Learning Representations*.
- [35] Haebin Shin, Lei Ji, Xiao Liu, and Yeyun Gong. Overcoming vocabulary mismatch: Vocabulary-agnostic teacher guided language modeling. In *Forty-second International Conference on Machine Learning*.
- [36] Mingjie Sun, Zhuang Liu, Anna Bair, and J Zico Kolter. A simple and effective pruning approach for large language models. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=PxoFut3dWW>.
- [37] Albert Tseng, Jerry Chee, Qingyao Sun, Volodymyr Kuleshov, and Christopher De Sa. Quip#: even better llm quantization with hadamard incoherence and lattice codebooks. In *Proceedings of the 41st International Conference on Machine Learning, ICML’24*. JMLR.org, 2024.

- [38] Albert Tseng, Zhaofeng Sun, and Christopher De Sa. Model-preserving adaptive rounding, 2025. URL <https://arxiv.org/abs/2505.22988>.
- [39] Haiyu Wang, Yutong Wang, Jack Jiang, and Sai Qian Zhang. Wsvd: Weighted low-rank approximation for fast and efficient execution of low-precision vision-language models. In *The Fourteenth International Conference on Learning Representations*, .
- [40] Shaowen Wang, Linxi Yu, and Jian Li. Lora-ga: Low-rank adaptation with gradient approximation. *Advances in Neural Information Processing Systems*, 37:54905–54931, 2024.
- [41] Xin Wang, Samiul Alam, Zhongwei Wan, Hui Shen, and Mi Zhang. SVD-LLM v2: Optimizing singular value truncation for large language model compression. In Luis Chiruzzo, Alan Ritter, and Lu Wang, editors, *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 4287–4296, Albuquerque, New Mexico, April 2025. Association for Computational Linguistics. ISBN 979-8-89176-189-6. doi: 10.18653/v1/2025.naacl-long.217. URL <https://aclanthology.org/2025.naacl-long.217/>.
- [42] Xin Wang, Yu Zheng, Zhongwei Wan, and Mi Zhang. SVD-LLM: Truncation-aware singular value decomposition for large language model compression. In *The Thirteenth International Conference on Learning Representations*, 2025. URL <https://openreview.net/forum?id=LNyIUouhdt>.
- [43] Yutong Wang, Haiyu Wang, and Sai Qian Zhang. Qsvd: Efficient low-rank approximation for unified query-key-value weight compression in low-precision vision-language models. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems*, .
- [44] Guangxuan Xiao, Ji Lin, Míkael Seznec, Hao Wu, Julien Demouth, and Song Han. Smoothquant: accurate and efficient post-training quantization for large language models. In *Proceedings of the 40th International Conference on Machine Learning, ICML’23*. JMLR.org, 2023.
- [45] Zhihang Yuan, Yuzhang Shang, Yue Song, Dawei Yang, Qiang Wu, Yan Yan, and Guangyu Sun. Asvd: Activation-aware singular value decomposition for compressing large language models, 2025. URL <https://arxiv.org/abs/2312.05821>.
- [46] Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, and Yejin Choi. HellaSwag: Can a machine really finish your sentence? In Anna Korhonen, David Traum, and Lluís Màrquez, editors, *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 4791–4800, Florence, Italy, July 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1472. URL <https://aclanthology.org/P19-1472/>.
- [47] Yilong Zhao, Chien-Yu Lin, Kan Zhu, Zihao Ye, Lequn Chen, Size Zheng, Luis Ceze, Arvind Krishnamurthy, Tianqi Chen, and Baris Kasikci. Atom: Low-bit quantization for efficient and accurate llm serving. *Proceedings of Machine Learning and Systems*, 6:196–209, 2024.

Appendix

A Adaptive-rank IO-SVD algorithm

Algorithm 2 summarizes the adaptive-rank IO-SVD truncation procedure. For each target layer, IO-SVD constructs the doubly whitened matrix

$$B_\ell = C_\ell^{1/2} W_\ell R_\ell^{1/2},$$

computes its SVD, and scores the first-order calibration-loss sensitivity of each whitened singular component. The algorithm maintains a shared pool containing one candidate from each layer: the smallest currently retained singular component of that layer. At each step, it removes the candidate with the smallest predicted loss impact while preserving the per-layer spectral order. This induces heterogeneous ranks across layers under a single global storage budget.

A practical detail is that low-rank factorization is storage-efficient only below a layer-dependent threshold. For a dense weight $W_\ell \in \mathbb{R}^{m_\ell \times n_\ell}$, the dense representation uses $m_\ell n_\ell$ parameters, while a rank- r factorization uses $r(m_\ell + n_\ell)$ parameters. We define

$$r_\ell^* := \left\lfloor \frac{m_\ell n_\ell}{m_\ell + n_\ell} \right\rfloor, \quad (13)$$

the largest rank at which the low-rank representation is no more expensive than the dense weight. Above this threshold, storing two low-rank factors would require more parameters than keeping the original dense module.

Let r denote the current rank before removing the tail singular component. The storage gain from dropping this component is

$$\text{storage_gain}_\ell(r) = \begin{cases} 0, & r > r_\ell^* + 1, \\ m_\ell n_\ell - r_\ell^*(m_\ell + n_\ell), & r = r_\ell^* + 1, \\ m_\ell + n_\ell, & r \leq r_\ell^*. \end{cases} \quad (14)$$

When $r > r_\ell^* + 1$, the layer remains cheaper to store densely even after the drop, so the realized storage gain is zero. When $r = r_\ell^* + 1$, the next drop moves the layer to rank r_ℓ^* , allowing the dense weight to be replaced by low-rank IO-SVD factors and yielding the one-time gain $m_\ell n_\ell - r_\ell^*(m_\ell + n_\ell)$. Once the layer is already below the threshold, each additional rank reduction removes one column-row pair from the two factors and saves $m_\ell + n_\ell$ parameters.

At the end of truncation, if a layer remains above the threshold rank, we keep the original dense module, i.e., $\hat{W}_\ell \leftarrow W_\ell$. This avoids introducing approximation error when the low-rank representation would not provide storage savings.

Algorithm 1 IO-SVD initialization

- 1: **Input:** weights $\{W_\ell\}_{\ell=1}^L$, calibration set $\mathcal{D}_{\text{cal}}$, pruning ratio π , minimum-rank ratio η
 - 2: **Output:** per-layer state $\mathcal{S}$, min-heap $\mathcal{Q}$, target removed budget B_{rm} , removed budget b
 - 3: Set $B_{\text{rm}} \leftarrow \pi \sum_{\ell=1}^L m_\ell n_\ell$, $b \leftarrow 0$, and initialize $\mathcal{Q} \leftarrow \emptyset$
 - 4: **for** $\ell = 1$ **to** L **do**
 - 5: Estimate R_ℓ and C_ℓ on $\mathcal{D}_{\text{cal}}$
 - 6: Form $B_\ell \leftarrow C_\ell^{1/2} W_\ell R_\ell^{1/2}$ and compute $B_\ell = U_\ell \Sigma_\ell V_\ell^\top$
 - 7: Sort singular components in descending order of $\sigma_{\ell,i}$, with corresponding columns of U_ℓ and V_ℓ
 - 8: Compute $G_\ell = \partial \mathcal{L}_{\text{cal}} / \partial W_\ell$ and $\tilde{G}_\ell \leftarrow C_\ell^{-1/2} G_\ell R_\ell^{-1/2}$
 - 9: Set $r_\ell \leftarrow r_\ell^{\max} = \min(m_\ell, n_\ell)$
 - 10: Set $r_\ell^* \leftarrow \lfloor m_\ell n_\ell / (m_\ell + n_\ell) \rfloor$
 - 11: Set $r_\ell^{\min} \leftarrow \lceil \eta r_\ell^* \rceil$
 - 12: **for** $i = 1$ **to** $r_\ell^{\max}$ **do**
 - 13: $g_{\ell,i} \leftarrow u_{\ell,i}^\top \tilde{G}_\ell v_{\ell,i}$
 - 14: $I_{\ell,i} \leftarrow |g_{\ell,i} \sigma_{\ell,i}|$
 - 15: **end for**
 - 16: **if** $r_\ell > r_\ell^{\min}$ **then**
 - 17: $\Delta b_{\ell,r_\ell} \leftarrow \text{storage_gain}_\ell(r_\ell)$
 - 18: Push $(I_{\ell,r_\ell}, \ell, r_\ell, \Delta b_{\ell,r_\ell})$ into $\mathcal{Q}$
 - 19: **end if**
 - 20: **end for**
-

Algorithm 2 Adaptive-rank IO-SVD truncation

```

1: Input: per-layer state  $\mathcal{S}$ , min-heap  $\mathcal{Q}$ , target removed budget  $B_{\text{rm}}$ , removed budget  $b$ 
2: Output: compressed weights  $\{\hat{W}_\ell\}_{\ell=1}^L$ 
3: while  $b < B_{\text{rm}}$  and  $\mathcal{Q} \neq \emptyset$  do
4:   Pop  $(I_{\ell,i}, \ell, i, \Delta b_{\ell,i})$  with the smallest score from  $\mathcal{Q}$ 
5:   Drop the current tail singular component of layer  $\ell$ 
6:   Update  $b \leftarrow b + \Delta b_{\ell,i}$  and  $r_\ell \leftarrow r_\ell - 1$ 
7:   if  $r_\ell > r_\ell^{\min}$  then
8:      $\Delta b_{\ell,r_\ell} \leftarrow \text{storage\_gain}_\ell(r_\ell)$ 
9:     Push  $(I_{\ell,r_\ell}, \ell, r_\ell, \Delta b_{\ell,r_\ell})$  into  $\mathcal{Q}$ 
10:  end if
11: end while
12: for  $\ell = 1$  to  $L$  do
13:  if  $r_\ell > r_\ell^*$  then
14:    Keep dense module:  $\hat{W}_\ell \leftarrow W_\ell$ 
15:  else
16:     $\hat{B}_\ell \leftarrow U_{\ell,1:r_\ell} \Sigma_{\ell,1:r_\ell} V_{\ell,1:r_\ell}^\top$ 
17:     $\hat{W}_\ell \leftarrow C_\ell^{-1/2} \hat{B}_\ell R_\ell^{-1/2}$ 
18:  end if
19: end for

```

B Objective derivation**B.1 KL expansion and output-side curvature**

We derive the second-order approximation used in Eq. (2). For a fixed token t , let

$$p_t = \text{softmax}(z_t)$$

be the predictive distribution of the uncompressed model, and define

$$f_t(z) := \text{KL}(p_t \parallel \text{softmax}(z)). \quad (15)$$

Let $q(z) = \text{softmax}(z)$. Then

$$f_t(z) = \sum_{i=1}^V p_{t,i} \log p_{t,i} - \sum_{i=1}^V p_{t,i} \log q_i(z). \quad (16)$$

Using

$$\log q_i(z) = z_i - \log \sum_{j=1}^V e^{z_j},$$

we obtain

$$f_t(z) = \sum_{i=1}^V p_{t,i} \log p_{t,i} - p_t^\top z + \log \sum_{j=1}^V e^{z_j}. \quad (17)$$

Therefore,

$$\nabla_z f_t(z) = q(z) - p_t. \quad (18)$$

At $z = z_t$, $q(z_t) = p_t$, so

$$\nabla_z f_t(z_t) = 0. \quad (19)$$

Since $f_t(z_t) = \text{KL}(p_t \parallel p_t) = 0$, both the zeroth- and first-order terms vanish.

The Hessian is the softmax Jacobian:

$$\nabla_z^2 f_t(z) = \text{Diag}(q(z)) - q(z)q(z)^\top. \quad (20)$$

Evaluating at $z = z_t$ gives

$$H_t = \nabla_z^2 f_t(z_t) = \text{Diag}(p_t) - p_t p_t^\top. \quad (21)$$

Thus, for a logit perturbation δz_t ,

$$\text{KL}(p_t \parallel \text{softmax}(z_t + \delta z_t)) = \frac{1}{2} \delta z_t^\top H_t \delta z_t + O(\|\delta z_t\|^3). \quad (22)$$

The matrix H_t is symmetric positive semidefinite. For any $v \in \mathbb{R}^V$,

$$v^\top H_t v = \sum_{i=1}^V p_{t,i} v_i^2 - \left(\sum_{i=1}^V p_{t,i} v_i \right)^2 \geq 0, \quad (23)$$

which is the variance of v_i under p_t . Also, $H_t \mathbf{1} = 0$, reflecting the invariance of the softmax distribution to adding a constant to all logits.

B.2 Trace-to-Frobenius reduction

Starting from Eq. (3),

$$\Delta \mathcal{J}_{\ell,t} \approx \frac{1}{2} x_t^\top \Delta W_\ell^\top C_{\text{token},t} \Delta W_\ell x_t, \quad (24)$$

we use $a^\top M a = \text{tr}(M a a^\top)$ to write

$$x_t^\top \Delta W_\ell^\top C_{\text{token},t} \Delta W_\ell x_t = \text{tr}(\Delta W_\ell x_t x_t^\top \Delta W_\ell^\top C_{\text{token},t}). \quad (25)$$

Averaging over calibration tokens gives

$$\Delta \mathcal{J}_\ell \approx \frac{1}{2} \mathbb{E}_t [\text{tr}(\Delta W_\ell x_t x_t^\top \Delta W_\ell^\top C_{\text{token},t})]. \quad (26)$$

Using the moment-decoupling approximation,

$$R_\ell = \mathbb{E}_t[x_t x_t^\top], \quad C_\ell = \mathbb{E}_t[C_{\text{token},t}], \quad (27)$$

we obtain

$$\Delta \mathcal{J}_\ell \approx \frac{1}{2} \text{tr}(\Delta W_\ell R_\ell \Delta W_\ell^\top C_\ell). \quad (28)$$

Let

$$M = C_\ell^{1/2} \Delta W_\ell R_\ell^{1/2}.$$

Then

$$\|M\|_F^2 = \text{tr}(M M^\top) \quad (29)$$

$$= \text{tr}(C_\ell^{1/2} \Delta W_\ell R_\ell \Delta W_\ell^\top C_\ell^{1/2}) \quad (30)$$

$$= \text{tr}(\Delta W_\ell R_\ell \Delta W_\ell^\top C_\ell), \quad (31)$$

where the last equality uses cyclic invariance of trace. Therefore,

$$\Delta \mathcal{J}_\ell \approx \frac{1}{2} \left\| C_\ell^{1/2} \Delta W_\ell R_\ell^{1/2} \right\|_F^2. \quad (32)$$

Substituting $\Delta W_\ell = W_\ell - \hat{W}_\ell$ yields Eq. (4).

C Efficient computation of $J^\top H J$

For a target module ℓ , let $h_{\ell,t} \in \mathbb{R}^{d_{\text{out}}}$ denote its output at token t . Let $z_{t,K} \in \mathbb{R}^K$ denote the logits restricted to the top- K coordinates of the uncompressed model, and let $p_{t,K} \in \mathbb{R}^K$ be the corresponding probabilities renormalized on this support. The reduced token-level curvature is

$$C_{\text{token},t} \approx \left(J_{t,K}^{(\ell)} \right)^\top H_{t,K} J_{t,K}^{(\ell)}, \quad J_{t,K}^{(\ell)} = \frac{\partial z_{t,K}}{\partial h_{\ell,t}}, \quad (33)$$

where

$$H_{t,K} = \text{Diag}(p_{t,K}) - p_{t,K} p_{t,K}^\top. \quad (34)$$

Directly forming $J_{t,K}^{(\ell)}$ for all tokens and modules is expensive. Instead, we exploit the structure of $H_{t,K}$. Define

$$s_t = \sqrt{p_{t,K}}, \quad D_t = \text{Diag}(s_t), \quad \Omega_t = I - s_t s_t^\top. \quad (35)$$

Since $p_{t,K}$ is renormalized, $\|s_t\|_2 = 1$, and hence

$$\Omega_t^2 = (I - s_t s_t^\top)^2 = I - s_t s_t^\top = \Omega_t. \quad (36)$$

Thus, Ω_t is an orthogonal projector onto the subspace orthogonal to s_t .

Now define

$$A_t = D_t \Omega_t. \quad (37)$$

Then

$$A_t A_t^\top = D_t \Omega_t^2 D_t \quad (38)$$

$$= D_t \Omega_t D_t \quad (39)$$

$$= D_t (I - s_t s_t^\top) D_t \quad (40)$$

$$= \text{Diag}(p_{t,K}) - p_{t,K} p_{t,K}^\top = H_{t,K}. \quad (41)$$

Therefore,

$$H_{t,K} = A_t A_t^\top. \quad (42)$$

Let e_j be the j -th canonical basis vector in $\mathbb{R}^K$, and define the deterministic probe

$$v_{t,j} = A_t e_j. \quad (43)$$

Sweeping over all K basis directions recovers the reduced Hessian:

$$\sum_{j=1}^K v_{t,j} v_{t,j}^\top = A_t \left(\sum_{j=1}^K e_j e_j^\top \right) A_t^\top = A_t A_t^\top = H_{t,K}. \quad (44)$$

For each probe $v_{t,j}$, define the scalar

$$\phi_{t,j} = v_{t,j}^\top z_{t,K}. \quad (45)$$

Its gradient with respect to the module output is

$$\nabla_{h_{\ell,t}} \phi_{t,j} = \left(J_{t,K}^{(\ell)} \right)^\top v_{t,j}. \quad (46)$$

This is a vector-Jacobian product and can be computed by reverse-mode automatic differentiation without materializing $J_{t,K}^{(\ell)}$. Denote

$$g_{\ell,t,j} = \nabla_{h_{\ell,t}} \phi_{t,j} = \left(J_{t,K}^{(\ell)} \right)^\top v_{t,j}. \quad (47)$$

Then

$$\sum_{j=1}^K g_{\ell,t,j} g_{\ell,t,j}^\top = \left(J_{t,K}^{(\ell)} \right)^\top \left(\sum_{j=1}^K v_{t,j} v_{t,j}^\top \right) J_{t,K}^{(\ell)} \quad (48)$$

$$= \left(J_{t,K}^{(\ell)} \right)^\top H_{t,K} J_{t,K}^{(\ell)}. \quad (49)$$

Thus, the curvature is recovered exactly on the top- K subspace; the only approximation is the restriction from the full vocabulary to the top- K support.

In practice, for each calibration batch, we compute the top- K logits and renormalized probabilities, form the probes $\{v_{t,j}\}_{j=1}^K$, and backpropagate each scalar $\phi_{t,j}$. Backward hooks on each target linear module collect the vectors $g_{\ell,t,j}$ and accumulate

$$\hat{C}_\ell = \frac{1}{N} \sum_{t=1}^N \sum_{j=1}^K g_{\ell,t,j} g_{\ell,t,j}^\top \approx \mathbb{E}_t [J_t^\top H_t J_t]. \quad (50)$$

A small damping term may be added to $\hat{C}_\ell$ before taking matrix square roots or inverse square roots.

D Derivation of the singular-component score

The adaptive rank-allocation score in Eq. (10) follows from a first-order Taylor approximation in the whitened SVD coordinates. Recall that

$$B_\ell = C_\ell^{1/2} W_\ell R_\ell^{1/2}. \quad (51)$$

A perturbation ΔW_ℓ induces

$$\Delta B_\ell = C_\ell^{1/2} \Delta W_\ell R_\ell^{1/2}, \quad \Delta W_\ell = C_\ell^{-1/2} \Delta B_\ell R_\ell^{-1/2}. \quad (52)$$

Let $G_\ell = \partial \mathcal{L} / \partial W_\ell$. The first-order loss change is

$$\Delta \mathcal{L} \approx \langle G_\ell, \Delta W_\ell \rangle \quad (53)$$

$$= \text{tr} \left(G_\ell^\top C_\ell^{-1/2} \Delta B_\ell R_\ell^{-1/2} \right) \quad (54)$$

$$= \text{tr} \left(\left(C_\ell^{-1/2} G_\ell R_\ell^{-1/2} \right)^\top \Delta B_\ell \right) \quad (55)$$

$$= \langle \tilde{G}_\ell, \Delta B_\ell \rangle, \quad (56)$$

where

$$\tilde{G}_\ell = C_\ell^{-1/2} G_\ell R_\ell^{-1/2} = \frac{\partial \mathcal{L}}{\partial B_\ell}. \quad (57)$$

Let

$$B_\ell = \sum_i \sigma_{\ell,i} u_{\ell,i} v_{\ell,i}^\top. \quad (58)$$

Holding $u_{\ell,i}$ and $v_{\ell,i}$ fixed, we have

$$\frac{\partial B_\ell}{\partial \sigma_{\ell,i}} = u_{\ell,i} v_{\ell,i}^\top. \quad (59)$$

Therefore,

$$g_{\ell,i} = \frac{\partial \mathcal{L}}{\partial \sigma_{\ell,i}} = \langle \tilde{G}_\ell, u_{\ell,i} v_{\ell,i}^\top \rangle = u_{\ell,i}^\top \tilde{G}_\ell v_{\ell,i}. \quad (60)$$

Removing the i -th singular component sets

$$\Delta \sigma_{\ell,i} = -\sigma_{\ell,i}.$$

The predicted first-order loss change is

$$\Delta \mathcal{L}_{\ell,i} \approx g_{\ell,i} \Delta \sigma_{\ell,i} = -g_{\ell,i} \sigma_{\ell,i}. \quad (61)$$

We use its magnitude as the component importance score:

$$I_{\ell,i} = |g_{\ell,i} \sigma_{\ell,i}|. \quad (62)$$

E Additional details for loss-aware remapping

For hybrid SVD–quantization compression, we write each truncated module as

$$\hat{W}_\ell = A_\ell D_\ell^\top, \quad (63)$$

where $A_\ell \in \mathbb{R}^{d_{\text{out}} \times r_\ell}$ and $D_\ell \in \mathbb{R}^{d_{\text{in}} \times r_\ell}$. Candidate rows are drawn from both low-rank factors. For a candidate row $r_{\ell,i}$, the 8-bit quantize-dequantize perturbation is

$$\Delta r_{\ell,i} = \mathcal{Q}_8(r_{\ell,i}) - r_{\ell,i}. \quad (64)$$

Let

$$\gamma_{\ell,i} = \frac{\partial \mathcal{L}_{\text{cal}}}{\partial r_{\ell,i}} \quad (65)$$

be the row gradient computed on calibration data after SVD truncation. A first-order Taylor approximation gives

$$\Delta \mathcal{L}_{\ell,i} \approx \langle \gamma_{\ell,i}, \Delta r_{\ell,i} \rangle = \langle \gamma_{\ell,i}, \mathcal{Q}_8(r_{\ell,i}) - r_{\ell,i} \rangle. \quad (66)$$

We define the remapping sensitivity score as

$$s_{\ell,i} = |\langle \gamma_{\ell,i}, \mathcal{Q}_8(r_{\ell,i}) - r_{\ell,i} \rangle|. \quad (67)$$

This score is small when either the row is quantized accurately or the quantization error lies in a direction that has little effect on the calibration loss.

Let C_{svd} denote the storage saved by SVD truncation and C_{target} denote the desired total storage saving. The remaining saving required from quantization is

$$C_{\text{rem}} = \max\{0, C_{\text{target}} - C_{\text{svd}}\}. \quad (68)$$

Each candidate row has a storage saving $c_{\ell,i}$, which may depend on the row length and quantization format. We select rows by solving the budgeted selection problem

$$\min_{\mathcal{S}} \sum_{(\ell,i) \in \mathcal{S}} s_{\ell,i} \quad \text{subject to} \quad \sum_{(\ell,i) \in \mathcal{S}} c_{\ell,i} \geq C_{\text{rem}}. \quad (69)$$

In practice, we use a greedy approximation. When all candidate rows have the same storage saving, rows are selected in increasing order of $s_{\ell,i}$. When row sizes differ, rows are selected by increasing cost per saved parameter:

$$\frac{s_{\ell,i}}{c_{\ell,i}}. \quad (70)$$

The selected rows are stored in 8-bit precision, and their row indices are stored as metadata. This index overhead is negligible relative to the compressed model size.