

SCOPE: A Generative Approach for LLM Prompt Compression

Tinghui Zhang
University of Florida
tinghui.zhang@ufl.edu

Yifan Wang*
University of Hawaii - Manoa
yifanw@hawaii.edu

Daisy Zhe Wang
University of Florida
daisyw@cise.ufl.edu

Abstract

A big issue in modern LLM applications is they tend to feed long context to LLM, which results in high inference cost and latency, and may exceed the context limit. Prompt compression addresses this issue by reducing the length of input context with minimum loss of generation quality, i.e., the goal of prompt compression is to shorten the LLM input while maintaining a high generation quality. To overcome these limitations, we propose SCOPE, a training-free generative prompt compression framework based on chunk-level rewriting. Unlike the existing token removal methods, our method centers at a chunking-and-summarization mechanism. Specifically, SCOPE splits a prompt into semantically coherent chunks and rewrites the chunks to be more concise. Then the chunks are reconstructed into a meaningful prompt. Additionally, we design several optimization techniques for SCOPE, effectively preserving critical information and text coherence in compression, as well as providing finer-grained control of the compression ratio. We conduct extensive evaluation on typical LLM applications like question-answering and summarization. Results show that SCOPE consistently outperforms the evaluated selective compression baselines across most settings, with particularly strong gains at high compression ratios.

1 Introduction

With the increasing length of input context in Large Language Models (LLMs) applications, users/developers have to face significantly inference cost and latency increase, as well as risks exceeding model context limits. To address these issues, prompt compression methods have been developed to shorten prompt while retaining necessary information. The state-of-the-art methods are usually based on *selective compression*, which focus on identifying and retaining the most important tokens of the original prompt, while removing less critical tokens. Although such approaches (called “selective” or “token removal” methods in this paper) reduce prompt length, they have notable drawbacks: **(1) Breaking contextual integrity:** By removing tokens of the prompt, selective methods disrupt the original context, leading to a loss of coherence and a potentially lost conjunction part of different chunks. **(2) Limiting context scope:** Selective methods use token as the processing unit, instead of considering at a higher level of the context, which limits their ability to understand the broader semantics. **(3) Losing key information:** Removal of tokens potentially discards key information, which never be compensated after the compression.

To address the problems, we propose SCOPE, a generative prompt compression method based on prompt rewrite with generative model.¹ Specifically, SCOPE rewrites the original prompt to be more concise, while preserving the overall meaning and critical information. To balance higher-level semantics and lower-level details, the rewrite is conducted on chunk-level (i.e., chunk by chunk) rather than the whole context. SCOPE deploys a summarization model for the rewrite. And because the goal of prompt compression is to reduce LLM cost, it makes no sense to use another LLM for the summarization in our method, therefore a smaller summarization model (e.g., BART (Lewis et al. (2019))) is chosen.

*Corresponding author.

¹Code is available at <https://github.com/tzhan024/scope-prompt-compression>.

Our method involves the following steps: (1) SCOPE first breaks down the original prompt into semantically coherent chunks (size not fixed), ensuring each chunk covers a complete and meaningful piece of information. (2) Each chunk is then evaluated for its relevance to the original prompt, and sorted by the relevance ascendingly, then the *less relevant* chunks are prioritized in compression. This is to squeeze the low-relevance chunks such that more space will be left for keeping highly relevant chunk content. (3) Furthermore, based on relevance and desired compression ratio, SCOPE calculates a specific (and usually different) compression ratio for each chunk. Such a dynamic compression ratio strategy guarantees the compression quality and robustness in finer grind. (4) Then each chunk is summarized in the sorted order with a summarization language model. Finally, the compressed (summarized) chunks are reassembled in their original order to form a coherent and shorter prompt.

Comparing to the state-of-the-art works like LLMingua-2 (Pan et al. (2024)), SCOPE requires no additional training and performs compression using lightweight pretrained embedding and summarization models, without invoking large LLMs during compression. This distinguishes SCOPE from prior generative approaches that rely on fine-tuning or reinforcement learning (e.g., RECOMP, PRCA), making it suitable as a plug-and-play module for existing LLM systems. Instead, all models (mainly the embedding and summarization models) are public pre-trained small language models, making SCOPE resource efficient and easy to use. In terms of end-to-end running speed, the most time-consuming step in SCOPE is the summarization, which is not an issue. Our evaluation shows that a small summarization model (with fast inference speed) like BART (Lewis et al. (2019)) is enough to achieve significantly high compression quality. SCOPE is a training-free generative prompt compression framework that operates at the chunk level without requiring additional model training. We evaluate our method on long document summarization and question-answering (QA) tasks, two common scenarios that require long input context. Our results show that SCOPE outperforms all the baselines in most cases for different downstream LLMs, effectively preserving semantic integrity and successfully maintaining inference quality after compression.

Our main contributions are as follows:

- (1) We propose SCOPE a training-free generative prompt compression framework that performs semantic chunking and chunk-level rewriting using lightweight pretrained models, based on a novel chunking-and-summarization mechanism, which effectively addresses contextual integrity break and key information loss, and achieves significantly high performance.
- (2) We design several novel optimizations to the compression, including semantic chunking, outlier chunk handling, dynamic compression ratio, sorting-based compression priority and keyword maintaining. These techniques effectively improve the compression quality.
- (3) We conduct extensive evaluation for the end-to-end performance and critical optimizations of our method. The evaluation results affirm the effectiveness of our design and provide guidance for better using SCOPE.

In the rest of this paper, Section 2 introduces prior works related to prompt compression. Section 3 introduces the technical details of our method. Section 4 is the experiment section, reporting and analyzing the results of end-to-end evaluation and ablation studies.

2 Related Work

Efficient handling of prompt lengths has become an important research area in large language models (LLMs), mainly to reduce computing costs and generation latencies. The LLMingua series includes several methods to solve these issues. Selective-Context (Li (2023)) is the earliest method, it selects tokens based on information theory but processes text in a single direction, which may lost important content. LLMingua (Jiang et al. (2023a)), LongLLMingua (Jiang et al. (2023b)), and LLMingua-2 (Pan et al. (2024)) are selective prompt compression methods that estimate token importance to remove redundant content, but by largely treating the prompt as a single sequence, they may drop or overlook widely separated yet critical tokens. Besides the LLMingua methods, other approaches have also been developed for compressing prompts effectively. PartPrompt (Mao et al. (2024)) per-

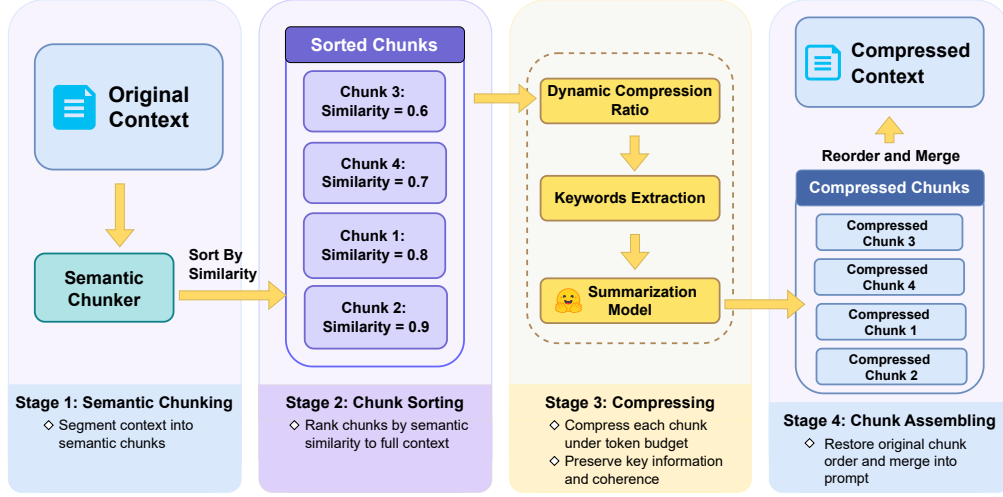


Figure 1: The workflow of SCOPE

forms structure-aware prompt compression by leveraging parse trees to estimate both local and global token importance and removing low-importance tokens accordingly. COMPACT (Yoon et al. (2024)) focuses on multi-document QA task, adaptively compressing documents based on query relevance and stopping once sufficient information has been gathered. Style-Compress (Pu et al. (2024)) studies how different compression styles, affect downstream task performance and iteratively selects the most effective compressed prompt for each task. Mean-Pooling Compression (Feldman & Artzi (2025)) achieves fast, parameter-free compression by applying non-overlapping mean pooling over LLM hidden states, but its reliance on TPUs limits practicality in real-world settings.

In addition to selective (token-removal) approaches, several recent works have explored generative or abstractive prompt compression. RECOMP (Xu et al. (2023)) formulates compression as a learned rewriting process, while PRCA (Yang et al. (2023)) leverages reinforcement learning for adaptive context selection. Prompt-SAW (Ali et al. (2024)) explores abstractive compression through structured rewriting. Compared to these approaches, SCOPE focuses on a training-free setting, using lightweight summarization models and chunk-level control to achieve efficient and flexible compression.

3 Methodology

In this section, we introduce the overall workflow and specific optimization techniques in SCOPE. In Figure 1, we illustrate the four-stage pipeline of SCOPE. **Stage 1** segments the original context (blue box) into semantic chunks using a semantic chunker (green box). **Stage 2** ranks the chunks by their semantic similarity to the full context. **Stage 3** applies dynamic chunk-level compression, where the compression ratio is adaptively determined based on similarity, chunk length, and token budget constraints, while preserving key entities and facts via keyword extraction and a generative summarization model. **Stage 4** reorders and merges the compressed chunks to form the final compressed context. To make it simple, we use "Line X" in this paragraph to denote the corresponding line in Algorithm 1.

In end-to-end workflow, the original context is first fed into the semantic chunker, which splits the entire context into chunks and computes similarity/relevance scores for each chunk to the full context (Line 1-2). Subsequently, keywords are extracted and maintained from each chunk (Line 3) for later postprocessing. The chunks are then sorted based on their similarity scores to the full context, ascendingly (Line 4), i.e., placing the less relevant chunks at the first. In the next step, a distinct compression ratio is calculated for each chunk individually (Line 5-7), followed by summarizing the chunk using the summarization model

Algorithm 1: End-to-End Prompt Compression**Input:** text string *essay*, compression ratio ρ **Output:** compressed text string

```

1  $E \leftarrow \text{get\_full\_context\_embedding}(essay);$ 
2  $chunks \leftarrow \text{recursive\_semantic\_chunking}(essay, E);$ 
3  $keywords \leftarrow \text{extract\_important\_entities}(chunks);$ 
4  $chunks \leftarrow \text{ascending\_sort\_by\_sim}(chunks, essay);$ 
5  $total \leftarrow \text{count\_tokens}(essay);$ 
6  $target \leftarrow \lfloor total / \rho \rfloor;$ 
7  $ratios \leftarrow \text{get\_compression\_ratios}(chunks, total, target);$ 
8 foreach  $c \in chunks$  do
9    $\lfloor$  compress  $c$  based on  $ratios[c]$  and  $keywords[c]$ 
10 Concatenate all chunks in their original order in essay;
11 return merged chunks;

```

(Line 8-9). The resulting compressed chunks are then merged in original order to generate the final compressed context (Line 10).

Following prior work (Liu et al. (2024)) on attention sink effects in transformers, we preserve head and tail tokens (128 and 256 respectively), as boundary tokens are known to receive disproportionately high attention. Based on that, we propose two variants of SCOPE: (1) SCOPE_D, a *head-and-tail preserving* variant that retains the initial and local window tokens, and (2) SCOPE_N, a *no-preserving* variant that applies compression to all tokens.

3.1 Semantic Chunking

The chunking is conducted over three levels: section, paragraph, and sentence. It begins by recursively dividing long contexts into sections and/or paragraphs. If a paragraph has exceeded length, it will be split into finer chunks (of sentences), which is discussed in next section. The overall semantic chunking algorithm is described as follows:

Step 1: The whole context is first split by section. For each section, if its length falls within a predefined token limit (e.g., up to 800 tokens in our evaluation), it is treated as a single chunk; otherwise it will be further split by paragraph naturally, and each paragraph will be processed as in Step 2.

Step 2: If a paragraph’s length falls within the same limit, it is treated as one chunk. Otherwise it will be further split into chunks of sentences, where each chunk includes multiple semantically coherent sentences. The semantic coherence is measured by sentence embedding. More details are introduced in Section 3.2.

Step 3: Finally, SCOPE merges adjacent tiny chunks into one chunk (by a length threshold) to preserve coherence and maintain a relatively stable chunk size.

Such a semantic chunking strategy splits the long context into manageable pieces while effectively preserving the semantic coherence within each piece of text. We evaluate the impact of semantic chunking in Section 4.6.

3.2 Paragraph Chunking

The chunking algorithm decides the proper split points to segment the text, aiming to maximize internal semantic consistency within each segment while balancing chunk size. The split points are selected based on semantic similarity between sentences. Specifically, in a paragraph, our chunking method first estimates how strongly each pair of adjacent sentences are related (by similarity between sentence embeddings), based on which it selects the initial split points where adjacent sentence similarity is less than a threshold. This results in the initial chunks. Then, the method grows each chunk up (with a upper size limit), until the end of the current chunk reaches a point that maximizes chunk-internal

similarity and minimizes cross-chunk similarity. The internal similarity of a chunk is the average of adjacent sentence similarities in the chunk, while cross-chunk similarity is the similarity between the two sentences around the chunk end. If the remaining text is too short or a chunk exceeds the limit, it adjusts the split point or merges outlier chunks so that all final segments are well-balanced and semantically coherent. More details are presented in Algorithm 2 (Appendix).

3.3 Compressing Chunks

3.3.1 Dynamic compression ratio

Once the semantic chunking process is complete, we calculate the cosine similarity (reflecting the relevance) between each chunk and the original context. When the context exceeds the embedding model’s input limit, we encode it in smaller segments and average their embeddings to obtain an aggregated full-context representation. Chunk relevance is then calculated using cosine similarity with this representation. Using these similarity measures, we derive a formula to determine the unique compression ratio for each chunk. The principle is having a higher compression ratio for less relevant chunks while lowering compression ratio for more relevant chunks. In short, we squeeze the irrelevant chunks to leave space for keeping relevant chunks as much as original. Below are the details for the ratio calculation:

First, compute the number of tokens to be compressed out:

$$L_{\text{total}} = \sum_i L_i, \quad \Delta = L_{\text{total}} - L_{\text{total}}/\rho.$$

Where L_{total} is the total token of the input context, L_i is the total token of each chunk, ρ is the target overall compression ratio. So L_{total}/ρ is the expected number of tokens after compression, then Δ is the number of tokens to be reduced.

Second, define each chunk’s compressibility weight as

$$w_i = L_i (1 - S_i),$$

where S_i is the normalized similarity (relevance) score of chunk i (up to 1.0). This weight follows such a trend: (1) it decreases for higher relevance, and (2) it increases for longer chunk. We use it as the weight to determine the number of reduced tokens for each chunk, such that (1) relevant chunks (whose weight is small) tend to remain, and (2) long chunks (whose weight is large) tend to be compressed more significantly.

Third, calculate difference of tokens after compression:

$$\Delta_i = \Delta \frac{w_i}{\sum_i w_i} = \Delta \frac{L_i(1 - S_i)}{\sum_i L_i(1 - S_i)}.$$

where Δ_i is the number of tokens to be reduced for chunk i .

Finally, the post-compression length of chunk i is:

$$L'_i = L_i - \Delta_i.$$

By such, we compress each chunk with a dynamic compression ratio based on the weight of chunk size and relevance, effectively preserving critical information, as well as squeezing enough to guarantee the overall ratio close to the target.

3.3.2 Compressing and postprocessing

To maintain the original meaning of most critical text, we sort the chunks based on their similarity (relevancy) scores to the original full context from low to high. Then we start the compression from lower relevance chunks to higher, with the dynamic compression ratio. In addition, the compression will early stop once the target number of reduced tokens (Δ) is reached. As a result, chunks with higher relevance to the original context are more likely to be fully preserved.

Table 1: Evaluation on the Arxiv-Summarization dataset at different compression ratios on GPT-4o-mini and Qwen-2.5.

Arxiv-Summarization (GPT-4o-mini / Qwen-2.5)													
Method	BLEU (%)		ROUGE-1 (%)		ROUGE-2 (%)		ROUGE-L (%)		ROUGE-Lsum (%)		BERTScore (%)		ρ
	GPT	QWEN	GPT	QWEN	GPT	QWEN	GPT	QWEN	GPT	QWEN	GPT	QWEN	
Selective-Context	35.95	33.05	33.44	33.96	7.16	7.49	18.55	18.12	26.61	26.32	79.75	79.29	5×
LLMLingua	35.78	33.77	30.75	29.19	4.48	3.62	17.48	16.10	25.01	23.15	79.21	78.51	5×
LongLLMLingua	36.23	34.55	32.58	31.07	5.76	4.81	18.17	16.89	26.12	24.40	79.71	79.07	5×
PartPrompt	36.20	32.85	33.10	33.82	6.25	7.20	18.37	18.19	26.52	26.50	79.78	79.46	5×
LLMLingua-2	36.57	35.62	35.53	34.11	8.04	7.08	19.14	18.00	27.81	26.12	80.55	80.12	5×
SCOPE _N	38.09	37.02	37.75	36.26	10.31	9.15	20.16	19.12	29.12	27.59	80.93	80.52	5×
SCOPE _D	37.65	36.72	37.80	38.33	10.36	11.08	20.15	20.34	29.09	29.24	80.80	80.78	5×
Selective-Context	36.30	34.02	35.26	35.83	8.62	9.07	19.22	18.99	27.68	27.49	80.10	79.80	3×
LLMLingua	35.69	34.15	32.08	30.44	5.30	4.32	17.85	16.59	25.73	23.91	79.49	78.94	3×
LongLLMLingua	36.66	35.32	34.00	32.45	6.81	5.79	18.67	17.43	26.94	25.17	80.11	79.56	3×
PartPrompt	37.07	34.55	35.89	36.71	8.44	9.46	19.55	19.56	28.20	28.34	80.46	80.22	3×
LLMLingua-2	36.81	36.00	37.08	35.42	9.32	8.22	19.74	18.60	28.75	27.05	80.73	80.33	3×
SCOPE _N	38.26	37.24	38.17	36.59	10.55	9.36	20.24	19.25	29.40	27.81	80.98	80.59	3×
SCOPE _D	37.87	37.00	38.26	38.79	10.66	11.44	20.42	20.66	29.41	29.56	80.93	80.93	3×
Selective-Context	36.87	35.12	36.85	37.41	9.76	10.49	19.80	19.93	28.61	28.63	80.46	80.32	2×
LLMLingua	36.02	34.77	33.97	32.34	6.77	5.75	18.44	17.24	26.80	25.03	79.94	79.46	2×
LongLLMLingua	37.44	36.25	35.75	34.07	8.20	6.99	19.41	18.13	28.06	26.25	80.63	80.12	2×
PartPrompt	38.02	36.07	38.43	38.94	10.53	11.43	20.65	20.81	29.78	29.84	81.09	80.91	2×
LLMLingua-2	36.96	36.43	38.14	36.37	10.29	9.02	20.22	19.12	29.37	27.68	80.86	80.54	2×
SCOPE _N	38.14	37.35	38.66	37.07	11.04	9.68	20.67	19.62	29.78	28.20	81.09	80.71	2×
SCOPE _D	37.78	37.32	38.74	39.47	11.09	12.12	20.63	21.08	29.77	30.12	81.02	81.10	2×
Original	38.69	37.98	40.49	41.23	12.63	13.59	21.85	22.43	31.12	31.51	81.50	81.49	1×

The compression is conducted using a generative summarization model, guided explicitly by the calculated compression ratio. Specifically, SCOPE instructs the model (like BART) to generate a summary of the given chunk i , and requires the output summary length to be L'_i .

Additionally, during compression, we extract and preserve critical keywords or factors within each chunk, crucial for maintaining effectiveness in downstream question-answering tasks. The summarization model is always instructed to pay additional attention to these keywords when rewriting the text. Furthermore, if the compression result is overly truncated (i.e., too short), the result will be substituted with these preserved keywords, which acts as a postprocessing to maintain the key information. We extract keywords using NER, which are enforced during summarization to preserve critical information. Extremely short segments are merged with adjacent chunks to maintain coherence. To quantify how frequently this safeguard is triggered, we analyze the first 200 GovReport examples under 5×, 3×, and 2× compression. No excessively short chunks or keyword replacement cases are observed across more than 7,000 generated chunks, indicating that such cases are rare in the evaluated settings.

3.4 Reconstruction of Compressed Context

After individual chunk compression, compressed chunks are reordered and merged according to their original sequence within the initial context. Additionally, original separators and paragraph boundaries are reinstated to maintain structural and narrative coherence. Then SCOPE outputs the merged context as final result.

4 Experiment

All experiments are evaluated on a machine with one NVIDIA A100 80GB Tensor Core GPU, 3 AMD Rome cores CPU and 64GB RAM. In this paper, we use ρ to denote the compression ratio, which is calculated as uncompressed prompt length over length after compression.

In our implementation, the semantic chunking threshold τ is set to 0.5, and chunk sizes are constrained between 400 and 700 tokens. The summarization model can be vary (e.g., bart-large-cnn). Keyword extraction is implemented using the HuggingFace Transformers NER pipeline with dbmdz/bert-large-cased-finetuned-conll103-english, with numerical and date expressions additionally preserved through rule-based matching.

Table 2: Evaluation on the GovReport-Summarization dataset at different compression ratios on GPT-4o-mini and Qwen-2.5.

GovReport-Summarization (GPT-4o-mini / Qwen-2.5)													
Method	BLEU (%)		ROUGE-1 (%)		ROUGE-2 (%)		ROUGE-L (%)		ROUGE-Lsum (%)		BERTScore (%)		ρ
	GPT	QWEN	GPT	QWEN	GPT	QWEN	GPT	QWEN	GPT	QWEN	GPT	QWEN	
Selective-Context	58.38	56.97	38.87	26.16	10.14	8.05	17.44	13.85	22.20	16.92	81.49	80.69	5×
LLMLingua	52.63	53.73	34.62	25.12	6.22	4.60	15.80	12.72	19.83	15.09	79.88	79.74	5×
LongLLMLingua	55.14	56.62	36.68	25.97	8.05	6.03	16.61	13.22	20.95	15.54	80.69	80.45	5×
PartPrompt	56.30	55.41	38.28	26.78	9.03	7.45	17.07	13.94	21.76	17.29	80.94	79.86	5×
LLMLingua-2	58.29	60.34	40.46	25.10	11.16	7.56	18.15	13.36	23.10	15.14	81.28	80.96	5×
SCOPE _N	60.52	62.72	43.59	26.52	14.00	9.18	19.20	14.29	24.76	16.21	81.86	81.76	5×
SCOPE _D	60.84	63.24	43.73	27.14	14.17	10.52	19.56	14.97	24.89	17.61	82.01	82.31	5×
Selective-Context	59.38	58.38	40.58	26.53	11.58	8.97	18.20	14.22	23.19	17.31	81.80	81.18	3×
LLMLingua	53.45	55.22	36.25	25.43	7.22	5.29	16.29	12.87	20.69	15.23	80.35	80.21	3×
LongLLMLingua	56.26	58.15	38.67	26.12	9.55	6.85	17.35	13.47	22.14	15.66	81.14	80.89	3×
PartPrompt	58.66	57.65	40.44	27.42	11.02	8.63	18.01	14.37	23.09	17.75	81.58	80.60	3×
LLMLingua-2	59.93	61.64	42.46	25.77	12.80	8.40	19.06	13.74	24.28	15.59	81.81	81.36	3×
SCOPE _N	60.86	62.70	43.69	26.53	14.10	9.21	19.36	14.33	24.85	16.18	81.97	81.80	3×
SCOPE _D	61.04	63.19	43.73	27.13	14.26	10.53	19.62	14.99	24.97	17.71	82.11	82.25	3×
Selective-Context	60.15	59.19	41.72	26.67	12.67	9.27	18.83	14.37	23.92	17.38	82.03	81.49	2×
LLMLingua	54.61	56.89	38.31	25.69	8.69	6.20	16.99	13.09	21.87	15.35	80.85	80.65	2×
LongLLMLingua	58.56	60.46	40.77	26.67	11.54	8.05	18.29	13.98	23.35	16.12	81.71	81.43	2×
PartPrompt	60.32	59.66	41.79	27.76	12.61	9.66	18.80	14.77	23.94	18.01	82.04	81.35	2×
LLMLingua-2	60.92	62.02	43.60	26.06	14.06	8.86	19.71	14.02	24.99	15.91	82.10	81.56	2×
SCOPE _N	61.35	62.94	43.79	26.60	14.44	9.30	19.58	14.29	24.95	16.18	82.17	81.87	2×
SCOPE _D	61.65	63.73	43.75	27.38	14.41	10.86	19.78	15.22	24.94	17.96	82.26	82.47	2×
Original	62.46	64.56	43.78	27.97	14.98	11.57	20.25	15.66	25.29	18.23	82.46	82.74	1×

4.1 Experiment Setting

(1) Datasets For most datasets, we use the test sets for evaluation. For Trivia-QA, we use the training set since the test set does not provide ground-truth answers. Due to time and resource limit, we randomly sample 2,000 records (i.e., 2000 prompts to be compressed) from each test set. To verify that the sampled evaluation is representative, we additionally evaluate all methods on the full Arxiv-Summarization test set of 6,440 examples at 5× compression. The relative ranking of the evaluated methods remains unchanged; detailed results are reported in Appendix A.3.4. If a set includes less than 2000 rows, we use it all. For the summarization task, we utilize three datasets: *Arxiv-Summarization* (Cohan et al. (2018)) for arXiv paper summarization, *Pubmed-Summarization* (Cohan et al. (2018)) for biomedical paper summarization, and *GovReport-Summarization* (Huang et al. (2021)) for long government report summarization. In this task, the given paper or report is first compressed by a compression method, then the compressed context is input to downstream LLM to generate a summary, which is compared against the ground truth summaries. For the question answering task, we employ two datasets: *Trivia-QA* (Joshi et al. (2017)) for reading-comprehension and *MultiFieldQA-en* (Bai et al. (2023)) from LongBench for long document QA. In this task, context is first compressed by a compression method, then fed to downstream LLM to generate answers, which are subsequently compared to the ground truth answers. More details are in Appendix.

(2) Baselines We use five baseline methods: Selective-Context (Li (2023)), LLMLingua (Jiang et al. (2023a)), LongLLMLingua (Jiang et al. (2023b)), PartPrompt (Mao et al. (2024)), and LLMLingua-2 (Pan et al. (2024)). Without explicit notation, all baselines and our method are using GPT-4o-mini as the downstream LLM. In addition, we also test the performance of all methods on different LLMs, reported in Section 4.4. For our own methods, we use SCOPE to denote both variants (SCOPE_N and SCOPE_D, introduced in Section 3) by default, and only distinguish them if necessary.

(3) Metrics For summarization tasks, we use ROUGE (Lin (2004)) (including ROUGE-1, ROUGE-2, ROUGE-L, and ROUGE-Lsum), BLEU (Papineni et al. (2002)), and BERTScore (Zhang et al. (2019)) as metrics of summary quality. ROUGE and BLEU are both measuring the n-grams match between ground truth and generated result, while BERTScore uses pre-trained contextual embeddings from BERT models to evaluate the

Table 3: Evaluation for QA on Trivia-QA and Longbench Multifield-QA-en datasets on both GPT-4o-mini (by default) and Qwen-2.5 ("W/T Qwen") models.

Question Answering Results				
Methods	Trivia-QA	Multifield-QA	Trivia-QA W/T Qwen	ρ
Selective-Context	82.31	25.82	66.99	5×
LLMLingua	80.05	23.35	58.02	5×
LongLLMLingua	80.79	27.03	60.04	5×
PartPrompt	82.61	26.82	63.95	5×
LLMLingua-2	83.58	36.23	72.68	5×
SCOPE _N	85.31	41.39	77.85	5×
SCOPE _D	85.66	43.54	78.36	5×
Selective-Context	83.85	32.81	71.52	3×
LLMLingua	80.63	25.23	59.85	3×
LongLLMLingua	81.35	30.96	62.65	3×
PartPrompt	83.04	33.62	68.19	3×
LLMLingua-2	85.09	40.32	76.89	3×
SCOPE _N	85.57	42.22	78.18	3×
SCOPE _D	85.81	46.09	78.82	3×
Selective-Context	85.55	40.24	76.22	2×
LLMLingua	81.58	30.16	62.15	2×
LongLLMLingua	84.40	35.10	70.58	2×
PartPrompt	84.70	40.97	73.53	2×
LLMLingua-2	85.84	46.96	79.16	2×
SCOPE _N	86.07	47.52	79.56	2×
SCOPE _D	86.25	47.15	80.57	2×
Original	86.08	54.20	81.99	1×

Table 4: Ablation study for keyword extraction on Trivia-QA for different compression ratios with GPT-4o-mini.

Trivia-QA		
Method	F1-Score (%)	ρ
SCOPE _N	85.57	3×
SCOPE _N W/O Keyword Extraction	84.95	3×
SCOPE _N	86.07	2×
SCOPE _N W/O Keyword Extraction	85.36	2×

Table 5: Ablation study for semantic chunking and dynamic compression ratio calculation, evaluated on Arxiv-Summarization and GovReport-Summarization datasets at 2× compression ratio on GPT-4o-mini.

Arxiv-Summarization						
Method	BLEU (%)	ROUGE-1 (%)	ROUGE-2 (%)	ROUGE-L (%)	ROUGE-Lsum (%)	BERTScore (%) ρ
SCOPE _N	38.14	38.66	11.04	20.67	29.78	81.09 2×
SCOPE _D	37.78	38.74	11.09	20.63	29.77	81.02 2×
Fix Chunking & compression ratio	37.00	37.98	10.53	20.10	29.24	80.75 2×
GovReport-Summarization						
Method	BLEU (%)	ROUGE-1 (%)	ROUGE-2 (%)	ROUGE-L (%)	ROUGE-Lsum (%)	BERTScore (%) ρ
SCOPE _N	61.35	43.79	14.44	19.58	24.95	82.17 2×
SCOPE _D	61.65	43.75	14.41	19.78	24.94	82.26 2×
Fix Chunking & compression ratio	60.73	43.13	13.87	19.28	24.65	81.93 2×

similarity between predicting and reference contexts. For QA tasks, we evaluate the answer quality by *F1-score*. These metrics evaluate downstream task performance, which indirectly reflects the effectiveness of prompt compression in preserving task-relevant information.

4.2 End-to-End Results on Summarization

This section reports and analyzes the end-to-end performance of SCOPE, as well as baseline methods on the summarization task, under various compression ratios (5x, 3x, and 2x). The summaries generated from compressed contexts are evaluated against the dataset-provided reference summaries using BLEU, ROUGE, and BERTScore. Tables 1, 2, 6 present summarization results across three datasets under various compression levels. We further evaluate SCOPE on the LongBench Multi-News dataset to examine its performance on multi-document summarization. SCOPE maintains the strongest overall performance among the evaluated methods across 2×, 3×, and 5× compression ratios; full results are provided in Appendix A.3.3. The result and conclusion from *Pubmed-Summarization* are similar to other 2 datasets, so we place it (Table 6) in appendix due to space limit. We have following observations:

(1) Our methods show the overall highest performance. They consistently achieve the highest scores in the vast majority of evaluation metrics across almost all summarization datasets. Specifically, our methods achieves up to 1.3x improvement of metric scores

comparing to baseline methods, and outperforms the state-of-the-art methods in almost all cases. On Arxiv-Summarization dataset, SCOPE leads in all metrics under all compression ratios. On GovReport-Summarization, SCOPE is the best again under 5x and 3x compression. With 2x compression, SCOPE’s overall performance remains dominant.

(2) SCOPE has the most stable performance across different compression ratios. From 2 to 5x compression across different datasets, its score difference is always within 1%, while all of the baseline methods show a larger score variation. Such a stability underscores the robustness and adaptability of our method to varied domains.

(3) The advantage of SCOPE enlarges when compression ratio increases. Specifically, SCOPE excels at higher compression ratios (e.g., 5x). For example, in GovReport-Summarization at 5x compression with GPT as downstream LLM, SCOPE achieves a ROUGE-1 of 43.73 and ROUGE-2 of 14.17, while the closest competitor (LLMLingua-2) scores 40.46 and 11.16 respectively. This indicates the effectiveness of our method to preserve the most critical information even when context is significantly compressed. Furthermore, SCOPE stably achieves a near-original performance (even under 5x compression), with scores remarkably close to the uncompressed (“Original”) input.

4.3 End-to-End Results on QA

This section reports the results on QA datasets, at three compression ratios (5x, 3x, and 2x), presented in Table 3

(1) SCOPE consistently achieves the highest F1-Score in all cases. In Trivia-QA, SCOPE achieves up to 5% higher F1-Score than the baselines, while achieving 20% higher F1-Score in Multifield-QA-en, which shows the significant performance of our method and its outstanding capability to deliver most critical information to downstream LLM. An interesting observation is that on Trivia-QA with GPT-4o-mini, SCOPE at 2x compression achieves an F1-score of 86.25, slightly higher than 86.08 with the original prompt. One possible explanation is that the rewriting process makes task-relevant information more salient to the downstream LLM.

(2) Similarly to summarization task, SCOPE presents the greatest stability across different compression ratios. As the compression ratio varies between 5x to 2x, the F1-Score of SCOPE remains more stable than the baselines. From 5x to 2x, SCOPE shows a variation less than 2% and 4% respectively on two datasets, while most baselines vibrate more than 2% and 4%. LLMLingua-2 even has a 10% difference from 5x to 2x.

(3) Same as summarization, the advantage of SCOPE is more obvious with higher compression ratio. The F1-Score gaps between SCOPE and the baselines are largest under 5x compression, particularly on MultiField-QA-en, where SCOPE achieves 20% higher score than LLMLingua. This indicates that SCOPE is more effective than baselines at retaining question-relevant information when the context is heavily reduced.

In summary, SCOPE maintains superior performance on both datasets under a wide range of compression ratios, highlighting its effectiveness for long-context question answering tasks.

4.4 Evaluation on Different Models

To evaluate the generalizability of our method, we evaluate some of the experiments with Qwen-2.5 (Yang et al. (2025)) as the downstream LLM. Table 1, 2 and 3 show the end-to-end results using Qwen-2.5 on different datasets and tasks given various compression ratios. We observe that SCOPE consistently achieves the highest scores in most cases of both summarization and QA tasks. And SCOPE also shows similar features to previous evaluation, like the highest stability given different metric scores and compression ratios, as well as reaching the biggest advantage over the baselines under 5x compression. All such observations indicate a strong generalizability and robustness of our method.

We also examine the sensitivity of SCOPE to the compression model by replacing BART with Llama-3-8B-Instruct. The two compression backbones exhibit similar performance

trends on GovReport and Multi-News across different compression ratios, suggesting that SCOPE is not limited to a particular summarization backbone. Detailed results are reported in Appendix A.3.5.

4.5 Efficiency

We compare the runtime of different compression methods across datasets and compression ratios (2x, 3x and 5x). Comparing to the baselines, SCOPE introduces moderate latency. For example, on GovReport dataset, across all three compression ratios, averagely SCOPE takes 4.20 seconds, PartPrompt takes 4.49 seconds, while LongLLMLingua takes 2.79 seconds; on Arxiv dataset, the three runtime numbers are 3.39s, 3.96s, and 2.15s. Given the significant quality improvement, such a slight latency overhead is acceptable, which ensures our method to be practical in real world.

4.6 Ablation studies

This section presents ablation experiment results for several key components of SCOPE: (1) semantic-chunking + dynamic compression ratio, (2) keywords extraction, (3) the embedding models and summarization models.

For the first, we evaluate SCOPE with semantic-chunking + dynamic compression ratio VS. SCOPE_N with fixed length chunking + fixed compression ratio, using Arxiv-Summarization and GovReport-Summarization datasets and 2x compression ratio. For the second, since keywords are more important to QA tasks, we evaluate it on Trivia-QA dataset and both 3x and 2x compression. Specifically, we compare SCOPE with VS without keyword extraction in QA task. For the last, we deploy different embedding models and summarization models in SCOPE and compare the end-to-end performance between them. The evaluations are both conducted on summarization task, and both results are reported in Table 7, please see appendix for more details about this result.

(1) Impact of chunking method As in Table 5, on both summarization datasets, the full SCOPE pipeline with semantic chunking and dynamic ratio, outperforms that with fixed length chunking and fixed compression ratio in all cases. With the semantic chunking and dynamic ratio, the full SCOPE gets further performance gain, proving the importance of those optimizations.

(2) Impact of keyword maintaining In Table 4, SCOPE without keyword extraction on Trivia-QA leads to consistent F1-Score drop under both 3x and 2x compression. This indicates that explicitly highlighting question-relevant terms is critical for LLM to generate accurate answer. By identifying keywords before compression and maintaining (adding back) them after compression, SCOPE effectively compensates for information loss.

(3) Embedding and summarization models

The result in Section A.3 and Table 7 shows SCOPE maintains a stable, high performance with different summarization and embedding models. Please see Appendix for more details.

5 Conclusion

In this paper, we introduce SCOPE, a training-free generative prompt compression framework that splits long contexts into semantically coherent chunks and rewrites each chunk using an off-the-shelf summarization model. Evaluation shows SCOPE consistently outperforms token-removal approaches, especially under high compression ratio, demonstrating the effectiveness of SCOPE across the evaluated settings. We believe our work can effectively save the cost in LLM application, thereby contribute to the advance of AI community.

References

All-MiniLM. <https://huggingface.co/sentence-transformers/all-MiniLM-L6-v2>, 2022.

- Muhammad Asif Ali, Zhengping Li, Shu Yang, Keyuan Cheng, Yang Cao, Tianhao Huang, Guimin Hu, Weimin Lyu, Lijie Hu, Lu Yu, et al. Prompt-saw: Leveraging relation-aware graphs for textual prompt compression. *arXiv preprint arXiv:2404.00489*, 2024.
- Yushi Bai, Xin Lv, Jiajie Zhang, Hongchang Lyu, Jiankai Tang, Zhidian Huang, Zhengxiao Du, Xiao Liu, Aohan Zeng, Lei Hou, et al. Longbench: A bilingual, multitask benchmark for long context understanding. *arXiv preprint arXiv:2308.14508*, 2023.
- Arman Cohan, Franck Dernoncourt, Doo Soon Kim, Trung Bui, Seokhwan Kim, Walter Chang, and Nazli Goharian. A discourse-aware attention model for abstractive summarization of long documents. *arXiv preprint arXiv:1804.05685*, 2018.
- Yair Feldman and Yoav Artzi. Simple context compression: Mean-pooling and multi-ratio training. *arXiv preprint arXiv:2510.20797*, 2025.
- Michael Günther, Jackmin Ong, Isabelle Mohr, Alaeddine Abdessalem, Tanguy Abel, Mohammad Kalim Akram, Susana Guzman, Georgios Mastrapas, Saba Sturua, Bo Wang, et al. Jina embeddings 2: 8192-token general-purpose text embeddings for long documents. *arXiv preprint arXiv:2310.19923*, 2023.
- Luyang Huang, Shuyang Cao, Nikolaus Parulian, Heng Ji, and Lu Wang. Efficient attentions for long document summarization. *arXiv preprint arXiv:2104.02112*, 2021.
- Huiqiang Jiang, Qianhui Wu, Chin-Yew Lin, Yuqing Yang, and Lili Qiu. Llmlingua: Compressing prompts for accelerated inference of large language models. *arXiv preprint arXiv:2310.05736*, 2023a.
- Huiqiang Jiang, Qianhui Wu, Xufang Luo, Dongsheng Li, Chin-Yew Lin, Yuqing Yang, and Lili Qiu. Longllmlingua: Accelerating and enhancing llms in long context scenarios via prompt compression. *arXiv preprint arXiv:2310.06839*, 2023b.
- Mandar Joshi, Eunsol Choi, Daniel S Weld, and Luke Zettlemoyer. Triviaqa: A large scale distantly supervised challenge dataset for reading comprehension. *arXiv preprint arXiv:1705.03551*, 2017.
- Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Ves Stoyanov, and Luke Zettlemoyer. Bart: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension. *arXiv preprint arXiv:1910.13461*, 2019.
- Yucheng Li. Unlocking context constraints of llms: Enhancing context efficiency of llms with self-information-based content filtering. *arXiv preprint arXiv:2304.12102*, 2023.
- Chin-Yew Lin. Rouge: A package for automatic evaluation of summaries. In *Text summarization branches out*, pp. 74–81, 2004.
- Di Liu, Meng Chen, Baotong Lu, Huiqiang Jiang, Zhenhua Han, Qianxi Zhang, Qi Chen, Chengruidong Zhang, Bailu Ding, Kai Zhang, et al. Retrievalattention: Accelerating long-context llm inference via vector retrieval. *arXiv preprint arXiv:2409.10516*, 2024.
- Wenhao Mao, Chengbin Hou, Tianyu Zhang, Xinyu Lin, Ke Tang, and Hairong Lv. Parse trees guided llm prompt compression. *arXiv preprint arXiv:2409.15395*, 2024.
- Zhuoshi Pan, Qianhui Wu, Huiqiang Jiang, Menglin Xia, Xufang Luo, Jue Zhang, Qingwei Lin, Victor Rühle, Yuqing Yang, Chin-Yew Lin, et al. Llmlingua-2: Data distillation for efficient and faithful task-agnostic prompt compression. *arXiv preprint arXiv:2403.12968*, 2024.
- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. Bleu: a method for automatic evaluation of machine translation. In *Proceedings of the 40th annual meeting of the Association for Computational Linguistics*, pp. 311–318, 2002.
- Xiao Pu, Tianxing He, and Xiaojun Wan. Style-compress: An llm-based prompt compression framework considering task-specific styles. *arXiv preprint arXiv:2410.14042*, 2024.

- Fangyuan Xu, Weijia Shi, and Eunsol Choi. Recomp: Improving retrieval-augmented lms with compression and selective augmentation. *arXiv preprint arXiv:2310.04408*, 2023.
- An Yang, Bowen Yu, Chengyuan Li, Dayiheng Liu, Fei Huang, Haoyan Huang, Jiandong Jiang, Jianhong Tu, Jianwei Zhang, Jingren Zhou, et al. Qwen2. 5-1m technical report. *arXiv preprint arXiv:2501.15383*, 2025.
- Haoyan Yang, Zhitao Li, Yong Zhang, Jianzong Wang, Ning Cheng, Ming Li, and Jing Xiao. Prca: Fitting black-box large language models for retrieval question answering via pluggable reward-driven contextual adapter. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pp. 5364–5375, 2023.
- Chanwoong Yoon, Taewhoo Lee, Hyeon Hwang, Minbyul Jeong, and Jaewoo Kang. Compact: Compressing retrieved documents actively for question answering. *arXiv preprint arXiv:2407.09014*, 2024.
- Jingqing Zhang, Yao Zhao, Mohammad Saleh, and Peter Liu. Pegasus: Pre-training with extracted gap-sentences for abstractive summarization. In *International conference on machine learning*, pp. 11328–11339. PMLR, 2020.
- Tianyi Zhang, Varsha Kishore, Felix Wu, Kilian Q Weinberger, and Yoav Artzi. Bertscore: Evaluating text generation with bert. *arXiv preprint arXiv:1904.09675*, 2019.

A Appendix

A.1 Details of Chunking Paragraphs

Algorithm 2: Chunking Paragraph

Input: text string T , chunk size bound max_token , min_token , similarity threshold τ

Output: list of text chunks

```

1 Split  $T$  into sentences  $S$ ;
2 Count tokens for each sentence:  $C \leftarrow [\text{countTokens}(s) \mid s \in S]$ ;
3 Compute sentence embeddings  $E$  and similarities  $\text{sim}$  between adjacent sentences;
4 Identify candidate split points:  $\text{cand} \leftarrow \{i + 1 \mid \text{sim}[i] < \tau\}$ ;
5 Initialize bounds  $\leftarrow []$ ,  $start \leftarrow 0$ ;
6 while  $start < |S|$  do
7   if  $\text{remaining\_tokens} < min\_token$  and  $\text{bounds}$  not empty then
8     Merge or rebalance the last chunk if needed;
9     break
10  Expand chunk greedily up to  $max\_token$  tokens from  $start$ ;
11  Find candidate split points in  $[start, end]$  with valid token count;
12  if  $\text{such points exist}$  then
13    Choose the split with the best semantic score
14  else
15    Split at  $end$ 
16  Adjust cut if needed to keep chunk  $\leq max\_token$  tokens;
17  Append  $(start, cut)$  to bounds;
18   $start \leftarrow cut$ 
19 Build chunks by joining the sentences between each  $(start, end)$  in bounds;
20 return list of text chunks

```

Algorithm 2 outlines the workflow of our paragraph-level chunking method. The primary components include token counting, embedding computation, identifying potential split points based on sentence similarity, and determining the start and end indices for each chunk.

Lines 1–3 initialize the algorithm by counting tokens in each sentence, encoding sentences to embeddings, and calculating adjacent sentence similarities. Lines 4 and 5 initialize variables for the split points of the candidate chunks and starting points of the iteration.

Lines 6–18 iteratively decide how to segment the text, aiming to balance chunk size while maximizing internal semantic consistency within each segment. Line 8 checks if the remaining text is too short to form a valid chunk, triggering a merge or adjustment if needed. Lines 10 and 11 expand each segment up to the maximum token limit, and determine the split points for the potential chunks. Lines 12–17 select the most suitable split point based on semantic similarity, optimizing the segmentation for coherence.

Finally, the last 2 lines generate the finalized chunk list from determined chunk boundaries (the split points), returning coherent chunks as a list.

A.2 Dataset Details

Arxiv-Summarization (Cohan et al. (2018)) is a large-scale dataset for scientific paper summarization, which contains both section-level and document-level granularity. This dataset contains about 216k examples, it pairs full-text arXiv papers that are up to 745,000 characters, with their abstracts that are up to 92,700 characters in each row. All data is in English, and both section and document subset contains about 216k rows, which split about 203k rows in train set, 6440 rows in validation set, and 6440 rows in test set.

PubMed-Summarization (Cohan et al. (2018)) is a biomedical summarization dataset containing pairs of article and abstract with about 133,215 rows in total. It pairs full-text PubMed articles of up to 826,000 characters with their abstracts of 174 to 4,340 characters in each row. All data is in English and the dataset is split into 119,924 rows in the train set, 6,633 rows in the validation set and 6,658 rows in the test set.

GovReport-Summarization (Huang et al. (2021)) is a dataset for summarization of long government reports containing about 19,463 pairs of document and summary. Each row pairs a government report of 320 to 1,320,000 characters with its concise summary of 127 to 13,700 characters. All data is in English and the document subset is split into 17,517 rows in the train set, 973 rows in the validation set and 973 rows in the test set.

Trivia-QA (Joshi et al. (2017)) is a reading-comprehension dataset containing triples of question, answer, and evidence. The subset used in our experiment *rc.wikipedia* contains about 77,600 rows. Each row provides a question authored by trivia enthusiasts, associate evidence documents and the ground-truth answer. *rc.wikipedia* subset is split into about 61,900 rows in the train set, 7,990 rows in the validation set and 7,700 rows in the test set.

MultiFieldQA-en (Bai et al. (2023)) is a subset of the LongBench dataset, designed to evaluate large language models’ (LLMs) ability to comprehend and answer questions based on long, single-document contexts across diverse domains. This subset contains 150 question-answering rows, each accompanied by a lengthy context document. The documents span various fields, including academic papers, legal documents, government reports, and technical manuals, reflecting real-world scenarios where in-depth understanding is required.

A.3 Additional experiments

A.3.1 Impact of different embedding models

We evaluate SCOPE with different embedding models on GovReport-Summarization dataset under all 3 compression ratios. The embedding model in SCOPE for all other experiments is *All-MiniLM* (all (2022)), while the competitor model in this experiment is *Jina-embedding* from JinaAI (Günther et al. (2023)). In Table 7, we report the scores and absolute score differences between SCOPE using different embedding models. The two embedding models result in a negligible performance difference, where the largest absolute difference is 0.40%, and lowest is 0.02%. This shows a stable performance of SCOPE when switching embedding model, indicating the outstanding adaptivity of SCOPE.

A.3.2 Impact of different summarization models

We evaluate SCOPE with different summarization models on Arxiv-Summarization dataset under all 3 compression ratios. The summarization model in SCOPE for all other experi-

Table 6: Evaluation for Pubmed-Summarization dataset for different methods and compression ratio on GPT-4o-mini.

Pubmed-Summarization							
Method	BLEU (%)	ROUGE-1 (%)	ROUGE-2 (%)	ROUGE-L (%)	ROUGE-Lsum (%)	BERTScore (%)	ρ
Selective-Context	43.92	34.67	8.30	18.37	27.89	81.74	5×
LLMLingua	43.27	29.97	5.72	16.32	24.55	80.97	5×
LongLLMLingua	44.66	32.61	7.44	17.48	26.39	81.71	5×
PartPrompt	43.17	32.56	6.52	17.28	26.46	81.04	5×
LLMLingua-2	45.02	35.86	8.60	18.74	28.61	81.91	5×
SCOPE _N	45.93	38.03	10.68	19.92	30.25	82.26	5×
SCOPE _D	45.64	38.00	10.85	19.99	30.18	82.34	5×
Selective-Context	44.76	36.56	9.69	19.30	29.24	82.22	3×
LLMLingua	43.38	31.58	6.40	16.93	25.58	81.23	3×
LongLLMLingua	45.27	34.22	8.31	18.22	27.59	82.03	3×
PartPrompt	44.90	35.60	8.71	18.75	28.67	81.92	3×
LLMLingua-2	45.43	37.53	10.02	19.62	29.77	82.31	3×
SCOPE _N	46.07	38.42	11.05	20.20	30.58	82.45	3×
SCOPE _D	46.08	38.46	11.20	20.24	30.51	82.50	3×
Selective-Context	45.80	38.15	10.88	20.12	30.34	82.64	2×
LLMLingua	43.89	33.48	7.47	17.77	26.88	81.63	2×
LongLLMLingua	46.12	36.10	9.38	19.11	29.02	82.49	2×
PartPrompt	46.06	37.83	10.44	20.00	30.18	82.57	2×
LLMLingua-2	45.99	38.77	11.18	20.42	30.81	82.60	2×
SCOPE _N	46.51	38.97	11.51	20.53	30.95	82.69	2×
SCOPE _D	46.38	39.03	11.59	20.56	30.95	82.69	2×
Original	47.29	40.22	12.62	21.46	31.93	83.13	1×

Table 7: Ablation study for different embedding models on GovReport-Summarization dataset and different summarization models on Arxiv-Summarization dataset, across different compression ratios on GPT-4o-mini.

GovReport-Summarization over different embedding models							
Method	BLEU (%)	ROUGE-1 (%)	ROUGE-2 (%)	ROUGE-L (%)	ROUGE-Lsum (%)	BERTScore (%)	ρ
SCOPE _N W/T all-MiniLM	60.52	43.59	14.00	19.20	24.76	81.86	5×
SCOPE _N W/T Jina-Embedding	60.20	43.66	13.85	19.26	24.79	81.75	5×
Difference	0.32	0.07	0.15	0.06	0.03	0.11	5×
SCOPE _N W/T all-MiniLM	60.86	43.69	14.10	19.36	24.85	81.97	3×
SCOPE _N W/T Jina-Embedding	60.58	43.61	14.05	19.44	24.83	81.94	3×
Difference	0.28	0.08	0.05	0.08	0.02	0.03	3×
SCOPE _N W/T all-MiniLM	61.35	43.79	14.44	19.58	24.95	82.17	2×
SCOPE _N W/T Jina-Embedding	60.95	43.57	14.10	19.51	24.88	82.05	2×
Difference	0.40	0.22	0.34	0.07	0.07	0.12	2×
Arxiv-Summarization over different summarization models							
Method	BLEU (%)	ROUGE-1 (%)	ROUGE-2 (%)	ROUGE-L (%)	ROUGE-Lsum (%)	BERTScore (%)	ρ
SCOPE _N W/T BART	38.09	37.75	10.31	20.16	29.12	80.93	5×
SCOPE _N W/T Google Pegasus	36.36	37.28	10.38	19.95	28.62	80.72	5×
Difference	1.73	0.47	0.07	0.21	0.50	0.21	5×
SCOPE _N W/T BART	38.26	38.17	10.55	20.24	29.40	80.98	3×
SCOPE _N W/T Google Pegasus	36.86	38.03	11.05	20.40	29.18	80.96	3×
Difference	1.40	0.14	0.50	0.16	0.22	0.02	3×
SCOPE _N W/T BART	38.14	38.66	11.04	20.67	29.78	81.09	2×
SCOPE _N W/T Google Pegasus	37.22	39.08	11.87	21.03	30.03	81.15	2×
Difference	0.92	0.42	0.83	0.36	0.25	0.06	2×

ments is *BART* (Lewis et al. (2019)), while the competitor model in this experiment is *Pegasus* from Google (Zhang et al. (2020)). In Table 7, we report the scores and absolute score differences between SCOPE using different summarization models. The two summarization models result in a negligible performance difference, where the largest absolute difference is 1.73%, and lowest is 0.02%. This shows a stable performance of SCOPE when switching across different summarization models, indicating the outstanding adaptivity of SCOPE.

A.3.3 Evaluation on Multi-Document Summarization

To further evaluate SCOPE on multi-document inputs, we conduct additional experiments on the Multi-News dataset from LongBench. Unlike the single-document summarization

Table 8: Evaluation on the LongBench Multi-News dataset at different compression ratios on GPT-4o-mini.

Multi-News							
Method	BLEU (%)	ROUGE-1 (%)	ROUGE-2 (%)	ROUGE-L (%)	ROUGE-Lsum (%)	BERTScore (%)	ρ
Selective-Context	40.40	32.97	5.91	15.11	18.57	77.78	5×
LLMLingua	37.67	29.29	4.06	13.91	16.90	76.11	5×
LongLLMLingua	39.15	31.68	5.36	14.97	17.71	77.21	5×
PartPrompt	39.94	33.18	5.98	15.48	18.74	77.65	5×
LLMLingua-2	43.76	34.80	7.71	16.06	19.00	78.71	5×
SCOPE	45.54	36.84	9.65	17.57	20.39	79.48	5×
Selective-Context	41.92	34.31	7.43	16.09	19.11	78.59	3×
LLMLingua	38.95	31.20	4.93	14.89	17.77	77.29	3×
LongLLMLingua	40.59	33.32	6.23	15.54	18.66	77.84	3×
PartPrompt	41.28	34.67	7.19	16.44	19.67	78.40	3×
LLMLingua-2	45.12	36.22	8.83	17.03	19.93	79.13	3×
SCOPE	45.88	37.24	10.12	17.71	20.47	79.60	3×
Selective-Context	43.49	35.47	8.51	16.76	19.81	79.08	2×
LLMLingua	40.63	32.94	6.25	15.58	18.52	78.01	2×
LongLLMLingua	41.99	34.28	7.25	16.26	19.30	78.55	2×
PartPrompt	42.37	35.76	8.34	16.98	20.30	78.80	2×
LLMLingua-2	45.29	36.46	9.35	17.31	20.01	79.20	2×
SCOPE	46.54	37.77	10.29	17.95	20.87	79.81	2×

Table 9: Evaluation on the full Arxiv-Summarization test set (6,440 examples) at 5× compression on GPT-4o-mini.

Full Arxiv-Summarization Test Set							
Method	BLEU (%)	ROUGE-1 (%)	ROUGE-2 (%)	ROUGE-L (%)	ROUGE-Lsum (%)	BERTScore (%)	ρ
LLMLingua	31.82	31.55	5.23	17.10	24.92	78.82	5×
LongLLMLingua	32.68	33.45	6.67	17.81	26.03	79.40	5×
PartPrompt	32.81	33.81	7.17	18.13	26.47	79.45	5×
LLMLingua-2	34.43	35.87	8.38	18.78	27.47	80.17	5×
SCOPE	37.05	38.88	11.66	20.83	29.76	81.03	5×

datasets used in the main evaluation, Multi-News requires summarizing information collected from multiple news documents. Table 8 reports the results under 5×, 3×, and 2× compression ratios. SCOPE consistently achieves the highest scores across all evaluated metrics and compression ratios. For example, under 5× compression, SCOPE achieves ROUGE-1 and ROUGE-2 scores of 36.84 and 9.65, compared with 34.80 and 7.71 from LLMLingua-2. These results show that SCOPE remains effective for multi-document summarization.

A.3.4 Evaluation on the Full Arxiv-Summarization Test Set

The main experiments use up to 2,000 randomly sampled examples from each dataset due to the computational cost of evaluating multiple compression methods followed by downstream LLM inference. To examine whether this sampling affects the experimental conclusions, we additionally evaluate all methods on the full Arxiv-Summarization test set containing 6,440 examples. Table 9 reports the results under 5× compression. The relative ranking of the evaluated methods remains unchanged, with SCOPE achieving the highest scores across all metrics. This result suggests that the conclusions obtained from the sampled evaluation are consistent with those on the full test set.

A.3.5 Impact of Different Compression Model Backbones

To further examine whether SCOPE depends on a particular summarization backbone, we replace BART with Llama-3-8B-Instruct as the compression model and evaluate both models on Longbench GovReport and Multi-News. Table 10 reports the results under 5×, 3×, and 2× compression ratios. The two backbones exhibit similar performance across both datasets and all compression ratios. Although BART achieves slightly higher scores in most settings, replacing it with Llama-3-8B-Instruct preserves the overall performance trend, indicating that SCOPE is not limited to a specific compression model backbone.

Table 10: Compression model backbone replacement study using BART and Llama-3-8B-Instruct on Longbench GovReport and Multi-News.

Dataset	ρ	Compression Model	ROUGE-1 (%)	ROUGE-2 (%)	BERTScore (%)
GovReport	5×	BART	27.99	10.89	82.73
	5×	Llama-3-8B	27.40	10.56	81.68
	3×	BART	28.17	11.43	82.78
	3×	Llama-3-8B	27.83	11.12	81.89
	2×	BART	28.32	11.54	82.90
	2×	Llama-3-8B	27.84	11.38	82.03
Multi-News	5×	BART	36.84	9.65	79.48
	5×	Llama-3-8B	36.61	9.74	79.36
	3×	BART	37.24	10.12	79.60
	3×	Llama-3-8B	36.68	9.94	79.32
	2×	BART	37.77	10.29	79.81
	2×	Llama-3-8B	36.88	9.95	79.53