

RAP: Runtime Adaptive Pruning for LLM Inference

Huanrong Liu^{*1} Chunlin Tian^{*1} Xuyang Wei² Qingbiao Li¹ Li Li¹

Abstract

Large language models (LLMs) excel at language understanding and generation, but their enormous computational and memory requirements hinder deployment. Compression offers a potential solution to mitigate these constraints. However, most existing methods rely on fixed heuristics and thus fail to adapt to runtime memory variations or heterogeneous KV cache demands arising from diverse user requests. To address these limitations, we propose *RAP*, an elastic pruning framework driven by reinforcement learning (RL) that dynamically adjusts compression strategies in a runtime-aware manner. Specifically, *RAP* dynamically tracks the evolving ratio between model parameters and KV cache across practical execution. Recognizing that FFNs house most parameters, whereas parameter-light attention layers dominate KV cache formation, the RL agent retains only those components that maximize utility within the current memory budget, conditioned on instantaneous workload and device state. Extensive experiments results demonstrate that *RAP* outperforms state-of-the-art baselines, marking the first time to jointly consider model weights and KV cache on the fly.

1. Introduction

Large language models (LLMs) has revolutionized artificial intelligence through unprecedented performance in complex language tasks (Brown et al., 2020; Achiam et al., 2023; microsoft; github). The autoregressive architectures, however, pair “billion-parameter” with memory-intensive Key–Value (KV) cache, inflating both computation and memory footprints (Fedus et al., 2022; Patterson et al., 2021; Touvron et al., 2023b; Chowdhery et al., 2023; Team et al., 2024). While cloud solutions mitigate some burdens, emerging

¹Faculty of Science and Technology, University of Macau, Macau, China ²School of Information and Software Engineering, University of Electronic Science and Technology of China, Chengdu, China. Correspondence to: Qingbiao Li <qingbiaoli@um.edu.mo>, Li Li <llili@um.edu.mo>.

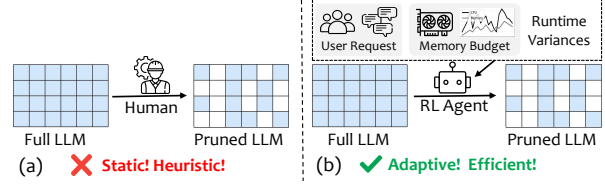


Figure 1. Illustration of RAP. (a) Conventional pruning relies on hand-developed heuristics that focus solely on model weights. (b) RAP employs a runtime-adaptive RL agent that dynamically prunes LLMs based on real-time user requests and memory budget constraints.

edge scenarios, mobile devices and real-time services (Yuan et al., 2023; Lin et al., 2022; 2024), demand on-device inference that current LLMs cannot sustain. Model compression is widely used to preserve generative quality while slashing resource costs.

To address LLM deployment bottlenecks, three main compression families have emerged: model pruning (Ma et al., 2023b; Zhong et al., 2024; Sun et al., 2024; Shao et al., 2024), knowledge distillation (Sun et al., 2019; Xu et al., 2024; Chen et al., 2024), and quantization (Liu et al., 2024; Lin et al., 2024). Among these approaches, we primarily focus on pruning. Existing schemes (Ma et al., 2023b; Zhong et al., 2024; Sun et al., 2024; Shao et al., 2024; Ashkboos et al., 2024; Gao et al., 2024; Men et al., 2024; He et al., 2024; Jaiswal et al., 2024), whether element-, block-, or layer-wise, achieve impressive parameter reductions but assume static workloads and rely on heuristic policies, neglecting runtime variability, as shown in Figure 1. Such rigidity overlooks two dominant sources of autoregressive inference runtime variance: 1) Input-driven variance: batch size and sequence length directly scale the KV cache memory (e.g., Llama-7B (Touvron et al., 2023a) requires 32 GB of KV cache memory, batch = 16 and length = 4k tokens, dwarfing the static 14 GB model parameters. 2) System-level variance. Edge devices often exhibit stochastic runtime variance, for instance, interference from co-running applications, affecting available memory budgets on the fly. This situation presents a compelling research question:

How to select optimal LLM pruning policy that can adapt to heterogeneous, time-varying request workloads while satisfying fluctuating memory budgets?

In this paper, we propose *RAP*, a runtime-adaptive pruning

framework that addresses these challenges. *RAP* abandons static one-size-fits-all compression in favor of dynamically adjusting the model’s sparsity level for each inference. As shown in Figure 1, it introduces a reinforcement learning (RL) agent that observes real-time signals, such as input sequence length, batch characteristics, and current memory availability, and selects an appropriate pruning policy on the fly. This design ensures that the model stays within memory budgets under tight conditions while preserving as many parameters as possible when resources allow. By coupling compression decisions with the execution context, *RAP* effectively accommodates heterogeneous workloads and fluctuating system constraints that are impractical for fixed pruning strategies. We formulate adaptive pruning as a sequential decision process and train the RL agent to maximize efficiency without compromising output quality. The agent’s reward function balances memory savings against generation fidelity, encouraging policies that reduce memory usage only to the extent they do not degrade performance. Once trained, the agent serves as an intelligent controller during inference, guiding the LLM to prune different components (e.g., attention modules, feed-forward networks, or even entire layers) in response to each request’s needs. Notably, *RAP* adds negligible runtime cost, since the learned policy can rapidly compute pruning decisions. This yields a flexible, context-aware compression mechanism that seamlessly scales LLM deployments to edge environments. Our experiments demonstrate that *RAP* outperforms static pruning baselines across a range of deployment scenarios. Without manual retuning, *RAP* adapts to varying batch sizes and sequence lengths, consistently meeting fluctuating memory limits while maintaining strong task performance. For example, under stringent memory constraints, *RAP* prunes a substantial fraction of the model’s weights to fit an LLM on-device yet maintains accuracy comparable to an unpruned model. Conversely, when memory is abundant, *RAP* leaves the model largely intact to maximize accuracy, effectively achieving the best of both worlds. In summary, our contributions are as follows:

- We propose *RAP*, a novel runtime-adaptive LLM pruning framework that dynamically adjusts model size based on real-time input demands and memory constraints.
- We cast the pruning policy selection as a reinforcement learning problem and develop an RL agent that learns an optimal policy balancing memory efficiency and model fidelity.
- We demonstrate through extensive experiments that *RAP* consistently outperforms static compression strategies under dynamic workloads, achieving superior memory savings and faster inference with minimal impact on output quality.

2. Background and Related Work

2.1. Runtime LLM Inference Memory Breakdown

Transformer-based LLMs comprise a stack of *homogeneous* decoder layer, each with a multi-head attention (MHA) block followed by a feed-forward network (FFN) block.

Given that FFNs typically contain approximately $2\times$ the parameters of their corresponding attention modules, the static parameter memory allocation is predominantly determined by FFN weights, which remain fixed once model are loaded. During inference, each token x is projected with W_q , W_k , and W_v within MHA to obtain $Q = xW_q$, $K = xW_k$, and $V = xW_v$; the resulting K and V tensors are appended to the KV cache across all layers. For Llama2-7B ($n_{\text{layers}} = 32$, $n_{\text{heads}} = 32$, $d_{\text{head}} = 128$), the per-token cache cost is $\text{Memory}_{\text{KV}} = 2 n_{\text{layers}} n_{\text{heads}} d_{\text{head}} p_a \approx 0.5 \text{ MB}$, where the factor 2 stores both keys and values.

Figure 3 shows memory footprint across batch size and sequence length. Each pie chart illustrates the relative proportion of memory consumed by model parameters (FFN in orange, MHA in blue) and KV cache (gray). As batch size and sequence length gradually extend, memory consumption transitions from parameter-dominated regimes to KV cache-dominated, highlighting the dynamic nature of memory bottlenecks in practical deployment. Once model is loaded into memory, increasing the batch size or extending the context length does not affect parameter memory consumption but substantially increases KV cache memory overhead.

$$\text{KV cache} \propto (\text{batch size}) \times (\text{sequence length}) \times n_{\text{layers}} \quad (1)$$

Therefore, practical memory scaling is driven almost entirely by the MHA-generated KV cache, underscoring the need for adaptive compression schemes that address both the FFN-heavy static parameter and this rapidly expanding dynamic cache.

2.2. Existing LLM Pruning

For runtime LLM inference, pruning strategies (Hu et al., 2021; Liu et al., 2023; Xia et al., 2023; Yin et al., 2023; Zhang et al., 2023) must balance efficiency, accuracy, and adaptability. **1) Static vs. dynamic pruning:** Static methods (e.g., ISC (Das et al., 2023), SparseGPT (Frantar & Alistarh, 2023), E-Sparse (Li et al., 2023), Wanda (Sun et al., 2024)) apply fixed sparsity without retraining, achieving up to 50% sparsity but degrading under higher sparsity levels and fundamentally lacking adaptability. Structured variants (Ashkboos et al., 2024; Chen et al., 2023; Ma et al., 2023b; Zhao et al., 2024) improve hardware efficiency but require retraining (e.g., LoRA (Hu et al., 2021)). In contrast,

dynamic pruning (An et al., 2024; Federici et al., 2024; Le et al., 2025; Liu et al., 2023) adapts per input, improving flexibility but retaining full weights and inducing irregular sparsity, limiting hardware speedups. **2) Parameter-only vs. parameter+KV compression:** Most pruning reduces weights (Ma et al., 2023b; Ashkboos et al., 2024; Li et al., 2023; Sun et al., 2024) but ignores KV cache, a major runtime bottleneck. While weight pruning shrinks static parameter, it fails under long-context due to exponentially growing KV cache. Recent methods (e.g., ShortGPT (Men et al., 2024), BlockPruner (Zhong et al., 2024), LLM-Drop (He et al., 2024), FinerCut (Zhang et al., 2024b)) prune both parameters and KV cache, reducing computation and memory but often rely on static rules, sacrificing accuracy. The core trade-off persists: parameter-only pruning is insufficient, while aggressive KV cache pruning hurts performance. **3) Heuristic vs. learning-based control:** Heuristic methods (Sun et al., 2024; Frantar & Alistarh, 2023; Ma et al., 2023b) use static scores (e.g., magnitude, saliency), lacking runtime adaptability or end-to-end optimization. Learning-based policies can jointly optimize for speed, memory, and accuracy. Though RL has proven effective in (Andrychowicz et al., 2020; Mnih et al., 2015; Zhang et al., 2017), it remains underexplored for LLM pruning, particularly for coordinated control of parameter and KV cache. *RAP* addresses this by introducing an RL-based policy that dynamically prunes both components, enabling runtime-adaptive and efficient inference beyond static baselines.

3. Motivation

In this section, we present key observations from stochastic workloads, model-intrinsic and system factors for practical LLM inference.

► **Takeaway 1: Runtime workloads are inherently dynamic.** Modern LLM service platforms must operate under highly volatile workload conditions (Patel et al., 2024; Li et al., 2024; Jaiswal et al., 2025). Figure 2, derived from an Azure LLM-inference trace (Stojkovic et al., 2025), reveals that prompt-length distributions and request arrival rates fluctuate markedly over time, producing a non-deterministic mix of short conversational turns and burst, long-form inputs. Figure 3 illustrates how memory allocation transitions from parameter-dominated regimes at low batch sizes to KV cache-dominated scenarios as batch size and sequence length scale up, fundamentally reshaping inference memory bottlenecks. These findings reveal a fundamental limitation in current serving infrastructures: static resource allocation and heuristic per-request throttling mechanisms fail to satisfy Quality of Experience (QoE) demands for latency and memory efficiency when facing the inherently dynamic and unpredictable nature of real-time inference workloads.

► **Takeaway 2: Homogeneous blocks exhibit heterogeneous**

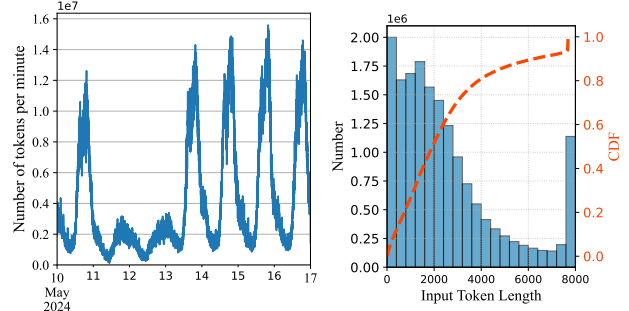


Figure 2. Distribution and daily variation of a conversational LLM inference workload.

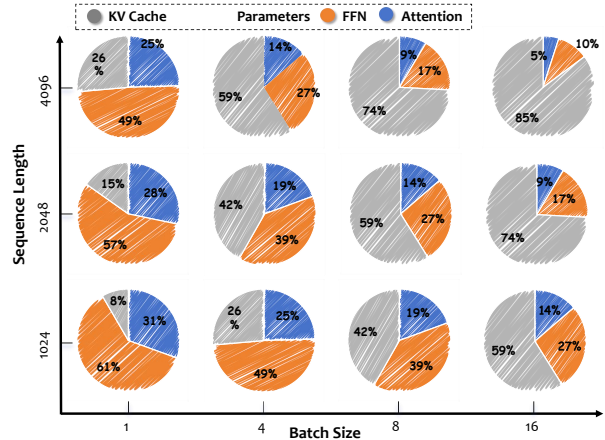


Figure 3. Dynamic memory footprint across varying batch sizes and sequence lengths.

impact. Current transformer architectures exhibit seemingly homogeneous layers (§2.1), yet their internal blocks (MHA and FFN) contribute heterogeneously to generation quality. Prior studies have broadly differentiated layer importance (Ma et al., 2023a; Zhang et al., 2024a; Yao et al., 2024; Pan et al., 2024) or assumed fixed superiority of FFN over MHA (He et al., 2024). However, as summarized in Figure 4, the impact of MHA and FFN removal on perplexity (PPL) varies significantly across layers, challenging coarse-grained or uniform assumptions. Moreover, solely optimizing FFN cannot alleviate the KV cache bottleneck that arises in long sequences and large batch sizes. Additionally, block importance demonstrates dynamic shifts across different request lengths, underscoring the limitations of existing static, heuristic-based pruning strategies (Yao et al., 2024; Pan et al., 2024; Ma et al., 2023a; Men et al., 2024). These insights highlight the critical imperative for adaptive method that dynamically discerns and leverages block-level sensitivity to accommodate heterogeneous runtime computational demands.

► **Takeaway 3: Real-world systems demonstrates runtime variance.** Real-world LLM inference systems rarely maintain consistent memory availability (Wang et al., 2024; Yu




Figure 4. Block sensitivity analysis: removing specific MHA and FFN under diff. sequence length.

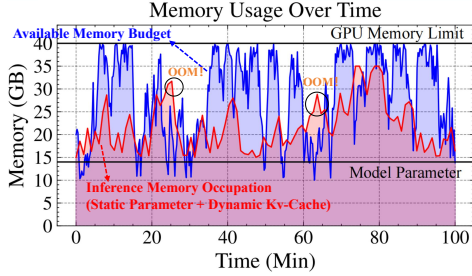


Figure 5. Dynamic memory allocation trace for Llama2-7B on an NVIDIA A40 (40 GB) (NVIDIA Corporation, 2020). Blue indicates available memory; red shows real-time usage (model + KV cache), which scales with workload and cause out-of-memory (OOM) errors under heavy requests.

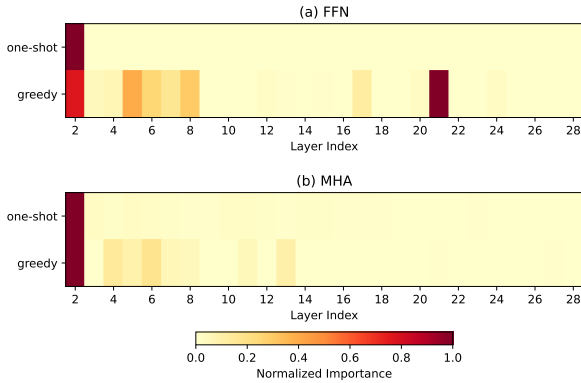


Figure 6. Per-block perplexity sensitivity (FFN vs. MHA) under one-shot and GSI pruning, with GSI revealing inter-layer heterogeneity missed by static one-shot methods.

et al., 2023; Xu et al., 2022). Instead, they encounter dynamic memory variability driven by heterogeneous LLM workloads and interference by co-running applications. Azure LLM service traces (Stojkovic et al., 2025) show that prompt-length and request-arrival spikes can induce instantaneous GPU-memory fluctuations of up to 5–10. Concurrent workloads further disrupt cache and bandwidth allocation, exacerbating contention and latency instability. As Figure 5 illustrates, these memory surges often preempt co-running applications and invalidate the fixed-budget assumptions of existing pruning and scheduling methods, highlighting a critical gap between current serving frameworks and real-world, memory-dynamic inference environments.

4. RAP Design

In this section, we present the design of *RAP*. Specifically, we first introduce greedy sequential importance analysis §4.1 to thoroughly assess the impact of individual transformer blocks. Then, we explain how we formulate the problem of runtime dynamic pruning as an RL task §4.2.

4.1. Greedy Sequential Importance

As discussed in §3, blocks exhibit heterogeneous contributions to model performance. Conventional one-shot pruning methods (Ma et al., 2023b; Zhong et al., 2024) that remove layers solely based on individual sensitivity ignore inter-layer dependencies, often leading to substantial performance degrades under aggressive compression ratio. The deep composition of nonlinear activations and residual connections in LLMs induces strong inter-layer dependencies (Ling et al., 2024; Meng et al., 2024), rendering the network fragile to architectural changes. Consequently, excising even a single layer can trigger a cascade of representational errors that corrupts the entire model’s functionality. To mitigate this, we propose *Greedy Sequential Importance* (GSI) analysis. As detailed in Algorithm 1, GSI performs iterative pruning by progressively removing the block whose exclusion results in the minimal deterioration, followed by re-evaluating after each step. This step-wise recalibration controls error accumulation, stabilizes accuracy over successive pruning stages, and achieves a more balanced compression–performance trade-off compared to static, one-shot methods. Figure 6 further highlights that one-shot pruning neglects inter-layer heterogeneity, leading to suboptimal pruning decisions. In this paper, we select perplexity as the proxy metric for the GSI algorithm to measure the impact of block removal on overall model performance, since perplexity is a widely-accepted metric for generative capabilities of LLM. Alternatively, task-specific downstream metrics can serve as a proxy to enable pruning decisions more aligned with target scenarios. Overall, GSI offers a principled and adaptive approach to LLM compression, effectively balancing model size reduction with task performance preservation.

4.2. RL-Guided Pruning Decisions

To address the dynamic inference environments characterized by user-request workloads and system runtime variance, we propose *RAP* an adaptive pruning framework based on reinforcement learning. Figure 7 presents the design overview of *RAP*. ① At each inference step, *RAP* observes the real-time request characteristic, model configuration, and available memory budget to determine the current execution state. ② Based on this state, the RL agent selects a pruning policy that satisfies the memory constraint while aiming to preserve model performance. ③ The base model then executes the selected pruning policy by removing the corresponding FFN

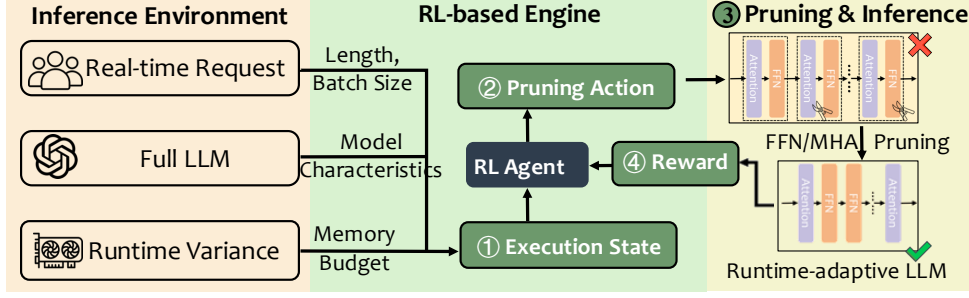


Figure 7. Design overview of RAP. (1) Runtime statistics from inference environment are encoded into execution state. (2) RL agent selects FFN/MHA blocks for pruning. (3) Resulting memory consumption and performance constitute the reward. (4) Agent gains reward and reinforces, completing an online loop for dynamically balanced efficiency and accuracy.

and MHA blocks, and subsequently performs inference on the compressed architecture. ④ Finally, *RAP* evaluates inference metrics, including memory overhead and perplexity, to derive a reward that quantifies how effectively the selected action balances computational efficiency with model performance. We next define the core RL components, *State*, *Action*, and *Reward*, to formalize the optimization space of *RAP*.

STATE: the state at the t -th timestep $S_t = (s_t^{Req}, s_t^{Model}, s_t^{Sys}) \in \mathbf{S}$ consists of three components:

- $s_t^{Req} = (R_{bs}, R_{sql})$ captures the real-time request characteristics, consisting of the batch size R_{bs} and sequence length R_{sql} .
- $s_t^{Model} = (\{\text{MHA}_{imp,i}\}_{i=1}^N, \{\text{FFN}_{imp,i}\}_{i=1}^N)$, representing importance score of each MHA and FFN block computed via GSI algorithm §4.1, where N denotes the total number of blocks, capturing the granular block-level model configuration.
- $s_t^{Sys} = (Sys_{avail}, Sys_{req})$ represents the runtime system memory state, where Sys_{avail} denotes the currently available system memory, and Sys_{req} indicates the anticipated memory overhead after executing the selected pruning policy.

ACTION: At each pruning step t , given N layers model and input state S_t , the action set is defined as $A_t = \{(a_1, \dots, a_{2N}) \mid a_i \in \{0, 1\}\}$, where $2N$ binary indicators represent whether to retain ($a_i = 1$) or remove ($a_i = 0$) each of the $2N$ transformer blocks (one MHA and one FFN per layer) at step t . Simultaneous multi-block selection creates an intractable action space of size 2^{2N} ; for example, Llama2-7B with 64 blocks, this yields approximately $2^{64} \approx 1.8 \times 10^{19}$ possible actions. To address this computational challenge, we decompose the decision into sequential single-block selections, reducing the action space to $2N$ decision step. However, directly applying one-shot top- k pruning proves suboptimal, as demonstrated in § 4.1,

Algorithm 1 Greedy Sequential Importance (GSI) using perplexity as the proxy metric

Require: Pre-trained model $\mathcal{M}$, evaluation corpus $\mathcal{C}$, target prune ratio ρ

Ensure: Pruned model $\mathcal{M}^{(t)}$, pruned blocks $\{B_{k_t}\}$, perplexities $\{P_{k_t}\}$

```

1:  $\mathcal{M}^{(0)} \leftarrow \mathcal{M}, t \leftarrow 0$ 
2: while PruneRatio( $\mathcal{M}^{(t)}$ ) <  $\rho$  do
3:    $t \leftarrow t + 1$ 
4:   for all block  $B_i$  in  $\mathcal{M}^{(t-1)}$  do
5:      $\hat{\mathcal{M}}_i \leftarrow \mathcal{M}^{(t-1)} \setminus B_i$ 
6:      $P_i \leftarrow \exp\left(-\frac{1}{|\mathcal{C}|} \sum_{w \in \mathcal{C}} \log p_{\hat{\mathcal{M}}_i}(w)\right)$ 
7:   end for
8:    $k \leftarrow \arg \min_i P_i$ 
9:    $\mathcal{M}^{(t)} \leftarrow \hat{\mathcal{M}}_k$ 
10: end while
11: return  $\mathcal{M}^{(t)}, \{B_{k_1}, \dots, B_{k_t}\}, \{P_{k_1}, \dots, P_{k_t}\}$ 

```

since block importance dynamically changes after each removal. More precisely, we utilize GSI-derived importance scores to iteratively remove the least important block at each step. After each removal, we re-assess the importance hierarchy among remaining blocks and select the next least important candidate, repeating this greedy selection until the peak memory footprint meets the memory budget constraint. While the approach requires iterative decision-making, the RL agent employs a lightweight 2-layer MLP with minimal parameters, ensuring computational overhead remains negligible compared to the inference costs of billion-parameter LLMs.

REWARD: To optimize a pruned model under a fixed memory budget presents a multi-objective challenge. We address this by formulating a unified reward as a weighted sum of two specialized metrics: R_{ppl} , reflecting language modeling performance via perplexity, and R_{mem} , which penalizes peak memory consumption during inference.

$$R_t = \sum_{i=1}^{2N} (A_t)_i \left(\alpha R_i^{\text{ppl}} - \beta R_i^{\text{mem}} \right) \quad (2)$$

Here, N is the total number of blocks. At each time step t , A_t is a binary action vector where $(A_t)_i = 1$ indicates that block i is preserved while $(A_t)_i = 0$ will remove block i . The terms R_i^{ppl} (detailed in § 4.2) and R_i^{me} denote the perplexity importance and estimated memory footprint of block i , respectively. The hyperparameters α and β act as reward scale factors, tuning the accuracy–memory trade-off and penalizing bottleneck workloads when necessary. Specifically, in this paper, we set $\alpha = 1$, $\beta = 0.3$. A detailed description of RL-agent algorithm can be found in Appendix A.

5. Experiments

5.1. Experimental Setup

Model and Dataset. We implemented *RAP* using PyTorch (Paszke et al., 2019) and the HuggingFace Transformers library (Wolf et al., 2019) for managing models and datasets. All experiments were conducted on NVIDIA A40 GPUs (NVIDIA Corporation, 2020). For GSI, we used the Alpaca dataset (Taori et al., 2023) to compute perplexity importance. We evaluated *RAP* over representative LLMs: Llama2-7B (Touvron et al., 2023c), Llama3-8B (Dubey et al., 2024), Qwen1.5-7B (Bai et al., 2023) and Qwen2.5-7B (Yang et al., 2024). We assessed model performance using the LM Evaluation Harness (Gao et al., 2023) following Llama’s evaluation protocol to perform zero-shot task classification on common sense reasoning datasets: BoolQ (Clark et al., 2019), PIQA (Bisk et al., 2020), HellaSwag (Zellers et al., 2019), WinoGrande (Sakaguchi et al., 2019), ARC-easy (Clark et al., 2018), ARC-challenge (Clark et al., 2018), and OpenbookQA (Mihaylov et al., 2018). We tested the model generative ability using WikiText2 (Merity et al., 2016) and PTB (Marcus et al., 1993) dataset. A detailed description of the benchmarks can be found in Appendix B.1.

Baselines. To validate the effectiveness of *RAP*, we compared several structured pruning methods: 1) LLM-Pruner (Ma et al., 2023a): Structural pruning via gradient-weight analysis to remove non-critical coupled layers; omits post-training for fair comparison but incurs pruning-policy overhead. 2) SliceGPT (Ashkboos et al., 2024): PCA-based post-training sparsification reduces embedding dimensions by projecting hidden representations shallow-to-deep. 3) ShortGPT (Men et al., 2024): Layer-pruning reveals redundancy in LLMs by removing redundant layers with minimal performance loss. 4) MHA-Drop (He et al., 2024): Cosine-similarity-guided pruning of entire multi-head attention layers for inference acceleration. 5) FFN-Skip (Jaiswal

et al., 2024): Input-adaptive dynamic skipping of FFN layers during decoding for faster generation with negligible quality trade-offs. A detailed description of the baseline models can be found in Appendix B.2. *Notably*, we diverge from previous works by evaluating all methods under identical memory budget, rather than a fixed pruning ratio. We posit that the pruning ratio is a misleading proxy for actual memory footprint, a claim substantiated by our empirical results which reveal a significant discrepancy. This gap arises primarily from the disproportionate memory overhead of runtime KV cache, which parameter counts alone fail to capture. By focusing on a fixed memory budget, our evaluation framework more accurately reflects the constraints of real-world deployment on resource-limited device, yielding more practical and reliable conclusions.

5.2. Overall Performance

In this section, we evaluate Llama2-7B and Llama3-8B under 80% and 60% unified memory budgets, covering both parameters and KV cache. For clarity, 80% memory budget corresponds to 80% of the peak memory footprint of the original, unpruned model, formally expressed as $80\% * \max(\text{param.} + \text{KV cache})$. Sparsity is progressively increased for each method until the total memory overhead meets the target budget constraint. Detail pruning settings for all baselines are detailed in Table 4 of Appendix C. Evaluated results with the same setting for Qwen1.5-7B and Qwen2.5-7B can be found in Table 3 of Appendix C.

Generation Ability. As shown in Table 1, *RAP* shows the smallest perplexity drift among all structured-pruning baselines. Specifically, at the 80% budget perplexity rises on Llama2-7B by only +6.33 on WikiText2 and +21.47 on PTB, outperforming the next-best method by 22.95 and 146.93, respectively. This advantage persists more pronounced under the harsher 60% cap, stemming from learning an architecturally-aware pruning policy targeting MHA when KV cache is the primary bottleneck and FFN blocks when parameter memory dominates. This asymmetric strategy adapts to the architectural nuances of different models. For instance, the FFN-heavy Llama3-8B (which uses GQA (Ainslie et al., 2023)) is highly sensitive to FFN removal, whereas the standard Llama2-7B is more degraded by pruning MHA. This learned selectivity allows *RAP* to navigate architectural trade-offs, preserving crucial generative capabilities even under severe compression.

Downstream Task Performance. We next evaluate zero-shot commonsense reasoning for the same memory budgets. As shown in Table 1, *RAP* again delivers the highest accuracy. Under the 80% budget it preserves 86% of dense accuracy and surpasses the leading baseline by +8.2% on Llama2-7B and +11.5% on Llama3-8B, with the largest gains on HellaSwag and ARC-e. Under an aggres-

Table 1. Zero-shot performance of pruned versus dense model under different memory budgets. ¹ 100% memory budget indicates exceeding peak inference memory usage (parameters + KV cache).

Budget	Schemes	Perplexity ↓		BoolQ	PIQA	Commonsense Task (%) ↑					
		WikiText2	PTB			WinoG.	HellaS.	ARC-e	ARC-c	OBQA	Avg.
Llama2-7B											
100% ¹	Dense	5.47	24.09	77.74	79.11	68.97	75.98	74.62	46.25	44.20	66.70
	LLMPruner (Ma et al., 2023b)	28.42	278.05	50.63	68.82	54.14	52.66	49.33	30.20	34.59	48.63
	SliceGPT (Ashkboos et al., 2024)	58.33	211.33	61.99	65.29	58.08	43.43	52.27	32.08	28.99	48.88
	ShortGPT (Men et al., 2024)	79.49	171.02	62.17	60.12	60.38	43.70	41.25	30.12	35.00	47.53
	MHA-Drop (He et al., 2024)	1068.99	1579.65	46.08	54.56	50.83	29.12	28.62	27.47	25.20	37.41
	FFN-Skip (Jaiswal et al., 2024)	28720.72	32216.40	42.80	49.35	51.22	26.69	27.18	28.49	26.60	36.05
	RAP	11.80	46.56	62.81	73.99	63.38	65.77	60.35	36.69	36.60	57.08
60%	LLMPruner	96.52	711.38	55.96	61.15	50.83	38.09	35.06	27.13	28.40	42.38
	SliceGPT	348.26	590.12	61.04	54.56	49.49	28.99	30.68	23.46	25.40	39.09
	ShortGPT	964.92	2219.93	55.57	50.98	50.51	27.83	26.39	27.47	26.60	37.91
	MHA-Drop	6731.72	7914.86	37.83	49.89	49.88	25.72	26.05	25.43	26.80	34.51
	FFN-Skip	202008.00	160986.48	44.83	50.64	48.60	25.86	25.72	28.92	28.19	36.13
	RAP	84.78	592.65	57.16	58.26	53.75	37.81	37.79	26.02	30.20	43.00
Llama3-8B											
100%	Dense	6.13	9.91	81.35	80.78	72.61	79.14	77.69	53.33	45.00	69.99
80%	LLMPruner	48.94	99.33	62.17	65.02	51.93	42.32	41.33	25.50	29.40	45.37
	SliceGPT	143.93	71.99	61.87	65.94	54.05	42.51	54.37	31.06	27.80	48.23
	ShortGPT	37412.61	41988.11	56.82	58.59	54.85	37.71	36.99	30.20	28.00	43.30
	MHA-Drop	529.00	737.98	37.80	53.92	50.20	26.87	30.47	23.81	27.20	35.75
	FFN-Skip	164387.73	149698.12	55.77	51.47	50.74	25.90	25.75	25.25	28.00	37.56
	RAP	12.98	27.15	68.84	76.55	66.11	65.55	62.12	39.51	39.60	59.77
60%	LLMPruner	4009.81	1882.99	40.48	50.05	52.33	26.26	26.77	25.94	27.00	35.55
	SliceGPT	2844.28	1084.03	40.86	53.86	48.93	27.97	32.07	23.04	25.80	36.08
	ShortGPT	13284.81	13512.55	41.44	50.98	50.03	26.74	25.46	25.34	26.80	35.26
	MHA-Drop	1757.11	2102.15	37.83	51.90	50.12	26.04	27.86	22.95	25.80	34.64
	FFN-Skip	624965.25	765475.19	51.93	51.95	50.03	26.02	24.03	26.96	28.59	37.08
	RAP	246.53	355.47	52.20	56.69	50.36	31.91	33.54	24.23	27.40	39.48

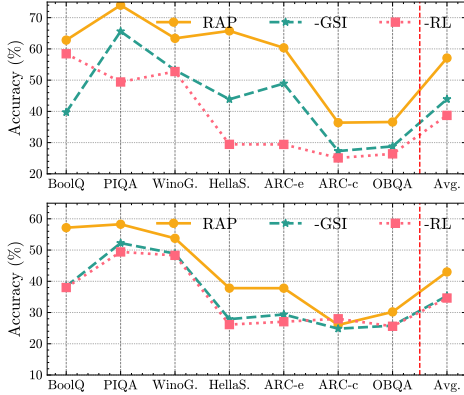


Figure 8. Effectiveness of GSI and RL Agent. Zero-shot performance of RAP^{-GSI} , RAP^{-RL} versus RAP evaluation on Llama2-7B under (a) 80% and (b) 60% memory budgets.

sive 60% memory budget, while all methods degrade, RAP proves uniquely resilient. It is the sole method to retain over 60% of the dense model’s performance, achieving scores of 43.0% on Llama2-7B (0.6% ↑ vs. runner-up) and 39.5% on Llama3-8B (2.4% ↑ vs. runner-up). These results indicate that RAP ’s memory-aware, block-level pruning, which considers both parameter and KV cache memory constraints, provides superior performance retention compared to conventional approaches under severe memory limitations.

5.3. Ablation Study

To explore the contribution of each component in RAP , we design two ablation variants: (1) RAP^{-GSI} , which disables

the iterative, Greedy Sequential Importance scorer and instead applies standard static, one-shot perplexity scoring across all requests; and (2) RAP^{-RL} , which removes the RL agent and randomly drops blocks, where ‘—’ means disable or remove proposed module.

Effectiveness of GSI. To isolate the contribution of the Greedy Sequential Importance, we implement a static baseline that performs one-shot perplexity evaluation on all blocks initially, then removes the k blocks with the lowest importance to meet the memory budget, without iterative re-evaluation after each removal. Figure 8 and Table 2 reveal that this shortcut severely erodes quality: perplexity on WikiText2 increases to 42.04 and average commonsense accuracy reduces by 13.17%. The degradation arises from latent inter-block dependencies in transformer stacks. Conventional one-shot methods, which score each block independently within the context of the full model, produce misleadingly optimistic importance estimates. These estimates become invalid under multi-block pruning scenarios, as they fail to account for inter-block dependencies. GSI addresses this by iteratively pruning the least critical block and then recalibrating the importance of all remaining blocks within the new, contracted architecture. This sequential, state-aware evaluation yields more faithful importance scores, leading to superior performance in high compression regimes.

Effectiveness of RL Agent. We next ablate the RL agent that converts GSI scores into real-time actions by comparing RAP with a naïve “Random-Drop” baseline that discards the same number of blocks but chooses them uniformly at random. As Figure 8 and Table 2 show, both variants satisfy

Table 2. Ablation study on perplexity.

Budget	Schemes	Perplexity ↓	
		WikiText2	PTB
80%	MODEL ^{-RL}	313.51	535.75
	MODEL ^{-GSI}	42.04	492.97
	MODEL	11.80	46.56
60%	MODEL ^{-RL}	7249.24	9059.14
	MODEL ^{-GSI}	803.72	977.01
	MODEL	74.78	592.65

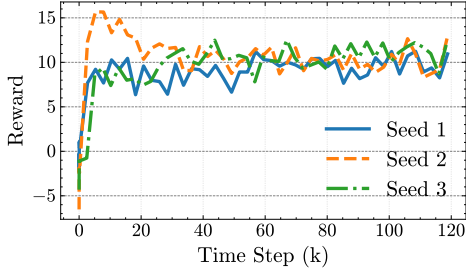


Figure 9. RL reward across different seeds.


the memory target, yet *RAP* obviously exceeds the random baseline on generation ability (−301.71 on WikiText2) and downstream performance (+18.37%). Crucially, *RAP* accomplishes this online: its RL controller makes block-selection decisions conditioned on the current KV/parameter split, so the policy can tighten or relax MHA/FFN pruning as the request mix shifts. Random-Drop lacks such awareness; each inference call therefore risks violating latency or memory constraints on resource-constrained devices. In short, RL preserves GSI’s quality while adding workload-adaptive guarantees, making *RAP* the more practical choice for on-device deployment.

5.4. Framework Analysis

Robustness of *RAP*.

To verify that *RAP*’s learning dynamics are not brittle to initialization, we retrain the agent on Llama2-7B with three independent random seeds. Figure 9 plots the seed-wise expected-reward curves. All trajectories increase smoothly and converge within a narrow band, showing that the agent consistently discovers high-quality pruning policies despite stochastic exploration. This stability stems from the architecture introduced above: (i) the Greedy Sequential Importance scorer supplies a well-shaped, low-variance reward signal, and (ii) the memory-aware action mask constrains the search space so early missteps cannot derail policy improvement. Collectively, these components make *RAP*’s reinforcement learning process both robust and generalizable across random seeds.

Impact of penalty factors α and β . *RAP* reward func-

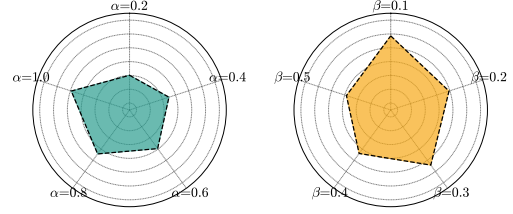
 Figure 10. Penalty factors (α and β) sensitivity.

tion integrates task utility with two penalty terms, weighted by α and β , to discourage accuracy degradation (importance decay) and excessive memory usage, respectively. By sweeping $\alpha \in [0.2, 1.0]$ and $\beta \in [0.1, 0.5]$, users can tune the performance–efficiency trade-off to match deployment needs. As shown in Figure 10, higher α values guide the policy to preserve critical blocks, while higher β values encourage pruning memory-intensive ones. The optimal reward ridge emerges at large α and moderate β ; we adopt $\alpha=1.0$ and $\beta=0.3$ in all experiments.

Overhead Analysis. As shown in Figure 12 in Appendix D. *RAP*’s RL controller adds negligible deployment overhead. While Llama2-7B has ~ 6.7 B parameters and requires 33GB memory for 2048-token inference at batch size 8, the controller has just 18K parameters over $3.7 \times 10^5 \times$ reduction. Latency overhead is negligible: the unpruned model requires 52.73s for inference, whereas a policy step completes in 0.5s ($< 1\%$ overhead). Even including the one-time 302s offline policy training, the amortized cost is negligible. This efficiency stems from the controller’s compact two-layer MLP, which processes GSI scores and applies memory-aware masking to accelerate pruning. Furthermore, we analyze the computational cost of GSI and the end-to-end latency on edge devices. In practical deployment on resource-constrained edge devices, *RAP* achieves significantly lower latency and higher throughput compared to baselines (see Table 5 and Table 6 in Appendix D).

6. Conclusion

This paper addresses the deployment challenges of LLMs caused by their excessive computational and memory demands. While compression techniques have been proposed to mitigate these constraints, existing methods rely on static heuristics and fail to adapt to runtime memory fluctuations or heterogeneous KV cache requirements stemming from diverse user workloads. To overcome these limitations, we introduce *RAP*, an elastic pruning framework powered by RL that dynamically optimizes compression strategies in real-time based on system conditions. This work bridges the gap between static compression techniques and dynamic real-world deployment scenarios, offering a scalable solution for efficient LLM inference in heterogeneous environments.

7. Impact Statement

Positive Societal Impacts The proposed *RAP* framework can substantially lower the computational and memory footprint of LLMs, thereby widening access for researchers, small enterprises, and under-resourced regions. By reducing both inference latency and energy consumption, *RAP* facilitates the deployment of privacy-preserving on-device assistants and real-time multilingual tools in settings such as healthcare triage, disaster response, and education, where network connectivity or cloud resources are limited. Moreover, the fine-grained control over model capacity afforded by *RAP* may accelerate scientific discovery: practitioners can iterate more rapidly on specialized models while retaining the interpretability of the original backbone, fostering reproducible and transparent AI research. Finally, by curbing redundant computation, the method contributes to a reduced carbon footprint for training and serving LLMs, aligning with global sustainability goals.

Negative Societal Impacts Conversely, the very efficiencies introduced by *RAP* may inadvertently amplify risks associated with LLM proliferation. Lower hardware barriers could enable malicious actors to integrate compact yet potent language models into disinformation pipelines, automated phishing campaigns, or large-scale spam generation. The ability to tailor pruning policies to specific downstream tasks might also facilitate the creation of domain-targeted deepfakes or toxic content filters that evade existing moderation systems. In addition, the accelerated adoption of slimmed-down LLMs could exacerbate labor displacement in sectors reliant on routine text production or customer support. Finally, although *RAP* decreases per-model energy usage, the ease of spawning numerous lightweight instances may lead to a rebound effect, offsetting aggregate environmental gains unless accompanied by conscientious governance and usage policies.

References

- Achiam, J., Adler, S., Agarwal, S., Ahmad, L., Akkaya, I., Aleman, F. L., Almeida, D., Altschmidt, J., Altman, S., Anadkat, S., et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- Ainslie, J., Lee-Thorp, J., de Jong, M., Zemlyanskiy, Y., Lebrón, F., and Sanghai, S. Gqa: Training generalized multi-query transformer models from multi-head checkpoints. *arXiv preprint arXiv:2305.13245*, 2023.
- An, Y., Zhao, X., Yu, T., Tang, M., and Wang, J. Fluctuation-based adaptive structured pruning for large language models. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pp. 10865–10873, 2024.
- Andrychowicz, O. M., Baker, B., Chociej, M., Jozefowicz, R., McGrew, B., Pachocki, J., Petron, A., Plappert, M., Powell, G., Ray, A., et al. Learning dexterous in-hand manipulation. *The International Journal of Robotics Research*, 39(1):3–20, 2020.
- Ashkboos, S., Croci, M. L., Nascimento, M. G. d., Hoefler, T., and Hensman, J. Slicept: Compress large language models by deleting rows and columns. *arXiv preprint arXiv:2401.15024*, 2024.
- Bai, J., Bai, S., Chu, Y., Cui, Z., Dang, K., Deng, X., Fan, Y., Ge, W., Han, Y., Huang, F., et al. Qwen technical report. *arXiv preprint arXiv:2309.16609*, 2023.
- Bisk, Y., Zellers, R., Bras, R. L., Gao, J., and Choi, Y. Piqua: Reasoning about physical commonsense in natural language. In *Thirty-Fourth AAAI Conference on Artificial Intelligence*, 2020.
- Brown, T., Mann, B., Ryder, N., Subbiah, M., Kaplan, J. D., Dhariwal, P., Neelakantan, A., Shyam, P., Sastry, G., Askell, A., et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33: 1877–1901, 2020.
- Chen, J., Xiao, S., Zhang, P., Luo, K., Lian, D., and Liu, Z. Bge m3-embedding: Multi-lingual, multi-functionality, multi-granularity text embeddings through self-knowledge distillation. *arXiv preprint arXiv:2402.03216*, 2024.
- Chen, T., Ding, T., Yadav, B., Zharkov, I., and Liang, L. Lorashear: Efficient large language model structured pruning and knowledge recovery. *arXiv preprint arXiv:2310.18356*, 2023.
- Chowdhery, A., Narang, S., and Devlin, J. Palm: Scaling language modeling with pathways. *J. Mach. Learn. Res.*, 24:240:1–240:113, 2023. URL <http://jmlr.org/papers/v24/22-1144.html>.
- Clark, C., Lee, K., Chang, M.-W., Kwiatkowski, T., Collins, M., and Toutanova, K. Boolq: Exploring the surprising difficulty of natural yes/no questions, 2019. URL <https://arxiv.org/abs/1905.10044>.
- Clark, P., Cowhey, I., Etzioni, O., Khot, T., Sabharwal, A., Schoenick, C., and Tafjord, O. Think you have solved question answering? try arc, the ai2 reasoning challenge. *arXiv:1803.05457v1*, 2018.
- Das, R. J., Sun, M., Ma, L., and Shen, Z. Beyond size: How gradients shape pruning decisions in large language models. *arXiv preprint arXiv:2311.04902*, 2023.
- Dubey, A., Jauhri, A., Pandey, A., Kadian, A., Al-Dahle, A., Letman, A., Mathur, A., Schelten, A., Yang, A., Fan, A., et al. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024.

- Federici, M., Belli, D., van Baalen, M., Jalalirad, A., Skliar, A., Major, B., Nagel, M., and Whatmough, P. Efficient llm inference using dynamic input pruning and cache-aware masking. *arXiv preprint arXiv:2412.01380*, 2024.
- Fedus, W., Dean, J., and Zoph, B. A review of sparse expert models in deep learning. *arXiv preprint arXiv:2209.01667*, 2022.
- Frantar, E. and Alistarh, D. Sparsegpt: Massive language models can be accurately pruned in one-shot. In *International Conference on Machine Learning*, pp. 10323–10337. PMLR, 2023.
- Gao, L., Tow, J., Abbasi, B., Biderman, S., Black, S., DiPofi, A., Foster, C., Golding, L., Hsu, J., Le Noac’h, A., Li, H., McDonell, K., Muennighoff, N., Ociepa, C., Phang, J., Reynolds, L., Schoelkopf, H., Skowron, A., Sutawika, L., Tang, E., Thite, A., Wang, B., Wang, K., and Zou, A. A framework for few-shot language model evaluation, 12 2023. URL <https://zenodo.org/records/10256836>.
- Gao, S., Lin, C.-H., Hua, T., Tang, Z., Shen, Y., Jin, H., and Hsu, Y.-C. Disp-llm: Dimension-independent structural pruning for large language models. *Advances in Neural Information Processing Systems*, 37:72219–72244, 2024.
- github. GitHub Copilot: Your AI pair programmer. <https://github.com/features/copilot>.
- He, S., Sun, G., Shen, Z., and Li, A. What matters in transformers? not all attention is needed. *arXiv preprint arXiv:2406.15786*, 2024.
- Hu, E. J., Shen, Y., Wallis, P., Allen-Zhu, Z., Li, Y., Wang, S., Wang, L., and Chen, W. Lora: Low-rank adaptation of large language models. *arXiv preprint arXiv:2106.09685*, 2021.
- Jaiswal, A., Hu, B., Yin, L., Ro, Y., Liu, S., Chen, T., and Akella, A. Ffn-skipllm: A hidden gem for autoregressive decoding with adaptive feed forward skipping. *arXiv preprint arXiv:2404.03865*, 2024.
- Jaiswal, S., Jain, K., Simmhan, Y., Parayil, A., Mallick, A., Wang, R., Amant, R. S., Bansal, C., Rühle, V., Kulkarni, A., et al. Serving models, fast and slow: optimizing heterogeneous llm inferencing workloads at scale. *arXiv preprint arXiv:2502.14617*, 2025.
- Le, Q., Diao, E., Wang, Z., Wang, X., Ding, J., Yang, L., and Anwar, A. Probe pruning: Accelerating llms through dynamic pruning via model-probing. *arXiv preprint arXiv:2502.15618*, 2025.
- Li, B., Jiang, Y., Gadepally, V., and Tiwari, D. Llm inference serving: Survey of recent advances and opportunities. *arXiv preprint arXiv:2407.12391*, 2024.
- Li, Y., Niu, L., Zhang, X., Liu, K., Zhu, J., and Kang, Z. E-sparse: Boosting the large language model inference through entropy-based n: M sparsity. *arXiv preprint arXiv:2310.15929*, 2023.
- Lin, J., Zhu, L., Chen, W.-M., Wang, W.-C., Gan, C., and Han, S. On-device training under 256kb memory. *Advances in Neural Information Processing Systems*, 35: 22941–22954, 2022.
- Lin, J., Tang, J., Tang, H., Yang, S., Chen, W.-M., Wang, W.-C., Xiao, G., Dang, X., Gan, C., and Han, S. Awq: Activation-aware weight quantization for on-device llm compression and acceleration. *Proceedings of Machine Learning and Systems*, 6:87–100, 2024.
- Ling, G., Wang, Z., Yan, Y., and Liu, Q. Slimgpt: Layer-wise structured pruning for large language models. *arXiv preprint arXiv:2412.18110v1*, 2024. URL <https://arxiv.org/abs/2412.18110v1>.
- Liu, Z., Wang, J., Dao, T., Zhou, T., Yuan, B., Song, Z., Shrivastava, A., Zhang, C., Tian, Y., Re, C., et al. Deja vu: Contextual sparsity for efficient llms at inference time. In *International Conference on Machine Learning*, pp. 22137–22176. PMLR, 2023.
- Liu, Z., Zhao, C., Fedorov, I., Soran, B., Choudhary, D., Krishnamoorthi, R., Chandra, V., Tian, Y., and Blankevoort, T. Spinqant: Llm quantization with learned rotations. *arXiv preprint arXiv:2405.16406*, 2024.
- Ma, X., Fang, G., and Wang, X. Llm-pruner: On the structural pruning of large language models. *Advances in neural information processing systems*, 36:21702–21720, 2023a.
- Ma, X., Fang, G., and Wang, X. Llm-pruner: On the structural pruning of large language models. In *Advances in Neural Information Processing Systems*, 2023b.
- Marcus, M., Santorini, B., and Marcinkiewicz, M. A. Building a large annotated corpus of english: The penn treebank. *Computational linguistics*, 19(2):313–330, 1993.
- Men, X., Xu, M., Zhang, Q., Wang, B., Lin, H., Lu, Y., Han, X., and Chen, W. Shortgpt: Layers in large language models are more redundant than you expect. *arXiv preprint arXiv:2403.03853*, 2024.
- Meng, X., Ibrahim, S., Behdin, K., Hazimeh, H., Ponomareva, N., and Mazumder, R. Osscar: One-shot structured pruning in vision and language models with combinatorial optimization. In *Proceedings of the 41st International Conference on Machine Learning*, pp. 325–335. PMLR, 2024. URL <https://openreview.net/pdf?id=ZctlF8R1V4>.

- Merity, S., Xiong, C., Bradbury, J., and Socher, R. Pointer sentinel mixture models, 2016.
- microsoft. Your Everyday AI Companion — Microsoft Bing. <https://www.bing.com/new>.
- Mihaylov, T., Clark, P., Khot, T., and Sabharwal, A. Can a suit of armor conduct electricity? a new dataset for open book question answering. In *EMNLP*, 2018.
- Mnih, V., Kavukcuoglu, K., Silver, D., Rusu, A. A., Veness, J., Bellemare, M. G., Graves, A., Riedmiller, M., Fidjeland, A. K., Ostrovski, G., et al. Human-level control through deep reinforcement learning. *nature*, 518(7540): 529–533, 2015.
- NVIDIA Corporation. NVIDIA A40 GPU. <https://www.nvidia.com/en-us/data-center/a40/>, 2020.
- Pan, R., Liu, X., Diao, S., Pi, R., Zhang, J., Han, C., and Zhang, T. Lisa: layerwise importance sampling for memory-efficient large language model fine-tuning. *Advances in Neural Information Processing Systems*, 37: 57018–57049, 2024.
- Paszke, A., Gross, S., Massa, F., Lerer, A., Bradbury, J., Chanan, G., Killeen, T., Lin, Z., Gimelshein, N., Antiga, L., et al. Pytorch: An imperative style, high-performance deep learning library. *Advances in neural information processing systems*, 32, 2019.
- Patel, P., Choukse, E., Zhang, C., Shah, A., Goiri, Í., Maleki, S., and Bianchini, R. Splitwise: Efficient generative llm inference using phase splitting. In *2024 ACM/IEEE 51st Annual International Symposium on Computer Architecture (ISCA)*, pp. 118–132. IEEE, 2024.
- Patterson, D., Gonzalez, J., Le, Q., Liang, C., Munguia, L.-M., Rothchild, D., So, D., Texier, M., and Dean, J. Carbon emissions and large neural network training. *arXiv preprint arXiv:2104.10350*, 2021.
- Sakaguchi, K., Bras, R. L., Bhagavatula, C., and Choi, Y. Winogrande: An adversarial winograd schema challenge at scale, 2019. URL <https://arxiv.org/abs/1907.10641>.
- Shao, H., Liu, B., and Qian, Y. One-shot sensitivity-aware mixed sparsity pruning for large language models. In *ICASSP 2024-2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 11296–11300. IEEE, 2024.
- Stojkovic, J., Zhang, C., Goiri, Í., Torrellas, J., and Choukse, E. Dynamollm: Designing LLM inference clusters for performance and energy efficiency. In *IEEE International Symposium on High Performance Computer Architecture, HPCA 2025, Las Vegas, NV, USA, March 1-5, 2025*, pp. 1348–1362. IEEE, 2025. doi: 10.1109/HPCA61900.2025.00102. URL <https://doi.org/10.1109/HPCA61900.2025.00102>.
- Sun, M., Liu, Z., Bair, A., and Kolter, J. Z. A simple and effective pruning approach for large language models, 2024. URL <https://arxiv.org/abs/2306.11695>.
- Sun, S., Cheng, Y., Gan, Z., and Liu, J. Patient knowledge distillation for bert model compression. *arXiv preprint arXiv:1908.09355*, 2019.
- Taori, R., Gulrajani, I., Zhang, T., Dubois, Y., Li, X., Guestrin, C., Liang, P., and Hashimoto, T. B. Stanford alpaca: An instruction-following llama model. https://github.com/tatsu-lab/stanford_alpaca, 2023.
- Team, G., Mesnard, T., Hardin, C., Dadashi, R., Bhupatiraju, S., Pathak, S., Sifre, L., Rivière, M., Kale, M. S., Love, J., et al. Gemma: Open models based on gemini research and technology. *arXiv preprint arXiv:2403.08295*, 2024.
- Touvron, H., Lavril, T., Izacard, G., Martinet, X., Lachaux, M.-A., Lacroix, T., Rozière, B., Goyal, N., Hambro, E., Azhar, F., et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023a.
- Touvron, H., Martin, L., Stone, K., Albert, P., Almahairi, A., Babaei, Y., Bashlykov, N., Batra, S., Bhargava, P., Bhosale, S., et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023b.
- Touvron, H., Martin, L., Stone, K., Albert, P., Almahairi, A., Babaei, Y., Bashlykov, N., Batra, S., Bhargava, P., Bhosale, S., et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023c. URL <https://arxiv.org/abs/2307.09288>.
- Wang, Y., Chen, Y., Li, Z., Kang, X., Tang, Z., He, X., Guo, R., Wang, X., Wang, Q., Zhou, A. C., et al. Burstgpt: A real-world workload dataset to optimize llm serving systems. *arXiv preprint arXiv:2401.17644*, 2024.
- Wolf, T., Debut, L., Sanh, V., Chaumond, J., Delangue, C., Moi, A., Cistac, P., Rault, T., Louf, R., Funtowicz, M., et al. Huggingface’s transformers: State-of-the-art natural language processing. *arXiv preprint arXiv:1910.03771*, 2019.
- Xia, H., Zheng, Z., Li, Y., Zhuang, D., Zhou, Z., Qiu, X., Li, Y., Lin, W., and Song, S. L. Flash-llm: Enabling cost-effective and highly-efficient large generative model inference with unstructured sparsity. *arXiv preprint arXiv:2309.10285*, 2023.

- Xu, F., Xu, J., Chen, J., Chen, L., Shang, R., Zhou, Z., and Liu, F. igniter: Interference-aware gpu resource provisioning for predictable dnn inference in the cloud. *IEEE Transactions on Parallel and Distributed Systems*, 34(3):812–827, 2022.
- Xu, X., Li, M., Tao, C., Shen, T., Cheng, R., Li, J., Xu, C., Tao, D., and Zhou, T. A survey on knowledge distillation of large language models. *arXiv preprint arXiv:2402.13116*, 2024.
- Yang, A., Yang, B., Hui, B., Zheng, B., Yu, B., Zhou, C., Li, C., Li, C., Liu, D., Huang, F., et al. Qwen2 technical report. *arXiv preprint arXiv:2407.10671*, 2024.
- Yao, K., Gao, P., Li, L., Zhao, Y., Wang, X., Wang, W., and Zhu, J. Layer-wise importance matters: Less memory for better performance in parameter-efficient fine-tuning of large language models. *arXiv preprint arXiv:2410.11772*, 2024.
- Yin, L., Wu, Y., Zhang, Z., Hsieh, C.-Y., Wang, Y., Jia, Y., Li, G., Jaiswal, A., Pechenizkiy, M., Liang, Y., et al. Outlier weighed layerwise sparsity (owl): A missing secret sauce for pruning llms to high sparsity. *arXiv preprint arXiv:2310.05175*, 2023.
- Yu, M., Wang, A., Chen, D., Yu, H., Luo, X., Li, Z., Wang, W., Chen, R., Nie, D., and Yang, H. Faaswap: slo-aware, gpu-efficient serverless inference via model swapping. *arXiv preprint arXiv:2306.03622*, 2023.
- Yuan, J., Yang, C., Cai, D., Wang, S., Yuan, X., Zhang, Z., Li, X., Zhang, D., Mei, H., Jia, X., et al. Mobile foundation model as firmware. *arXiv preprint arXiv:2308.14363*, 2023.
- Zellers, R., Holtzman, A., Bisk, Y., Farhadi, A., and Choi, Y. Hellaswag: Can a machine really finish your sentence? In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, 2019.
- Zhang, D., Maei, H., Wang, X., and Wang, Y.-F. Deep reinforcement learning for visual object tracking in videos. *arXiv preprint arXiv:1701.08936*, 2017.
- Zhang, M., Chen, H., Shen, C., Yang, Z., Ou, L., Yu, X., and Zhuang, B. Loraprune: Pruning meets low-rank parameter-efficient fine-tuning. *arXiv preprint arXiv:2305.18403*, 2023.
- Zhang, Y., Dong, Y., and Kawaguchi, K. Investigating layer importance in large language models. *arXiv preprint arXiv:2409.14381*, 2024a.
- Zhang, Y., Li, Y., Wang, X., Shen, Q., Plank, B., Bischl, B., Rezaei, M., and Kawaguchi, K. Finercut: Finer-grained interpretable layer pruning for large language models. *arXiv preprint arXiv:2405.18218*, 2024b.
- Zhao, B., Hajishirzi, H., and Cao, Q. Apt: Adaptive pruning and tuning pretrained language models for efficient training and inference. *arXiv preprint arXiv:2401.12200*, 2024.
- Zhong, L., Wan, F., Chen, R., Quan, X., and Li, L. Block-pruner: Fine-grained pruning for large language models. *arXiv preprint arXiv:2406.10594*, 2024.

A. Detail of RL-Agent Algorithm

A.1. Problem Formulation

We cast RAP as a finite-horizon MDP $\mathcal{M} = (\mathcal{S}, \mathcal{A}, \mathcal{P}, \mathcal{R}, \gamma)$ with horizon $H \leq 2N$, where N is the number of transformer layers and each layer contributes one MHA block and one FFN block (thus $2N$ removable blocks).

State. At decision step t , the state $s_t \in \mathcal{S}$ concatenates request-, model-, and system-level features:

$$s_t = (s_t^{\text{Req}}, s_t^{\text{Model}}, s_t^{\text{Sys}}),$$

with

$$\begin{aligned} s_t^{\text{Req}} &= (R_{\text{bs}}, R_{\text{sql}}), & s_t^{\text{Model}} &= (\{\text{MHA}_{\text{imp},i}^{(t)}\}_{i=1}^N, \{\text{FFN}_{\text{imp},i}^{(t)}\}_{i=1}^N), \\ s_t^{\text{Sys}} &= (\text{Sys}_{\text{avail}}^{(t)}, \widehat{\text{Sys}}_{\text{req}}^{(t)}). \end{aligned}$$

Here $\text{MHA}_{\text{imp},i}^{(t)}$ and $\text{FFN}_{\text{imp},i}^{(t)}$ are the *current* Greedy Sequential Importance (GSI) scores recomputed after each removal (see Alg. 1); $\text{Sys}_{\text{avail}}^{(t)}$ is the available GPU memory observed at time t ; and $\widehat{\text{Sys}}_{\text{req}}^{(t)}$ is the agent’s estimate of the peak memory after applying the candidate action.

Action. We adopt *sequential single-block* decisions compatible with DQN:

$$\mathcal{A} = \{0, 1, 2, \dots, 2N\}.$$

Action $a_t = 0$ denotes STOP; $a_t \in \{1, \dots, 2N\}$ removes the corresponding block (one of the N MHA or N FFN blocks). An *action mask* invalidates pruned blocks and can optionally disable actions predicted to break correctness constraints. The episode terminates when either: (i) STOP is taken, or (ii) the peak memory fits the budget.

Transition. Given (s_t, a_t) , the environment deterministically updates the pruned architecture $\mathcal{M}_t \mapsto \mathcal{M}_{t+1}$ by excising the selected block if $a_t > 0$, then re-evaluates the GSI scores on the contracted model to produce s_{t+1} . Runtime memory availability $\text{Sys}_{\text{avail}}^{(t+1)}$ can be treated as exogenous.

Discount. We set $\gamma = 0.99$.

A.2. Memory Model (Peak GPU Footprint)

Consistent with the main text, the peak inference memory comprises *static parameters* and *dynamic KV cache*. Let b_{prec} be bytes per scalar (e.g., 2 for bfloat16). For a model state $\mathcal{M}$ (after some blocks are removed) and a request tuple $(R_{\text{bs}}, R_{\text{sql}})$, we estimate

$$\text{Mem}_{\text{param}}(\mathcal{M}) = b_{\text{prec}} \sum_{B \in \mathcal{B}(\mathcal{M})} \#\text{params}(B), \quad (3)$$

$$\text{Mem}_{\text{KV}}(\mathcal{M}, R_{\text{bs}}, R_{\text{sql}}) = b_{\text{prec}} \cdot 2 \sum_{\ell \in \mathcal{L}(\mathcal{M})} n_{\text{heads},\ell} d_{\text{head},\ell} R_{\text{bs}} R_{\text{sql}}, \quad (4)$$

where $\mathcal{B}(\mathcal{M})$ and $\mathcal{L}(\mathcal{M})$ denote remaining blocks and layers, respectively; the factor 2 stores keys and values. The peak is

$$\text{Mem}_{\text{peak}}(\mathcal{M}, R_{\text{bs}}, R_{\text{sql}}) = \text{Mem}_{\text{param}}(\mathcal{M}) + \text{Mem}_{\text{KV}}(\mathcal{M}, R_{\text{bs}}, R_{\text{sql}}).$$

This matches the linear KV-cache scaling with batch and sequence length emphasized in the main paper.

A.3. DQN-based Policy Learning with Action Masking

Let $Q_\theta(s, a)$ be the action-value function and $Q_{\bar{\theta}}$ its target copy. We adopt masked ε -greedy:

$$\pi(a|s) = \begin{cases} \text{uniform over valid actions} & \text{with prob. } \varepsilon, \\ \arg \max_{a \in \mathcal{A}_{\text{valid}}(s)} Q_\theta(s, a) & \text{with prob. } 1 - \varepsilon, \end{cases}$$

where $\mathcal{A}_{\text{valid}}(s)$ removes already-pruned blocks and can optionally include feasibility heuristics. With transitions $(s_t, a_t, r_t, s_{t+1}, \text{done})$ stored in replay buffer $\mathcal{D}$, we minimize

$$\mathcal{L}(\theta) = \mathbb{E}_{(s,a,r,s',d) \sim \mathcal{D}} \left[(Q_{\theta}(s, a) - y)^2 \right], \quad y = r + \gamma(1 - d) \max_{a' \in \mathcal{A}_{\text{valid}}(s')} Q_{\bar{\theta}}(s', a').$$

We soft-update the target network periodically: $\bar{\theta} \leftarrow \tau\theta + (1 - \tau)\bar{\theta}$.

B. Datasets and Baselines

B.1. Commonsense Reasoning

The details of the benchmarks are as follows:

- BoolQ (Clark et al., 2019): yes/no questions which are naturally occurring and generated in unprompted and unconstrained settings. There are 3270 questions in the test set.
- PIQA (Bisk et al., 2020): questions with two solutions requiring physical commonsense. There are 1830 questions in the test set.
- HellaSwag (Zellers et al., 2019): commonsense NLI questions including a context and several endings which complete the context. There are 10042 questions in the test set.
- WinoGrande (Sakaguchi et al., 2019): fill-in-a-blank task with binary options to choose the right option for a given sentence which requires commonsense reasoning. There are 1267 questions in the test set.
- ARC-easy (Clark et al., 2018) & ARC-challenge (Clark et al., 2018): the Challenge Set and Easy Set of ARC dataset of genuine grade-school level, containing 2376/1172 multiple-choice science questions in the test set, respectively.
- OpenbookQA (Mihaylov et al., 2018): questions requiring multi-step reasoning, use of additional commonsense knowledge, and rich text comprehension. There are 500 questions in the test set.

B.2. Baselines

- *LLMPruner* (Ma et al., 2023a), which adopts structural pruning that selectively removes non-critical coupled structures based on weights and gradient information, maximally preserving the majority of the LLM’s functionality. LLMPruner applies post training to the pruned model, but for fair comparison, we do not apply post training to it. However, LLMPruner requires extra overhead for pruning its gradient-base pruning policy.
- *SliceGPT* (Ashkboos et al., 2024), which is a post-training sparsification scheme that replaces each weight matrix with a smaller matrix, reducing the embedding dimension of the network. Specifically, they applied PCA to the hidden representation from shallow to deep layers, and incorporated the dimension reduction matrix into existing network parameters.
- *DISP-LLM* (Gao et al., 2024), which introduces a dimension-independent structural pruning scheme that breaks inter-layer width coupling. This post-training method uses gradient-based optimization via a learned hyper-network to determine which neurons to remove in each layer, enabling flexible layer-specific width reduction without additional fine-tuning.
- *ShortGPT* (Men et al., 2024) reveals significant redundancy among LLMs by proposing a layer-pruning method that removes redundant layers with minimal performance degradation
- *MHA-Drop* (He et al., 2024), which prunes entire multi-head self-attention layers of Transformer blocks to accelerate inference. By removing a fraction of the attention layers based on cosine similarity-based importance, this approach achieves notable speedups with minor impact on the model performance.
- *FFN-Skip* (Jaiswal et al., 2024), which applies inference-time skipping strategy that omits selected feed-forward network layers to reduce computation. It leverages an input-adaptive criterion to dynamically skip FFN blocks during decoding, yielding faster generation with negligible degradation in output quality.

Table 3. Zero-shot performance of pruned versus dense model under different memory budgets. ¹ 100% memory budget indicates exceeding peak inference memory usage (parameters + KV cache).

Budget	Schemes	Perplexity ↓		Commonsense Task (%) ↑							
		WikiText2	PTB	BoolQ	PIQA	WinoG.	HellaS.	ARC-e	ARC-c	OBQA	Avg.
Qwen1.5-7B											
100% ¹	Dense	7.95	11.93	82.45	79.05	66.14	76.90	62.25	42.83	41.60	64.46
80%	ShortGPT (Men et al., 2024)	16.88	24.88	43.98	72.69	58.41	59.11	54.50	33.70	32.20	50.66
	MHA-Drop (He et al., 2024)	14.26	22.73	59.91	75.90	58.96	67.61	61.73	41.89	37.20	57.59
	FFN-Skip (Jaiswal et al., 2024)	94.77	123.12	45.26	59.19	51.30	36.67	36.41	22.70	28.00	39.93
	RAP	18.88	30.88	64.50	73.39	56.51	59.98	56.26	36.09	38.60	55.05
60%	ShortGPT	445.24	701.1	54.55	56.08	51.07	32.49	32.37	24.23	28.40	39.89
	MHA-Drop	628.12	676.62	45.87	54.45	51.45	33.16	33.08	25.67	29.59	39.05
	FFN-Skip	1889780.25	2455505.75	46.7	51.69	49.64	26.41	25.21	25.85	28.79	36.33
	RAP	54.48	68.33	54.76	61.70	51.07	39.72	44.28	24.32	29.59	43.64
Qwen2.5-7B											
100%	Dense	6.85	11.36	84.61	79.71	73.00	78.95	77.40	51.01	47.40	70.30
80%	ShortGPT	523.53	2154.89	72.20	66.59	56.35	48.50	61.99	40.27	36.40	54.62
	MHA-Drop	115.11	184.05	42.75	71.38	57.46	55.60	52.90	39.25	40.40	51.39
	FFN-Skip	141.24	175.33	48.69	61.26	53.51	42.08	45.16	31.14	30.00	44.55
	RAP	13.56	20.33	70.46	72.74	60.62	63.93	57.87	37.29	35.19	56.87
60%	ShortGPT	3460.52	4107.47	38.59	54.03	52.80	27.61	26.56	23.63	25.40	35.52
	MHA-Drop	9099.49	16067.49	48.47	54.30	50.99	28.23	29.67	27.38	32.20	38.75
	FFN-Skip	1628213.25	1434617.50	45.78	52.12	48.93	26.83	24.54	27.3	27.6	36.16
	RAP	306.13	423.79	47.80	57.99	51.07	33.64	34.33	26.54	30.80	40.31

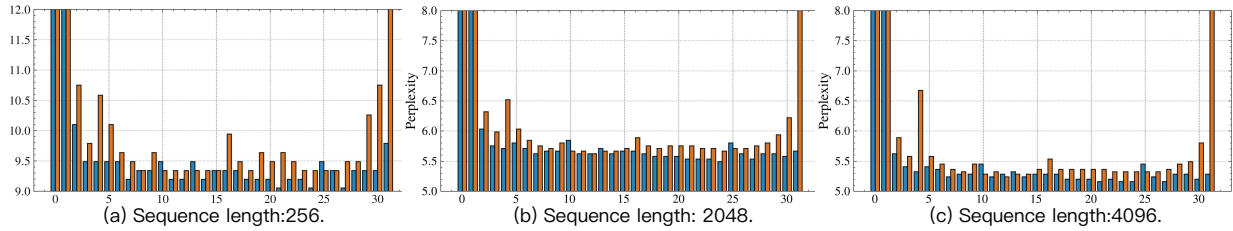


Figure 11. Block sensitivity analysis: removing specific MHA and FFN under diff. sequence length

C. More Results

Table 3 shows additional results on Qwen-1.5-7B and Qwen-2.5-7B, which confirms the proposed *RAP* is architecture-agnostic: it preserves competitive perplexity and downstream accuracy across two distinct generations of the Qwen series, implying that the same pruning strategy can be ported to other modern transformer backbones with minimal modification.

Schemes	Llama2-7B 80%	Llama2-7B 60%	Llama3-8B 80%	Llama3-8B 60%
LLMPuner	35%	45%	35%	45%
SliceGPT	40%	65%	40%	65%
ShortGPT	~37%	~75%	~31%	~75%
MHA-Drop	~26%	~32%	~12%	~15%
FFN-Skip	~52%	~64%	~65%	~81%
RAP	~24%	~30%	~31%	~42%

Table 4. The pruning ratio of model weight within the memory budget for different heuristics schemes.

D. Additional Efficiency Analysis

In this section, we provide a detailed analysis of the computational cost associated with the Greedy Sequential Importance (GSI) metric and compare the end-to-end latency and throughput of our method against baselines on edge devices.

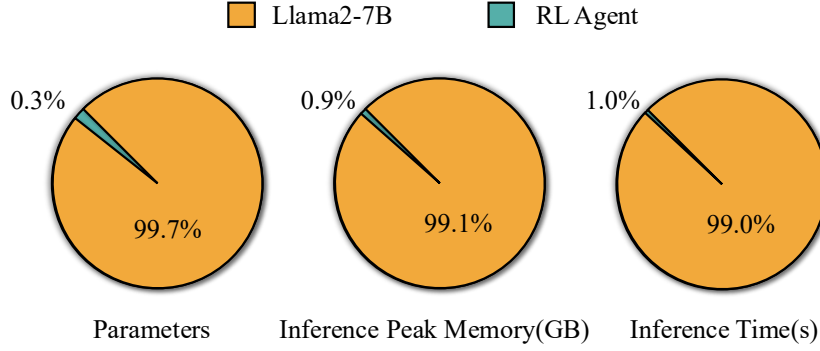


Figure 12. Overhead analysis comparing the RL agent and Llama2-7B in terms of parameter, peak memory usage, and inference latency, illustrating the negligible cost of deploying the RL controller.

D.1. Computational Cost of GSI

For Llama2-7B with 64 blocks, GSI requires evaluating perplexity after each block removal. In our implementation, GSI computes block importance once per model on a large calibration corpus (Alpaca). This process incurs a one-time cost. For instance, calculating GSI scores for Llama2-7B takes approximately 4 hours on a single Nvidia A40 GPU. Crucially, these scores are stored and reused for all subsequent inferences, amortizing the cost to zero during deployment. Users can also opt for a simpler corpus to further reduce this computational overhead. The GSI calculation times for various models are summarized in Table 5.

Table 5. Computational cost of GSI on a single Nvidia A40 GPU.

MODEL	TOTAL BLOCKS	GSI TIME (H)
LLAMA2-7B	64	4.0
LLAMA3-8B	64	3.9
QWEN1.5-7B	64	4.5
QWEN2.5-7B	56	3.5

D.2. End-to-End Latency and Throughput Comparison

Our proposed method is primarily tailored for resource-constrained edge devices rather than high-performance server environments. On such edge platforms, the strict memory limit often serves as the hard constraint that dictates feasibility, whereas servers prioritize aggregate throughput.

To demonstrate practical efficiency, we conducted additional experiments to evaluate the end-to-end latency and throughput on a representative edge device. The results, presented in Table 6, demonstrate that our approach achieves lower latency and higher throughput compared to baselines (Dense model, LLM-Pruner (Ma et al., 2023b), and SliceGPT (Ling et al., 2024)) by effectively reducing memory consumption and computational overhead.

Table 6. End-to-end latency and throughput comparison on an edge device.

METHOD	LATENCY (S)	THROUGHPUT (TOKEN/S)
DENSE	52.40	39.08
LLM-PRUNER	83.47	24.53
SLICEGPT	64.64	31.68
RAP (OURS)	43.36	47.23

E. Limitation

Despite its promising results, *RAP* still faces several important limitations. First, the Greedy Sequential Importance procedure relies on repeated perplexity measurements over an external corpus (Alpaca), which may become computationally prohibitive for models with tens-of-billions of parameters or for domains lacking a representative calibration set, thereby limiting scalability. Secondly, while the online controller adds negligible inference latency, the offline reinforcement-learning stage still demands several hundred seconds of GPU time and shows sensitivity to the reward coefficients α, β , suggesting non-trivial tuning effort for new hardware or workload profiles. Thirdly, the current state representation tracks only batch size, sequence length and instantaneous memory, omitting latency, energy and heterogeneous device characteristics; as a result, the learned policy may yield sub-optimal trade-offs when such factors dominate deployment objectives. Finally, we note that addressing the challenges of long-context inference, which leads to substantial growth in the KV cache and is often infeasible on resource-constrained devices, is beyond the scope of this paper. Nevertheless, we believe our method’s demonstrated efficiency in compressing the KV cache provides a promising foundation for future community efforts in long-context inference compression.

F. The Use of Large Language Models

We used LLMs solely as a writing-assistance tool to polish our paper (grammar, wording, concision, and minor $\text{\LaTeX}$ formatting). The LLM did not contribute to research ideation, problem formulation, method design, experiments, data analysis, results, or conclusions, and it was not used to generate citations or technical content. All suggestions were reviewed and, when adopted, edited by the authors, who take full responsibility for the paper’s content; no proprietary data beyond the manuscript text was shared with the tool.