

Revisiting the Effectiveness of LLM Pruning for Test-Time Scaling

Ocean Monjur, Shahriar Kabir Nahin, Anshuman Chhabra

Bellini College of AI, Cybersecurity, and Computing

University of South Florida

Tampa, FL, USA

{omonjur, shahriarkabir, anshumanc}@usf.edu

Abstract

Large Language Models (LLMs) now exhibit remarkable reasoning capabilities through test-time compute scaling (TTS), with impressive performance across math and coding benchmarks. In parallel, research in model compression has developed *pruning methods* that seek to remove redundant/detrimental parameters without sacrificing task performance. The intersection of these two research advancements lays the foundation for our work. Specific to reasoning LLMs, prior work has shown that *structured pruning* (methods which remove entire set of layer blocks), significantly degrades TTS reasoning performance. However, in this work, we revisit this assumption and investigate whether *unstructured pruning* (methods that carefully remove only certain redundant/detrimental weights) exhibits similar limitations. Surprisingly, our extensive experiments across four reasoning benchmarks on two reasoning LLMs: s1.1-7B and Qwen3-8B, consistently show that unstructured pruning augments TTS performance compared to structured pruning, and at times can even outperform the unpruned full-weight LLMs. Furthermore, we also empirically study the impact of different layer-wise sparsity allocation strategies, which are an important parametric choice for instantiating these unstructured methods. These findings challenge the conventional notion that pruning always reduces TTS performance and in fact, suggest that carefully undertaken pruning can retain TTS effectiveness.

1 Introduction

The advent of Large Language Models (LLMs) (Brown et al., 2020) has fundamentally impacted various sectors of society, such as software engineering (Khali et al., 2025), education (Wang et al., 2026), and healthcare (Lin and Kuo, 2025), among others. Moreover, LLMs attain improvements in capabilities as a function of scale (in terms of both data and parameter size) (Kaplan et al., 2020),

thus necessitating ever-increasing computational resource requirements for model storage, training, and inference (Bai et al., 2024).

Motivated by these large model sizes, the research community has also proposed several approaches for pruning large neural networks such as LLMs (LeCun et al., 1989; Hassibi et al., 1993; Sun et al., 2024; Lu et al., 2024). In essence, state-of-the-art LLM pruning methods seek to eliminate redundant or less influential model parameters, with minimal to little impact on performance (Askari et al., 2025). Furthermore, LLM pruning can generally be categorized into two types: *structured pruning* (Men et al., 2025), which removes entire model layer blocks, and *unstructured pruning* (Sun et al., 2024), which removes individual weights inside layer blocks while following predefined sparsity rates per layer.

In complementary work aimed at further improving LLM performance, recent work has found that allocating additional computation during inference significantly increases downstream task performance on a myriad of complex reasoning tasks (e.g., math and coding problems) (Muennighoff et al., 2025). This inference paradigm, commonly referred to as test-time scaling (TTS), increases model performance by allowing it to generate additional tokens sequentially and decompose problems into reasoning traces (Wei et al., 2022).

Our work is primarily concerned with the *intersection* of both these adjacent but complementary research directions (i.e., LLM pruning and TTS). In particular, recent work (Wang et al., 2025) has explored the effect of *structured* LLM pruning in TTS and has found that while pruned models retain performance in short or shallow reasoning tasks, significant performance degradation is observed in tasks that require longer reasoning chains. Their findings suggest that structured LLM pruning significantly impairs the model’s ability to handle long and complex multi-step reasoning tasks.

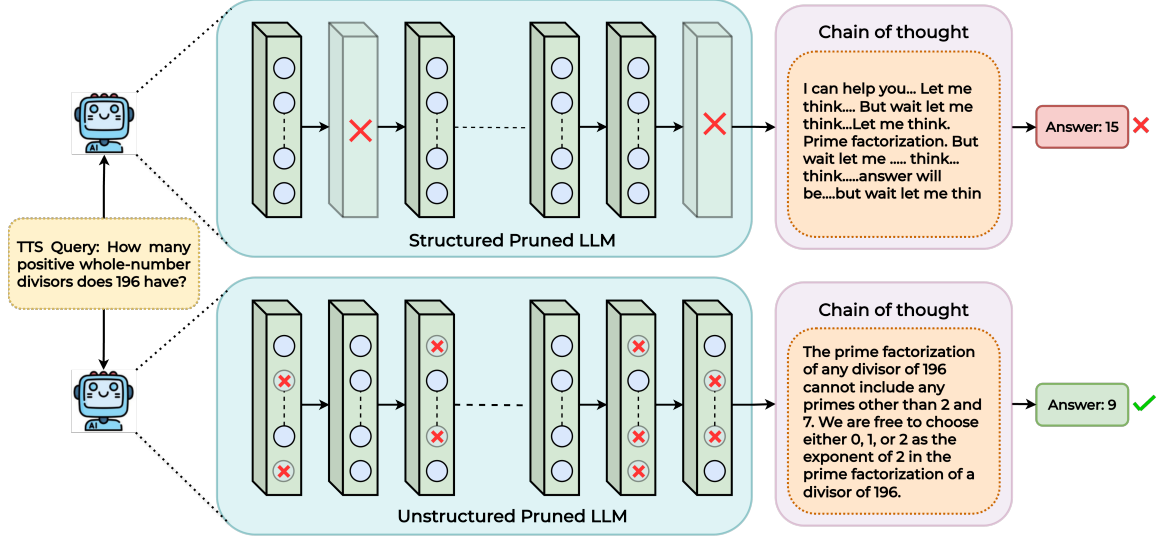


Figure 1: Overview of *structured* and *unstructured* pruning for LLMs and their impact on test-time scaling (TTS) reasoning performance. As identified in prior work, removing entire layer blocks via *structured* pruning makes LLMs more susceptible to producing incoherent chains of thought, ultimately resulting in incorrect answers. However, as our findings show, this is not the case for *unstructured* pruning, where TTS performance can be augmented significantly via targeted weight removal.

We move beyond the structured pruning case and demonstrate that while structured pruning degrades performance for TTS, this trend does not hold for recently proposed *unstructured* LLM pruning methods, such as Magnitude (Han et al., 2015) and Wanda (Sun et al., 2024) pruning. Interestingly, we find that unstructured pruning strategies can match *unpruned* LLMs’ performance in most cases, and at times, even exceed their performance on some benchmarks, thus demonstrating their potential in augmenting LLMs’ reasoning performance despite possessing fewer parameters. Through our work, we seek to galvanize future research that can fully disentangle the role of unstructured pruning for performance improvements in next-generation LLMs.

In sum, we make the following contributions:

- Through extensive experiments on the MATH500 (Hendrycks et al., 2021; Lightman et al., 2024), AIME24 (Mathematical Association of America, 2024), AMC23 (Liao et al., 2025), and GPQA-Diamond (Rein et al., 2024) datasets using the s1.1-7B (Muenighoff et al., 2025) and Qwen3-8B (Yang et al., 2025a) LLMs we show that, contrary to prior assumptions, not all pruning methods result in detrimental TTS performance.
- Our findings confirm that although Wang et al. (2025) correctly identified that structured pruning degrades TTS performance, their findings do not hold for *unstructured pruning* strategies, which at times can even exceed the

performance of unpruned models.

- We empirically investigate different layer-wise sparsity allocation strategies in unstructured pruning to assess their impact on TTS performance and derive novel insights with regards to their usefulness.

2 Related Works

LLM Pruning. Neural network pruning serves as a means for reducing model complexity while preserving predictive performance (LeCun et al., 1989; Hassibi et al., 1993). These approaches have also shown significant promise in LLMs. Unstructured pruning approaches, including classical magnitude-based (Han et al., 2015) pruning as well as recent methods such as Wanda (Sun et al., 2024), and SparseGPT (Frantar and Alistarh, 2023), operate by selectively masking individual weights based on some predefined criteria. Magnitude pruning prunes weights that have the lowest weight magnitude, while Wanda masks based on the input activations multiplied by the weight magnitudes. SparseGPT, an optimization-based method, prunes sequentially by minimizing the layer-wise output reconstruction error. Structured pruning methods such as ShortGPT (Men et al., 2025), LLM-Pruner (Ma et al., 2023), and SliceGPT (Ashkboos et al., 2024) work by removing entire layers based on some measures of importance.

Test-Time Scaling. Utilizing additional compute

in LLMs during inference via the generation of *thinking tokens*, has shown to yield significant performance improvements on tasks requiring complex reasoning (Wei et al., 2022; Muennighoff et al., 2025; Chen et al., 2025; Team et al., 2025). Several such TTS strategies have been proposed. Search/verification approaches explore multiple candidate solutions through search (Cobbe et al., 2021; Lightman et al., 2023; Coulom, 2006; Gao et al., 2024), ensembling strategies such as PackLLM (Mavromatis et al., 2024) use perplexity-based weighting for test-time model fusion, iterative refinement methods such as Self-Refine (Madaan et al., 2023) undertake continuous revision, and temperature-based methods (Xie et al., 2024) adjust token generation at inference, among others. In the context of LLM pruning and TTS, (Wang et al., 2025) study only structured pruning methods (e.g. ShortGPT (Men et al., 2025)) and find that they deteriorate TTS performance. In this work, we extend this analysis to unstructured pruning and explore how different parametric choices impact downstream TTS capabilities.

3 Preliminaries and Background

In this section, we introduce preliminaries and provide background on LLM pruning methods and TTS strategies.

3.1 Test-Time Scaling (TTS)

TTS enhances model performance by allocating additional compute at test-time, essentially increasing the number of generated tokens at the output to reason more about the input query. Let $x \in X$ be an input, and let $C_1 < C_2 < C_3 \dots < C_k$ denote a sequence of token limits. A model M under gradual increase in token limits C_j produces an output: $y^{C_j} = M(x; C_j)$ where y^{C_j} is the sequence generated by model M up to C_j tokens. Such a scaling of test-time compute has been shown to result in improved performance on complex reasoning tasks.

3.2 Large Language Model Pruning

Model pruning works by reducing or removing redundant or less influential parameters from a model while attempting to maintain its original performance. For LLMs, pruning can be categorized as: *Structured Pruning* and *Unstructured Pruning*.

3.2.1 Structured Pruning

Structured pruning removes entire layers of an LLM, resulting in a reduced network with a smaller

architecture. Let $L \subseteq \{1, \dots, N\}$ be the set of retained layer indices, selected by some criterion ϕ and some threshold τ :

$$L = \{l : \phi(W^{(l)}) \geq \tau\} \quad (1)$$

Then the structured pruned model $\tilde{M}_{struct}$ is $\tilde{M}_{struct} = \tilde{W}^{(l)}$ where $\tilde{W}^{(l)} = \{W^{(l)}\}_{l \in L}$.

ShortGPT (Men et al., 2025): is a structured pruning approach which removes layers according to *Block Influence* (BI) scores where layers with the smallest BI scores are removed, and the BI score of layer i is defined as:

$$BI_i = 1 - \mathbb{E}_{X,t} \frac{X_{i,t}^T X_{i+1,t}}{\|X_{i,t}\|_2 \|X_{i+1,t}\|_2}$$

where $X_{i,t}$ is the t^{th} row of hidden states of the i^{th} layer. Therefore, in Equation (1), the BI_i scores act as ϕ and the number of layers to remove is τ .

3.2.2 Unstructured Pruning

Unstructured pruning masks individual weights independently of the network’s architecture, resulting in a sparse model that retains the original structure. Let $S^{(l)} \in \{0, 1\}$ be a binary mask applied to the weight matrix $W^{(l)}$ of layer l which can be defined as $\tilde{W}^{(l)} = S^{(l)} \odot W^{(l)}$. Here the mask is defined by some threshold τ and ϕ as pruning criterion:

$$S_{ij}^{(l)} = \begin{cases} 1 & \text{if } \phi(W_{ij}^{(l)}) \geq \tau \\ 0 & \text{otherwise} \end{cases} \quad (2)$$

Then the unstructured pruned model $\tilde{M}_{unstruct}$ is, $\tilde{M}_{unstruct} = \tilde{W}^{(l)}$.

Magnitude Pruning (Han et al., 2015): is an unstructured pruning approach in which a specified fraction of the weights with the smallest magnitudes are masked out. Formally, given a desired sparsity level s , the bottom $s\%$ of the weights (by absolute value) are masked, producing a sparse model while preserving the original structure of the network. Clearly in Equation (2) the criterion ϕ can simply be defined as: $\phi_{mag} = |W|$.

Wanda (Sun et al., 2024): is an improvement upon magnitude pruning, where the pruning criterion is defined as the elementwise product of the weight magnitudes W and the norms of the input activations $\|X\|_2$. From Equation (2) the criterion ϕ for Wanda is defined as, $\phi_{wan} = |W| \odot \|X\|_2$.

Note on Sparsity Allocation Strategies. While the default strategy when utilizing the aforementioned unstructured pruning methods is to prune

all layers *uniformly*, several layer-specific sparsity allocation methods have also been proposed that prune different layers at different rates (totaling the overall pruning ratio) for improved performance. To this end, alongside uniform pruning, in this work we will experiment with two popular and recently proposed sparsity allocation methods: **Outlier Weighted Layerwise Sparsity (OWL)** (Yin et al., 2024) and **LayerIF** (Askari et al., 2025) to assess the impact on downstream TTS performance.

4 Proposed Research Questions

We now define the two fundamental research questions (RQs) we aim to study in our work.

- **(RQ1)** Does *unstructured pruning* hinder the effectiveness of TTS in LLMs, similar to structured pruning (as shown in recent work by Wang et al. (2025))? If not, can unstructured pruning preserve or further improve TTS performance?
- **(RQ2)** For unstructured pruning, which *layer sparsity allocation* strategies (uniform pruning across layers, influence-based allocation methods such as LayerIF (Askari et al., 2025), and outlier methods such as OWL (Yin et al., 2024)) lead to improved TTS performance?

These research questions establish the scope and objectives of our work, and inform the methodology and experimental evaluations in the subsequent sections.

5 Experiments and Results

Datasets. To empirically evaluate our RQs, we conducted experiments on four widely used reasoning benchmarks that span advanced mathematical and scientific domains: MATH500 (Hendrycks et al., 2021; Lightman et al., 2024), AIME24 (Mathematical Association of America, 2024), AMC23 (Liao et al., 2025), and GPQA-Diamond (Rein et al., 2024). These benchmarks contain challenging reasoning tasks that require multi-step inference, making them ideal candidates for studying the impact of pruning under TTS.

LLMs. To study the effect of pruning under TTS, we conduct experiments using open-source models with strong reasoning capabilities, such as s1.1-7B (Muennighoff et al., 2025) and Qwen3-8B (Yang et al., 2025a). The s1.1-7B model is trained on the high-quality s1k (Muennighoff et al., 2025) reasoning dataset, which introduces budget forcing during inference for improved TTS. Qwen3-8B

LLM is also a reasoning LLM with state-of-the-art multi-step reasoning capabilities. Both models have previously been used to compare structured pruning against the base unpruned model in TTS (Wang et al., 2025), which makes them well-suited for our analysis as well. Moreover, owing to space constraints, we also provide additional results for Llama-3.1-8B in Appendix G.

Methodology and Protocol. Our experiments follow a similar methodology to Wang et al. (2025). In our experiments, we evaluate each of the model configurations (unpruned, different structured and unstructured pruning methods) under sequential TTS at five different thinking token limits: 512, 1024, 2048, 4096, 8192. All results are obtained over 3 runs with random seeds. Furthermore, we conduct experiments on standard sparsity ratios (10% and 20%) for unstructured pruning approaches (Wanda and Magnitude) as per prior work (Zhang et al., 2024; Zhu et al., 2026). Note that for structured pruning (e.g. ShortGPT) parameters are pruned as entire layer blocks, so vary from 2.7%-7% in terms of total parameter counts.¹ Subsequently, we will investigate different sparsity allocation strategies such as Uniform, OWL, and LayerIF and their impact on TTS.

As prescribed in Yin et al. (2024), for OWL, we set $M = 7$, where M is defined as the value that determines the cutoff point for identifying outlier weights. For LayerIF (Askari et al., 2025), we allocate sparsity to both attention and MLP layers. Moreover, for computational efficiency, we assume the Hessian to be the identity matrix as in prior work on influence analysis (Pruthi et al., 2020; Chhabra et al., 2025; Vitel and Chhabra, 2026). Due to space constraints, we provide additional implementation details in Appendix A.

5.1 (RQ1) Impact of Unstructured Pruning on TTS Performance

Figure 2 presents a comparison of structured and unstructured pruning approaches for TTS, highlighting their relative impact on performance. The results for structured pruning (ShortGPT) are largely similar to those obtained by (Wang et al., 2025), showing substantial performance degradation across all four datasets for both

¹While these structured pruning rates of 2.7% (1 layer) and 5.7% (2 layers) for Qwen3-8B, and 3.5% (1 layer) and 7% (2 layers) for s1.1-7B, are non-standard for unstructured pruning, we also provide results for these pruning rates in Appendix F and obtain similar trends as our main experiments.

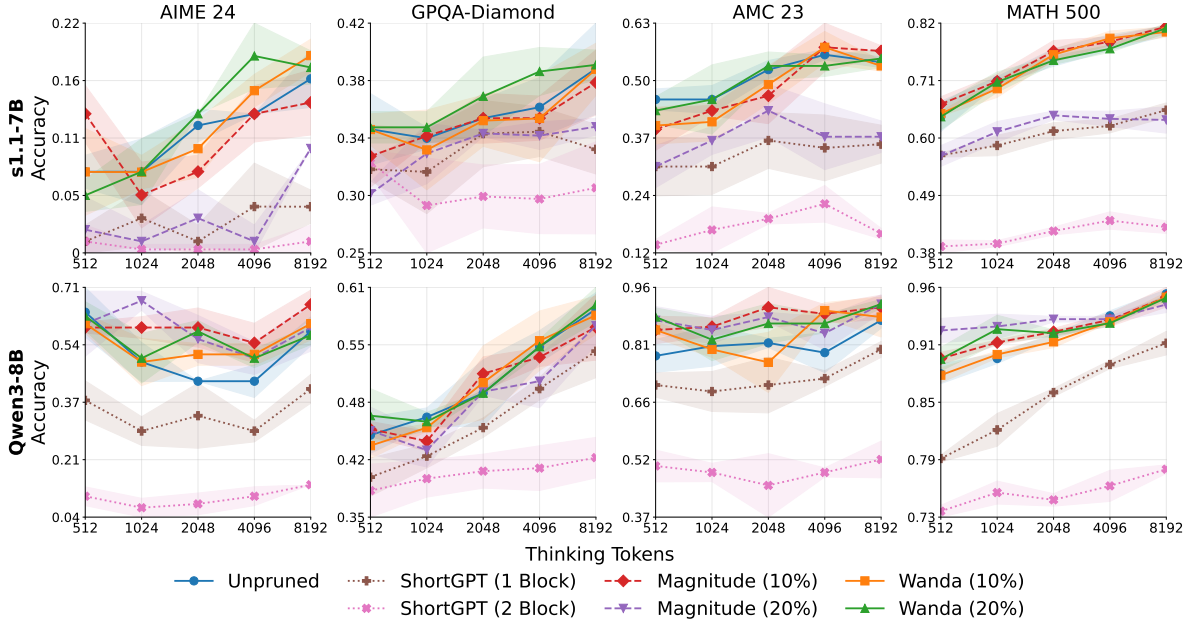


Figure 2: Comparing *structured* (*ShortGPT*) and *unstructured* (*Magnitude*, *Wanda*) pruning methods on four long-chain reasoning datasets. Unstructured pruning is employed *uniformly* at both 10% and 20% sparsity rates, while structured pruning removes 1 and 2 layer blocks. It is evident that unstructured pruning retains or surpasses unpruned LLM performance, whereas structured pruning leads to substantial degradation.

reasoning models compared to the unpruned LLM baselines. The results obtained for unstructured pruning approaches (*Wanda* and *Magnitude*) however are substantially different. Not only do these methods outperform their structured pruning counterparts, they also consistently match or even exceed the performance of the unpruned models across all datasets and reasoning models.

Focusing on the s1.1-7B model, we observe that unstructured pruning using *Wanda*-20% yields substantially better performance across most thinking-token budgets compared to the unpruned variant on AIME24 and GPQA-Diamond. For AMC 23 and Math500, *Wanda*-20%, *Wanda*-10%, and *Magnitude*-10% closely align or slightly outperform the unpruned baseline.

The Qwen3-8B model generally achieves substantially higher performance than s1.1-7B on the selected reasoning datasets, making comparisons across pruning strategies more robust. For Qwen3-8B, we can observe that the unstructured pruning approaches: *Wanda*-20%, *Magnitude*-10%, and *Magnitude*-20%, show significant improvements over the base unpruned model on AIME24 and AMC 23, while results on GPQA-Diamond and MATH500 show equivalent or slightly increased performance. While *Magnitude*-20% showed weaker performance compared to other unstructured pruning approaches on the other reasoning

model s1.1-7B, for Qwen3-8B, its results are comparable with other unstructured pruning methods.

Across both models, we observe a consistent trend in which unstructured pruning methods surpass the unpruned baseline, with performance gains of upto $\approx 10\%$ for certain token budgets (1024, 2048, and 4096) in Qwen3-8B. This suggests that these methods effectively identify and remove weights detrimental to TTS while preserving those that are beneficial for the same. For GPQA-Diamond, we observe the same pattern: unstructured pruning consistently surpasses the unpruned baseline with *Wanda*-20% attaining the best performance for s1.1-7B. A similar trend of unstructured approaches matching or exceeding unpruned models holds for AMC23. We observe that the performance of unstructured pruned models matches that of the unpruned baseline for s1.1-7B, while for Qwen3-8B, they consistently exceed it. The results for MATH500 across both models show that the unstructured approaches closely match the unpruned models. We attribute this behavior to the initial superlative performance of the unpruned model, which leaves little scope for additional improvements. But this result on MATH500 demonstrates that degradation is almost nonexistent, making unstructured pruning an exceptionally strong approach for improving/preserving TTS capabilities.

Remarks on RQ1 Findings. Experiments across

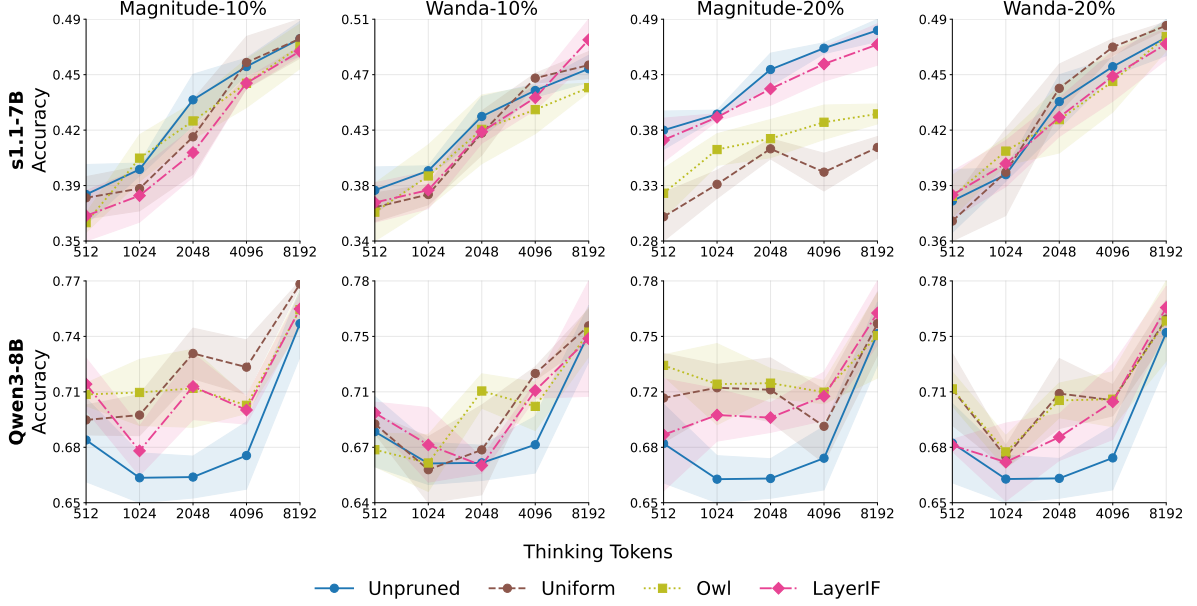


Figure 3: Comparing different *layer-wise sparsity allocation* strategies (*Uniform*, *OWL*, and *LayerIF*) with global sparsity rates of 10% and 20%. Performance is averaged across AIME24, GPQA-Diamond, AMC23, and MATH500 benchmarks while varying thinking tokens from 512 to 8192.

all four reasoning datasets and both LLMs demonstrate a consistent conclusion: *unstructured pruning* not only outperforms *structured pruning*, but also retains or, on most occasions, outperforms the performance of the unpruned LLMs. These findings provide greater clarity and, in essence, disagree with the conclusions of Wang et al. (2025), who argue that pruning, particularly in the context of TTS, generally leads to performance degradation. While our results confirm their observation that *structured pruning* is detrimental for test-time scaling, clearly this conclusion does not generalize to all pruning methods, especially those that are *unstructured* in nature.

5.2 (RQ2) Effect of Layer Sparsity Allocation Strategies on TTS Performance

As opposed to uniformly allocating sparsity across layers for the two unstructured pruning strategies, we now explore how state-of-the-art layer-wise sparsity allocation strategies affect the TTS performance of our chosen LLMs. We compare Uniform (i.e. uniform allocation), OWL (Yin et al., 2024), and LayerIF (Askari et al., 2025) using a global sparsity of 10% and 20% for both unstructured pruning strategies: Magnitude and Wanda. Figure 3 demonstrates TTS performance accuracy of each sparsity allocation strategy, averaged across all four datasets (AIME 24, GPQA-Diamond, AMC 23, and MATH500). Overall, the trends are similar to those observed

in RQ1, and hold across all sparsity allocation strategies. It can be observed that several models pruned using unstructured pruning generally end up outperforming their unpruned counterparts.

For s1.1-7B, applying Magnitude-20% pruning uniformly results in a significant decline in performance relative to the unpruned LLM. In contrast, OWL and LayerIF significantly mitigate this degradation in performance, with LayerIF in particular attaining performance similar to that of the unpruned model. When the pruning ratio is 10%, we observe that pruning yields better or similar results compared to the unpruned model. For Wanda on s1.1-7B, we can observe that all three sparsity allocation baselines achieve similar performance to the unpruned model with Uniform allocation surpassing all other allocation strategies including the unpruned model.

Similarly, in the case of Qwen3-8B, all three sparsity allocation strategies outperform the base unpruned model. Interestingly, uniform allocation shows competitive performance when compared with OWL and LayerIF, often matching or slightly exceeding the unpruned LLM across several token budgets. However, OWL allocation achieves better average accuracy across both Wanda and Magnitude pruning methods, and across various thinking token budgets. LayerIF, in general, is not as competitive as OWL for Qwen3-8B but achieves better performance at higher thinking token counts.

In Table 1, we provide a more fine-grained

Table 1: Results for the s1.1-7B and Qwen3-8B LLMs obtained across layer-wise sparsity allocation strategies and unstructured pruning approaches with a total/global sparsity rate of 20%, and maximum thinking tokens = 8192. Top performing configuration for each LLM and dataset in bold.

Model	Allocation	Pruning	AIME24	GPQA-Diamond	AMC23	MATH500
s1.1-7B	Uniform	Magnitude	0.1000 $\pm$ 0.0000	0.3468 $\pm$ 0.0063	0.3750 $\pm$ 0.0354	0.6360 $\pm$ 0.0251
		Wanda	0.1775 $\pm$ 0.0159	0.3933$\pm$0.0111	0.5500 $\pm$ 0.0204	0.8107$\pm$0.0094
	OWL	Magnitude	0.0778 $\pm$ 0.0157	0.3468 $\pm$ 0.0133	0.4750 $\pm$ 0.0204	0.6860 $\pm$ 0.0128
		Wanda	0.1889$\pm$0.0157	0.3956 $\pm$ 0.0119	0.5250 $\pm$ 0.0354	0.7967 $\pm$ 0.0009
	LayerIF	Magnitude	0.1556 $\pm$ 0.0416	0.3687 $\pm$ 0.0311	0.5250 $\pm$ 0.0204	0.8007 $\pm$ 0.0131
		Wanda	0.1333 $\pm$ 0.0000	0.3956 $\pm$ 0.0086	0.5583$\pm$0.0312	0.8013 $\pm$ 0.0050
Qwen3-8B	Uniform	Magnitude	0.5889 $\pm$ 0.0685	0.5690 $\pm$ 0.0212	0.9167$\pm$0.0236	0.9467 $\pm$ 0.0081
		Wanda	0.5667 $\pm$ 0.0272	0.5926$\pm$0.0195	0.9167$\pm$0.0118	0.9533 $\pm$ 0.0025
	OWL	Magnitude	0.6000 $\pm$ 0.0816	0.5556 $\pm$ 0.0297	0.8917 $\pm$ 0.0118	0.9460 $\pm$ 0.0016
		Wanda	0.6000 $\pm$ 0.0720	0.5673 $\pm$ 0.0203	0.9000 $\pm$ 0.0204	0.9573$\pm$0.0062
	LayerIF	Magnitude	0.6222$\pm$0.0567	0.5774 $\pm$ 0.0063	0.8917 $\pm$ 0.0312	0.9547 $\pm$ 0.0057
		Wanda	0.6222$\pm$0.0416	0.5774 $\pm$ 0.0208	0.9083 $\pm$ 0.0236	0.9480 $\pm$ 0.0043

analysis for all the sparsity allocation strategies across both LLMs specifically for the maximum token budget case (=8192 thinking tokens). Owing to space constraints, results for other thinking token configurations: 512, 1024, 2048, 4096 are provided in Section C and show similar trends. Note that as 8192 tokens is the maximum thinking budget, it provides a clear perspective on the models’ performance upper-bound. It can be observed that TTS performance for Qwen3-8B across all pruning and allocation strategies shows similar results, indicating that unstructured pruning, regardless of sparsity allocation strategy, is quite effective. For the s1.1-7B model, there is more variability across allocation strategies and pruning approaches. Interestingly, magnitude pruning combined with uniform allocation in this weaker model is more susceptible to performance degradation, but improved allocation strategies such as OWL and LayerIF can mitigate some of these shortcomings. For instance, in Magnitude pruning for AIME24, AMC23, and MATH500, Uniform allocation has accuracies of 0.100, 0.375, 0.636, but LayerIF attains accuracies of 0.155, 0.525, 0.800, highlighting a substantial improvement.

Remarks on RQ2 Findings. Our findings imply that non-uniform sparsity allocation methods, such as OWL and LayerIF, consistently outperform uniform allocation, particularly for the weaker s1 model. While Qwen3-8B is more resilient during TTS even when pruned with uniformly allocated sparsity at higher, more sophisticated allocation strategies provide modest improvements. Furthermore, while layer-wise sparsity allocation

strategies constitute an important parametric choice for unstructured pruning methods, we also conduct additional experiments to observe if the specific choice of pruning layer (MLP or attention) leads to drastically differing TTS performance. Due to space constraints, we provide these additional results in Section B but find that the choice of layer for pruning does not affect TTS performance significantly, unlike the choice of sparsity allocation strategy.

6 Discussion

We now discuss some salient points of interest, extrapolating beyond the results we have obtained from our experiments.

Unstructured pruning outperforms unpruned LLMs in TTS. Our results demonstrating that unstructured pruning not only preserves performance but can even exceed that of the unpruned LLM constitutes an interesting finding. There are several reasons outlined in prior work that help explain this outcome. For instance, the *Lottery Ticket Hypothesis* (Frankle and Carbin, 2019) suggests that dense neural networks contain high-performing subnetworks that can outperform the original unpruned model when trained in isolation. In a similar vein, Yang et al. (2025b) theoretically demonstrate that moderate pruning rates can indeed improve generalization bounds. Moreover, Bartoldson et al. (2020) find that pruning can improve generalization in deep neural networks especially when post-training is undertaken with the pruned models. Other works have also shown that certain pruned models can maintain performance comparable to their un-

pruned counterparts even at high sparsity levels (of around 50%), without requiring post-training (Sun et al., 2024; Frantar and Alistarh, 2023).

Qualitative analysis of reasoning chains. Complementary to these works, our findings indicate that, even for TTS and reasoning, pruning can maintain or exceed the performance of the unpruned model, without requiring post-pruning training. Additionally, our findings show that unstructured pruning, which masks specific weights rather than entire blocks, can achieve this effect while preserving the model’s overall reasoning capability. Thus, not all parameters seem to be equally important for reasoning, implying that carefully applied pruning can serve as a method to enhance downstream TTS performance. To analyze this further, we first provide qualitative examples in Appendix D that demonstrate improved reasoning chains after pruning (for Wanda-Uniform 20%) compared to the base model. Second, we utilize GPT-4o as a Judge LLM and find that it prefers the reasoning traces for this pruned model more than the unpruned base LLM. These results are provided in Appendix E due to space limitations.

Pruning layers selected by structured pruning differ significantly compared to unstructured layer-wise sparsity allocation strategies. To interpret our findings further, we seek to analyze which layers are selected for pruning across structured (ShortGPT) and unstructured (specifically, layer-sparsity allocation strategies such as OWL and LayerIF, since the default unstructured pruning strategy is just to uniformly allocate rates) methods. For s1.1-7B, ShortGPT completely removes Layers 16 and 17, while OWL prunes Layer 10 and 11 the most, and LayerIF applies the highest pruning to Layers 11 and 12. Similarly, for Qwen3-8B, the layers removed via ShortGPT (20 and 17) differ from the layers selected by both OWL (8 and 11) and LayerIF (0 and 4). This distinction in the layers being selected gives an indication as to why performance differs across the methods, as there is little to no overlap across layers being pruned across these methods.

Non-uniform sparsity allocation can augment TTS performance when pruning has adverse effects. We find that for less performant models such as s1.1-7B, certain pruning strategies are more detrimental than others, i.e., Magnitude-Uniform pruning at 20% sparsity lags behind Wanda-Uniform at 20%. However, interestingly,

non-uniform sparsity methods, such as LayerIF, can significantly reduce this degradation. This indicates that while Magnitude pruning alone may remove weights without considering their functional importance, allocating sparsity in a layer-aware or influence-aware manner helps preserve critical components of the model’s reasoning capacity.

Uniform sparsity allocation is a strong default option for sparsity allocation. As we have observed in the previous section, for performant TTS-enabled reasoning LLMs such as Qwen3-8B, when using more advanced pruning methods such as Wanda, even the simplest sparsity allocation strategy, i.e. uniform allocation, remains highly competitive compared to OWL and LayerIF across most thinking token budgets. This suggests that higher-capacity models are inherently more robust to sparsity allocation patterns, likely due to their greater parameter redundancy. Hence, carefully allocating sparsity across layers to improve performance leads to less pronounced effects for high-performing LLMs and indicates that simple uniform pruning may already be sufficient for maintaining or, on occasions exceeding reasoning performance.

7 Conclusion

We systematically explored the impact of pruning on reasoning performance under test-time scaling across multiple benchmarks and reasoning LLMs. In agreement with prior work, we found that structured pruning is detrimental for TTS performance across thinking token budgets. However, our findings contrast for the relatively unexplored unstructured pruning setting as our results demonstrate that unstructured pruning can consistently surpass the unpruned LLMs across various datasets and pruning strategies. We also conducted analysis across different layer-aware sparsity allocation strategies for unstructured pruning and find that non-uniform strategies consistently outperform uniform allocation for simpler models but the difference between uniform and non-uniform strategies is minimal for more performant LLMs. Our work seeks to challenge the conventional notion that pruning strategies are inherently detrimental for TTS and galvanize future research into the role pruning can play in augmenting LLM TTS performance.

Limitations

While we believe our experiments consider a diverse range of pruning scenarios, there are still limi-

tations and unexplored areas that future work might address. To ensure fairness in comparison with other non-training baselines we considered, we did not explore pruning methods, e.g. SparseGPT (Frantar and Alistarh, 2023), that require training on data post the pruning process, although these can be investigated in future work. Moreover, while outside the scope of our work since our study was localized to pruning, the effect of other compression techniques such as *quantization* (Egashira et al., 2024; Liu et al., 2024) and how they impact downstream TTS performance would constitute an interesting research direction as well. Finally, recent work has outlined safety issues with TTS (Nahin et al., 2025) and a complementary research direction could investigate if pruning can serve a role in mitigating these given our findings that pruning can even surpass the limits of the unpruned model.

Ethics Statement

Our work explores the effectiveness of pruning methods for LLMs during TTS. All the datasets and models used in this study are publicly available and widely used. We do not introduce any new data, sensitive, or personal information, and focus solely on model performance in TTS. Our findings aim to enhance LLM robustness and performance in TTS and do not generate or promote harmful content.

References

- Saleh Ashkboos, Maximilian L. Croci, Marcelo Gennari do Nascimento, Torsten Hoefler, and James Hensman. 2024. [SliceGPT: Compress large language models by deleting rows and columns](#). In *The Twelfth International Conference on Learning Representations*.
- Hadi Askari, Shivanshu Gupta, Fei Wang, Anshuman Chhabra, and Muhao Chen. 2025. [LayerIF: Estimating layer quality for large language models using influence functions](#). In *The Thirty-ninth Annual Conference on Neural Information Processing Systems*.
- Guangji Bai, Zheng Chai, Chen Ling, Shiyu Wang, Jiaying Lu, Nan Zhang, Tingwei Shi, Ziyang Yu, Mengdan Zhu, Yifei Zhang, Xinyuan Song, Carl Yang, Yue Cheng, and Liang Zhao. 2024. [Beyond efficiency: A systematic survey of resource-efficient large language models](#). *Preprint*, arXiv:2401.00625.
- Brian Bartoldson, Ari Morcos, Adrian Barbu, and Gordon Erlebacher. 2020. [The generalization-stability tradeoff in neural network pruning](#). In *Advances in Neural Information Processing Systems*, volume 33, pages 20852–20864. Curran Associates, Inc.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, and 12 others. 2020. [Language models are few-shot learners](#). In *Advances in Neural Information Processing Systems*, volume 33, pages 1877–1901. Curran Associates, Inc.
- Yanxi Chen, Xuchen Pan, Yaliang Li, Bolin Ding, and Jingren Zhou. 2025. [Provable scaling laws for the test-time compute of large language models](#). In *The Thirty-ninth Annual Conference on Neural Information Processing Systems*.
- Anshuman Chhabra, Bo Li, Jian Chen, Prasant Mohapatra, and Hongfu Liu. 2025. [Outlier Gradient Analysis: Efficiently Identifying Detrimental Training Samples for Deep Learning Models](#). In *International Conference on Machine Learning*.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. 2021. [Training verifiers to solve math word problems](#). *Preprint*, arXiv:2110.14168.
- Rémi Coulom. 2006. Efficient selectivity and backup operators in monte-carlo tree search. In *International conference on computers and games*, pages 72–83. Springer.
- Kazuki Egashira, Mark Vero, Robin Staab, Jingxuan He, and Martin Vechev. 2024. Exploiting llm quantization. *Advances in Neural Information Processing Systems*, 37:41709–41732.
- Jonathan Frankle and Michael Carbin. 2019. [The lottery ticket hypothesis: Finding sparse, trainable neural networks](#). In *International Conference on Learning Representations*.
- Elias Frantar and Dan Alistarh. 2023. [SparseGPT: Massive language models can be accurately pruned in one-shot](#). In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pages 10323–10337. PMLR.
- Zitian Gao, Boye Niu, Xuzheng He, Haotian Xu, Hongzhang Liu, Aiwei Liu, Xuming Hu, and Lijie Wen. 2024. [Interpretable contrastive monte carlo tree search reasoning](#). *Preprint*, arXiv:2410.01707.
- Song Han, Jeff Pool, John Tran, and William Dally. 2015. [Learning both weights and connections for efficient neural network](#). In *Advances in Neural Information Processing Systems*, volume 28. Curran Associates, Inc.
- Babak Hassibi, David G Stork, and Gregory J Wolff. 1993. Optimal brain surgeon and general network pruning. In *IEEE international conference on neural networks*, pages 293–299. IEEE.

- Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. 2021. [Measuring mathematical problem solving with the MATH dataset](#). In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 2)*.
- Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B. Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. 2020. [Scaling laws for neural language models](#). *Preprint*, arXiv:2001.08361.
- Dipin Khatri, Yijin Liu, David N Palacio, Yixuan Zhang, and Denys Poshyvanyk. 2025. Mapping the trust terrain: LLMs in software engineering-insights and perspectives. *ACM Transactions on Software Engineering and Methodology*.
- Yann LeCun, John Denker, and Sara Solla. 1989. Optimal brain damage. *Advances in neural information processing systems*, 2.
- Mengqi Liao, Xiangyu Xi, Chen Ruinian, Jia Leng, Yangen Hu, Ke Zeng, Shuai Liu, and Huaiyu Wan. 2025. [Enhancing efficiency and exploration in reinforcement learning for LLMs](#). In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pages 1451–1463, Suzhou, China. Association for Computational Linguistics.
- Hunter Lightman, Vineet Kosaraju, Yuri Burda, Harrison Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. 2023. Let’s verify step by step. In *The Twelfth International Conference on Learning Representations*.
- Hunter Lightman, Vineet Kosaraju, Yuri Burda, Harrison Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. 2024. [Let’s verify step by step](#). In *The Twelfth International Conference on Learning Representations*.
- Chihung Lin and Chang-Fu Kuo. 2025. [Roles and potential of large language models in healthcare: A comprehensive review](#). *Biomedical Journal*, 48(5):100868.
- Zechun Liu, Changsheng Zhao, Igor Fedorov, Bilge Soran, Dhruv Choudhary, Raghuraman Krishnamoorthi, Vikas Chandra, Yuandong Tian, and Tijmen Blankevoort. 2024. Spiquant: Llm quantization with learned rotations. *arXiv preprint arXiv:2405.16406*.
- Haiquan Lu, Yefan Zhou, Shiwei Liu, Zhangyang Wang, Michael W. Mahoney, and Yaoqing Yang. 2024. [Alphapruning: Using heavy-tailed self regularization theory for improved layer-wise pruning of large language models](#). In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*.
- Xinyin Ma, Gongfan Fang, and Xinchao Wang. 2023. [Llm-pruner: On the structural pruning of large language models](#). In *Advances in Neural Information Processing Systems*, volume 36, pages 21702–21720. Curran Associates, Inc.
- Aman Madaan, Niket Tandon, Prakhar Gupta, Skyler Hallinan, Luyu Gao, Sarah Wiegrefe, Uri Alon, Nouha Dziri, Shrimai Prabhumoye, Yiming Yang, and 1 others. 2023. Self-refine: Iterative refinement with self-feedback. *Advances in Neural Information Processing Systems*, 36:46534–46594.
- Mathematical Association of America. 2024. American invitational mathematics examination 2024 aime. https://artofproblemsolving.com/wiki/index.php/AIME_Problems_and_Solutions.
- Costas Mavromatis, Petros Karypis, and George Karypis. 2024. Pack of llms: Model fusion at test-time via perplexity optimization. *arXiv preprint arXiv:2404.11531*.
- Xin Men, Mingyu Xu, Qingyu Zhang, Qianhao Yuan, Bingning Wang, Hongyu Lin, Yaojie Lu, Xianpei Han, and Weipeng Chen. 2025. Shortgpt: Layers in large language models are more redundant than you expect. In *Findings of the Association for Computational Linguistics: ACL 2025*, pages 20192–20204.
- Niklas Muennighoff, Zitong Yang, Weijia Shi, Xiang Lisa Li, Li Fei-Fei, Hannaneh Hajishirzi, Luke Zettlemoyer, Percy Liang, Emmanuel Candès, and Tatsunori B Hashimoto. 2025. s1: Simple test-time scaling. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pages 20286–20332.
- Shahriar Kabir Nahin, Hadi Askari, Muhao Chen, and Anshuman Chhabra. 2025. Less Diverse, Less Safe: The Indirect But Pervasive Risk of Test-Time Scaling in Large Language Models. *arXiv preprint arXiv:2510.08592*.
- Garima Pruthi, Frederick Liu, Satyen Kale, and Mukund Sundararajan. 2020. [Estimating training data influence by tracing gradient descent](#). In *Advances in Neural Information Processing Systems*, volume 33, pages 19920–19930. Curran Associates, Inc.
- David Rein, Betty Li Hou, Asa Cooper Stickland, Jackson Petty, Richard Yuanzhe Pang, Julien Dirani, Julian Michael, and Samuel R. Bowman. 2024. [GPQA: A graduate-level google-proof q&a benchmark](#). In *First Conference on Language Modeling*.
- Mingjie Sun, Zhuang Liu, Anna Bair, and J Zico Kolter. 2024. [A simple and effective pruning approach for large language models](#). In *The Twelfth International Conference on Learning Representations*.
- Kimi Team, Angang Du, Bofei Gao, Bowei Xing, Changjiu Jiang, Cheng Chen, Cheng Li, Chenjun Xiao, Chenzhuang Du, Chonghua Liao, Chuning Tang, Congcong Wang, Dehao Zhang, Enming Yuan, Enzhe Lu, Fengxiang Tang, Flood Sung, Guangda Wei, Guokun Lai, and 77 others. 2025. [Kimi k1.5: Scaling reinforcement learning with llms](#). *Preprint*, arXiv:2501.12599.
- Dmytro Vitel and Anshuman Chhabra. 2026. First is Not Really Better Than Last: Evaluating Layer

Choice and Aggregation Strategies in Language Model Data Influence Estimation. In *International Conference on Learning Representations*.

Keyu Wang, Tian Lyu, Guinan Su, Jonas Geiping, Lu Yin, Marco Canini, and Shiwei Liu. 2025. When fewer layers break more chains: Layer pruning harms test-time scaling in llms. *arXiv preprint arXiv:2510.22228*.

Shen Wang, Tianlong Xu, Hang Li, Chaoli Zhang, Joleen Liang, Jiliang Tang, Philip S Yu, and Qingsong Wen. 2026. Large language models for education: A survey and outlook. *IEEE Signal Processing Magazine*, 42(6):51–63.

Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, and 1 others. 2022. Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems*, 35:24824–24837.

Johnathan Xie, Annie S Chen, Yoonho Lee, Eric Mitchell, and Chelsea Finn. 2024. Calibrating language models with adaptive temperature scaling. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*.

An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, Chujie Zheng, Dayiheng Liu, Fan Zhou, Fei Huang, Feng Hu, Hao Ge, Haoran Wei, Huan Lin, Jialong Tang, and 41 others. 2025a. [Qwen3 technical report](#). *Preprint*, arXiv:2505.09388.

Hongru Yang, Yingbin Liang, Xiaojie Guo, Lingfei Wu, and Zhangyang Wang. 2025b. [Random pruning over-parameterized neural networks can improve generalization: A training dynamics analysis](#). *Journal of Machine Learning Research*, 26(84):1–51.

Lu Yin, You Wu, Zhenyu Zhang, Cheng-Yu Hsieh, Yaqing Wang, Yiling Jia, Gen Li, Ajay Kumar Jaiswal, Mykola Pechenizkiy, Yi Liang, Michael Bendersky, Zhangyang Wang, and Shiwei Liu. 2024. [Outlier weighed layerwise sparsity \(OWL\): A missing secret sauce for pruning LLMs to high sparsity](#). In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pages 57101–57115. PMLR.

Honghe Zhang, Xiaolong Shi Xiaolong Shi, Jingwei Sun, and Guangzhong Sun. 2024. Structured pruning for large language models using coupled components elimination and minor fine-tuning. In *Findings of the Association for Computational Linguistics: NAACL 2024*, pages 1–12.

Yijun Zhu, Jianxin Wang, and Chengchao Shen. 2026. High-fidelity pruning for large language models. *arXiv preprint arXiv:2603.08083*.

Appendix

A Implementation Details

All experimental settings reported in our paper, including pruning methods and sparsity allocation strategies, follow the standard methodologies and implementation details described in the original papers. Only minor adjustments were introduced where necessary to ensure compatibility with Qwen-based architectures and their corresponding model configurations. The datasets used in this work are obtained directly from their standard and publicly available HuggingFace repositories, without additional modifications unless explicitly stated. For generating responses from the models during evaluation, we maintain a fixed sampling temperature of 1 across all experiments to ensure consistency in generation behavior.

To account for the randomness in the generation process and to provide more consistent outputs, we evaluate each experiment using three different random seeds, specifically 7, 11, and 42. All model evaluations and benchmark measurements are conducted using the lm-evaluation-harness framework, which provides a standardized evaluation pipeline for large language models and ensures reproducibility and consistency across different experimental settings.

For Wanda, we use the default settings given in the Wanda repository, and as is standard, our calibration data is a subset of the C4 data. Specifically, our calibration dataset consists of 128 samples drawn from the English subset of the C4 dataset. For LayerIF (Askari et al., 2025), we adopt the TracIN (Pruthi et al., 2020) formulation to estimate layer-wise influence by computing two backward passes on the S1 dataset, one over the chain-of-thought reasoning and one over the answer, using cross-entropy loss, with the resulting per-layer gradient dot products guiding the allocation of sparsity across layers.

B Unstructured Pruning Layer Choice (Attention vs MLP) Effects on TTS Performance

Examining both Figure 4 and Figure 5, we do not observe any clear overarching pattern or consistent trend across the experiments. Nevertheless, these experiments yield specific results that can be meaningfully extrapolated. For instance, in Figure 4, Magnitude-Pruned MLP typically outper-

forms Magnitude-Pruned Attention at 10% sparsity, but this relationship is inverted when sparsity increases to 20%. This inversion likely reflects the higher redundancy tolerance of MLP layers at low sparsity, which might diminish if pruned over a critical threshold.

Overall, there remains some variability across pruned layer choices for s1.1-7B. However, as shown in Figure 5, for the more performant Qwen3-8B model this variability is much smaller, suggesting that the choice of which layer type to prune does not lead to substantial differences overall especially if performance is already very good. Taken together, these observations indicate that while layer selection can introduce very minor fluctuations, the overall impact remains relatively limited across the evaluated settings.

C Additional Results for Varying Thinking Tokens

We present the fine-grained results for all five thinking tokens configurations (512, 1024, 2048, 4096, and 8192) under the 10% global sparsity setting in Tables 6 to 10. In addition, we report the corresponding results for the remaining four thinking token configurations (512, 1024, 2048, and 4096) under the 20% sparsity setting in Tables 2 to 5. This detailed breakdown allows us to more closely examine how different thinking token budgets interact with pruning and sparsity levels, providing a clearer view of the performance trends across configurations.

D Qualitative Analysis of Chain-of-Thoughts for Pruned vs Unpruned Models

The qualitative examples for the unpruned and Wanda-Uniform 20% pruned variant of the Qwen3-8B models are provided in Tables 11 to 14. Where two qualitative examples for each of the four datasets (AIME24, AMC23, GPQA-Diamond, and MATH500) at 2048 thinking tokens are shown. Overall, inspection of the chain of thought reveals no clearly identifiable signal. The chain of thought generation in both cases shows coherent outputs. Interestingly, (Wang et al., 2025) shows that the chain-of-thought generated by *structurally* pruned models often contains incoherent outputs and repeated segments; issues that are not observed in either unpruned models or those pruned using *unstructured* methods. This finding is consistent with

the quantitative results, where unstructured pruned models often match or surpass the performance of their unpruned counterparts.

E LLM as a judge Analysis of Chain-of-Thoughts for Pruned vs Unpruned Models

To complement the qualitative chain-of-thought analysis in Appendix D, we conducted an auxiliary evaluation of the Chain-of-Thought outputs for AIME24 using an LLM as a Judge (GPT-4o), comparing unpruned and Wanda-Uniform 20% for the same Qwen3-8B model with 2048 and 8192 token budgets, with results in Table 15. The results indicate that, although the differences are modest, the Wanda 20% pruned LLM consistently achieves higher judge scores than the unpruned base model. Both the qualitative and LLM-as-a-Judge evaluations point to the same conclusion: unstructured pruning preserves the integrity of the chain-of-thought generation even at 20% sparsity.

F Comparison of Structured and Unstructured Pruning at the Same Sparsity Rates

Throughout this paper, we followed common practice in unstructured pruning literature and reported results at 10% and 20% sparsity, which are standard sparsity rates for pruning. The goal was to show that even at these levels, unstructured pruning significantly outperforms structured pruning settings that remove at most 7% of parameters. To provide a comparison under a more matched parameter budget, we include additional results under pruning budgets for both structured and unstructured pruning on AIME24 and GPQA-Diamond in Table 16 and 17. Specifically, we report results for Qwen3-8B at 2.7% and 5.7% sparsity (equivalent to removing 1 and 2 layers, respectively) and s1.1-7B at 3.5% and 7.0% sparsity (also corresponding to removing 1 and 2 layers).

The results presented in Table 16 and 17 reinforce our findings from RQ1. Across both models and datasets, the best performing variant at each token budget is either the unpruned model or one of the unstructured pruning methods, while structured pruning via ShortGPT exhibits substantial performance degradation in comparison. This holds regardless of whether one or two layers are removed, suggesting that even modest structural pruning is disproportionately harmful to reasoning

performance relative to the equivalent amount of unstructured sparsity.

G Additional Results on Llama-3.1-8B

Additionally, we evaluate DeepSeek-R1-Distill-Llama-8B², a Llama-3.1-8B LLM trained using reasoning traces generated by DeepSeek-R1 to enable reasoning and TTS. As can be seen in Table 18, our TTS-pruning findings generalize to this LLM as well. The performance is assessed under the same experimental setup as RQ1 on AIME24 and GPQA-Diamond.

H Code and Reproducibility

Experiments for this paper were conducted on two computing clusters: one equipped with RTX A6000 GPUs and the other with B200 GPUs. The code will be released shortly via a public GitHub repository.

²<https://huggingface.co/deepseek-ai/DeepSeek-R1-Distill-Llama-8B>

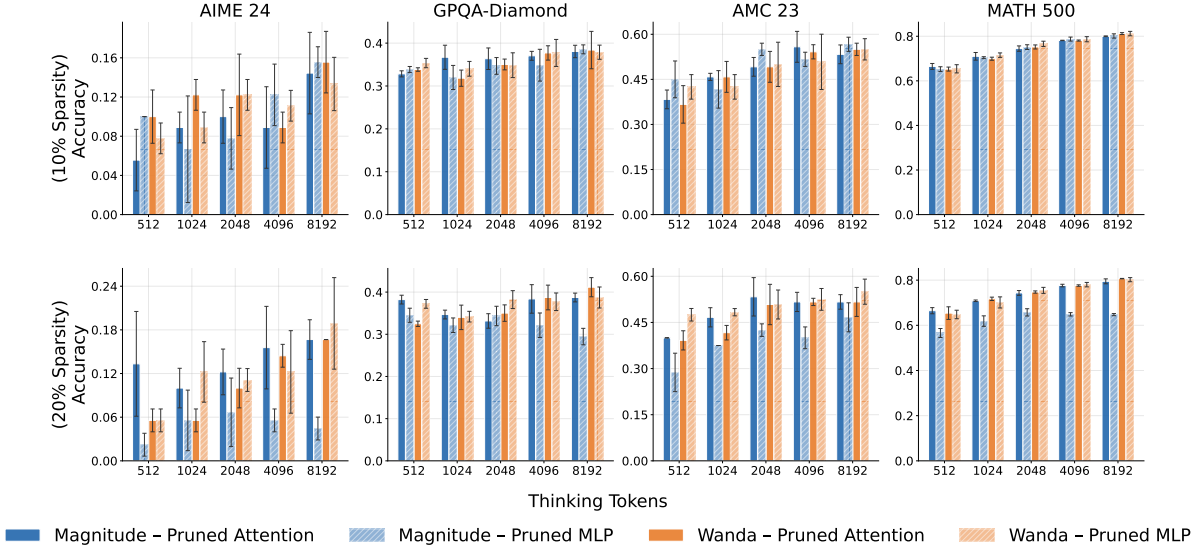


Figure 4: s1.1-7B results, when attention and feed-forward MLP layers are pruned in isolation at different sparsity ratios (10% and 20%) using Magnitude and Wanda with uniform sparsity across all four of our selected datasets and all five thinking token budgets.

Table 2: Results for s1.1-7B and Qwen3-8B across allocation strategies and pruning approaches (Global Sparsity: 20%, Max Thinking Tokens: 512).

Model	Allocation	Pruning	AIME24	GPQA-Diamond	AMC23	MATH500
s1.1-7B	Uniform	Magnitude	0.0222 $\pm$ 0.0314	0.2963 $\pm$ 0.0086	0.3083 $\pm$ 0.0471	0.5673 $\pm$ 0.0198
		Wanda	0.0551 $\pm$ 0.0154	0.3463 $\pm$ 0.0118	0.4333 $\pm$ 0.0312	0.6420 $\pm$ 0.0247
	OWL	Magnitude	0.0333 $\pm$ 0.0000	0.3114 $\pm$ 0.0252	0.3667 $\pm$ 0.0943	0.5720 $\pm$ 0.0295
		Wanda	0.1111 $\pm$ 0.0314	0.3620 $\pm$ 0.0227	0.4167 $\pm$ 0.0514	0.6447 $\pm$ 0.0219
	LayerIF	Magnitude	0.1000 $\pm$ 0.0471	0.3569 $\pm$ 0.0104	0.3917 $\pm$ 0.0425	0.6380 $\pm$ 0.0113
		Wanda	0.1000 $\pm$ 0.0000	0.3418 $\pm$ 0.0133	0.4500 $\pm$ 0.0354	0.6460 $\pm$ 0.0227
Qwen3-8B	Uniform	Magnitude	0.6000 $\pm$ 0.0943	0.4512 $\pm$ 0.0265	0.8750 $\pm$ 0.0354	0.9207 $\pm$ 0.0120
		Wanda	0.6222 $\pm$ 0.0416	0.4680 $\pm$ 0.0304	0.8833 $\pm$ 0.0236	0.8920 $\pm$ 0.0118
	OWL	Magnitude	0.6556 $\pm$ 0.0314	0.4495 $\pm$ 0.0071	0.8917 $\pm$ 0.0425	0.9267 $\pm$ 0.0019
		Wanda	0.6111 $\pm$ 0.0157	0.4512 $\pm$ 0.0086	0.9000 $\pm$ 0.0204	0.9040 $\pm$ 0.0057
	LayerIF	Magnitude	0.6000 $\pm$ 0.0471	0.4276 $\pm$ 0.0126	0.8167 $\pm$ 0.0656	0.9160 $\pm$ 0.0114
		Wanda	0.5778 $\pm$ 0.0416	0.4411 $\pm$ 0.0203	0.8333 $\pm$ 0.0425	0.8827 $\pm$ 0.0019

Table 3: Results for s1.1-7B and Qwen3-8B across allocation strategies and pruning approaches (Global Sparsity: 20%, Max Thinking Tokens: 1024).

Model	Allocation	Pruning	AIME24	GPQA-Diamond	AMC23	MATH500
s1.1-7B	Uniform	Magnitude	0.0110 $\pm$ 0.0156	0.3266 $\pm$ 0.0227	0.3667 $\pm$ 0.0312	0.6133 $\pm$ 0.0196
		Wanda	0.0778 $\pm$ 0.0314	0.3463 $\pm$ 0.0118	0.4583 $\pm$ 0.0773	0.7080 $\pm$ 0.0193
	OWL	Magnitude	0.0556 $\pm$ 0.0157	0.3384 $\pm$ 0.0251	0.4333 $\pm$ 0.0471	0.6227 $\pm$ 0.0106
		Wanda	0.0778 $\pm$ 0.0157	0.3283 $\pm$ 0.0041	0.5250 $\pm$ 0.0000	0.7087 $\pm$ 0.0139
	LayerIF	Magnitude	0.0667 $\pm$ 0.0000	0.3620 $\pm$ 0.0104	0.4583 $\pm$ 0.0118	0.6860 $\pm$ 0.0140
		Wanda	0.0778 $\pm$ 0.0157	0.3468 $\pm$ 0.0304	0.4750 $\pm$ 0.0540	0.7107 $\pm$ 0.0157
Qwen3-8B	Uniform	Magnitude	0.6667 $\pm$ 0.0272	0.4293 $\pm$ 0.0189	0.8500 $\pm$ 0.0354	0.9247 $\pm$ 0.0124
		Wanda	0.5000 $\pm$ 0.0720	0.4613 $\pm$ 0.0104	0.8250 $\pm$ 0.0540	0.9220 $\pm$ 0.0140
	OWL	Magnitude	0.6000 $\pm$ 0.0544	0.4630 $\pm$ 0.0063	0.8917 $\pm$ 0.0471	0.9247 $\pm$ 0.0041
		Wanda	0.4889 $\pm$ 0.0786	0.4478 $\pm$ 0.0063	0.8750 $\pm$ 0.0540	0.9080 $\pm$ 0.0059
	LayerIF	Magnitude	0.6333 $\pm$ 0.0471	0.4091 $\pm$ 0.0071	0.8417 $\pm$ 0.0236	0.9227 $\pm$ 0.0074
		Wanda	0.5000 $\pm$ 0.0720	0.4663 $\pm$ 0.0063	0.8250 $\pm$ 0.0000	0.9047 $\pm$ 0.0164

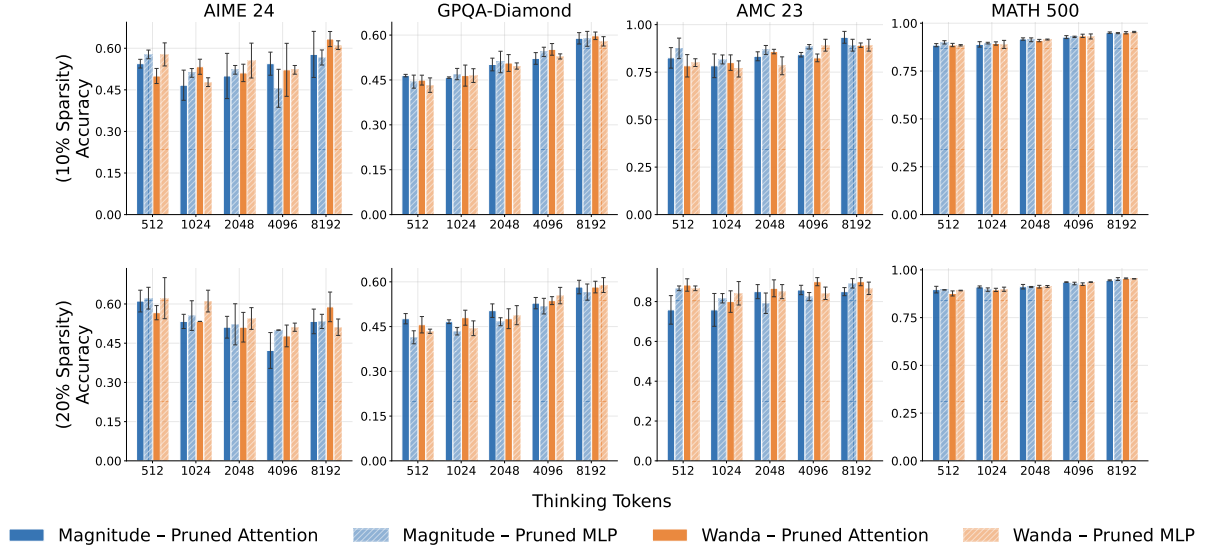


Figure 5: Qwen3-8B results, when attention and feed-forward MLP layers are pruned in isolation at different sparsity ratios (10% and 20%) using Magnitude and Wanda with uniform sparsity across all four of our selected datasets and all five thinking token budgets.

Table 4: Results for s1.1-7B and Qwen3-8B across allocation strategies and pruning approaches (Global Sparsity: 20%, Max Thinking Tokens: 2048).

Model	Allocation	Pruning	AIME24	GPQA-Diamond	AMC23	MATH500
s1.1-7B	Uniform	Magnitude	0.0332 $\pm$ 0.0272	0.3418 $\pm$ 0.0024	0.4333 $\pm$ 0.0589	0.6447 $\pm$ 0.0082
		Wanda	0.1332 $\pm$ 0.0001	0.3697 $\pm$ 0.0295	0.5333 $\pm$ 0.0312	0.7493 $\pm$ 0.0077
	OWL	Magnitude	0.0778 $\pm$ 0.0157	0.3333 $\pm$ 0.0082	0.4083 $\pm$ 0.0656	0.6720 $\pm$ 0.0059
		Wanda	0.1111 $\pm$ 0.0416	0.3603 $\pm$ 0.0195	0.5000 $\pm$ 0.0354	0.7413 $\pm$ 0.0184
	LayerIF	Magnitude	0.0889 $\pm$ 0.0314	0.3822 $\pm$ 0.0063	0.4667 $\pm$ 0.0118	0.7433 $\pm$ 0.0217
		Wanda	0.0889 $\pm$ 0.0157	0.3670 $\pm$ 0.0104	0.5083 $\pm$ 0.0236	0.7540 $\pm$ 0.0086
Qwen3-8B	Uniform	Magnitude	0.5556 $\pm$ 0.0685	0.4949 $\pm$ 0.0041	0.8833 $\pm$ 0.0118	0.9320 $\pm$ 0.0028
		Wanda	0.5778 $\pm$ 0.0314	0.4933 $\pm$ 0.0024	0.8667 $\pm$ 0.0514	0.9180 $\pm$ 0.0033
	OWL	Magnitude	0.5444 $\pm$ 0.0157	0.4949 $\pm$ 0.0109	0.9083 $\pm$ 0.0514	0.9340 $\pm$ 0.0016
		Wanda	0.5333 $\pm$ 0.0544	0.5017 $\pm$ 0.0298	0.8833 $\pm$ 0.0312	0.9213 $\pm$ 0.0019
	LayerIF	Magnitude	0.5556 $\pm$ 0.0567	0.4949 $\pm$ 0.0149	0.8250 $\pm$ 0.0354	0.9253 $\pm$ 0.0041
		Wanda	0.5444 $\pm$ 0.0416	0.4865 $\pm$ 0.0156	0.8083 $\pm$ 0.0118	0.9147 $\pm$ 0.0041

Table 5: Results for s1.1-7B and Qwen3-8B across allocation strategies and pruning approaches (Global Sparsity: 20%, Max Thinking Tokens: 4096).

Model	Allocation	Pruning	AIME24	GPQA-Diamond	AMC23	MATH500
s1.1-7B	Uniform	Magnitude	0.0110 $\pm$ 0.0156	0.3401 $\pm$ 0.0104	0.3750 $\pm$ 0.0736	0.6380 $\pm$ 0.0145
		Wanda	0.1885 $\pm$ 0.0314	0.3883 $\pm$ 0.0181	0.5333 $\pm$ 0.0236	0.7713 $\pm$ 0.0068
	OWL	Magnitude	0.0778 $\pm$ 0.0157	0.3670 $\pm$ 0.0126	0.4167 $\pm$ 0.0425	0.6927 $\pm$ 0.0094
		Wanda	0.1000 $\pm$ 0.0544	0.3956 $\pm$ 0.0437	0.5333 $\pm$ 0.0236	0.7727 $\pm$ 0.0057
	LayerIF	Magnitude	0.1333 $\pm$ 0.0272	0.3872 $\pm$ 0.0423	0.4833 $\pm$ 0.0312	0.7720 $\pm$ 0.0134
		Wanda	0.1333 $\pm$ 0.0272	0.3838 $\pm$ 0.0165	0.5083 $\pm$ 0.0425	0.7880 $\pm$ 0.0059
Qwen3-8B	Uniform	Magnitude	0.5000 $\pm$ 0.0471	0.5067 $\pm$ 0.0298	0.8417 $\pm$ 0.0425	0.9320 $\pm$ 0.0028
		Wanda	0.5000 $\pm$ 0.0272	0.5455 $\pm$ 0.0082	0.8667 $\pm$ 0.0236	0.9280 $\pm$ 0.0028
	OWL	Magnitude	0.5556 $\pm$ 0.0314	0.5017 $\pm$ 0.0133	0.8750 $\pm$ 0.0408	0.9280 $\pm$ 0.0059
		Wanda	0.5111 $\pm$ 0.0416	0.5236 $\pm$ 0.0227	0.8750 $\pm$ 0.0204	0.9327 $\pm$ 0.0082
	LayerIF	Magnitude	0.5333 $\pm$ 0.0272	0.5101 $\pm$ 0.0041	0.8667 $\pm$ 0.0312	0.9407 $\pm$ 0.0077
		Wanda	0.5111 $\pm$ 0.0831	0.5404 $\pm$ 0.0251	0.8583 $\pm$ 0.0312	0.9267 $\pm$ 0.0047

Table 6: Results for s1.1-7B and Qwen3-8B across allocation strategies and pruning approaches (Global Sparsity: 10%, Max Thinking Tokens: 512).

Model	Allocation	Pruning	AIME24	GPQA-Diamond	AMC23	MATH500
s1.1-7B	Uniform	Magnitude Wanda	0.1332 $\pm$ 0.0272	0.3246 $\pm$ 0.0233	0.3917 $\pm$ 0.0471	0.6660 $\pm$ 0.0140
			0.0775 $\pm$ 0.0416	0.3447 $\pm$ 0.0118	0.4000 $\pm$ 0.0408	0.6480 $\pm$ 0.0043
	OWL	Magnitude Wanda	0.0667 $\pm$ 0.0272	0.3283 $\pm$ 0.0143	0.3917 $\pm$ 0.0425	0.6680 $\pm$ 0.0102
			0.0333 $\pm$ 0.0272	0.3316 $\pm$ 0.0265	0.4417 $\pm$ 0.0312	0.6487 $\pm$ 0.0175
Qwen3-8B	LayerIF	Magnitude Wanda	0.1000 $\pm$ 0.0272	0.3418 $\pm$ 0.0212	0.3750 $\pm$ 0.0408	0.6547 $\pm$ 0.0139
			0.0667 $\pm$ 0.0272	0.3485 $\pm$ 0.0214	0.4167 $\pm$ 0.0514	0.6533 $\pm$ 0.0077
	Uniform	Magnitude Wanda	0.5889 $\pm$ 0.0157	0.4529 $\pm$ 0.0086	0.8500 $\pm$ 0.0354	0.8927 $\pm$ 0.0062
			0.6000 $\pm$ 0.0272	0.4343 $\pm$ 0.0143	0.8500 $\pm$ 0.0204	0.8760 $\pm$ 0.0075
Qwen3-8B	OWL	Magnitude Wanda	0.6111 $\pm$ 0.0416	0.4461 $\pm$ 0.0104	0.8750 $\pm$ 0.0000	0.9087 $\pm$ 0.0075
			0.5333 $\pm$ 0.0471	0.4276 $\pm$ 0.0104	0.8333 $\pm$ 0.0312	0.8980 $\pm$ 0.0043
	LayerIF	Magnitude Wanda	0.6889 $\pm$ 0.0157	0.4478 $\pm$ 0.0298	0.8250 $\pm$ 0.0736	0.9020 $\pm$ 0.0075
			0.5889 $\pm$ 0.0685	0.4461 $\pm$ 0.0195	0.8667 $\pm$ 0.0236	0.8873 $\pm$ 0.0062

Table 7: Results for s1.1-7B and Qwen3-8B across allocation strategies and pruning approaches (Global Sparsity: 10%, Max Thinking Tokens: 1024).

Model	Allocation	Pruning	AIME24	GPQA-Diamond	AMC23	MATH500
s1.1-7B	Uniform	Magnitude Wanda	0.0554 $\pm$ 0.0315	0.3398 $\pm$ 0.0048	0.4333 $\pm$ 0.0118	0.7093 $\pm$ 0.0137
			0.0773 $\pm$ 0.0160	0.3293 $\pm$ 0.0300	0.4083 $\pm$ 0.0425	0.6953 $\pm$ 0.0165
	OWL	Magnitude Wanda	0.0778 $\pm$ 0.0157	0.3620 $\pm$ 0.0275	0.4500 $\pm$ 0.0000	0.7227 $\pm$ 0.0226
			0.0778 $\pm$ 0.0157	0.3451 $\pm$ 0.0086	0.4333 $\pm$ 0.0825	0.7120 $\pm$ 0.0113
Qwen3-8B	LayerIF	Magnitude Wanda	0.0778 $\pm$ 0.0416	0.3636 $\pm$ 0.0149	0.3833 $\pm$ 0.0425	0.6960 $\pm$ 0.0123
			0.0556 $\pm$ 0.0157	0.3333 $\pm$ 0.0258	0.4417 $\pm$ 0.0514	0.6940 $\pm$ 0.0114
	Uniform	Magnitude Wanda	0.5889 $\pm$ 0.0314	0.4394 $\pm$ 0.0109	0.8583 $\pm$ 0.0236	0.9087 $\pm$ 0.0025
			0.4889 $\pm$ 0.0685	0.4545 $\pm$ 0.0041	0.8000 $\pm$ 0.0204	0.8967 $\pm$ 0.0034
Qwen3-8B	OWL	Magnitude Wanda	0.5667 $\pm$ 0.0544	0.4933 $\pm$ 0.0635	0.8667 $\pm$ 0.0624	0.9187 $\pm$ 0.0075
			0.5000 $\pm$ 0.0000	0.4798 $\pm$ 0.0635	0.7750 $\pm$ 0.0890	0.9027 $\pm$ 0.0074
	LayerIF	Magnitude Wanda	0.5222 $\pm$ 0.0629	0.4579 $\pm$ 0.0145	0.8250 $\pm$ 0.0000	0.9107 $\pm$ 0.0090
			0.4889 $\pm$ 0.0629	0.4747 $\pm$ 0.0149	0.8417 $\pm$ 0.0236	0.9000 $\pm$ 0.0177

Table 8: Results for s1.1-7B and Qwen3-8B across allocation strategies and pruning approaches (Global Sparsity: 10%, Max Thinking Tokens: 2048).

Model	Allocation	Pruning	AIME24	GPQA-Diamond	AMC23	MATH500
s1.1-7B	Uniform	Magnitude Wanda	0.0778 $\pm$ 0.0157	0.3532 $\pm$ 0.0188	0.4667 $\pm$ 0.0624	0.7667 $\pm$ 0.0203
			0.0998 $\pm$ 0.0275	0.3513 $\pm$ 0.0193	0.4917 $\pm$ 0.0425	0.7600 $\pm$ 0.0098
	OWL	Magnitude Wanda	0.1333 $\pm$ 0.0471	0.3367 $\pm$ 0.0086	0.4667 $\pm$ 0.0312	0.7667 $\pm$ 0.0137
			0.1222 $\pm$ 0.0416	0.3620 $\pm$ 0.0172	0.4750 $\pm$ 0.0736	0.7553 $\pm$ 0.0009
Qwen3-8B	LayerIF	Magnitude Wanda	0.0556 $\pm$ 0.0157	0.3434 $\pm$ 0.0124	0.5000 $\pm$ 0.0250	0.7620 $\pm$ 0.0107
			0.1000 $\pm$ 0.0272	0.3552 $\pm$ 0.0133	0.4917 $\pm$ 0.0118	0.7600 $\pm$ 0.0065
	Uniform	Magnitude Wanda	0.5889 $\pm$ 0.0567	0.5152 $\pm$ 0.0189	0.9083 $\pm$ 0.0514	0.9193 $\pm$ 0.0034
			0.5111 $\pm$ 0.0314	0.5051 $\pm$ 0.0412	0.7667 $\pm$ 0.0773	0.9093 $\pm$ 0.0057
Qwen3-8B	OWL	Magnitude Wanda	0.5333 $\pm$ 0.0720	0.5084 $\pm$ 0.0401	0.8833 $\pm$ 0.0118	0.9293 $\pm$ 0.0019
			0.5667 $\pm$ 0.0720	0.4966 $\pm$ 0.0401	0.8667 $\pm$ 0.0236	0.9167 $\pm$ 0.0066
	LayerIF	Magnitude Wanda	0.5778 $\pm$ 0.0416	0.4798 $\pm$ 0.0218	0.8750 $\pm$ 0.0354	0.9260 $\pm$ 0.0082
			0.4556 $\pm$ 0.0157	0.4983 $\pm$ 0.0208	0.7833 $\pm$ 0.0425	0.9140 $\pm$ 0.0033

Table 9: Results for s1.1-7B and Qwen3-8B across allocation strategies and pruning approaches (Global Sparsity: 10%, Max Thinking Tokens: 4096).

Model	Allocation	Pruning	AIME24	GPQA-Diamond	AMC23	MATH500
s1.1-7B	Uniform	Magnitude Wanda	0.1331 $\pm$ 0.0269	0.3532 $\pm$ 0.0166	0.5750 $\pm$ 0.0540	0.7847 $\pm$ 0.0096
			0.1553 $\pm$ 0.0156	0.3530 $\pm$ 0.0326	0.5750 $\pm$ 0.0354	0.7913 $\pm$ 0.0136
	OWL	Magnitude Wanda	0.1444 $\pm$ 0.0416	0.3569 $\pm$ 0.0167	0.5083 $\pm$ 0.0118	0.7853 $\pm$ 0.0090
			0.1222 $\pm$ 0.0685	0.3434 $\pm$ 0.0071	0.5250 $\pm$ 0.0000	0.7853 $\pm$ 0.0009
	LayerIF	Magnitude Wanda	0.1222 $\pm$ 0.0157	0.3687 $\pm$ 0.0165	0.5167 $\pm$ 0.0514	0.7880 $\pm$ 0.0128
			0.1333 $\pm$ 0.0272	0.3923 $\pm$ 0.0190	0.5000 $\pm$ 0.0408	0.7880 $\pm$ 0.0059
Qwen3-8B	Uniform	Magnitude Wanda	0.5444 $\pm$ 0.0567	0.5337 $\pm$ 0.0104	0.8917 $\pm$ 0.0236	0.9313 $\pm$ 0.0066
			0.5111 $\pm$ 0.0314	0.5522 $\pm$ 0.0333	0.9000 $\pm$ 0.0204	0.9293 $\pm$ 0.0009
	OWL	Magnitude Wanda	0.4778 $\pm$ 0.0567	0.5286 $\pm$ 0.0370	0.8750 $\pm$ 0.0612	0.9353 $\pm$ 0.0009
			0.4667 $\pm$ 0.0720	0.5370 $\pm$ 0.0370	0.8667 $\pm$ 0.0118	0.9360 $\pm$ 0.0086
	LayerIF	Magnitude Wanda	0.4444 $\pm$ 0.0875	0.5219 $\pm$ 0.0186	0.9000 $\pm$ 0.0408	0.9400 $\pm$ 0.0075
			0.5000 $\pm$ 0.0272	0.5438 $\pm$ 0.0104	0.8750 $\pm$ 0.0354	0.9293 $\pm$ 0.0019

Table 10: Results for s1.1-7B and Qwen3-8B across allocation strategies and pruning approaches (Global Sparsity: 10%, Max Thinking Tokens: 8192).

Model	Allocation	Pruning	AIME24	GPQA-Diamond	AMC23	MATH500
s1.1-7B	Uniform	Magnitude Wanda	0.1440 $\pm$ 0.0311	0.3800 $\pm$ 0.0244	0.5667 $\pm$ 0.0118	0.8133 $\pm$ 0.0025
			0.1889 $\pm$ 0.0157	0.3900 $\pm$ 0.0196	0.5333 $\pm$ 0.0118	0.8033 $\pm$ 0.0098
	OWL	Magnitude Wanda	0.1667 $\pm$ 0.0272	0.3687 $\pm$ 0.0143	0.5417 $\pm$ 0.0425	0.8080 $\pm$ 0.0075
			0.1111 $\pm$ 0.0416	0.3872 $\pm$ 0.0063	0.5417 $\pm$ 0.0312	0.8047 $\pm$ 0.0096
	LayerIF	Magnitude Wanda	0.1333 $\pm$ 0.0272	0.3653 $\pm$ 0.0104	0.5667 $\pm$ 0.0118	0.8080 $\pm$ 0.0043
			0.1667 $\pm$ 0.0272	0.4192 $\pm$ 0.0051	0.5750 $\pm$ 0.0408	0.8000 $\pm$ 0.0071
Qwen3-8B	Uniform	Magnitude Wanda	0.6556 $\pm$ 0.0416	0.5673 $\pm$ 0.0370	0.9083 $\pm$ 0.0312	0.9540 $\pm$ 0.0098
			0.6000 $\pm$ 0.0471	0.5808 $\pm$ 0.0214	0.8833 $\pm$ 0.0514	0.9540 $\pm$ 0.0049
	OWL	Magnitude Wanda	0.5778 $\pm$ 0.0416	0.5993 $\pm$ 0.0126	0.9000 $\pm$ 0.0204	0.9513 $\pm$ 0.0041
			0.5778 $\pm$ 0.0416	0.5993 $\pm$ 0.0126	0.8667 $\pm$ 0.0118	0.9580 $\pm$ 0.0075
	LayerIF	Magnitude Wanda	0.6000 $\pm$ 0.0471	0.5808 $\pm$ 0.0071	0.8917 $\pm$ 0.0118	0.9573 $\pm$ 0.0041
			0.6111 $\pm$ 0.0314	0.6077 $\pm$ 0.0242	0.9000 $\pm$ 0.0204	0.9520 $\pm$ 0.0020

Table 11: Qualitative outputs on AIME24 for Unpruned vs. Wanda-Uniform 20% pruned model.

Query	Unpruned	Wanda-Uniform 20%
Let p be the least prime number for which there exists a positive integer n such that $n^4 + 1$ is divisible by p^2 . Find the least positive integer m such that $m^4 + 1$ is divisible by p^2 .	Chain of Thought: Okay, so I need to find the smallest prime number p where there's a positive integer n such that p^2 divides $n^4 + 1$. Then, once I find that p, I need to find the smallest positive integer m such that p^2 divides $m^4 + 1$. Hmm. Let me start by understanding the problem step by step. First, let's think about primes p where p^2 divides $n^4 + 1$ for some n. That means $n^4 \equiv -1 \pmod{p^2}$. So, $n^4 \equiv -1 \pmod{p^2}$. Let me recall that if a number a is congruent to -1 modulo p^2, then raising it to the power of 4 gives us a result that's congruent to 1 (mod p^2) because $(-1)^4 = 1$. Wait, but $n^4 \equiv -1 \pmod{p^2}$. So, squar.....is odd, then p is $1 \pmod{2}$. Suppose $p = 1 \pmod{4}$. Then $p - 1$ is divisible by 4. Let me check: If $p = 1 \pmod{4}$, then $p - 1$ is divisible by 4, so $k = (p - 1)/2$ is divisible by 2. Therefore, $k * p$ is divisible by $2 * p$, which is $2 * (\text{something odd})$. Therefore, to have $k * p$ divisible by 4, since k is divisible by 2 (as $p = 1 \pmod{4}$), p is odd, so $k * p$ is divisible by $2 * \text{odd}$, but we need it to be divisible by 4. Therefore, if k is divisible by 2, then $k * p$ is divisible by $2 * 2 = 4$? Wait, k is $(p - 1)/2$. If $p = 1$ Answer: 155 (Incorrect)	Chain of Thought: Okay, so I need to find the least prime number p such that there's a positive integer n where p^2 divides $n^4 + 1$. Then, once I find that p, I need to find the smallest positive integer m such that p^2 divides $m^4 + 1$. Hmm. Let me start by understanding the problem step by step. First, let's think about primes p where p^2 divides $n^4 + 1$. That means $n^4 \equiv -1 \pmod{p^2}$. So, we need to find primes p for which -1 is a quartic residue modulo p.....Alternatively, compute $n^4 \pmod{11}$: $n = 0$: 0, $n = 1$: 1, $n = 2$: $16 \pmod{11} = 5$, $n = 3$: $81 \pmod{11} = 4$, $n = 4$: $256 \pmod{11} = 3$, $n = 5$: $625 \pmod{11} = 3$, $n = 6$: $1296 \pmod{11} = 3$, $n = 7$: $2401 \pmod{11} = 5$, $n = 8$: $4096 \pmod{11} = 3$, $n = 9$: $6561 \pmod{11} = 4$, $n = 10$: $10000 \pmod{11} = 1$ (since $11 * 909 = 9999$, $10000 - 9999 = 1$). Answer: 110 (Correct)
Let $\mathcal{B}$ be the set of rectangular boxes with surface area 54 and volume 23. Let r be the radius of the smallest sphere that can contain each of the rectangular boxes that are elements of $\mathcal{B}$. The value of r^2 can be written as $\frac{p}{q}$, where p and q are relatively prime positive integers. Find $p + q$.	Chain of Thought: Okay, so I need to find the smallest sphere that can contain any rectangular box with surface area 54 and volume 23. Then, find r^2 where r is the radius of that sphere, and express it as a fraction p/q with p and q coprime, then find $p + q$. Alright, let's start breaking this down. First, let me recall that for a rectangular box with dimensions x, y, z, the surface area is $2(xy + yz + zx)$ and the volume is xyz. So, given that the surface area is 54 and the volume is 23, I can write: $2(xy + yz + zx) = 54 \Rightarrow xy + yz + zx = 27$, , $xyz = 23$. Therefore, the equations are: $2x = \lambda(y + z) + \mu yz$, $2y = \lambda(x + z) + \mu xz$, $2z = \lambda(x + y) + \mu xy$. Additionally, we have the constraints: $xy + yz + zx = 27$, $xyz = 23$. So, four equations with variables x, y, z, λ, μ. That seems complicated. However, perhaps there is some symmetry. Alternatively, maybe we can assume some symmetry. For example, suppose two variables are equal. Let's assume $x = y$. Then, as before, we can solve. But earlier, we found solutions. However, maybe that is the case where the and $xyz = 23$. So, the problem is about rectangles x, y, z with these. Answer: 137 (Incorrect)	Chain of Thought: Okay, so I need to find the smallest sphere that can contain any rectangular box with surface area 54 and volume 23. Then, find r^2 where r is the radius of that sphere, and express it as a fraction p/q with p and q coprime, then find $p + q$. Alright, let's start. First, let me recall some formulas. For a rectangular box with length, width, and height x, y, z, the surface area is $2(xy + yz + zx) = 54$. The volume is $xyz = 23$. The problem is about finding the smallest sphere that can contain such a box. The sphere's radius will depend on the box's dimensions. = $-1 + 2\sqrt{6} \approx -1 + 4.898 \approx 3.898$, which is positive. Therefore, if $x = y = 2$, then $z = 23/(2^2) = 23/4 = 5.75$. Alternatively, if $x = y \approx 3.898$, then $z = 23/x^2$. Let me compute x^2 exactly: $x = -1 + 2\sqrt{6}$. Therefore, $x^2 = (-1 + 2\sqrt{6})^2 = 1 - 4\sqrt{6} + 24 = 25 - 4\sqrt{6} \approx 25 - 9.798 \approx 15.202$. Then $z = 23/(25 - 4\sqrt{6})$. Let me rationalize that denominator: Multiply numerator and denominator by $(25 + 4\sqrt{6})$: $z = \frac{23(25 + 4\sqrt{6})}{(25 - 4\sqrt{6})(25 + 4\sqrt{6})} = \frac{23(25 + 4\sqrt{6})}{625 - (4\sqrt{6})^2}$. Answer: 721 (Correct)

Table 12: Qualitative outputs on AMC23 for Unpruned vs. Wanda-Uniform 20% pruned model.

Query	Unpruned	Wanda-Uniform 20%
If A and B are vertices of a polyhedron, define the distance $d(A, B)$ to be the minimum number of edges of the polyhedron one must traverse in order to connect A and B. For example, if $\overline{AB}$ is an edge of the polyhedron, then $d(A, B) = 1$, but if $\overline{AC}$ and $\overline{CB}$ are edges and $\overline{AB}$ is not an edge, then $d(A, B) = 2$. Let Q, R, and S be randomly chosen distinct vertices of a regular icosahedron (regular polyhedron made up of 20 equilateral triangles). Find the probability that $d(Q, R) > d(R, S)$. The final answer can be written in the form $\frac{m}{n}$, where m and n are relatively prime positive integers. What is $m + n$?	Chain of Thought: Okay, so I need to find the maximum value of the imaginary part of a complex number z that satisfies the equation $1 + z + z^2 = 4$. The answer should be in the form $\frac{\sqrt{m}}{n}$, where m and n are coprime, and then find $m + n$. Alright, let's start by recalling some complex number properties. First, let me denote z as a complex number. Let me write $z = x + yi$, where x and y are real numbers. Then, I need to compute $1 + z + z^2$ and set it equal to 4, then find the maximum value of y. But before diving into algebra, maybe there's a smarter way. Sometimes with modulus equations, it's helpful to consider $y^4 + (2x^2 + 2x - 1)y^2 - 16 = 0$. Hmm, this seems complicated. Maybe there's a better approach. Let me think. Alternatively, maybe consider substituting y^2 from the equation or something else. Alternatively, think of this as a quadratic equation in y^2? Let me check. Let me rearrange the equation: $y^4 + (2x^2 + 2x - 1)y^2 + (x^4 + 2x^3 + 3x^2 + 2x + 1 - 16) = 0$. So, if I let $y^2 = t$, then: $t^2 + (2x^2 + 2x - 1)t + (x^4 + 2x^3 + 3x^2 + 2x + 1 - 16) = 0$. Let me compute the constant term: $x^4 + 2x^2 + 3x^2$ Answer: 31 (Incorrect)	Chain of Thought: Okay, so I need to find the maximum value of the imaginary part of a complex number z that satisfies the equation $1 + z + z^2 = 4$. The answer should be in the form $\frac{\sqrt{m}}{n}$, where m and n are coprime, and then find $m + n$. Alright, let's start by understanding the problem. First, z is a complex number. Let me denote $z = x + yi$, where x and y are real numbers. The imaginary part of z is y, so we need to maximize y given that $1 + z + z^2 = 4$. Let me write down the equation $1 + z + z^2 = 4$. Let me compute $1 + z + z^2$ first. Since $z = x + yi$, then $z^2 = (x + yi)^2 = x^2 - y^2 + 2xyi$. Therefore, $1 + z + z^2 = 1 + x + yi + x^2 - y^2 + 2xyi = (1 + x + x^2 - y^2) + (y + 2xy)i$. Let me consider that $1 + z + z^2 = 4e^{i\theta}$, where θ is some angle. Then, solving for z. But solving quadratic equations with complex coefficients might not be straightforward. Alternatively, maybe consider that z is a root of the equation $z^2 + z + 1 = 4e^{i\theta}$, so $z^2 + z + (1 - 4e^{i\theta}) = 0$. Then, solving for z: $z = \frac{-1 \pm \sqrt{1 - 4(1 - 4e^{i\theta})}}{2} = \frac{-1 \pm \sqrt{1 - 4 + 16e^{i\theta}}}{2} = \frac{-1 \pm \sqrt{-3 + 16e^{i\theta}}}{2}$. But this seems complicated as well. The square root Answer: 29 (Correct)
In the state of Coinland, coins have values 6, 10, and 15 cents. Suppose x is the value in cents of the most expensive item in Coinland that cannot be purchased using these coins with exact change. What is the sum of the digits of x?	Chain of Thought: Okay, so I need to figure out the largest amount of money that can't be made with coins of 6, 10, and 15 cents. Then, once I find that number, called x, I have to find the sum of its digits. Alright, let me start by recalling some math concepts. First, I remember something called the Frobenius number, which is the largest monetary amount that cannot be obtained using any combination of coins of specified denominations. But wait, the Frobenius number is only straightforward to calculate when there are two coin denominations. For more than two, there isn't a general formula, right? So, since we but we need the largest one. So, if we can make all numbers from 45 upwards, then 44 would be the answer. But since we have 15, maybe 44 can be made with 15? Wait, 44. Let me check. Let's see, can we make 44 with 6, 10, 15? Let's try. First, try using 15 once: $44 - 15 = 29$. Can we make 29 with 6 and 10? 29 is odd. 6 and 10 are even. So no. If we use 15 twice: $44 - 30 = 14$. Can we make 14 with 6 and 10? $10 + 6$ (something)? $14 - 10 = 4$. Not divisible by 6. $14 - 6 = 8$. Not divisible by 10. So no Answer: 8 (Incorrect)	Chain of Thought: Okay, so I need to figure out the largest amount of money that can't be formed using coins of 6, 10, and 15 cents. Then, once I find that number, called x, I have to find the sum of its digits. Alright, let me start by recalling some concepts about the Frobenius number. Wait, the Frobenius number is the largest number that can't be expressed as a combination of given denominations, right? But I remember that the Frobenius number is only straightforward to calculate when there are two denominations. For more than two, there isn't a general formula, so I guess I need another approach here. The formed. $5 \times 4 = 20$ can be formed as $10 + 10$. So the only number that cannot be formed with 10 and 15 is 5. So in terms of numbers that can be formed using 10 and 15, they are all multiples of 5 starting from 10. So if we have 5, it can't be formed. But 5 is not a multiple of 6, 10, or 15. So if we add 6 to the equation, perhaps we can form numbers that aren't multiples of 5? Wait, but the problem is we can use 6, 10, 15. So maybe the idea is that if we can use 6 to adjust the amounts. Let me think. Answer: 11 (Correct)

Table 13: Qualitative outputs on GPQA-Diamond for Unpruned vs. Wanda-Uniform 20% pruned model.

Query	Unpruned	Wanda-Uniform 20%
ChIP-seq on a PFA-fixed sample with an antibody to the IKAROS transcription factor in human B cells followed by next-generation sequencing and standard quality control, alignment and peak-calling steps produced ChIP peaks that disappeared when PFA+DSG fixation was used. Where are we most likely to find such disappearing peaks? A. At random locations in the genome B. At active promoters and enhancers C. At repeats D. In the introns of large genes	Chain of Thought Okay, so I need to figure out where the ChIP peaks that disappear when using PFA+DSG fixation compared to just PFA fixation would be located. Let me start by recalling what I know about ChIP-seq and fixation methods. First, ChIP-seq is used to identify the binding sites of proteins, like transcription factors, across the genome. The process involves fixing the proteins to DNA using a cross-linking agent, then immunoprecipitating the protein-DNA complexes, and sequencing the DNA. PFA (paraformaldehyde) is a common fixative used in ChIP experiments. It's a mild cross-linker that primarily cross-links proteins, and if the fixation with PFA+DSG alters the chromatin structure or protein-DNA interactions in these regions, the peaks would disappear. </think> When analyzing the disappearance of ChIP-seq peaks in samples fixed with PFA+DSG compared to PFA alone, we focus on the mechanism of fixation and its impact on protein-DNA interactions. Here's a breakdown of the reasoning: — Key Considerations 1. Fixation and Protein-DNA Interactions: - PFA (paraformaldehyde) Answer: A (Incorrect)	Chain of Thought Okay, so I need to figure out where the disappearing ChIP peaks are most likely located when using PFA+DSG fixation instead of just PFA. Let me start by recalling what I know about ChIP-seq and fixation methods. First, ChIP-seq is used to determine where a particular protein binds to DNA. The process involves crosslinking the protein to DNA, shearing the DNA, and then immunoprecipitating the protein-DNA complexes. The DNA is then sequenced to find the binding sites. Now, fixation with PFA (paraformaldehyde) is a common method. But sometimes, other fixatives are used. The question mentions DSG, indicating some issue with the crosslinking in certain regions. Alternatively, think about the fact that some fixatives like formaldehyde are better at preserving protein-DNA interactions, while others may not. If the DSG fixation is not as effective, then the peaks that require strong crosslinking would be lost. If those peaks are in regions where the protein is bound more tightly, maybe in active promoters or enhancers. Alternatively, if the DSG fixation is causing more shearing in certain regions Answer: B (Correct)
A benzene ring has a carboxylic acid a carbaldehyde and a cyano group all meta to one another. Ortho to the carboxylic acid are a hydroxyl and a dimethyl amino and para to the carboxylic acid is a methoxy group. The methoxy and the alcohol are also both ortho to the nitrile. What is the correct IUPAC name for this molecule? A. 2-hydroxy-3-cyano-4-methoxy-5-formyl-6-(dimethylamino)benzoic acid B. 3-cyano-6-(dimethylamino)-5-formyl-2-hydroxy-4-methoxybenzoic acid C. 2-(dimethylamino)-3-formyl-4-methoxy-5-cyano-6-hydroxybenzoic acid D. 5-cyano-2-(dimethylamino)-3-formyl-6-hydroxy-4-methoxybenzoic acid	Chain of Thought: Okay, so I need to figure out the correct IUPAC name for this complex benzene ring compound. Let me start by breaking down the information given. The molecule has a benzene ring with four substituents: a carboxylic acid, a carbaldehyde (which is formyl group), a cyano group, and a methoxy group. Additionally, there's a hydroxyl group and a dimethylamino group. The positions of these groups relative to each other are specified as meta, ortho, and para. Let me start by recalling that in IUPAC nomenclature for aromatic compounds, the substituents are numbered in such a way that the lowest possible numbers are assigned, considering the order of priority. The priority order for substituents is usually based on their functional groups, with carboxylic acids being higher priority than others. Wait, but in the case of benzoic acids, the carboxylic acid is at position 1. Then, to have another group meta to it, it must be at 3. Then, the third group would need to be meta to both 1 and 3. The positions that are meta to 1 are 3 and 5. The positions that are meta to 3 are 1 and 5. Therefore, the only common position is 5. So if the third group is at 5, then it is meta to both 1 and 3. Therefore, the three groups are at positions Answer: C (Incorrect)	Chain of Thought: Okay, so I need to figure out the correct IUPAC name for this complex benzene ring molecule. Let me start by breaking down the information given. First, the molecule has a benzene ring with four different functional groups: a carboxylic acid, a carbaldehyde (which is an aldehyde group), a cyano group (CN), and a hydroxyl group (OH). Additionally, there are two more substituents: a dimethylamino group (which is an N,N-dimethylamino group) and a methoxy group (OCH3). The problem states that these groups are arranged in specific positions relative to each other. Let me parse that step by step. The first part says: "A benzene ring has a carboxylic acid, a carbaldehyde, and a cyano group all meta to one another." So, the carboxylic acid, aldehyde, and cyano group are all meta to each other. Option B. Wait, but let me check the options again. Option B is: 3-cyano-6-(dimethylamino)-5-formyl-2-hydroxy-4-methoxybenzoic acid Yes. That seems to match my analysis. But let me check if the order of substituents is correct. In IUPAC nomenclature, substituents are listed in alphabetical order. Let me check the substituents again. The substituents are: - cyano (CN) - dimethylamino (N(CH3)2) - formyl (CHO) - hydroxyl (OH) - methoxy (OCH3) So, in alphabetical order, the order should Answer: B (Correct)

Table 14: Qualitative outputs on MATH500 for Unpruned vs. Wanda-Uniform 20% pruned model.

Query	Unpruned	Wanda-Uniform 20%
The expression $2 \cdot 3 \cdot 4 \cdot 5 + 1$ is equal to 121, since multiplication is carried out before addition. However, we can obtain values other than 121 for this expression if we are allowed to change it by inserting parentheses. For example, we can obtain 144 by writing $(2 \cdot (3 \cdot 4)) \cdot (5 + 1) = 144$. In total, how many values can be obtained from the expression $2 \cdot 3 \cdot 4 \cdot 5 + 1$ by inserting parentheses? (Note that rearranging terms is not allowed, only inserting parentheses).	Chain of Thought: Okay, so I need to figure out how many different values can be obtained from the expression $2 \cdot 3 \cdot 4 \cdot 5 + 1$ by inserting parentheses. The original value is 121 because multiplication is done before addition. But if I can add parentheses, maybe I can get different results. The example given is $(2 \cdot (3 \cdot 4)) \cdot (5 + 1) = 144$. So, I need to explore all possible ways of inserting parentheses here and see how many unique results we can get. First, let me recall that inserting parentheses changes the order of operations. Since multiplication is associative and commutative, but addition is only associative, so inserting parentheses might change the order in which operations are performed, especially since we have both multiplication and addition here. Wait, but in the original expression, the grouping: $(2 \cdot ((3 + 4) \cdot 5)) + 1$. Let me compute: $3 + 4 = 7$, $7 \cdot 5 = 35$, $2 \cdot 35 = 70$, $70 + 1 = 71$. Which we had earlier. How about $(2 \cdot 3) \cdot (4 + 5) + 1$. That's $6 \cdot 9 + 1 = 54 + 1 = 55$. Which we had before. How about $((2 + 3) \cdot 4 \cdot 5) + 1$? Wait, but the original expression doesn't have a + between 2 and 3. Wait, but can we insert parentheses to do $(2 + 3) \cdot 4 \cdot 5 + 1$? Wait, but the original expression is $2 \cdot 3 \cdot 4 \cdot 5 + 1$. So inserting parentheses to do $(2 + 3)$ would require changing the operations? Wait, no. Wait, Answer: 8 (Incorrect)	Chain of Thought: Okay, so I need to figure out how many different values can be obtained from the expression $2 \cdot 3 \cdot 4 \cdot 5 + 1$ by inserting parentheses. The original value is 121 because multiplication is done before addition. But if I can add parentheses, maybe I can get different results. The example given is 144 by doing $(2 \cdot (3 \cdot 4)) \cdot (5 + 1)$. Let me try to understand this. First, the original expression is $2 \cdot 3 \cdot 4 \cdot 5 + 1$. Since multiplication has higher precedence than addition, it's evaluated as $(2 \cdot 3 \cdot 4 \cdot 5) + 1 = 120 + 1 = 121$. But if I can insert parentheses, I can group operations differently. The problem says that rearranging terms isn't allowed, only inserting parentheses. So I can't change the order of the numbers, only how the operations are grouped. Let me think about the structure of the expression. The original : between the product of 2,3,4,5 and 1. So the addition is only between the entire product and 1. So, to have the addition happen earlier, we need to have parentheses that include the addition operator. But the addition is between the product and 1, so how can we group it differently? Wait, for example, maybe inserting parentheses between the multiplications and the addition. For example, $2 \cdot 3 \cdot (4 \cdot (5 + 1))$ which is same as before. Or $2 \cdot (3 \cdot 4 \cdot (5 + 1))$. All these groupings lead to same value. So the Answer: 4 (Correct)
Let $p(x)$ be a polynomial of degree 5 such that $p(n) = \frac{n}{n^2-1}$ for $n = 2, 3, 4, \dots, 7$. Find $p(8)$.	Chain of Thought: Okay, so I need to find $p(8)$ where $p(x)$ is a degree 5 polynomial that satisfies $p(n) = \frac{n}{n^2-1}$ for $n = 2, 3, 4, 5, 6, 7$. Hmm. Let me think. First, since $p(x)$ is a degree 5 polynomial and we have 6 points (from $n=2$ to $n=7$), that should uniquely determine the polynomial, right? Because a polynomial of degree n is uniquely determined by $n+1$ points. So here, degree 5, 6 points, so unique. But how do I find $p(8)$? But maybe there's a smarter way than just finding the polynomial directly? Let me recall some techniques. Maybe interpolation? But interpolation for degree 5 might be tedious. Maybe there's a trick here with the given function $\frac{n}{n^2-1}$. Let function $f(x) = \frac{x}{x^2-1}$. For $x = 8$, $f(8) = \frac{8}{64-1} = \frac{8}{63} \approx 0.12698$. But $p(8)$ is $\frac{721}{9} \approx 80.111$. That seems way larger. But $p(x)$ is a degree 5 polynomial passing through those points. So maybe it's possible? But maybe there's a mistake in the calculation? Because the value seems very different from $f(8)$. Let me check $q(8)$ again. Wait, $q(x) = (x^2 - 1)p(x) - x$. So, if I think about $x=8$, then: $q(8) = (64 - 1)p(8) - 8 = 63p(8) - 8$. But we Answer: $\frac{721}{9}$ (Incorrect)	Chain of Thought: Okay, so I need to find $p(8)$ where $p(x)$ is a degree 5 polynomial that satisfies $p(n) = \frac{n}{n^2-1}$ for $n = 2, 3, 4, 5, 6, 7$. Hmm. Let me think. First, since $p(x)$ is a degree 5 polynomial and we have 6 points (from $n=2$ to $n=7$), that should uniquely determine the polynomial, right? Because a polynomial of degree n is uniquely determined by $n+1$ points. So here, degree 5, 6 points, so unique. But how do I find $p(8)$? But maybe there's a smarter way than constructing the entire polynomial? Maybe using some kind of interpolation or something? Let me recall that when you have a polynomial Therefore, $Q(x) = (x-2)(x-3)\dots(x-7)(x-a)$, where a is some constant. Therefore, $Q(x)$ is degree 7. But then, how can I find k? Wait, but I need another condition. Maybe we can find $Q(x)$ by evaluating at another point? For example, we can plug in $x = 1$? Let me try that. Let me compute $Q(1) = (1^2 - 1)p(1) - 1 = 0 \cdot p(1) - 1 = -1$. On the other hand, $Q(1) = (1-2)(1-3)\dots(1-7)(1-a) = (-1)(-2)(-3)(-4)(-5)(-6)(1-a)$. Let me compute that product. First, compute the product $(1-2)(1-3)\dots(1-7)$ Answer: $\frac{3}{56}$ (Correct)

Table 15: LLM as judge score using GPT-4o on the Chain of Thought reasoning between Unpruned and Wanda-20% sparsity on AIME24 for 2048 and 8192 thinking tokens. Results indicate that, although the differences are modest, the Wanda-20% model consistently achieves higher judge scores than the unpruned baseline.

Max_Token	Unpruned	Wanda 20%
2048	2.500	2.630
8192	2.230	2.300

Table 16: Results for Qwen3-8B on AIME24 and GPQA-Diamond comparing exact parameter count pruned using unstructured (magnitude and wanda) and structured pruning (ShortGPT). Here, 1 Layer and 2 Layer indicate 1 or 2 Layers removed using ShortGPT. For Qwen3-8B, removing one layer amounts to 2.7% and two layers amount to 5.5% removal of total parameters.

Dataset	Token	Unpruned	1 Layer	2 Layer	Mag 2.7%	Mag 5.5%	Wanda 2.7%	Wanda 5.5%
AIME	512	0.633$\pm$0.072	0.378 $\pm$ 0.057	0.100 $\pm$ 0.027	0.610 $\pm$ 0.016	0.633$\pm$0.000	0.533 $\pm$ 0.100	0.550 $\pm$ 0.050
	1024	0.489 $\pm$ 0.057	0.289 $\pm$ 0.042	0.067 $\pm$ 0.027	0.500 $\pm$ 0.100	0.516 $\pm$ 0.050	0.466 $\pm$ 0.033	0.580$\pm$0.080
	2048	0.433 $\pm$ 0.000	0.333 $\pm$ 0.094	0.078 $\pm$ 0.031	0.433 $\pm$ 0.033	0.450 $\pm$ 0.017	0.500$\pm$0.000	0.430 $\pm$ 0.030
	4096	0.433 $\pm$ 0.047	0.289 $\pm$ 0.031	0.100 $\pm$ 0.027	0.450 $\pm$ 0.050	0.430 $\pm$ 0.000	0.517$\pm$0.016	0.450 $\pm$ 0.016
	8192	0.578 $\pm$ 0.042	0.411 $\pm$ 0.042	0.133 $\pm$ 0.000	0.560 $\pm$ 0.060	0.580 $\pm$ 0.016	0.580 $\pm$ 0.110	0.610$\pm$0.016
GPQA	512	0.446 $\pm$ 0.020	0.399 $\pm$ 0.021	0.384 $\pm$ 0.030	0.455$\pm$0.015	0.442 $\pm$ 0.023	0.452 $\pm$ 0.013	0.450 $\pm$ 0.005
	1024	0.466 $\pm$ 0.010	0.423 $\pm$ 0.013	0.397 $\pm$ 0.021	0.470 $\pm$ 0.040	0.475$\pm$0.010	0.470 $\pm$ 0.005	0.450 $\pm$ 0.010
	2048	0.493 $\pm$ 0.037	0.455 $\pm$ 0.011	0.406 $\pm$ 0.019	0.513 $\pm$ 0.013	0.505 $\pm$ 0.010	0.518$\pm$0.033	0.508 $\pm$ 0.013
	4096	0.493 $\pm$ 0.037	0.498 $\pm$ 0.013	0.409 $\pm$ 0.025	0.561$\pm$0.025	0.561$\pm$0.020	0.538 $\pm$ 0.033	0.556 $\pm$ 0.005
	8192	0.588 $\pm$ 0.019	0.540 $\pm$ 0.030	0.421 $\pm$ 0.023	0.596 $\pm$ 0.000	0.606 $\pm$ 0.005	0.581 $\pm$ 0.010	0.619$\pm$0.008

Table 17: Results for s1.1-7B on AIME24 and GPQA-Diamond comparing exact parameter count pruned using unstructured (magnitude and wanda) and structured pruning (ShortGPT). Here, 1 Layer and 2 Layer indicate 1 or 2 Layers removed using ShortGPT. For s1.1-7B, removing one layer amounts to 3.5% and two layers amount to 7% removal of total parameters.

Dataset	Token	Unpruned	1 Layer	2 Layer	Mag 3.5%	Mag 7%	Wanda 3.5%	Wanda 7%
AIME	512	0.078 $\pm$ 0.016	0.011 $\pm$ 0.016	0.011 $\pm$ 0.016	0.067 $\pm$ 0.000	0.117$\pm$0.017	0.067 $\pm$ 0.000	0.017 $\pm$ 0.017
	1024	0.078 $\pm$ 0.032	0.033 $\pm$ 0.027	0.003 $\pm$ 0.005	0.100$\pm$0.033	0.050 $\pm$ 0.050	0.083 $\pm$ 0.017	0.083 $\pm$ 0.050
	2048	0.122$\pm$0.016	0.011 $\pm$ 0.016	0.003 $\pm$ 0.005	0.083 $\pm$ 0.017	0.100 $\pm$ 0.000	0.067 $\pm$ 0.033	0.083 $\pm$ 0.017
	4096	0.133 $\pm$ 0.000	0.044 $\pm$ 0.042	0.003 $\pm$ 0.005	0.133 $\pm$ 0.000	0.083 $\pm$ 0.017	0.150$\pm$0.050	0.150$\pm$0.017
	8192	0.167 $\pm$ 0.027	0.044 $\pm$ 0.016	0.011 $\pm$ 0.016	0.183 $\pm$ 0.050	0.217$\pm$0.083	0.117 $\pm$ 0.017	0.183 $\pm$ 0.017
GPQA	512	0.345$\pm$0.027	0.315 $\pm$ 0.009	0.320 $\pm$ 0.009	0.331 $\pm$ 0.008	0.323 $\pm$ 0.030	0.331 $\pm$ 0.023	0.326 $\pm$ 0.013
	1024	0.338 $\pm$ 0.008	0.313 $\pm$ 0.031	0.288 $\pm$ 0.036	0.290 $\pm$ 0.013	0.328 $\pm$ 0.025	0.328 $\pm$ 0.005	0.354$\pm$0.005
	2048	0.353$\pm$0.014	0.342 $\pm$ 0.025	0.294 $\pm$ 0.024	0.333 $\pm$ 0.020	0.336 $\pm$ 0.018	0.338 $\pm$ 0.015	0.343 $\pm$ 0.005
	4096	0.362 $\pm$ 0.022	0.343 $\pm$ 0.019	0.292 $\pm$ 0.026	0.381$\pm$0.018	0.346 $\pm$ 0.003	0.381 $\pm$ 0.003	0.394$\pm$0.005
	8192	0.391$\pm$0.034	0.330 $\pm$ 0.019	0.301 $\pm$ 0.035	0.381 $\pm$ 0.033	0.364 $\pm$ 0.025	0.389 $\pm$ 0.025	0.369 $\pm$ 0.020

Table 18: Additional results for Llama-3.1-8B (DeepSeek-R1-Distill) on AIME24 and GPQA-Diamond pruned using unstructured (magnitude and wanda) and structured pruning (ShortGPT). Here, 1 Layer and 2 Layer indicate 1 or 2 Layers removed using ShortGPT.

Dataset	Token	Unpruned	1 Layer	2 Layer	Mag 10%	Mag 20%	Wanda 10%	Wanda 20%
AIME	512	0.380$\pm$0.016	0.300 $\pm$ 0.067	0.183 $\pm$ 0.083	0.380$\pm$0.500	0.350 $\pm$ 0.160	0.360 $\pm$ 0.030	0.310 $\pm$ 0.830
	1024	0.410$\pm$0.016	0.367 $\pm$ 0.033	0.100 $\pm$ 0.067	0.410$\pm$0.010	0.360 $\pm$ 0.280	0.310 $\pm$ 0.050	0.330 $\pm$ 0.000
	2048	0.400$\pm$0.130	0.167 $\pm$ 0.033	0.200 $\pm$ 0.033	0.360 $\pm$ 0.030	0.280 $\pm$ 0.050	0.310 $\pm$ 0.167	0.300 $\pm$ 0.100
	4096	0.433$\pm$0.067	0.350 $\pm$ 0.017	0.300 $\pm$ 0.000	0.410 $\pm$ 0.050	0.380 $\pm$ 0.110	0.430 $\pm$ 0.000	0.360 $\pm$ 0.330
	8192	0.460$\pm$0.060	0.233 $\pm$ 0.033	0.250 $\pm$ 0.083	0.430 $\pm$ 0.000	0.360 $\pm$ 0.060	0.410 $\pm$ 0.016	0.410 $\pm$ 0.083
GPQA	512	0.350 $\pm$ 0.035	0.342 $\pm$ 0.018	0.333 $\pm$ 0.010	0.380$\pm$0.002	0.360 $\pm$ 0.035	0.380$\pm$0.035	0.370 $\pm$ 0.003
	1024	0.380$\pm$0.050	0.369 $\pm$ 0.015	0.376 $\pm$ 0.043	0.370 $\pm$ 0.023	0.370 $\pm$ 0.005	0.380$\pm$0.013	0.380$\pm$0.040
	2048	0.390 $\pm$ 0.010	0.376 $\pm$ 0.008	0.376 $\pm$ 0.008	0.400$\pm$0.020	0.370 $\pm$ 0.008	0.400$\pm$0.003	0.390 $\pm$ 0.018
	4096	0.400 $\pm$ 0.005	0.366 $\pm$ 0.053	0.338 $\pm$ 0.015	0.400 $\pm$ 0.008	0.400 $\pm$ 0.008	0.410 $\pm$ 0.008	0.420$\pm$0.051
	8192	0.470$\pm$0.020	0.323 $\pm$ 0.141	0.328 $\pm$ 0.066	0.440 $\pm$ 0.025	0.430 $\pm$ 0.023	0.450 $\pm$ 0.046	0.410 $\pm$ 0.028