
The Sparsity Whisperer

Linghao Kong
MIT
linghao@mit.edu

Inimai Subramanian
MIT
inimai@mit.edu

Micah Adler
MIT
micah432@mit.edu

Dan Alistarh
IST Austria
dan.alistarh@ist.ac.at

Dan Gutfreund
IBM
dgutfre@us.ibm.com

Nir Shavit
MIT & Red Hat AI
shanir@mit.edu

Abstract

Pruning reduces the inference cost of large language models, but existing criteria primarily preserve large activations or reconstruct layer outputs. We argue that this overlooks a key computation performed by particularly sparsity-sensitive neurons in the MLP up and gate projections: separating similar inputs into dissimilar outputs. This suggests that effective pruning should preserve not only activations, but also the differences between outputs more broadly. We introduce a family of difference-informed pruning methods built upon this principle. Wisp is a first-order, update-free method that scores weights using input-difference norms, and Wisp+ refines this score neuronwise using the input pairs each neuron separates most strongly. Finally, Whisper is a second-order method that uses a lightly regularized difference Hessian as its reconstruction objective. Across Llama 2 and 3.1 models from 7B to 405B parameters, our second-order variant consistently improves over strong reconstruction-based baselines, while our update-free variants improve over activation-aware baselines, especially in constrained settings. The improvements over Wanda and SparseGPT extend to structured sparsity, downstream evaluations, and other model families. Augmenting stronger techniques such as RIA and ALPS with our difference-informed criteria yields further improvements, shifting the overall accuracy-runtime frontier outward at negligible additional cost. These results suggest that preserving output differences is a broadly useful and composable signal for post-training LLM sparsification.

1 Introduction

As large language models (LLMs) continue to scale, their computational costs increasingly constrain deployment. This has made post-training compression an important tool for reducing inference cost while preserving the capabilities of pretrained models [Lin et al., 2024, Frantar et al., 2022, Han et al., 2015, Sun et al., 2023, Zhang et al., 2024a, Liu et al., 2023, Lee et al., 2024]. Weight sparsity [LeCun et al., 1989, Hassibi and Stork, 1992] is one such form of compression, removing parameters by setting selected weights to zero, which reduces the number of stored nonzero weights and offers a path to inference acceleration on hardware and kernels that exploit sparsity [Mishra et al., 2021, Macko and Boža, 2025]. We study pruning in the one-shot setting, where a pretrained model is sparsified using only a small calibration set and no subsequent finetuning. This setting is well studied for LLMs, where the cost of retraining makes the choice of pruning criterion particularly important.

Existing one-shot pruning methods differ primarily in how they estimate weight saliency. Magnitude pruning [Hagiwara, 1994], the simplest approach, removes weights with the smallest absolute values,

¹Code available at <https://github.com/Shavit-Lab/Whisper>.

but degrades LLM performance sharply. Input-aware methods such as Wanda [Sun et al., 2024], and refinements such as RIA [Zhang et al., 2024a], scale weight magnitudes by activation statistics from a small calibration set while leaving the remaining weights unchanged. SparseGPT [Frantar and Alistarh, 2023] has become a canonical second-order baseline for one-shot LLM pruning. It uses calibration inputs to form an approximate Hessian for a layerwise reconstruction problem, estimates the error induced by pruning individual weights, and updates the remaining weights to compensate. More recent methods such as ALPS [Meng et al., 2024] improve this reconstruction stage through stronger optimization and post-processing. Together, these methods form a strong set of practical baselines, but they use calibration data primarily to estimate which weights support large activations or local reconstruction. This raises the question of whether other structure in the calibration set can provide useful saliency information.

A clue for such additional structure comes from Wasserstein neurons, a recently identified subpopulation of neurons that are unusually difficult to sparsify [Sawmya et al., 2025, Kong et al., 2026]. Unlike ordinary neurons, these units are characterized not primarily by large activations or large weight magnitudes, but by their input-output geometry: they tend to map similar input vectors to dissimilar output scalars. Prior work shows that this behavior is strongly associated with the Wasserstein distance (WD) of neuron’s output distribution to a Gaussian baseline, thus terming high-WD units as Wasserstein neurons. These neurons’ sensitivity to pruning is especially apparent at higher sparsities and in more constrained settings. This suggests that pruning criteria may benefit from accounting for the geometry of the differences between output values more generally, rather than relying only on activation magnitude or reconstruction error.

Motivated by this insight, we develop a family of one-shot pruning methods that use output differences as an explicit saliency signal in the MLP up and gate projections, where Wasserstein neurons concentrate. **Wasserstein-Inspired Saliency Pruning (Wisp)** replaces Wanda’s activation-magnitude statistic in these projections with a saliency based on pairwise differences between the calibration inputs, leaving the surviving weights unchanged. Wisp+ specializes this statistic to the pairs that each neuron separates most strongly in output space relative to input distance. The second-order method, **Wasserstein-inspired Hessian-Informed Separation-Preserving Error Reconstruction (Whisper)**, retains SparseGPT’s weight updates but replaces its reconstruction geometry in the same projections with a Hessian constructed from pairwise input differences to preserve differences in output. Attention and down projections retain the corresponding baseline method, so our methods alter only the relevant criteria without changing model architecture or introducing additional optimization. We also use Wisp, Wisp+ and Whisper to denote their underlying difference-informed saliency statistics and Hessian geometry when incorporated into other pruning methods: while introduced through Wanda and SparseGPT, these components also improve the stronger RIA and ALPS formulations.

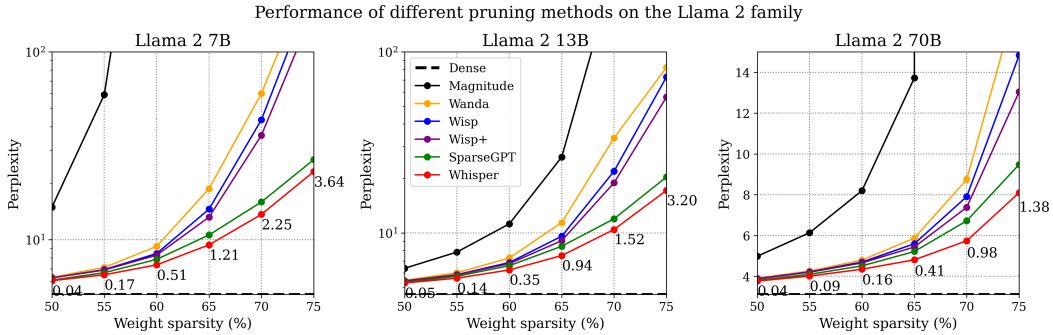


Figure 1: Unstructured sparsity scaling on Llama 2. Perplexity is shown for Llama 2 7B, 13B, and 70B as unstructured sparsity increases from 50% to 75% (lower is better). Wisp and Wisp+ consistently improve over Wanda in the no-update setting, while Whisper improves over SparseGPT at every sparsity and model size. The gains grow as pruning becomes more aggressive, suggesting that preserving pairwise output differences becomes increasingly important at high sparsity. Numbers written next to values indicate absolute perplexity improvement of Whisper over SparseGPT.

Empirically, we find that preserving output differences improves one-shot pruning across sparsity regimes, model scales, model families, and pruning formulations. On unstructured sparsity sweeps

over the Llama 2 family, Wisp and Wisp+ consistently improve over Wanda and close the gap to SparseGPT, while Whisper improves over SparseGPT at every tested sparsity from 50% to 75%, with the largest gains appearing at higher sparsities (Figure 1). The same pattern holds under 2:4 structured sparsity and on downstream Open LLM Leaderboard v1-like evaluations: Wisp+ is the strongest no-update method, and Whisper obtains the best overall perplexity (PPL) and mean downstream score across the Llama 2 and 3.1 families (Table 2). The gains generalize to Mistral and Qwen models (Table 5), and they do not come from hidden runtime costs: Wisp runs at Wanda speed, Wisp+ remains faster than SparseGPT, and Whisper runs at approximately SparseGPT speed (Table 11). Moreover, the difference-informed signal composes with stronger pruning techniques: augmenting RIA with Wisp or Wisp+ improves RIA across all tested settings, while augmenting ALPS with Whisper improves ALPS in all but one setting, with negligible additional pruning time (Section 4.7). Together, these results show that output differentiation improves both update-free saliency pruning and second-order reconstruction, from canonical baselines to stronger recent methods. This consistency distinguishes the signal from method-specific saliency or solver refinements and supports separation preservation as a general principle for one-shot LLM sparsification.

2 Related Work

Post-training compression The high cost of LLM inference has motivated post-training compression methods such as quantization [Lin et al., 2024, Ashkboos et al., 2024, Frantar et al., 2022], activation sparsity [Lee et al., 2024, Liu et al., 2023], and weight sparsity. We focus on one-shot weight pruning, where a pretrained model is sparsified using a small calibration set and no subsequent finetuning. This setting avoids retraining cost, but makes the pruning criterion especially important.

Canonical one-shot pruning backbones SparseGPT [Frantar and Alistarh, 2023], building on the Optimal Brain Surgeon/Compression framework [Hassibi and Stork, 1992, Frantar and Alistarh, 2022], formulates pruning as a layerwise sparse reconstruction problem. Given calibration inputs, it forms an approximate Hessian $\mathbf{H} = \mathbf{X}\mathbf{X}^T$, prunes weights according to estimated reconstruction cost, and updates the remaining weights to compensate for pruning error. Wanda [Sun et al., 2024] instead provides a simpler first-order alternative, scoring weights by $|\mathbf{W}_{ij}| \cdot \|\mathbf{X}_j\|_2$ and pruning without weight updates. These methods define two canonical practical regimes for one-shot LLM pruning: Wanda-style update-free saliency pruning and SparseGPT-style second-order reconstruction with weight updates. Our methods intervene directly in the calibration geometry of these regimes: Wisp and Wisp+ replace Wanda’s activation statistic with difference-informed saliencies, while Whisper replaces SparseGPT’s standard Hessian with a difference-informed second moment.

Stronger pruning formulations Recent methods strengthen Wanda- and SparseGPT-style pruning while remaining within comparable pruning paradigms. RIA [Zhang et al., 2024a] refines update-free saliency through normalized weight importance and activation statistics, while ALPS [Meng et al., 2024] improves sparse reconstruction through a stronger but costlier optimization procedure and post-processing. We therefore use RIA and ALPS as stronger recent baselines and test composability: RIA-Wisp and RIA-Wisp+ replace RIA’s activation statistic with difference-informed statistics, while ALPS-Whisper replaces ALPS’s reconstruction Hessian with our difference-informed geometry. Other approaches, including gradient-based scoring [Das et al., 2023], pruning-and-growing mask refinement [Zhang et al., 2024b], and symbolic saliency search [Dong et al., 2024] are more orthogonal to our intervention. To the best of our knowledge, prior work has not studied replacing activation-based reconstruction geometry with one that explicitly preserves pairwise output differences.

Wasserstein neurons and interpretability-guided sparsity Our work builds upon the findings of Sawmya et al. [2025] on Wasserstein neurons. They are a subpopulation of transformer MLP neurons concentrated within the up and gate projections whose output distributions have large WD from a Gaussian baseline and that map similar inputs to dissimilar outputs, a behavior quantified by their mapping difficulty metric, explained in more detail in Section A.6. These high-WD neurons are disproportionately sensitive to weight sparsification, with fragility increasing at higher sparsity. Prior work proposed Sparse Expansion to mitigate this high-sparsity fragility by routing inputs to multiple sparse experts, but doing so expands the sparse weights across 16 experts, making it better suited as an analytical framework than as a practical pruning method. In contrast, our methods add no additional components, instead converting output differentiation into practical pruning criteria.

3 Methodology

3.1 Wisp: Layerwise difference-informed saliency

The simplest way to preserve output differences is at the layer level. For a pair of inputs $\mathbf{x}_1$ and $\mathbf{x}_2$, their output difference under a linear layer is $\mathbf{W}\mathbf{x}_1 - \mathbf{W}\mathbf{x}_2 = \mathbf{W}(\mathbf{x}_1 - \mathbf{x}_2)$. Thus, preserving pairwise output differences after pruning amounts to preserving the layer outputs induced by differences between inputs. Wanda estimates the importance of a weight by combining its magnitude with the size of the corresponding input channel on the calibration set. We instead score each weight by its contribution to the layer outputs induced by these input differences.

Consider a linear layer $\mathbf{W} \in \mathbb{R}^{n \times m}$ with n output neurons and m input channels. Let $\mathbf{X} = [\mathbf{x}_1, \dots, \mathbf{x}_s] \in \mathbb{R}^{m \times s}$ denote the calibration inputs to the layer, where each column $\mathbf{x}_\ell \in \mathbb{R}^m$ is one input vector. We write $\mathbf{X}_j \in \mathbb{R}^s$ for the j -th input channel across the s calibration samples.

Let π be a random permutation of $\{1, \dots, s\}$ and let $\mathbf{X}_\pi = [\mathbf{x}_{\pi(1)}, \dots, \mathbf{x}_{\pi(s)}]$ be the corresponding column-permuted calibration matrix. We define $\Delta\mathbf{X} = \mathbf{X} - \mathbf{X}_\pi$, so that the ℓ -th column is the sampled pairwise difference $\Delta\mathbf{X}_{:, \ell} = \mathbf{x}_\ell - \mathbf{x}_{\pi(\ell)}$. For neuron i , the output difference induced by this pair is $\Delta y_{i, \ell} = \mathbf{w}_i \Delta\mathbf{X}_{:, \ell} = \sum_{j=1}^m \mathbf{W}_{ij} \Delta\mathbf{X}_{j, \ell}$. More details on sampling choices in Section A.3, including using nearest neighbors rather than randomly sampled input pairs.

Thus, the contribution of weight $\mathbf{W}_{ij}$ to pairwise output separation across sampled pairs has magnitude proportional to $|\mathbf{W}_{ij}| \cdot \|\Delta\mathbf{X}_j\|_2$. We therefore define the layerwise difference-informed saliency $\mathbf{S}_{ij}^{\text{Wisp}} = |\mathbf{W}_{ij}| \cdot \|\Delta\mathbf{X}_j\|_2$. More formally, this score also follows from a difference-preservation objective in which pruning is chosen to preserve $\mathbf{W}\Delta\mathbf{X}$ rather than the ordinary layer outputs $\mathbf{W}\mathbf{X}$ (Section A.2). Under a diagonal approximation and without updates to the surviving weights, pruning $\mathbf{W}_{ij}$ incurs cost $\mathbf{W}_{ij}^2 \|\Delta\mathbf{X}_j\|_2^2$. Ranking by the square root of this cost yields the saliency above. Random pairing also admits an equivalent deterministic centered implementation at the second-moment level, with nearly identical performance; we provide the derivation and comparison in Section A.4 and include both variants in our code. We retain the pairwise formulation because it directly expresses the output-difference preservation objective and is required for Wisp+.

This score has the same form as Wanda, but replaces the activation norm $\|\mathbf{X}_j\|_2$ with a difference norm $\|\Delta\mathbf{X}_j\|_2$. It preserves Wanda’s no-update pruning procedure and changes only the calibration statistic used to score weights, yielding correlated but distinct scores (Figure 2a).

We apply this saliency only to the MLP projections where input differentiation is expected to matter. Prior work finds that Wasserstein neurons are concentrated primarily in the projections preceding the MLP nonlinearity, especially the up and gate projections. Consistent with this localization, we find that the difference saliency improves pruning in the up and gate projections and is comparable to or underperforms Wanda in the MLP down and attention projections (Table 4). We therefore use Wisp for the up and gate projections, and retain standard Wanda for attention and down projections.

3.2 Wisp+: Neuronwise difference-informed saliency

The layerwise statistic in Wisp uses the same norm of pairwise input differences for every neuron in a layer. However, recent work suggests that individual Wasserstein neurons specialize in differentiating distinct subsets of input pairs [Kong et al., 2026]. We therefore refine the difference statistic at the neuron level. Unlike the layerwise statistic, this neuron-specific conditioning cannot be represented by a single global centered statistic, so Wisp+ inherently retains the explicit pairwise formulation.

As in Wisp, let π be a random permutation of the calibration samples and define $\Delta\mathbf{X} = \mathbf{X} - \mathbf{X}_\pi$. For neuron i , let $y_{i, \ell} = \mathbf{w}_i \mathbf{x}_\ell$ denote its scalar output on calibration input $\mathbf{x}_\ell$. The output difference induced by the ℓ -th sampled pair is $\Delta y_{i, \ell} = y_{i, \ell} - y_{i, \pi(\ell)} = \mathbf{w}_i \Delta\mathbf{X}_{:, \ell}$. We score each sampled pair by the output separation induced per unit input distance: $r_{i, \ell} = \frac{|\Delta y_{i, \ell}|}{\|\Delta\mathbf{X}_{:, \ell}\|_2}$. We then select the top K pair indices for neuron i : $\mathcal{P}_i = \text{TopK}_{\ell \in \{1, \dots, s\}} r_{i, \ell}$. In all experiments in the main text, $K = 0.005s$.

Given this neuron-specific pair set, we estimate which input channels are most involved in the separations that neuron i performs. For input channel j , we compute the average absolute channel difference over the selected pairs: $\frac{1}{|\mathcal{P}_i|} \sum_{\ell \in \mathcal{P}_i} |\Delta\mathbf{X}_{j, \ell}|$. We use an ℓ_1 statistic over the selected difference vectors as it performs better empirically than the corresponding ℓ_2 statistic in the neuronwise setting.

The neuronwise difference-informed saliency is then $\mathbf{S}_{ij}^{\text{Wisp+}} = |\mathbf{W}_{ij}| \cdot \frac{1}{|\mathcal{P}_i|} \sum_{\ell \in \mathcal{P}_i} |\Delta \mathbf{X}_{j,\ell}|$. Thus, while Wisp asks which input channels vary across sampled calibration pairs at the layer level, Wisp+ asks which input channels vary among the specific pairs that neuron i maps unusually far apart. We show that this saliency preserves the ability of neurons to separate similar inputs (Figure 2) and also provide additional ablations for the choice of K and neuron specialization proportion (Section A.7).

We apply this saliency only to the MLP up and gate projections, like in Wisp, and use Wanda elsewhere (Table 4). Wisp+ remains a first-order, no-update method. Its additional cost comes only from selecting neuron-specific high-differentiation pairs and computing the corresponding channel statistics, but both in complexity and in wall-clock remains faster than SparseGPT (Tables 1 and 11).

3.3 Whisper: Difference-informed Hessian reconstruction

The layerwise difference statistic $\Delta \mathbf{X}$ also defines a natural second-order pruning objective. SparseGPT seeks to preserve the layer output $\mathbf{W}\mathbf{X}$ on calibration inputs, yielding the standard Hessian $\mathbf{H} = \mathbf{X}\mathbf{X}^T$. By contrast, our goal is to preserve the layer’s pairwise output separations, $\mathbf{W}\Delta \mathbf{X}$, where $\Delta \mathbf{X}$ contains sampled differences between calibration inputs, constructed as before. Replacing the standard reconstruction target $\mathbf{W}\mathbf{X}$ with the separation-preservation target $\mathbf{W}\Delta \mathbf{X}$ yields the difference Hessian $\mathbf{H}_\Delta = \Delta \mathbf{X}\Delta \mathbf{X}^T$. Thus, while Wisp can be viewed as a first-order diagonal approximation to preserving $\mathbf{W}\Delta \mathbf{X}$, the full second-order analogue is obtained by using $\mathbf{H}_\Delta$ in place of $\mathbf{H}$. We provide the derivation in Section A.1. Similarly, this difference Hessian is equivalent up to scale to a centered covariance formulation, yielding a deterministic implementation of Whisper that closely matches the performance of our sampled formulation (Section A.4).

In practice, using only $\mathbf{H}_\Delta$ can be unstable, as reconstruction overemphasizes preserving relative pairwise differences while discarding information about the absolute calibration output values. We therefore lightly regularize the difference Hessian with the standard activation Hessian. Let $\mu = \frac{\text{tr}(\mathbf{H})}{m}$ and $\mu_\Delta = \frac{\text{tr}(\mathbf{H}_\Delta)}{m}$. We first rescale $\mathbf{H}_\Delta$ to match the average diagonal scale of $\mathbf{H}$, and then define $\tilde{\mathbf{H}} = \gamma \mathbf{H} + (1 - \gamma) \frac{\mu}{\mu_\Delta} \mathbf{H}_\Delta$ where γ is small, equal to 0.01 in all experiments. This interpolation preserves the difference-informed geometry while retaining a small amount of the standard reconstruction objective. More details about this regularization can be found in Section A.5.

Whisper uses $\tilde{\mathbf{H}}$ as a drop-in replacement for the SparseGPT Hessian. The pruning score becomes $\mathbf{S}_{ij}^{\text{Whisper}} = |\mathbf{W}_{ij}|^2 / \left[(\tilde{\mathbf{H}} + \lambda \mathbf{I})^{-1} \right]_{jj}$ and the remaining weights are updated using the same reconstruction procedure as SparseGPT. $\lambda = 0.01$ across all experiments for SparseGPT and Whisper.

As with Wisp and Wisp+, we apply the difference-informed Hessian only to the MLP up and gate projections (Table 4). Attention projections and MLP down projections are pruned using standard SparseGPT. Thus, Whisper changes only the Hessian geometry in the targeted projections, while preserving SparseGPT’s pruning solver, weight-update rule, and asymptotic complexity.

We provide the pseudocode for our methods in Section A.10 and summarize the pruning metrics and complexities of our and prior methods below. Note that for Wisp and Wisp+, we follow the precedent established by Wanda and prune each neuron to the same sparsity level, as we do for Wanda itself.

Method	Weight Update	Calibration	Pruning Metric $\mathbf{S}_{ij}$	Complexity
Magnitude	$\times$	$\times$	$ \mathbf{W}_{ij} $	$O(1)$
Wanda	$\times$	$\checkmark$	$ \mathbf{W}_{ij} \cdot \ \mathbf{X}_j\ _2$	$\tilde{O}(d_{\text{hidden}}^2)$
Wisp	$\times$	$\checkmark$	$ \mathbf{W}_{ij} \cdot \ \Delta \mathbf{X}_j\ _2$	$O(d_{\text{hidden}}^2)$
Wisp+	$\times$	$\checkmark$	$ \mathbf{W}_{ij} \cdot \frac{1}{ \mathcal{P}_i } \sum_{\ell \in \mathcal{P}_i} \Delta \mathbf{X}_{j,\ell} $	$O(d_{\text{hidden}}^2)$
SparseGPT	$\checkmark$	$\checkmark$	$ \mathbf{W}_{ij} ^2 / \left[(\mathbf{H} + \lambda \mathbf{I})^{-1} \right]_{jj}$	$\tilde{O}(d_{\text{hidden}}^3)$
Whisper	$\checkmark$	$\checkmark$	$ \mathbf{W}_{ij} ^2 / \left[(\tilde{\mathbf{H}} + \lambda \mathbf{I})^{-1} \right]_{jj}$	$O(d_{\text{hidden}}^3)$

Table 1: Comparison of difference-informed pruning methods with existing LLM pruning algorithms.

3.4 Evaluation protocol

We evaluate on Llama 2 (7B, 13B, 70B) [Touvron et al., 2023], Llama 3.1 (8B, 70B, 405B) [Dubey et al., 2024], Mistral 7B v0.3 [Jiang et al., 2023], Qwen3 (8B, 14B) [Yang et al., 2025], and Granite 4.1 (8B, 30B) [IBM Research, 2026]. For all methods, we use 128 sequences of 4096 tokens from the WikiText-2 [Merity et al., 2016] training set for calibration. Wisp, Wisp+, and Whisper form pairs within each calibration sequence rather than across the full set for memory efficiency, and per-sequence saliency is aggregated. We prune each linear layer to the same sparsity, skipping pruning the embedding layer and final language modeling head as is standard practice. We test both unstructured and 2:4 sparsity [Mishra et al., 2021], where two of every four consecutive weights are pruned for hardware acceleration. We use NVIDIA H100 and L40S GPUs for our experiments.

For language modeling, we report perplexity on the WikiText-2 test set. For downstream performance, we use the Language Model Evaluation Harness [Gao et al., 2024] to evaluate the sparsified models on an Open LLM Leaderboard v1-like task suite: ARC Challenge (25-shot) [Clark et al., 2018], MathQA (0-shot) [Amini et al., 2019], HellaSwag (10-shot) [Zellers et al., 2019], MMLU (5-shot) [Hendrycks et al., 2020], TruthfulQA-MC (0-shot) [Lin et al., 2022], and WinoGrande (5-shot) [Sakaguchi et al., 2021]. In all tables, lower perplexity and higher benchmark score indicate better performance.

4 Experimental Results

4.1 Language modeling capability scaling under unstructured sparsity

Figure 1 shows perplexity across the Llama 2 family as sparsity increases from 50% to 75%, with raw values in Table 12. For all three models, the same ordering emerges. Whisper consistently performs the best overall, improving over SparseGPT. Among methods without weight updates, Wisp and Wisp+ consistently outperform Wanda, with Wisp+ usually yielding the stronger performance.

The gains are more modest at lower sparsity, where all input-aware methods remain close, but grow as pruning becomes more aggressive. In particular, Wisp+ meaningfully reduces the performance gap from the baselines with and without weight updates, quantified as $\frac{\text{PPL}_{\text{Wanda}} - \text{PPL}_{\text{Wisp+}}}{\text{PPL}_{\text{Wanda}} - \text{PPL}_{\text{SparseGPT}}}$. At 65% sparsity, Wisp+ closes 68% of the Wanda-SparseGPT gap on Llama 2 7B, 78% on Llama 2 13B, and 67% on Llama 2 70B. Thus, although Wisp+ performs no weight updates, it recovers a large fraction of the benefit normally obtained by moving from first-order pruning to second-order reconstruction.

The difference-informed second-order method yields the strongest overall performance, with Whisper improving over SparseGPT at every reported sparsity and model size. These improvements are obtained using the same SparseGPT mask selection and weight-update rule, changing only the Hessian geometry in the MLP up and gate projections. Overall, as the number of remaining weights decreases, it becomes increasingly important to preserve directions along which outputs are separated.

4.2 Scaling across the Llama families

We measure the WikiText-2 perplexity and downstream benchmark scores for the Llama 2 and 3.1 families at 2:4 sparsity, 50% unstructured sparsity, and 65% unstructured sparsity (Table 2). The same pattern once again appears across both model families and across all sparsity settings. Among methods with weight updates, Whisper consistently improves over SparseGPT, yielding the best perplexity score in all reported configurations and the best benchmark score in all but one, in which Wisp+ outperforms it. Among methods without weight updates, Wisp improves over Wanda in nearly every setting, and Wisp+ usually improves further.

At 2:4 sparsity, Wisp+ is the best no-update method for all models for both language modeling and downstream performance, indicating that the difference-informed statistic provides a stronger saliency signal even under structured settings. Overall, the reconstruction-based Whisper yields the best perplexity and downstream performance for every model.

The gains become more pronounced at higher sparsity. At 65% unstructured sparsity, Wisp+ substantially improves over Wanda across all models, while Whisper improves over SparseGPT in both perplexity and mean downstream score. These results are consistent with the motivating hypothesis: as sparsity increases, preserving output-separation structure becomes increasingly important. At 50% sparsity, the models are less stressed, but the same ordering mostly persists. Whisper still obtains the

Method	Sparsity	7B		Llama 2 13B		70B		8B		Llama 3.1 70B		405B
		PPL	Mean	PPL	Mean	PPL	Mean	PPL	Mean	PPL	Mean	PPL
Dense		5.12	53.22	4.57	57.01	3.12	65.17	5.84	61.52	2.64	70.62	1.34
Magnitude	2:4	54.39	38.16	8.32	43.93	6.33	54.83	765.3	32.77	1.1e3	39.34	10.55
Wanda		10.53	39.39	7.79	43.94	4.97	57.13	18.87	36.81	7.84	56.76	4.60
Wisp		9.52	40.41	7.36	45.49	4.86	57.57	17.65	38.03	7.61	57.82	4.53
Wisp+		<u>9.20</u>	<u>40.79</u>	<u>7.24</u>	<u>46.00</u>	<u>4.81</u>	<u>57.79</u>	<u>16.70</u>	<u>38.40</u>	<u>7.51</u>	<u>58.01</u>	<u>4.50</u>
SparseGPT		8.18	41.19	6.69	44.93	4.71	57.05	11.19	41.62	6.78	56.98	4.20
Whisper		7.56	41.98	6.29	46.60	4.51	58.39	10.18	42.24	6.40	58.22	4.06
Magnitude	50%	14.89	45.25	6.37	51.12	4.99	60.54	150.9	38.66	17.91	54.14	40.27
Wanda		6.31	47.41	5.47	52.87	3.91	62.52	8.76	50.79	5.29	64.97	2.75
Wisp		<u>6.25</u>	47.65	<u>5.42</u>	53.28	3.89	<u>62.81</u>	8.62	<u>51.31</u>	5.25	64.92	2.73
Wisp+		<u>6.25</u>	<u>47.91</u>	<u>5.42</u>	53.21	<u>3.88</u>	<u>62.76</u>	<u>8.50</u>	51.25	<u>5.23</u>	64.95	<u>2.72</u>
SparseGPT		6.09	48.35	5.34	52.84	3.81	62.66	7.80	53.16	4.94	65.77	2.59
Whisper		6.04	48.62	5.28	53.14	3.77	62.96	7.64	53.49	4.93	65.97	2.57
Magnitude	65%	3.7e4	32.76	26.24	35.87	13.73	47.02	3.4e4	<u>33.19</u>	8.3e3	32.60	1.1e4
Wanda		18.81	33.92	11.33	36.72	5.89	54.31	36.48	32.44	9.83	49.41	5.64
Wisp		14.61	35.19	9.59	38.90	5.60	55.64	34.90	32.89	9.25	51.17	5.51
Wisp+		<u>13.17</u>	<u>36.05</u>	<u>9.04</u>	<u>39.71</u>	<u>5.44</u>	<u>55.83</u>	<u>30.09</u>	33.10	<u>9.01</u>	<u>51.55</u>	<u>5.48</u>
SparseGPT		10.64	38.36	8.41	41.11	5.22	55.76	14.51	38.95	7.29	55.34	4.86
Whisper		9.46	39.67	7.54	42.57	4.83	57.71	13.07	39.37	6.88	56.00	4.68

Table 2: Performance on Llama 2 and 3.1. Bold indicates best overall performance and underline indicates best performance without weight updates. We report only perplexity for Llama 3.1 405B due to the prohibitive cost of downstream evaluation at this scale. Results collected over three trials.

lowest perplexity for every model, and its downstream mean is best or near-best across the table. This suggests that the difference-informed Hessian is not only useful in extreme pruning regimes, but also improves more practically relevant one-shot pruning settings. Raw scores provided in Section A.11.

4.3 Task-level behavior on Llama 2 70B

We provide a detailed task breakdown for Llama 2 70B. The improvements in Table 2 arise from multiple benchmarks rather than being driven by a single task.

Method	Sparsity	PPL	Mean	ARC-C	MathQA	HS	MMLU	TQA	WinoG
Dense		3.12	65.17	67.32	38.32	87.27	69.65	44.82	83.66
Magnitude	2:4	6.33	54.83	55.97	30.35	78.36	50.73	39.90	73.64
Wanda		4.97	57.13	<u>59.50</u>	31.89	78.63	55.96	38.73	78.08
Wisp		4.86	57.57	59.16	31.98	79.41	56.92	39.63	78.32
Wisp+		<u>4.81</u>	<u>57.79</u>	59.04	<u>32.19</u>	<u>79.72</u>	<u>57.45</u>	39.77	<u>78.56</u>
SparseGPT		4.71	57.05	58.96	32.51	78.20	57.26	37.43	77.95
Whisper		4.51	58.39	60.69	32.45	79.91	58.82	39.65	78.80

Table 3: Performance on Llama 2 70B at 2:4 sparsity. Bold indicates best performance and underline indicates best performance without weight updates. Results collected over three trials.

4.4 Localizing and preserving input differentiation

Having established that difference-informed saliency improves pruning performance, we investigate whether Wisp+ captures the input differentiating structure that motivates the method as a diagnostic.

First, Wisp and Wisp+ remain correlated with Wanda because all three scores include weight magnitude. However, the off-diagonal spread shows that the difference-informed statistics are not simply rescaled Wanda scores (Figure 2a, b). We next ask whether Wisp+ identifies the weights most responsible for input separation. To do so, we analyze Wisp+ saliencies for weights in Wasserstein neurons compared to the same number of randomly chosen neurons. Following Kong et al. [2026], we define Wasserstein neurons as those that have the top 1% mapping difficulty (MD), i.e. neurons that separate similar inputs the most. We use the formulation of MD established in prior work and

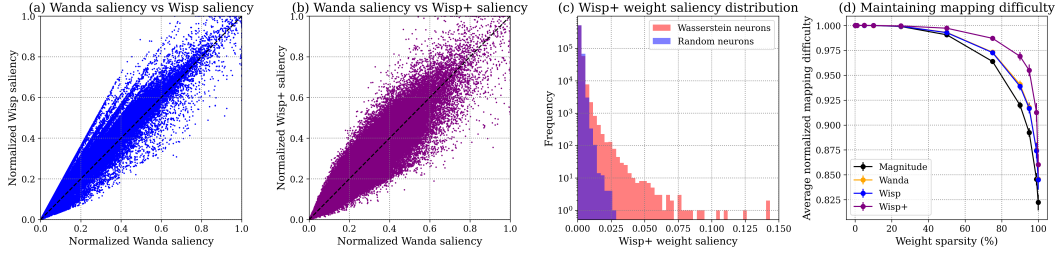


Figure 2: Analysis of Wisp and Wisp+ for an individual layer. Wisp (a) and Wisp+ (b) saliencies compared to Wanda. Wisp+ weight saliencies for randomly chosen vs. Wasserstein neurons (c). Under pruning, Wisp+ best preserves the mapping difficulty of Wasserstein neurons, especially at higher sparsities (d). Mapping difficulty is used only for this illustrative analysis and not for any of the pruning techniques directly. Analysis performed in the second gate projection of Llama 3.1 8B. Error bars indicate one standard error of the mean.

provide the implementation details in Section A.6. Sawmya et al. [2025] used Wasserstein distance and MD to identify Wasserstein neurons, but did not assign credit to the individual weights supporting their input-differentiating behavior. Wisp+ provides this weight-level localization: high-MD neurons exhibit a much heavier tail of high-saliency weights, suggesting that neuronwise pair selection concentrates saliency on weights that support input separation.

Finally, we test whether this localization preserves the original input-output geometry for Wasserstein neurons under pruning. As sparsity increases, we measure degradation in MD for the pruned outputs. At high sparsity, Wisp+ preserves MD best, followed by Wanda and Wisp, and then by magnitude pruning. While improving over Wanda in performance, Wisp uses a shared layerwise difference statistic, so it does not capture the neuron-specific structure targeted by Wisp+. This may explain why it tracks Wanda closely, and is slightly lower at some extreme sparsities, in terms of preserved MD in this analysis. Thus, Wisp+’s neuron-specific saliency is associated with both improved perplexity and better preservation of the motivating input-differentiating behavior. We note that our usage of MD is purely for diagnostic analysis after pruning and is not incorporated into the core pruning algorithms.

4.5 Component-wise comparisons

We validate where difference-informed pruning is most useful. For each component type, we prune only that component in Llama 2 7B at 2:4 sparsity and compare the corresponding standard and difference-informed criteria in terms of final perplexity. The gains are concentrated in the MLP gate and up projections, especially when both are pruned together. This matches the motivation from Wasserstein neurons, which are most prominently observed there [Sawmya et al., 2025]. Other components are less consistent: the MLP down projection worsens under difference-informed saliency, and attention shows mixed behavior, with a small gain for Wisp+ but not for Wisp or Whisper. We therefore use the difference-informed criteria only for the MLP gate and up projections throughout the paper, and retain the corresponding baseline method for attention and down projections.

Component	% of all parameters	Wanda	Wisp	Wisp+	SparseGPT	Whisper
MLP gate	22.3%	5.8410	5.8162	5.7224	5.4557	5.4203
MLP up	22.3%	5.5759	5.5704	5.5724	5.4686	5.4696
MLP gate + up	44.6%	6.7854	6.6412	6.5035	6.0176	5.9018
MLP down	22.3%	5.6289	5.6762	5.7318	5.5273	5.5414
Attention	33.1%	6.7038	6.7617	6.6270	5.7504	5.7743

Table 4: Component-wise comparison of standard and difference-informed pruning criteria. Results are averaged over three trials.

4.6 Generalization to Mistral and Qwen

We next evaluate whether the gains generalize beyond the Llama families. Table 5 reports 2:4 sparsity results for Mistral 7B v0.3, Qwen3 8B Base, and Qwen3 14B Base.

Method	Mistral 7B v0.3		Qwen3 8B Base		Qwen3 14B Base	
	PPL	Mean	PPL	Mean	PPL	Mean
Dense	4.95	60.56	6.51	68.25	5.95	71.70
Magnitude	13.49	42.12	754.4	31.92	121.3	41.57
Wanda	9.64	41.49	11.33	50.31	8.81	56.66
Wisp	8.97	42.74	11.18	<u>50.49</u>	8.68	56.65
Wisp+	<u>8.64</u>	<u>43.05</u>	<u>10.86</u>	50.46	<u>8.55</u>	<u>57.03</u>
SparseGPT	7.47	44.79	9.04	51.12	7.80	57.82
Whisper	6.91	45.97	8.82	51.45	7.65	58.11

Table 5: Performance on Mistral 7B v0.3, Qwen3 8B Base, and Qwen3 14B Base at 2:4 sparsity. Bold indicates best performance and underline indicates best performance without weight updates. Results collected over three trials.

These results show that the benefit of preserving input differentiation is not specific to Llama 2 or Llama 3.1. The improvements transfer across architectures and model families, including both Mistral and Qwen models. This supports the view that pairwise input separation provides a general calibration signal for post-training sparsification. Additional results on Granite 4.1 in Section A.11.5.

4.7 Composability with stronger pruning methods

We next test whether difference-informed pruning composes with stronger methods. RIA augments Wanda-style pruning with row and column normalized weight importance and modified activation scaling. We form RIA-Wisp and RIA-Wisp+ by retaining RIA’s weight normalization while replacing its activation statistic in the MLP gate and up projections with the corresponding Wisp or Wisp+ difference statistic. Similarly, ALPS improves second-order pruning through a stronger sparse-reconstruction optimizer. We form ALPS-Whisper by retaining the complete ALPS procedure and hyperparameters while replacing its standard Hessian in the gate and up projections with the Whisper regularized difference-informed Hessian, using the same $\gamma = 0.01$. More details in Section A.9.

Method	Llama 2 7B			Llama 2 13B			Llama 2 70B		
	2:4	50%	65%	2:4	50%	65%	2:4	50%	65%
RIA	10.24	6.25	18.23	7.48	5.39	10.22	4.91	3.84	5.79
RIA-Wisp	9.57	6.22	15.83	7.19	5.38	9.30	4.85	<u>3.83</u>	5.59
RIA-Wisp+	<u>9.34</u>	<u>6.21</u>	<u>14.52</u>	<u>7.13</u>	<u>5.37</u>	8.94	<u>4.81</u>	<u>3.83</u>	<u>5.46</u>
ALPS	7.22	5.88	8.24	6.11	5.17	6.80	4.50	3.74	4.80
ALPS-Whisper	7.04	5.89	7.94	5.97	5.15	6.54	4.41	3.72	4.66

Table 6: Composability with stronger pruning methods on WikiText-2. Difference-informed variants improve RIA in all settings and ALPS in all but one. Bold indicates best performance and underline indicates best performance without weight updates. Results are averaged over three trials.

Across Llama 2 7B, 13B, and 70B at 2:4, 50%, and 65% sparsity, RIA-Wisp improves upon RIA in all nine settings with negligible pruning time overhead. RIA-Wisp+ improves further, showing that difference-informed saliency is complementary to RIA’s weight normalization. ALPS-Whisper similarly improves ALPS in eight of nine settings with at most 1.5% additional pruning time; the sole exception differs by only 0.01 perplexity for Llama 2 7B at 50% sparsity. Figure 3 illustrates the resulting accuracy-runtime tradeoff at 2:4 sparsity. In particular, on Llama 2 70B, Whisper nearly matches ALPS (4.51 compared to 4.50 perplexity) while requiring only 20% total pruning time, and ALPS-Whisper further reduces perplexity to 4.41 at essentially the same cost as ALPS. Thus, difference-informed criteria are not specific to Wanda or SparseGPT, but improve stronger pruning formulations and shift the overall accuracy-runtime frontier. Full results provided in Section A.11.6.

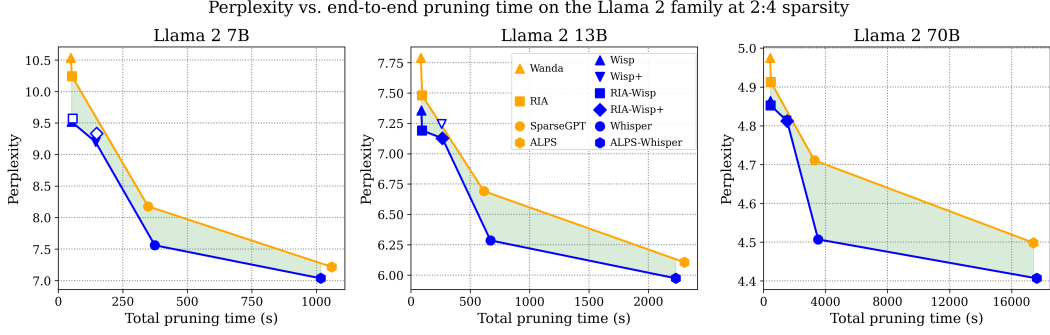


Figure 3: Difference-informed pruning shifts the accuracy-runtime frontier outward. Perplexity vs. end-to-end pruning time is shown for the Llama 2 family at 2:4 sparsity (lower-left is better). Orange markers denote baseline pruning methods, while blue markers denote their difference-informed counterparts. Filled markers denote Pareto-efficient methods and hollow markers denote dominated methods. Lines connect Pareto-efficient points within each group, and the shaded region highlights the improvement in attainable accuracy-runtime tradeoffs. Results collected over three trials.

5 Limitations

Our experiments focus on dense pretrained language models and one-shot pruning without subsequent finetuning. This is the standard setting for many LLM sparsity studies, since dense models provide a controlled benchmark for comparing pruning criteria without additional architectural or systems complications. Extending the method to mixture of experts (MoE) models is an interesting direction, but MoE sparsification generally requires more engineering around routing and load balancing. Because MoE architectures allocate a larger fraction of parameters to expert MLP up and gate projections, difference-informed pruning may be especially useful there. Similarly, our techniques only modify the saliencies of the up and gate projections, and we do not propose changes to the down or attention projections. Despite this restriction, we observe consistent performance. We also do not study post-pruning finetuning or recovery training. Finetuning could improve all pruning methods, but it would also act as a confound. We therefore isolate the pure one-shot setting, where differences between methods can be attributed directly to the pruning criterion or reconstruction geometry.

6 Conclusion and Discussion

Across sparsity patterns, model scales, model families, and pruning formulations, our results show that one-shot pruning benefits from preserving pairwise output differences. Wisp demonstrates that a simple layerwise difference statistic improves Wanda at essentially the same cost. Wisp+ further shows that specializing this statistic to neuron-specific high-differentiation pairs yields stronger no-update pruning. Whisper extends the same principle to second-order pruning by replacing SparseGPT’s activation Hessian with a lightly regularized difference-informed Hessian. Across our primary Wanda and SparseGPT comparisons, Whisper obtains the lowest perplexity in every pruned setting and improves downstream averages across Llama, Mistral, and Qwen models. Composing these criteria with RIA and ALPS shifts the accuracy-runtime frontier outward: RIA-Wisp and RIA-Wisp+ improve RIA and ALPS-Whisper improves ALPS in nearly every setting with negligible additional pruning time. Together, these results establish difference-informed pruning as a broadly effective principle for one-shot LLM sparsification, improving performance across backbones, saliency formulations, and reconstruction solvers.

More broadly, our findings suggest that pruning criteria may benefit by being tailored to the computation performed by each model component. The MLP up and gate projections appear to rely on maintaining differences between outputs, and preserving this behavior improves sparsification. Other components may require different preservation principles. We hope this work motivates the development of component-specific pruning criteria that preserve not only large activations or reconstruction fidelity, but also the functional role each component plays in the model.

Acknowledgments

The authors would like to thank Eldar Kurtić, Alexandre Marques, Rebecca Lin, Timothy Gomez, and Shashata Sawmya for providing insightful feedback and constructive discussions during the development of this work.

This project was supported by an MIT-IBM Watson AI Lab grant and the MIT UROP Office. Computational resources were provided by the MIT Office of Research Computing and Data.

References

- Aida Amini, Saadia Gabriel, Shanchuan Lin, Rik Koncel-Kedziorski, Yejin Choi, and Hannaneh Hajishirzi. Mathqa: Towards interpretable math word problem solving with operation-based formalisms. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 2357–2367, 2019.
- Saleh Ashkboos, Amirkeivan Mohtashami, Maximilian L Croci, Bo Li, Martin Jaggi, Dan Alistarh, Torsten Hoefer, and James Hensman. Quarot: Outlier-free 4-bit inference in rotated llms. *arXiv preprint arXiv:2404.00456*, 2024.
- Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. Think you have solved question answering? try arc, the ai2 reasoning challenge. *arXiv preprint arXiv:1803.05457*, 2018.
- Rocktim Jyoti Das, Mingjie Sun, Liqun Ma, and Zhiqiang Shen. Beyond size: How gradients shape pruning decisions in large language models. *arXiv preprint arXiv:2311.04902*, 2023.
- Peijie Dong, Lujun Li, Zhenheng Tang, Xiang Liu, Xinglin Pan, Qiang Wang, and Xiaowen Chu. Pruner-zero: Evolving symbolic pruning metric from scratch for large language models. In *Proceedings of the 41st International Conference on Machine Learning*. PMLR, 2024.
- Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, et al. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024.
- Elias Frantar and Dan Alistarh. Optimal brain compression: A framework for accurate post-training quantization and pruning. *Advances in Neural Information Processing Systems*, 35:4475–4488, 2022.
- Elias Frantar and Dan Alistarh. Sparsegpt: Massive language models can be accurately pruned in one-shot. In *International Conference on Machine Learning*, pages 10323–10337. PMLR, 2023.
- Elias Frantar, Saleh Ashkboos, Torsten Hoefer, and Dan Alistarh. Gptq: Accurate post-training quantization for generative pre-trained transformers. *arXiv preprint arXiv:2210.17323*, 2022.
- Leo Gao, Jonathan Tow, Baber Abbasi, Stella Biderman, Sid Black, Anthony DiPofi, Charles Foster, Laurence Golding, Jeffrey Hsu, Alain Le Noac’h, Haonan Li, Kyle McDonell, Niklas Muennighoff, Chris Ociepa, Jason Phang, Laria Reynolds, Hailey Schoelkopf, Aviya Skowron, Lintang Sutawika, Eric Tang, Anish Thite, Ben Wang, Kevin Wang, and Andy Zou. The language model evaluation harness, 07 2024. URL <https://zenodo.org/records/12608602>.
- Masafumi Hagiwara. A simple and effective method for removal of hidden units and weights. *Neurocomputing*, 6(2):207–218, 1994.
- Song Han, Jeff Pool, John Tran, and William Dally. Learning both weights and connections for efficient neural network. *Advances in neural information processing systems*, 28, 2015.
- Babak Hassibi and David Stork. Second order derivatives for network pruning: Optimal brain surgeon. *Advances in neural information processing systems*, 5, 1992.
- Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding. *arXiv preprint arXiv:2009.03300*, 2020.
- IBM Research. Granite 4.1 llms: How they’re built. <https://huggingface.co/blog/ibm-granite/granite-4-1>, 2026.
- Albert Q Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, et al. Mistral 7b. *arXiv preprint arXiv:2310.06825*, 2023.
- Linghao Kong, Angelina Ning, Micah Adler, and Nir Shavit. Negative pre-activations differentiate syntax. In *The Fourteenth International Conference on Learning Representations*, 2026.

- Yann LeCun, John Denker, and Sara Solla. Optimal brain damage. *Advances in neural information processing systems*, 2, 1989.
- Je-Yong Lee, Donghyun Lee, Genghan Zhang, Mo Tiwari, and Azalia Mirhoseini. Cats: Contextually-aware thresholding for sparsity in large language models. *arXiv preprint arXiv:2404.08763*, 2024.
- Ji Lin, Jiaming Tang, Haotian Tang, Shang Yang, Wei-Ming Chen, Wei-Chen Wang, Guangxuan Xiao, Xingyu Dang, Chuang Gan, and Song Han. Awq: Activation-aware weight quantization for on-device llm compression and acceleration. *Proceedings of Machine Learning and Systems*, 6: 87–100, 2024.
- Stephanie Lin, Jacob Hilton, and Owain Evans. Truthfulqa: Measuring how models mimic human falsehoods. In *Proceedings of the 60th annual meeting of the association for computational linguistics (volume 1: long papers)*, pages 3214–3252, 2022.
- Zichang Liu, Jue Wang, Tri Dao, Tianyi Zhou, Binhang Yuan, Zhao Song, Anshumali Shrivastava, Ce Zhang, Yuandong Tian, Christopher Re, et al. Deja vu: Contextual sparsity for efficient llms at inference time. In *International Conference on Machine Learning*, pages 22137–22176. PMLR, 2023.
- Vladimír Macko and Vladimír Boža. Macko: Sparse matrix-vector multiplication for low sparsity. *arXiv preprint arXiv:2511.13061*, 2025.
- Xiang Meng, Kayhan Behdin, Haoyue Wang, and Rahul Mazumder. Alps: Improved optimization for highly sparse one-shot pruning for large language models. *Advances in Neural Information Processing Systems*, 37:37594–37625, 2024.
- Stephen Merity, Caiming Xiong, James Bradbury, and Richard Socher. Pointer sentinel mixture models. *arXiv preprint arXiv:1609.07843*, 2016.
- Asit Mishra, Jorge Albericio Latorre, Jeff Pool, Darko Stosic, Dusan Stosic, Ganesh Venkatesh, Chong Yu, and Paulius Micikevicius. Accelerating sparse deep neural networks. *arXiv preprint arXiv:2104.08378*, 2021.
- Keisuke Sakaguchi, Ronan Le Bras, Chandra Bhagavatula, and Yejin Choi. Winogrande: An adversarial winograd schema challenge at scale. *Communications of the ACM*, 64(9):99–106, 2021.
- Shashata Sawmya, Linghao Kong, Ilia Markov, Dan Alistarh, and Nir N Shavit. Wasserstein distances, neuronal entanglement, and sparsity. In *The Thirteenth International Conference on Learning Representations*, 2025.
- Mingjie Sun, Zhuang Liu, Anna Bair, and J Zico Kolter. A simple and effective pruning approach for large language models. *arXiv preprint arXiv:2306.11695*, 2023.
- Mingjie Sun, Zhuang Liu, Anna Bair, and J. Zico Kolter. A simple and effective pruning approach for large language models. In *The Twelfth International Conference on Learning Representations*, 2024.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
- An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, et al. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*, 2025.
- Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, and Yejin Choi. Hellaswag: Can a machine really finish your sentence? *arXiv preprint arXiv:1905.07830*, 2019.
- Yingtao Zhang, Haoli Bai, Haokun Lin, Jialin Zhao, Lu Hou, and Carlo Vittorio Cannistraci. Plug-and-play: An efficient post-training pruning method for large language models. In *The Twelfth International Conference on Learning Representations*, 2024a.

Yuxin Zhang, Lirui Zhao, Mingbao Lin, Yunyun Sun, Yiwu Yao, Xingjia Han, Jared Tanner, Shiwei Liu, and Rongrong Ji. Dynamic sparse no training: Training-free fine-tuning for sparse LLMs. In *The Twelfth International Conference on Learning Representations*, 2024b.

A Appendix

A.1 Difference preservation objective

Consider a linear layer with dense weights $\mathbf{W}$ and sparse weights $\widehat{\mathbf{W}}$. Standard layerwise reconstruction methods such as SparseGPT aim to preserve the layer output on calibration inputs:

$$\min_{\widehat{\mathbf{W}}} \left\| \mathbf{W}\mathbf{X} - \widehat{\mathbf{W}}\mathbf{X} \right\|_F^2$$

Writing $\mathbf{E} = \mathbf{W} - \widehat{\mathbf{W}}$, this becomes

$$\|\mathbf{E}\mathbf{X}\|_F^2 = \text{tr}(\mathbf{E}\mathbf{X}\mathbf{X}^T\mathbf{E}^T)$$

Letting $\mathbf{e}_i$ denote row i of $\mathbf{E}$, we can equivalently write this objective as

$$\|\mathbf{E}\mathbf{X}\|_F^2 = \sum_{i=1}^n \mathbf{e}_i \mathbf{X} \mathbf{X}^T \mathbf{e}_i^T$$

Thus, for each output row, the reconstruction objective is a quadratic form whose curvature matrix is:

$$\mathbf{H} = \mathbf{X}\mathbf{X}^T$$

Our goal is instead to preserve the layer's ability to separate paired calibration inputs. Let

$$\Delta\mathbf{X} = \mathbf{X} - \mathbf{X}_\pi$$

be the matrix of sampled pairwise differences. The corresponding objective is

$$\min_{\widehat{\mathbf{W}}} \left\| \mathbf{W}\Delta\mathbf{X} - \widehat{\mathbf{W}}\Delta\mathbf{X} \right\|_F^2 = \min_{\widehat{\mathbf{W}}} \|\mathbf{E}\Delta\mathbf{X}\|_F^2$$

Expanding gives

$$\|\mathbf{E}\Delta\mathbf{X}\|_F^2 = \text{tr}(\mathbf{E}\Delta\mathbf{X}\Delta\mathbf{X}^T\mathbf{E}^T) = \sum_{i=1}^n \mathbf{e}_i \Delta\mathbf{X}\Delta\mathbf{X}^T \mathbf{e}_i^T$$

Thus, preserving pairwise output differences yields the difference curvature matrix

$$\mathbf{H}_\Delta = \Delta\mathbf{X}\Delta\mathbf{X}^T$$

This, with the addition of light regularization, is the Hessian used by Whisper.

Since Whisper otherwise follows the SparseGPT update rule, replacing $\mathbf{H}$ by the regularized difference Hessian $\tilde{\mathbf{H}} = \gamma\mathbf{H} + (1 - \gamma)\frac{\mu}{\mu_\Delta}\mathbf{H}_\Delta$ directly yields the score

$$\mathbf{S}_{ij}^{\text{Whisper}} = \frac{|\mathbf{W}_{ij}|^2}{\left[(\tilde{\mathbf{H}} + \lambda\mathbf{I})^{-1} \right]_{jj}}$$

A.2 Diagonal approximation and Wisp

The same difference-preservation objective also yields the first-order Wisp saliency under a diagonal approximation to the curvature. For one output row i , the difference-preserving reconstruction error is

$$\mathbf{e}_i \mathbf{H}_\Delta \mathbf{e}_i^T$$

with the Hessian of differences

$$\mathbf{H}_\Delta = \Delta \mathbf{X} \Delta \mathbf{X}^T$$

where $\mathbf{e}_i = \mathbf{w}_i - \widehat{\mathbf{w}}_i$. If we ignore cross-channel interactions by approximating

$$\mathbf{H}_\Delta \approx \text{diag}(\mathbf{H}_\Delta)$$

then the row-wise objective becomes

$$\sum_{j=1}^m e_{ij}^2 (\mathbf{H}_\Delta)_{jj}$$

Since

$$(\mathbf{H}_\Delta)_{jj} = \sum_{\ell=1}^s (\Delta \mathbf{X}_{j,\ell})^2 = \|\Delta \mathbf{X}_j\|_2^2$$

the diagonal reconstruction error is

$$\sum_{j=1}^m (\mathbf{w}_{ij} - \widehat{\mathbf{w}}_{ij})^2 \|\Delta \mathbf{X}_j\|_2^2$$

In a no-update pruning rule, removing weight $\mathbf{W}_{ij}$ sets $\widehat{\mathbf{w}}_{ij} = 0$, and therefore incurs diagonal cost

$$\mathbf{W}_{ij}^2 \|\Delta \mathbf{X}_j\|_2^2$$

Ranking weights by this cost is equivalent to ranking by its square root,

$$|\mathbf{W}_{ij}| \|\Delta \mathbf{X}_j\|_2$$

which is precisely the Wisp saliency. This is directly analogous to the diagonal reconstruction view of Wanda, with the activation norm $\|\mathbf{X}_j\|_2$ replaced by the difference norm $\|\Delta \mathbf{X}_j\|_2$.

A.3 Sampling approach details

To test whether additional samples of pairwise differences improves performance, we increase the number of independent random permutations to obtain $N \in \{s, 2s, 4s, 8s, 16s\}$ pairs per calibration sequence of length s , keeping $K = 0.005N$ for Wisp+.

Method	Sampled pairs per sequence				
	s	$2s$	$4s$	$8s$	$16s$
Wisp	9.52	9.54	9.52	9.54	9.52
Wisp+	9.20	9.21	9.21	9.20	9.23
Whisper	7.56	7.57	7.55	7.56	7.54

Table 7: One permutation per calibration sequence is sufficient in practice. We report WikiText-2 perplexity for Llama 2 7B at 2:4 sparsity. Results are averaged over three trials.

Performance remains essentially unchanged across all pair counts for Wisp, Wisp+, and Whisper, indicating that one permutation ($N = s$) is sufficient in practice and more computationally efficient.

Furthermore, to directly isolate whether input similarity itself contributes to the pruning signal, even without Wisp+’s neuron-specific saliency, we run the following nearest neighbor pairing ablation for Wisp. For a calibration sequence containing activation vectors $\mathbf{x}_1, \mathbf{x}_2, \dots, \mathbf{x}_s$, rather than forming $\Delta\mathbf{X}$ using a random permutation to create pairs as in Section 3.1, we now directly find the nearest neighbor of each $\mathbf{x}_i$ via the L_2 norm: $n(i) = \operatorname{argmin}_{j \in \{1, 2, \dots, s\}, j \neq i} \|\mathbf{x}_i - \mathbf{x}_j\|_2$.

We then form $\Delta\mathbf{x}_i^{NN} = \mathbf{x}_i - \mathbf{x}_{n(i)}$ and thus construct $\Delta\mathbf{X}_{NN} = [\mathbf{x}_1 - \mathbf{x}_{n(1)}, \mathbf{x}_2 - \mathbf{x}_{n(2)}, \dots, \mathbf{x}_s - \mathbf{x}_{n(s)}]$. This preserves the same number of pairwise differences as the random-permutation implementation. All other aspects of Wisp and the evaluation protocol remain unchanged for this diagnostic ablation. We report WikiText-2 perplexity averaged over three trials.

Method	Llama 2 7B			Llama 2 13B			Llama 2 70B		
	2:4	50%	65%	2:4	50%	65%	2:4	50%	65%
Wisp with random pairs	9.52	6.25	14.61	7.36	5.42	9.59	4.86	3.89	5.60
Wisp with nearest neighbors	9.42	6.26	14.14	7.27	5.41	9.33	4.84	3.88	5.53
Wisp+	9.20	6.25	13.17	7.24	5.42	9.04	4.81	3.88	5.44

Table 8: Nearest neighbor pairing ablation on the Llama 2 family. Replacing random pairs in Wisp with nearest neighbor input activation pairs consistently improves perplexity in the more constrained 2:4 and 65% sparsity settings, while performance remains similar at 50% sparsity. Wisp+ generally improves further through neuron-specific, output-aware pair selection. Results are averaged over three trials.

Method	Llama 2 7B	Llama 2 13B	Llama 2 70B
Wisp with random pairs	51.3 s	87.3 s	434 s
Wisp with nearest neighbors	84.0 s	139 s	573 s
Wisp+	144 s	258 s	1476 s

Table 9: More targeted pair selection improves performance at increased pruning cost. Results are averaged over three trials.

Nearest neighbor pairing improves Wisp at 2:4 and 65% sparsity while remaining comparable at 50%, showing that emphasizing differences between similar inputs strengthens the layerwise statistic in more constrained settings. However, this incurs a 30% to 65% increase in pruning time; we therefore do not use nearest neighbor pairing in our primary experiments. Wisp+ generally improves further through neuron-specific, output-aware pair selection. Overall, these results support the difference-informed framework: the progression from global difference preservation to increasingly targeted preservation of input separation improves performance, with a corresponding tradeoff in computational cost.

A.4 Centering interpretation of random pairing

The random-pair statistics used by Wisp and Whisper admit an equivalent centered interpretation at the second-moment level. Let

$$\bar{\mathbf{x}} = \frac{1}{s} \mathbf{X} \mathbf{1}$$

denote the mean calibration input and define the centered calibration matrix

$$\mathbf{X}_c = \mathbf{X} - \bar{\mathbf{x}} \mathbf{1}^T$$

Recall that $\Delta \mathbf{X} = \mathbf{X} - \mathbf{X}_\pi$, where π is a uniformly sampled random permutation of the calibration inputs. Taking the expectation over π gives

$$\begin{aligned} \mathbb{E}_\pi [\Delta \mathbf{X} \Delta \mathbf{X}^T] &= \mathbb{E}_\pi [(\mathbf{X} - \mathbf{X}_\pi)(\mathbf{X} - \mathbf{X}_\pi)^T] \\ &= \mathbf{X} \mathbf{X}^T + \mathbb{E}_\pi [\mathbf{X}_\pi \mathbf{X}_\pi^T] - \mathbb{E}_\pi [\mathbf{X} \mathbf{X}_\pi^T] - \mathbb{E}_\pi [\mathbf{X}_\pi \mathbf{X}^T] \end{aligned}$$

Permuting the columns does not change their second moment, so

$$\mathbf{X}_\pi \mathbf{X}_\pi^T = \mathbf{X} \mathbf{X}^T$$

Moreover, each permuted column is uniformly distributed over the columns of $\mathbf{X}$, and therefore

$$\mathbb{E}_\pi [\mathbf{X} \mathbf{X}_\pi^T] = \mathbb{E}_\pi [\mathbf{X}_\pi \mathbf{X}^T] = s \bar{\mathbf{x}} \bar{\mathbf{x}}^T$$

It follows that

$$\mathbb{E}_\pi [\Delta \mathbf{X} \Delta \mathbf{X}^T] = 2 (\mathbf{X} \mathbf{X}^T - s \bar{\mathbf{x}} \bar{\mathbf{x}}^T) = 2 \mathbf{X}_c \mathbf{X}_c^T$$

Thus, the random-pair difference Hessian is a stochastic estimator of twice the centered second-moment matrix.

For Wisp, taking the diagonal gives

$$\mathbb{E}_\pi [\|\Delta \mathbf{X}_j\|_2^2] = 2 \|\mathbf{X}_{c,j}\|_2^2$$

The corresponding expected diagonal pruning cost is therefore

$$2 \mathbf{W}_{ij}^2 \|\mathbf{X}_{c,j}\|_2^2$$

Ranking weights by the square root of this cost yields

$$\sqrt{2} |\mathbf{W}_{ij}| \|\mathbf{X}_{c,j}\|_2$$

which has the same ordering as the deterministic centered saliency

$$\mathbf{S}_{ij}^{\text{Centered Wisp}} = |\mathbf{W}_{ij}| \|\mathbf{X}_{c,j}\|_2$$

The common factor $\sqrt{2}$ does not affect pruning decisions.

The same equivalence holds for Whisper. Let

$$\mathbf{H}_c = \mathbf{X}_c \mathbf{X}_c^T, \quad \mu_c = \frac{\text{tr}(\mathbf{H}_c)}{m}$$

Since the expected random-pair Hessian is $2\mathbf{H}_c$, its trace scale is also multiplied by two. Consequently, the factor cancels under the normalization used by Whisper:

$$\frac{\mu}{2\mu_c} (2\mathbf{H}_c) = \frac{\mu}{\mu_c} \mathbf{H}_c$$

The deterministic centered form of the regularized Hessian is therefore

$$\tilde{\mathbf{H}}_c = \gamma \mathbf{H} + (1 - \gamma) \frac{\mu}{\mu_c} \mathbf{H}_c$$

which has the same normalized geometry as the expected random-pair construction.

Hence, random pairing and direct centering represent the same global second-moment statistic up to a constant factor: random pairing estimates it stochastically, whereas centering computes it deterministically. This identity also holds when the statistics are constructed separately within each calibration sequence and subsequently aggregated.

To assess whether the two formulations also match in practice, we compare their pruning performance across Llama 2 scales and sparsity settings.

Method	Llama 2 7B			Llama 2 13B			Llama 2 70B		
	2:4	50%	65%	2:4	50%	65%	2:4	50%	65%
Wisp	9.52	6.25	14.61	7.36	5.42	9.59	4.86	3.89	5.60
Centered Wisp	9.53	6.25	14.56	7.36	5.42	9.58	4.86	3.89	5.60
Whisper	7.56	6.04	9.46	6.29	5.28	7.54	4.51	3.77	4.83
Centered Whisper	7.56	6.04	9.45	6.28	5.28	7.51	4.50	3.77	4.82

Table 10: Centered implementations closely match the random-pair formulations of Wisp and Whisper across Llama 2 scales and sparsities. Results are averaged over three trials.

The centered variants closely match the random-pair formulations because they deterministically compute the same second-moment geometry, up to a common factor that does not affect pruning. We retain pairwise output-difference preservation as the conceptual framework because explicit pairs naturally support both Wisp+’s neuron-specific selection and similarity-focused constructions such as the nearest neighbor pairing ablation in Table 8. Accordingly, the primary experiments use the random-pair formulation, while the centered variants provide deterministic implementations of the global Wisp and Whisper statistics. We provide both implementations in the code.

A.5 Regularizing $\mathbf{H}_\Delta$ with γ

In practice, using only $\mathbf{H}_\Delta$ may be ill-conditioned and may overemphasize preserving differences at the expense of preserving absolute outputs. We therefore combine the difference Hessian with the standard activation Hessian:

$$\tilde{\mathbf{H}} = (1 - \gamma)\mathbf{H}_\Delta^* + \gamma\mathbf{H}^*$$

where $\mathbf{H}_\Delta^*$ and $\mathbf{H}^*$ are trace-normalized versions of $\mathbf{H}_\Delta$ and $\mathbf{H}$, respectively. This corresponds to the regularized objective

$$(1 - \gamma)\|\mathbf{E}\Delta\tilde{\mathbf{X}}\|_F^2 + \gamma\|\mathbf{E}\tilde{\mathbf{X}}\|_F^2$$

which preserves pairwise separations while retaining a small amount of the standard reconstruction objective. We conduct experiments for the choice of γ below, both on the level of an individual layer and end to end. Note that $\gamma = 1$ is equivalent to using the baseline SparseGPT algorithm.

First, we evaluate the reconstruction error for both regular outputs $\mathbf{W}\mathbf{X}$ and the outputs of pairwise differences of inputs $\mathbf{W}\Delta\mathbf{X}$ for different values of γ in Whisper at 2:4 sparsity. We find that using smaller γ minimizes the mean square error (MSE) of reconstructing $\mathbf{W}\Delta\mathbf{X}$ with the sparse weights $\tilde{\mathbf{W}}$, with $\gamma = 1$ having the highest MSE (Figure 4a). However, this comes at the cost of worse reconstruction of $\mathbf{W}\mathbf{X}$ itself, with decreasing MSE for $\mathbf{W}\mathbf{X}$ as γ increases (Figure 4b).

When we compute the mean of the outputs for each neuron i , $\text{mean } \mathbf{w}_i\mathbf{X}$, and compare them to the mean of the outputs under sparsity, $\text{mean } \hat{\mathbf{w}}_i\mathbf{X}$, we observe that lower γ causes a greater shift in the means in favor of preserving the differences (Figure 4c).

Overall, this suggests that, while using a smaller γ will better preserve outputs of pairwise input differences, a γ that is too small sacrifices reconstruction of the regular outputs and systematically misaligns the neuronwise means, ultimately causing worse end to end recovery. We thus choose $\gamma = 0.01$ for all experiments in the main paper, which has a balance of low MSE for the outputs of pairwise differences of inputs, low MSE for the outputs of regular inputs, and high alignment between neuronwise dense output means and neuronwise pruned output means.

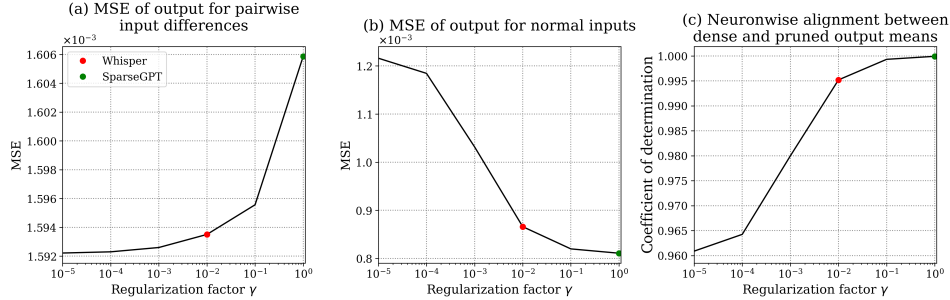


Figure 4: Effect of γ for an individual layer. Reconstruction error for the outputs of the pairwise input differences (a). Reconstruction error for the regular outputs (b). Coefficient of determination of the neuronwise sparse output means compared to the neuronwise dense output means (c). The γ used for all experiments in the main paper, 0.01, is marked, as well as the effective γ for SparseGPT of 1. Analysis performed in the second gate projection of Llama 3.1 8B. The layer is pruned to 2:4 sparsity.

We also measure end to end perplexity when sparsifying individual components in each transformer block, with different γ values. We do so in Llama 2 7B at 2:4 sparsity.

For the MLP gate and up projections, both separately and jointly, we observe a decrease in perplexity compared to $\gamma = 1$ (SparseGPT) as γ decreases. This improvement in performance occurs up to a point, after which perplexity once again rises (Figure 5a-c). This likely corresponds to the point in which the reconstruction of $\mathbf{W}\Delta\mathbf{X}$ comes at too high of a cost to the reconstruction of $\mathbf{W}\mathbf{X}$ itself, as observed in Figure 4.

However, for the MLP down and attention projections, we observe that the overall perplexity for any $\gamma < 1.0$ is worse than $\gamma = 1$, which aligns with the observation that Wasserstein neurons themselves are concentrated in the up and gate projections [Sawmya et al., 2025, Kong et al., 2026].

We then measure perplexity for different models when sparsifying them end to end to 2:4 sparsity for different γ with Whisper. We find that decreasing γ improves performance, with perplexity decreasing consistently, up to a point. For γ below ≈ 0.001 , we see perplexity increase and performance degrade. We thus use $\gamma = 0.01$ for all Whisper experiments in the main paper. Optimizing γ per model or per layer remains interesting future work.

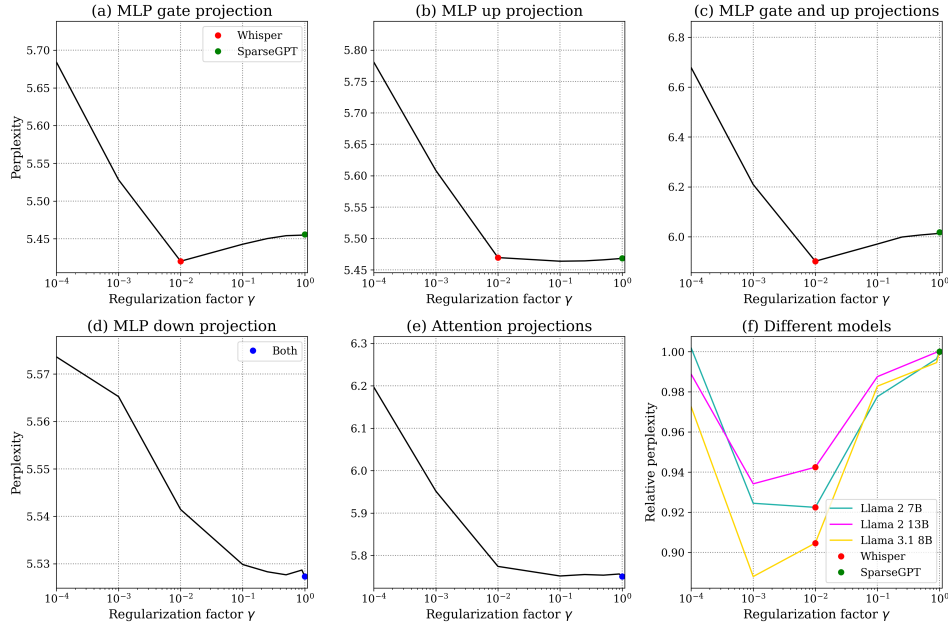


Figure 5: Effect of γ for different transformer components. Perplexity when sparsifying only the MLP gate projection in every transformer block (a), only the MLP up projection in every transformer block (b), both the MLP gate and up projections in every transformer block (c), only the MLP down projection in every transformer block (d), and attention projections in every transformer block (e). (a-e) Analysis performed in Llama 2 7B. Perplexity for end to end sparsification of Llama 2 7B, Llama 2 13B, and Llama 3.1 8B with different γ in Whisper (f). The γ used for all experiments in the main paper, 0.01, is marked, as well as the effective γ for SparseGPT of 1. Layers and models pruned to 2:4 sparsity.

A.6 Mapping difficulty definition

Mapping difficulty is a metric proposed by prior work [Sawmya et al., 2025] to measure the ability of a neuron to differentiate similar inputs. We use it only to select for Wasserstein neurons for ablation analyses and as a validation that Wisp+ preserves this ability, but do not use it directly to design our pruning algorithms. We provide the formulation below:

Consider a linear layer $\mathbf{W} \in \mathbb{R}^{n \times m}$ with n output neurons and m input channels. Let $\mathbf{X} = [\mathbf{x}_1, \dots, \mathbf{x}_s] \in \mathbb{R}^{m \times s}$ denote the calibration inputs to the layer, where each column $\mathbf{x}_\ell \in \mathbb{R}^m$ is one input vector.

Let π be a random permutation of $\{1, \dots, s\}$ and let $\mathbf{X}_\pi = [\mathbf{x}_{\pi(1)}, \dots, \mathbf{x}_{\pi(s)}]$ be the corresponding column-permuted calibration matrix. We define $\Delta\mathbf{X} = \mathbf{X} - \mathbf{X}_\pi$, so that the ℓ -th column is the sampled pairwise difference $\Delta\mathbf{X}_{:, \ell} = \mathbf{x}_\ell - \mathbf{x}_{\pi(\ell)}$. For neuron i , the output difference induced by this pair is $\Delta y_{i, \ell} = \mathbf{w}_i \Delta\mathbf{X}_{:, \ell}$.

Compute the ℓ_2 norm for each of the ℓ pairwise difference of input vectors, $\|\Delta\mathbf{X}_{:, \ell}\|_2$. This is normalized by the maximum $N_x = \max_{\ell \in \{1, \dots, s\}} \|\Delta\mathbf{X}_{:, \ell}\|_2$ to bound the norms between 0 and 1.

For each neuron i , compute the ℓ_1 norm for each pairwise difference in output scalars, $|\Delta y_{i, \ell}| = |\mathbf{w}_i \Delta\mathbf{X}_{:, \ell}|$. This is normalized by the median $N_{y, i} = \text{median}_{\ell \in \{1, \dots, s\}} |\Delta y_{i, \ell}|$ to account for differences in scales between neurons.

The mapping difficulty of each neuron is then defined as the average of the per-pair ratio of the normalized output differences to the normalized input differences:

$$\text{MD}_i = \text{mean}_{\ell \in \{1, \dots, s\}} \left(\frac{|\Delta y_{i, \ell}|}{N_{y, i}} \right) / \left(\frac{\|\Delta\mathbf{X}_{:, \ell}\|_2}{N_x} \right)$$

This measures the degree of separation in output space that a neuron must provide for incoming inputs.

A.7 From Wisp to Wisp+

For Wisp+, to better understand how the choice of K , the number of pairs each neuron is specialized on, impacts performance, we sweep K and measure end to end perplexity in Llama 2 7B at 2:4 sparsity. For $K = s$, with s being the total number of samples of pairwise differences, this essentially reduces to Wisp, with ℓ_1 instead of ℓ_2 norm. As the fraction of s that K comprises decreases, we observe a consistent decrease in perplexity, suggesting that increasing specialization yields increasing performance (Figure 6a). We use $K = 0.005s$ in all experiments for Wisp+ in the main body.

We also investigate how changing the number of neurons that are specialized within Wisp+ impacts performance. We again measure end to end perplexity in Llama 2 7B at 2:4 sparsity, using $K = 0.005s$. For each gate and up projection, we sweep the proportion of neurons that we apply the Wisp+ saliency to, and apply Wisp to the remainder. For a fraction of 1.0, this is equivalent to Wisp+, and for a fraction of 0.0, this is equivalent to Wisp.

To choose the neurons that we apply Wisp+ to within each layer, we order them by their mapping difficulty. For all specialization fractions, we specialize the neurons with the highest mapping difficulty first to understand whether specialization most helps neurons that significantly separate similar inputs, or whether it helps in general. We follow the formulation of mapping difficulty established by Sawmya et al. [2025], which we describe in Section A.6. We use this metric purely to understand the behavior of this algorithm under this ablation, and the metric does not factor into the pruning algorithms presented in the main body.

We observe that specializing neurons with higher mapping difficulty yields the largest marginal gains. Perplexity drops most steeply when moving from no specialization to specializing the neurons with the highest mapping difficulties. However, the improvement is not confined exclusively to this top subset. Perplexity continues to decrease as a larger fraction of neurons is specialized, suggesting that input differentiation is a broader property shared by many neurons in the gate and up projections, rather than a capability localized only to the Wasserstein neurons. At the same time, the curve flattens once most neurons have been specialized: the final gains from including the neurons with the lowest mapping difficulties, especially the bottom 20%, are small. Thus, specialization is generally beneficial, but exhibits diminishing returns in the regime of least input separation. For consistency, we specialize all neurons in Wisp+ in the main experiments.

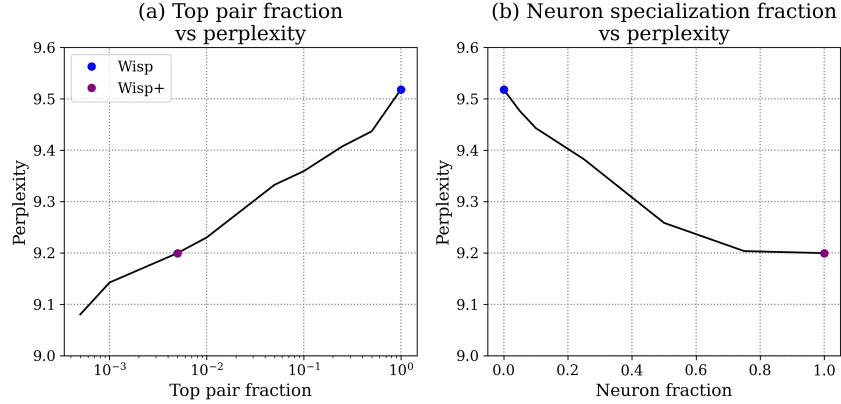


Figure 6: Effect of specialization degree on Wisp+ performance. Decreasing the proportion of all pairs that are specialized upon increases performance (a). Increasing the proportion of neurons that are specialized increases performance (b). Analysis performed in Llama 2 7B at 2:4 sparsity.

A.8 Runtime

We report wall-clock pruning time for an entire model on an NVIDIA H100 GPU. The proposed methods do not introduce hidden computational blowups.

Model	Wanda	Wisp	Wisp+	SparseGPT	Whisper
Llama 2 7B	48.7 s	51.3 s	144 s	348 s	374 s
Llama 2 13B	83.3 s	87.3 s	258 s	615 s	670 s
Llama 2 70B	420 s	434 s	1476 s	3279 s	3520 s

Table 11: Wall-clock time of each pruning method in seconds. Results collected over three trials.

Wisp has essentially the same runtime as Wanda, indicating that the layerwise difference statistic improves it while staying in the same practical cost regime. Wisp+ is slower than Wisp because it selects neuron-specific pairs that are highly differentiated, but it remains substantially faster than SparseGPT. This makes Wisp+ an intermediate point on the accuracy-cost frontier: it is more accurate than Wanda-style pruning while remaining cheaper than second-order reconstruction. Finally, Whisper has nearly the same runtime as SparseGPT. Since Whisper uses the same mask selection and weight update procedure as SparseGPT, this small overhead is from constructing $\mathbf{H}_\Delta$. The accuracy gains therefore come from changing the reconstruction geometry, not from a more expensive solver.

A.9 Composability with RIA and ALPS

To assess our difference-informed criteria in terms of their composability with and applicability to more recent pruning methods, we augment RIA [Zhang et al., 2024a] and ALPS [Meng et al., 2024] to form RIA-Wisp, RIA-Wisp+, and ALPS-Whisper.

RIA is a stronger first-order baseline than Wanda that uses the following saliency

$$\mathbf{S}_{ij}^{\text{RIA}} = \left(\frac{|\mathbf{W}_{ij}|}{\|\mathbf{W}_{:j}\|_1} + \frac{|\mathbf{W}_{ij}|}{\|\mathbf{W}_{i:}\|_1} \right) \cdot (\|\mathbf{X}_j\|_2)^a$$

which normalizes weight importance across both rows and columns and scales activations. We augment RIA with the Wisp and Wisp+ activation saliencies to yield RIA-Wisp, with criterion:

$$\left(\frac{|\mathbf{W}_{ij}|}{\|\mathbf{W}_{:j}\|_1} + \frac{|\mathbf{W}_{ij}|}{\|\mathbf{W}_{i:}\|_1} \right) \cdot (\|\Delta\mathbf{X}_j\|_2)^a$$

as well as RIA-Wisp+, with criterion:

$$\left(\frac{|\mathbf{W}_{ij}|}{\|\mathbf{W}_{:j}\|_1} + \frac{|\mathbf{W}_{ij}|}{\|\mathbf{W}_{i:}\|_1} \right) \cdot \left(\frac{1}{|\mathcal{P}_i|} \sum_{\ell \in \mathcal{P}_i} |\Delta\mathbf{X}_{j,\ell}| \right)^a$$

with $a = 0.5$ for all three techniques, following the original RIA implementation. Like Wisp and Wisp+, these saliencies are applied only to the up and gate projections, leaving the original RIA saliency for the down and attention projections.

ALPS is a stronger reconstruction-based method than SparseGPT. For dense weights $\mathbf{W}$ and sparse weights $\widehat{\mathbf{W}}$, it directly optimizes the ridge-regularized layerwise reconstruction objective

$$\min_{\widehat{\mathbf{W}}} \frac{1}{2} \|(\mathbf{W} - \widehat{\mathbf{W}})\mathbf{X}\|_F^2 + \frac{\lambda_2}{2} \|\mathbf{W} - \widehat{\mathbf{W}}\|_F^2 \quad \text{s.t.} \quad \|\widehat{\mathbf{W}}\|_0 \leq k$$

The corresponding curvature matrix is

$$\mathbf{H}_{\text{ALPS}} = \mathbf{X}\mathbf{X}^T + \lambda_2 \mathbf{I}$$

ALPS first uses the alternating direction method of multipliers (ADMM) to jointly search for the sparse support and update the surviving weights, alternating between a reconstruction update and projection onto the target sparsity pattern. Once the support stabilizes, it fixes the mask and uses preconditioned conjugate gradient (PCG) to further optimize the surviving weights.

To form ALPS-Whisper, we retain this complete optimization procedure and all original ALPS hyperparameters, but replace the standard activation curvature in the MLP gate and up projections with our regularized difference-informed curvature, using the same $\gamma = 0.01$ as Whisper

$$\widetilde{\mathbf{H}} = \gamma \mathbf{H} + (1 - \gamma) \frac{\mu}{\mu_\Delta} \mathbf{H}_\Delta, \quad \mathbf{H} = \mathbf{X}\mathbf{X}^T, \quad \mathbf{H}_\Delta = \Delta\mathbf{X}\Delta\mathbf{X}^T$$

Accordingly, ALPS-Whisper uses

$$\mathbf{H}_{\text{ALPS-Whisper}} = \widetilde{\mathbf{H}} + \lambda_2 \mathbf{I}$$

throughout both the ADMM and PCG stages, while retaining the standard ALPS curvature for all other projections. Thus, ALPS improves the optimization of the sparse reconstruction problem, whereas Whisper changes its geometry from primarily preserving absolute layer outputs to primarily preserving their differences.

We observe that the difference-informed variants consistently improve their corresponding RIA and ALPS formulations with little additional cost, demonstrating composability with both stronger first-order saliency methods and stronger second-order reconstruction optimizers. Full results are reported in Section A.11.6.

A.10 Pseudocode for Wisp, Wisp+, Whisper

Consider a linear layer with weight matrix $\mathbf{W} \in \mathbb{R}^{n \times m}$, where n is the number of output neurons and m is the number of input channels. Let $\mathbf{X} = [\mathbf{x}_1, \dots, \mathbf{x}_s] \in \mathbb{R}^{m \times s}$ denote the calibration inputs to the layer, where s is the number of calibration samples and each column $\mathbf{x}_\ell \in \mathbb{R}^m$ is one input vector. Note that for Wisp and Wisp+, we follow the precedent established by Wanda and prune each neuron to the same sparsity level, as we do for Wanda itself [Sun et al., 2023].

All three routines are applied only to the MLP up and gate projections. For attention projections and MLP down projections, we retain the corresponding standard baseline method: Wanda for first-order update-free pruning and SparseGPT for second-order pruning with weight updates.

Algorithm 1 Wisp: Layerwise Difference-Informed Saliency

Require:

Inputs: Calibration activations $\mathbf{X} = [\mathbf{x}_1, \dots, \mathbf{x}_s] \in \mathbb{R}^{m \times s}$

Weights: Layer weights $\mathbf{W} \in \mathbb{R}^{n \times m}$

Ensure: Saliency matrix $\mathbf{S}^{\text{Wisp}} \in \mathbb{R}^{n \times m}$

```

1: Sample a random permutation  $\pi$  of  $\{1, \dots, s\}$ 
2: Construct  $\mathbf{X}_\pi = [\mathbf{x}_{\pi(1)}, \dots, \mathbf{x}_{\pi(s)}]$ 
3: Compute sampled pairwise differences  $\Delta\mathbf{X} \leftarrow \mathbf{X} - \mathbf{X}_\pi$ 
4: for  $j = 1, \dots, m$  do
5:   Compute channel difference statistic  $d_j \leftarrow \|\Delta\mathbf{X}_{:,j}\|_2$ 
6: end for
7: for  $i = 1, \dots, n$  do
8:   for  $j = 1, \dots, m$  do
9:      $\mathbf{S}_{ij}^{\text{Wisp}} \leftarrow |\mathbf{W}_{ij}| \cdot d_j$ 
10:   end for
11: end for
12: return  $\mathbf{S}^{\text{Wisp}}$ 

```

Algorithm 2 Wisp+: Neuronwise Difference-Informed Saliency

Require:Inputs: Calibration activations $\mathbf{X} = [\mathbf{x}_1, \dots, \mathbf{x}_s] \in \mathbb{R}^{m \times s}$ Weights: Layer weights $\mathbf{W} \in \mathbb{R}^{n \times m}$ Hyperparameters: Number of selected pairs K , by default $K = 0.005s$ **Ensure:** Saliency matrix $\mathbf{S}^{\text{Wisp+}} \in \mathbb{R}^{n \times m}$

```
1: Sample a random permutation  $\pi$  of  $\{1, \dots, s\}$ 
2: Construct  $\mathbf{X}_\pi = [\mathbf{x}_{\pi(1)}, \dots, \mathbf{x}_{\pi(s)}]$ 
3: Compute sampled pairwise differences  $\Delta\mathbf{X} \leftarrow \mathbf{X} - \mathbf{X}_\pi$ 
4: for  $\ell = 1, \dots, s$  do
5:   Compute input-pair distance  $d_\ell \leftarrow \|\Delta\mathbf{X}_{:, \ell}\|_2$ 
6: end for
7: for  $i = 1, \dots, n$  do
8:   for  $\ell = 1, \dots, s$  do
9:     Compute output separation  $\Delta y_{i, \ell} \leftarrow \mathbf{w}_i \Delta\mathbf{X}_{:, \ell}$ 
10:    Compute normalized separation  $r_{i, \ell} \leftarrow \frac{|\Delta y_{i, \ell}|}{d_\ell}$ , ignore sample if  $d_\ell = 0$ 
11:   end for
12:   Select neuron-specific pairs
       $\mathcal{P}_i \leftarrow \text{TopK}_{\ell \in \{1, \dots, s\}} r_{i, \ell}$ 
13:   for  $j = 1, \dots, m$  do
14:     Compute selected channel statistic
      
$$a_{ij} \leftarrow \frac{1}{|\mathcal{P}_i|} \sum_{\ell \in \mathcal{P}_i} |\Delta\mathbf{X}_{j, \ell}|$$

15:      $\mathbf{S}_{ij}^{\text{Wisp+}} \leftarrow |\mathbf{W}_{ij}| \cdot a_{ij}$ 
16:   end for
17: end for
18: return  $\mathbf{S}^{\text{Wisp+}}$ 
```

Algorithm 3 Whisper: Difference-Informed Hessian Reconstruction

Require:

 Inputs: Calibration activations $\mathbf{X} = [\mathbf{x}_1, \dots, \mathbf{x}_s] \in \mathbb{R}^{m \times s}$

 Weights: Layer weights $\mathbf{W} \in \mathbb{R}^{n \times m}$

 Hyperparameters: Target sparsity ρ , regularization factor γ (by default $\gamma = 0.01$), damping λ
Ensure: Pruned and reconstructed weights $\mathbf{W}'$

- 1: Sample a random permutation π of $\{1, \dots, s\}$
- 2: Construct $\mathbf{X}_\pi = [\mathbf{x}_{\pi(1)}, \dots, \mathbf{x}_{\pi(s)}]$
- 3: Compute sampled pairwise differences $\Delta \mathbf{X} \leftarrow \mathbf{X} - \mathbf{X}_\pi$
- 4: Compute standard activation Hessian $\mathbf{H} \leftarrow \mathbf{X} \mathbf{X}^T$
- 5: Compute difference Hessian $\mathbf{H}_\Delta \leftarrow \Delta \mathbf{X} \Delta \mathbf{X}^T$
- 6: Compute average diagonal scales

$$\mu \leftarrow \frac{\text{tr}(\mathbf{H})}{m}, \quad \mu_\Delta \leftarrow \frac{\text{tr}(\mathbf{H}_\Delta)}{m}$$

- 7: Form regularized difference-informed Hessian

$$\tilde{\mathbf{H}} \leftarrow \gamma \mathbf{H} + (1 - \gamma) \frac{\mu}{\mu_\Delta} \mathbf{H}_\Delta$$

- 8: Compute damped inverse Hessian

$$\mathbf{G} \leftarrow (\tilde{\mathbf{H}} + \lambda \mathbf{I})^{-1}$$

- 9: **for** $i = 1, \dots, n$ **do**
- 10: **for** $j = 1, \dots, m$ **do**
- 11: Compute pruning score

$$\mathbf{S}_{ij}^{\text{Whisper}} \leftarrow \frac{|\mathbf{W}_{ij}|^2}{\mathbf{G}_{jj}}$$

- 12: **end for**
 - 13: **end for**
 - 14: Select weights to prune according to $\mathbf{S}^{\text{Whisper}}$ and target sparsity ρ
 - 15: Reconstruct remaining weights using the SparseGPT iterative mask and weight update rule with Hessian $\tilde{\mathbf{H}}$
 - 16: Let $\mathbf{W}'$ denote the resulting sparse reconstructed weights
 - 17: **return** $\mathbf{W}'$
-

A.11 Raw perplexity and benchmark evaluation values

A.11.1 Sparsity sweep for Llama 2

Method	50%	55%	60%	65%	70%	75%
<u>Llama 2 7B</u>						
Magnitude	14.90	59.26	<u>3.7e3</u>	3.7e4	5.2e4	4.8e4
Wanda	6.31	7.12	9.21	18.69	60.12	287.6
Wisp	<u>6.25</u>	6.93	8.44	14.55	43.56	228.05
Wisp+	6.26	<u>6.89</u>	<u>8.27</u>	<u>13.19</u>	<u>36.00</u>	<u>169.09</u>
SparseGPT	6.09	6.67	7.86	10.60	15.89	26.70
Whisper	6.05	6.50	7.35	9.39	13.63	23.06
<u>Llama 2 13B</u>						
Magnitude	6.37	7.83	11.22	26.25	275.2	7.8e3
Wanda	5.47	6.02	7.27	11.40	33.48	82.05
Wisp	<u>5.42</u>	5.88	6.86	9.58	21.94	72.72
Wisp+	<u>5.42</u>	<u>5.86</u>	<u>6.76</u>	<u>9.06</u>	<u>18.93</u>	<u>56.28</u>
SparseGPT	5.33	5.76	6.59	8.43	11.96	20.36
Whisper	5.29	5.62	6.24	7.49	10.44	17.17
<u>Llama 2 70B</u>						
Magnitude	4.99	6.14	8.20	13.73	1.5e3	2.5e4
Wanda	3.91	4.27	4.80	5.88	8.75	17.95
Wisp	<u>3.89</u>	4.22	4.70	5.60	7.91	13.04
Wisp+	<u>3.89</u>	<u>4.20</u>	<u>4.66</u>	<u>5.44</u>	<u>7.39</u>	<u>13.04</u>
SparseGPT	3.81	4.10	4.52	5.22	6.72	9.48
Whisper	3.77	4.01	4.35	4.81	5.74	8.10

Table 12: Language modeling performance on Llama 2 family for different unstructured sparsities. Bold indicates best performance and underline indicates best performance without weight updates. Raw values for Figure 1.

A.11.2 Perplexity and evaluations for Llama 2

Method	Perplexity	Mean	ARC Challenge	MathQA	HellaSwag	MMLU	TruthfulQA	WinoGrande
Dense	5.12	53.22	53.16	28.31	78.61	46.58	38.96	73.72
2:4 Sparsity								
Magnitude	54.39	38.16	30.29	23.08	47.24	27.05	42.23	59.04
Wanda	10.53 ± 0.02	39.39 ± 0.02	34.19 ± 0.27	23.31 ± 0.03	53.27 ± 0.11	27.91 ± 0.23	39.89 ± 0.12	57.80 ± 0.42
Wisp	9.52 ± 0.01	40.41 ± 0.05	35.78 ± 0.08	23.81 ± 0.17	56.58 ± 0.14	28.88 ± 0.07	38.63 ± 0.20	58.77 ± 0.39
Wisp+	9.20 ± 0.00	40.79 ± 0.07	36.72 ± 0.20	23.93 ± 0.14	57.81 ± 0.08	27.80 ± 0.38	38.58 ± 0.23	59.88 ± 0.21
SparseGPT	8.18 ± 0.01	41.19 ± 0.05	37.71 ± 0.55	24.77 ± 0.23	55.26 ± 0.10	28.74 ± 0.41	37.45 ± 0.12	63.22 ± 0.72
Whisper	7.56 ± 0.01	41.98 ± 0.10	38.59 ± 0.54	24.13 ± 0.25	58.18 ± 0.03	29.44 ± 0.35	37.06 ± 0.18	64.46 ± 0.52
50% Sparsity								
Magnitude	14.89	45.25	42.83	24.05	67.01	29.32	41.19	67.09
Wanda	6.31 ± 0.00	47.41 ± 0.08	47.47 ± 0.30	26.00 ± 0.07	72.01 ± 0.04	<u>32.40 ± 0.44</u>	37.27 ± 0.07	<u>69.32 ± 0.14</u>
Wisp	<u>6.25 ± 0.00</u>	47.65 ± 0.11	48.01 ± 0.25	26.47 ± 0.02	72.76 ± 0.02	31.94 ± 0.34	38.03 ± 0.09	68.69 ± 0.21
Wisp+	<u>6.25 ± 0.00</u>	<u>47.91 ± 0.02</u>	48.49 ± 0.16	26.68 ± 0.10	73.42 ± 0.05	32.02 ± 0.09	38.08 ± 0.19	68.75 ± 0.33
SparseGPT	6.09 ± 0.00	48.35 ± 0.08	47.04 ± 0.53	26.73 ± 0.22	71.72 ± 0.03	36.39 ± 0.20	37.47 ± 0.49	70.72 ± 0.16
Whisper	6.04 ± 0.00	48.62 ± 0.16	46.96 ± 0.46	26.71 ± 0.23	73.06 ± 0.08	35.89 ± 0.35	38.59 ± 0.41	70.53 ± 0.44
65% Sparsity								
Magnitude	36925.58	32.76	26.96	19.13	25.83	24.20	51.09	49.33
Wanda	18.81 ± 0.08	33.92 ± 0.08	24.26 ± 0.37	23.63 ± 0.09	35.28 ± 0.11	27.51 ± 0.04	40.36 ± 0.07	52.46 ± 0.15
Wisp	14.61 ± 0.04	35.19 ± 0.14	27.02 ± 0.03	23.90 ± 0.18	41.44 ± 0.25	27.08 ± 0.16	38.19 ± 0.22	53.54 ± 0.32
Wisp+	<u>13.17 ± 0.02</u>	<u>36.05 ± 0.07</u>	<u>28.24 ± 0.31</u>	23.91 ± 0.08	<u>44.74 ± 0.07</u>	27.48 ± 0.08	37.49 ± 0.08	<u>54.46 ± 0.32</u>
SparseGPT	10.64 ± 0.04	38.36 ± 0.10	31.88 ± 0.17	24.09 ± 0.00	47.64 ± 0.11	27.48 ± 0.30	38.61 ± 0.34	60.46 ± 0.36
Whisper	9.46 ± 0.02	39.67 ± 0.21	34.76 ± 0.38	24.10 ± 0.34	52.16 ± 0.19	27.21 ± 0.50	38.65 ± 0.75	61.17 ± 0.24

Table 13: Language modeling and evaluation performance for Llama 2 7B. Bold indicates best performance and underline indicates best performance without weight updates. Results acquired over three trials. Error indicates one standard error of the mean. Raw values for Table 2.

Method	Perplexity	Mean	ARC Challenge	MathQA	HellaSwag	MMLU	TruthfulQA	WinoGrande
Dense	4.57	57.01	59.64	31.83	82.19	55.35	36.90	76.16
2:4 Sparsity								
Magnitude	8.32	43.93	39.93	23.72	67.37	29.65	38.35	64.56
Wanda	7.79 ± 0.01	43.94 ± 0.04	39.73 ± 0.20	25.84 ± 0.16	62.14 ± 0.14	34.70 ± 0.16	37.13 ± 0.06	64.09 ± 0.25
Wisp	7.36 ± 0.01	45.49 ± 0.05	41.70 ± 0.25	26.23 ± 0.20	65.01 ± 0.05	35.36 ± 0.14	37.49 ± 0.10	67.14 ± 0.16
Wisp+	<u>7.24 ± 0.01</u>	<u>46.00 ± 0.05</u>	<u>42.52 ± 0.19</u>	<u>26.05 ± 0.19</u>	66.11 ± 0.12	<u>35.85 ± 0.29</u>	37.53 ± 0.14	<u>67.96 ± 0.41</u>
SparseGPT	6.69 ± 0.02	44.93 ± 0.26	40.53 ± 0.10	26.07 ± 0.30	61.65 ± 0.31	36.56 ± 0.68	36.80 ± 0.22	67.96 ± 0.23
Whisper	6.29 ± 0.01	46.60 ± 0.16	43.03 ± 1.16	26.38 ± 0.29	65.41 ± 0.09	37.41 ± 0.33	38.07 ± 0.46	69.32 ± 0.30
50% Sparsity								
Magnitude	6.37	51.12	49.49	27.07	75.81	43.96	39.45	70.96
Wanda	5.47 ± 0.00	52.87 ± 0.04	53.33 ± 0.09	29.32 ± 0.13	76.83 ± 0.03	47.59 ± 0.12	36.24 ± 0.06	73.90 ± 0.25
Wisp	5.42 ± 0.00	53.28 ± 0.04	54.12 ± 0.10	29.40 ± 0.11	77.53 ± 0.03	47.73 ± 0.09	36.76 ± 0.09	74.16 ± 0.09
Wisp+	<u>5.42 ± 0.00</u>	53.21 ± 0.02	54.12 ± 0.08	29.32 ± 0.10	78.03 ± 0.09	47.62 ± 0.10	35.99 ± 0.17	74.19 ± 0.20
SparseGPT	5.34 ± 0.00	52.84 ± 0.09	52.99 ± 0.05	28.78 ± 0.10	76.38 ± 0.07	46.05 ± 0.23	39.03 ± 0.20	73.85 ± 0.31
Whisper	5.28 ± 0.00	53.14 ± 0.10	53.44 ± 0.15	29.11 ± 0.05	77.48 ± 0.07	46.42 ± 0.13	39.14 ± 0.48	73.27 ± 0.30
65% Sparsity								
Magnitude	26.24	35.87	27.99	22.21	43.20	25.07	43.46	53.28
Wanda	11.33 ± 0.06	36.72 ± 0.09	29.69 ± 0.21	25.20 ± 0.28	45.42 ± 0.17	27.63 ± 0.04	37.19 ± 0.15	55.17 ± 0.30
Wisp	9.59 ± 0.01	38.90 ± 0.13	32.91 ± 0.45	25.43 ± 0.05	51.67 ± 0.01	27.85 ± 0.22	37.14 ± 0.15	58.43 ± 0.22
Wisp+	9.04 ± 0.01	39.71 ± 0.09	34.67 ± 0.25	25.44 ± 0.05	53.77 ± 0.09	27.94 ± 0.37	36.76 ± 0.24	59.69 ± 0.25
SparseGPT	8.41 ± 0.01	41.11 ± 0.09	37.49 ± 0.22	24.84 ± 0.28	54.61 ± 0.28	29.99 ± 0.53	37.73 ± 0.11	62.01 ± 0.23
Whisper	7.54 ± 0.02	42.57 ± 0.13	38.91 ± 0.71	25.25 ± 0.19	58.64 ± 0.18	30.76 ± 0.65	37.74 ± 0.33	64.09 ± 0.23

Table 14: Language modeling and evaluation performance for Llama 2 13B. Bold indicates best performance and underline indicates best performance without weight updates. Results acquired over three trials. Error indicates one standard error of the mean. Raw values for Table 2.

Method	Perplexity	Mean	ARC Challenge	MathQA	HellaSwag	MMLU	TruthfulQA	WinoGrande
Dense	3.12	65.17	67.32	38.32	87.27	69.65	44.82	83.66
2:4 Sparsity								
Magnitude	6.33	54.83	55.97	30.35	78.36	50.73	39.90	73.64
Wanda	4.97 ± 0.00	57.13 ± 0.04	<u>59.50 ± 0.06</u>	31.89 ± 0.17	78.63 ± 0.01	55.96 ± 0.09	38.73 ± 0.15	78.08 ± 0.07
Wisp	4.86 ± 0.00	57.57 ± 0.04	59.16 ± 0.15	31.98 ± 0.07	79.41 ± 0.05	56.92 ± 0.16	39.63 ± 0.11	78.32 ± 0.16
Wisp+	<u>4.81 ± 0.00</u>	<u>57.79 ± 0.04</u>	59.04 ± 0.05	<u>32.19 ± 0.02</u>	<u>79.72 ± 0.11</u>	<u>57.45 ± 0.17</u>	39.77 ± 0.21	<u>78.56 ± 0.23</u>
SparseGPT	4.71 ± 0.01	57.05 ± 0.04	58.96 ± 0.05	32.51 ± 0.32	78.20 ± 0.14	57.26 ± 0.31	37.43 ± 0.38	77.95 ± 0.14
Whisper	4.51 ± 0.00	58.39 ± 0.03	60.69 ± 0.44	32.45 ± 0.25	79.91 ± 0.13	58.82 ± 0.23	39.65 ± 0.47	78.80 ± 0.27
50% Sparsity								
Magnitude	4.99	60.54	62.54	34.04	83.47	62.24	42.11	78.85
Wanda	3.91 ± 0.00	62.52 ± 0.03	66.38 ± 0.17	34.66 ± 0.09	84.90 ± 0.03	64.35 ± 0.12	42.83 ± 0.07	81.98 ± 0.14
Wisp	3.89 ± 0.00	62.81 ± 0.02	66.15 ± 0.16	34.80 ± 0.04	85.17 ± 0.06	64.93 ± 0.05	43.45 ± 0.07	82.37 ± 0.30
Wisp+	<u>3.88 ± 0.00</u>	62.76 ± 0.05	65.96 ± 0.18	<u>34.85 ± 0.08</u>	<u>85.23 ± 0.02</u>	64.76 ± 0.09	43.33 ± 0.14	82.45 ± 0.05
SparseGPT	3.81 ± 0.01	62.66 ± 0.15	66.33 ± 0.33	34.96 ± 0.13	84.93 ± 0.07	64.81 ± 0.16	42.76 ± 0.53	82.19 ± 0.19
Whisper	3.77 ± 0.00	62.96 ± 0.08	66.27 ± 0.49	35.15 ± 0.36	85.24 ± 0.02	65.12 ± 0.08	43.53 ± 0.41	82.45 ± 0.23
65% Sparsity								
Magnitude	13.73	47.02	48.55	26.87	70.63	31.45	39.99	64.64
Wanda	5.89 ± 0.01	54.31 ± 0.12	55.75 ± 0.12	31.64 ± 0.01	73.45 ± 0.08	51.37 ± 0.24	36.40 ± 0.09	77.27 ± 0.18
Wisp	5.60 ± 0.00	55.64 ± 0.01	56.68 ± 0.17	31.60 ± 0.11	75.41 ± 0.01	<u>53.07 ± 0.11</u>	38.49 ± 0.23	78.58 ± 0.16
Wisp+	5.44 ± 0.00	55.83 ± 0.00	57.14 ± 0.25	31.71 ± 0.12	75.90 ± 0.06	52.96 ± 0.05	38.54 ± 0.14	78.74 ± 0.17
SparseGPT	5.22 ± 0.01	55.76 ± 0.08	57.25 ± 0.36	31.76 ± 0.25	75.71 ± 0.10	53.53 ± 0.12	38.56 ± 0.42	77.77 ± 0.25
Whisper	4.83 ± 0.01	57.71 ± 0.02	60.18 ± 0.10	31.75 ± 0.16	78.72 ± 0.06	55.68 ± 0.23	40.56 ± 0.49	79.37 ± 0.16

Table 15: Language modeling and evaluation performance for Llama 2 70B. Bold indicates best performance and underline indicates best performance without weight updates. Results acquired over three trials. Error indicates one standard error of the mean. Raw values for Tables 2 and 3.

A.11.3 Perplexity and evaluations for Llama 3.1

Method	Perplexity	Mean	ARC Challenge	MathQA	HellaSwag	MMLU	TruthfulQA	WinoGrande
Dense	5.84	61.52	57.68	39.56	81.71	66.29	45.17	78.69
2:4 Sparsity								
Magnitude	765.32	32.77	22.78	<u>25.09</u>	29.85	25.44	42.77	50.67
Wanda	18.87 ± 0.02	36.81 ± 0.15	27.96 ± 0.08	24.85 ± 0.38	44.87 ± 0.19	29.47 ± 0.23	38.08 ± 0.12	55.67 ± 0.51
Wisp	17.65 ± 0.14	38.03 ± 0.12	30.06 ± 0.08	25.07 ± 0.10	47.50 ± 0.13	<u>30.81 ± 0.31</u>	38.15 ± 0.30	56.62 ± 0.21
Wisp+	16.70 ± 0.06	<u>38.40 ± 0.10</u>	<u>31.09 ± 0.40</u>	24.98 ± 0.06	<u>48.49 ± 0.03</u>	30.38 ± 0.44	37.87 ± 0.10	<u>57.62 ± 0.47</u>
SparseGPT	11.19 ± 0.08	41.62 ± 0.24	35.44 ± 0.20	25.99 ± 0.33	52.61 ± 0.46	34.53 ± 0.99	37.83 ± 0.37	63.33 ± 0.07
Whisper	10.18 ± 0.04	42.24 ± 0.26	36.01 ± 0.86	25.72 ± 0.44	55.63 ± 0.26	34.78 ± 0.26	38.01 ± 0.58	63.30 ± 0.12
50% Sparsity								
Magnitude	150.89	38.66	32.85	25.86	41.03	31.98	47.67	52.57
Wanda	8.76 ± 0.01	50.79 ± 0.04	46.08 ± 0.26	31.76 ± 0.14	68.36 ± 0.08	49.68 ± 0.14	38.16 ± 0.18	70.72 ± 0.12
Wisp	8.62 ± 0.01	<u>51.31 ± 0.05</u>	45.93 ± 0.36	31.55 ± 0.16	69.70 ± 0.04	<u>51.43 ± 0.10</u>	38.46 ± 0.27	70.77 ± 0.11
Wisp+	<u>8.50 ± 0.01</u>	51.25 ± 0.07	45.79 ± 0.27	31.39 ± 0.18	<u>70.01 ± 0.11</u>	50.73 ± 0.31	38.44 ± 0.33	<u>71.11 ± 0.08</u>
SparseGPT	7.80 ± 0.01	53.16 ± 0.21	49.43 ± 0.53	32.40 ± 0.28	72.56 ± 0.10	54.45 ± 0.22	38.73 ± 0.60	71.40 ± 0.42
Whisper	7.64 ± 0.00	53.49 ± 0.03	50.40 ± 0.16	32.27 ± 0.38	73.95 ± 0.13	54.52 ± 0.34	39.19 ± 0.11	70.64 ± 0.21
65% Sparsity								
Magnitude	33929.21	<u>33.19</u>	<u>25.60</u>	20.87	25.91	25.03	49.34	<u>52.41</u>
Wanda	36.48 ± 0.33	32.44 ± 0.03	21.08 ± 0.34	23.14 ± 0.06	31.95 ± 0.05	26.77 ± 0.22	41.74 ± 0.06	49.99 ± 0.27
Wisp	34.90 ± 0.42	32.89 ± 0.02	21.62 ± 0.16	<u>24.21 ± 0.04</u>	32.46 ± 0.21	27.00 ± 0.29	41.84 ± 0.11	50.20 ± 0.14
Wisp+	30.09 ± 0.29	33.10 ± 0.07	22.50 ± 0.12	<u>23.86 ± 0.12</u>	<u>33.50 ± 0.22</u>	<u>27.02 ± 0.16</u>	41.43 ± 0.08	50.28 ± 0.45
SparseGPT	14.51 ± 0.09	38.95 ± 0.13	30.57 ± 0.47	25.96 ± 0.40	<u>47.06 ± 0.02</u>	29.71 ± 0.16	40.91 ± 0.39	59.46 ± 0.62
Whisper	13.07 ± 0.07	39.37 ± 0.28	32.59 ± 0.78	25.33 ± 0.06	50.05 ± 0.02	28.98 ± 1.04	40.21 ± 0.32	59.06 ± 0.13

Table 16: Language modeling and evaluation performance for Llama 3.1 8B. Bold indicates best performance and underline indicates best performance without weight updates. Results acquired over three trials. Error indicates one standard error of the mean. Raw values for Table 2.

Method	Perplexity	Mean	ARC Challenge	MathQA	HellaSwag	MMLU	TruthfulQA	WinoGrande
Dense	2.64	70.62	69.88	51.76	88.03	78.86	49.74	85.48
2:4 Sparsity								
Magnitude	1089.38	39.34	24.57	21.98	45.90	33.82	42.40	67.40
Wanda	7.84 ± 0.02	56.76 ± 0.05	57.31 ± 0.12	35.11 ± 0.07	72.79 ± 0.23	59.53 ± 0.57	40.35 ± 0.43	75.48 ± 0.25
Wisp	7.61 ± 0.02	57.82 ± 0.10	58.19 ± 0.15	35.11 ± 0.32	75.76 ± 0.22	60.22 ± 0.27	42.06 ± 0.42	75.56 ± 0.42
Wisp+	<u>7.51 ± 0.01</u>	<u>58.01 ± 0.17</u>	<u>58.22 ± 0.21</u>	<u>35.50 ± 0.10</u>	76.01 ± 0.25	60.66 ± 0.24	41.83 ± 0.73	<u>75.82 ± 0.41</u>
SparseGPT	6.78 ± 0.01	56.98 ± 0.39	56.26 ± 0.60	36.17 ± 0.26	71.90 ± 0.92	61.24 ± 0.40	40.04 ± 0.44	<u>76.30 ± 0.50</u>
Whisper	6.40 ± 0.02	58.22 ± 0.61	58.76 ± 0.83	36.53 ± 0.68	74.18 ± 1.59	62.59 ± 0.19	40.39 ± 0.69	76.85 ± 0.37
50% Sparsity								
Magnitude	17.91	54.14	57.34	27.40	66.98	66.14	41.26	65.75
Wanda	5.29 ± 0.00	64.97 ± 0.07	64.93 ± 0.30	44.81 ± 0.01	81.83 ± 0.16	73.18 ± 0.11	42.87 ± 0.25	82.19 ± 0.14
Wisp	5.25 ± 0.00	64.92 ± 0.06	65.67 ± 0.21	44.33 ± 0.11	81.13 ± 0.17	73.60 ± 0.04	42.75 ± 0.21	82.03 ± 0.27
Wisp+	<u>5.23 ± 0.00</u>	64.95 ± 0.08	<u>65.96 ± 0.09</u>	44.77 ± 0.37	81.25 ± 0.12	73.47 ± 0.01	42.83 ± 0.32	81.43 ± 0.09
SparseGPT	4.94 ± 0.00	65.77 ± 0.05	65.76 ± 0.30	44.48 ± 0.26	83.56 ± 0.27	73.07 ± 0.05	44.57 ± 0.13	83.19 ± 0.12
Whisper	4.93 ± 0.01	65.97 ± 0.10	66.18 ± 0.41	44.78 ± 0.12	84.37 ± 0.24	73.44 ± 0.04	44.58 ± 0.68	82.48 ± 0.09
65% Sparsity								
Magnitude	8331.90	32.60	26.88	19.73	26.68	23.19	48.58	50.51
Wanda	9.83 ± 0.10	49.41 ± 0.14	49.06 ± 0.49	32.47 ± 0.18	58.43 ± 0.35	47.76 ± 0.36	39.77 ± 0.21	68.98 ± 0.46
Wisp	9.25 ± 0.03	51.17 ± 0.32	51.59 ± 0.12	32.47 ± 0.14	61.91 ± 0.50	<u>50.15 ± 0.59</u>	41.57 ± 0.42	69.32 ± 0.37
Wisp+	9.01 ± 0.06	51.55 ± 0.21	51.91 ± 0.70	33.04 ± 0.22	62.16 ± 0.77	50.05 ± 0.37	41.72 ± 0.16	70.43 ± 0.35
SparseGPT	7.29 ± 0.03	55.34 ± 0.20	54.72 ± 0.86	34.09 ± 0.20	<u>70.57 ± 0.64</u>	56.51 ± 0.63	39.86 ± 0.84	<u>76.27 ± 0.41</u>
Whisper	6.88 ± 0.01	56.00 ± 0.17	54.27 ± 0.13	33.61 ± 0.20	73.62 ± 0.22	58.57 ± 0.72	39.25 ± 0.42	76.66 ± 0.37

Table 17: Language modeling and evaluation performance for Llama 3.1 70B. Bold indicates best performance and underline indicates best performance without weight updates. Results acquired over three trials. Error indicates one standard error of the mean. Raw values for Table 2.

Method	Perplexity
Dense	1.34
	<u>2:4 Sparsity</u>
Magnitude	10.55
Wanda	4.60 ± 0.00
Wisp	4.53 ± 0.00
Wisp+	4.50 ± 0.00
SparseGPT	4.20 ± 0.01
Whisper	4.06 ± 0.01
	<u>50% Sparsity</u>
Magnitude	40.27
Wanda	2.75 ± 0.00
Wisp	2.73 ± 0.00
Wisp+	2.72 ± 0.00
SparseGPT	2.59 ± 0.00
Whisper	2.57 ± 0.00
	<u>65% Sparsity</u>
Magnitude	11214.91
Wanda	5.64 ± 0.00
Wisp	5.51 ± 0.01
Wisp+	5.48 ± 0.01
SparseGPT	4.86 ± 0.00
Whisper	4.68 ± 0.01

Table 18: Language modeling performance for Llama 3.1 405B. We report only perplexity due to the prohibitive cost of downstream evaluations at this scale. Bold indicates best performance and underline indicates best performance without weight updates. Results acquired over three trials. Error indicates one standard error of the mean. Raw values for Table 2.

A.11.4 Perplexity and evaluations for Mistral 7B v0.3 and Qwen3

Method	PPL	Mean	ARC-C	MathQA	HS	MMLU	TQA	WinoG
Dense	4.95	60.56	60.41	35.51	83.05	63.58	42.61	78.22
Magnitude	13.49	42.12	38.05	25.33	<u>60.10</u>	28.87	<u>38.56</u>	61.80
Wanda	9.64 ± 0.04	41.49 ± 0.10	37.12 ± 0.18	27.20 ± 0.12	55.71 ± 0.16	31.24 ± 0.35	37.08 ± 0.04	60.56 ± 0.39
Wisp	8.97 ± 0.03	42.74 ± 0.07	38.20 ± 0.17	27.40 ± 0.15	58.08 ± 0.04	32.62 ± 0.26	38.14 ± 0.10	61.98 ± 0.23
Wisp+	8.64 ± 0.03	43.05 ± 0.04	38.94 ± 0.15	26.97 ± 0.11	58.79 ± 0.04	<u>33.74 ± 0.41</u>	37.92 ± 0.12	61.96 ± 0.30
SparseGPT	7.47 ± 0.03	44.79 ± 0.39	41.33 ± 0.23	27.26 ± 0.32	59.19 ± 0.17	38.25 ± 1.23	38.56 ± 0.37	64.14 ± 0.33
Whisper	6.91 ± 0.03	45.97 ± 0.21	43.23 ± 0.58	26.71 ± 0.10	62.27 ± 0.15	39.73 ± 0.71	39.29 ± 0.18	64.61 ± 0.14

Table 19: Language modeling and evaluation performance for Mistral 7B v0.3 at 2:4 sparsity. Bold indicates best performance and underline indicates best performance without weight updates. Results acquired over three trials. Error indicates one standard error of the mean. Raw values for Table 5.

Method	PPL	Mean	ARC-C	MathQA	HS	MMLU	TQA	WinoG
Dense	6.51	68.25	68.00	54.34	79.63	78.79	52.33	76.40
Magnitude	754.43	31.92	21.08	19.63	27.10	24.46	48.11	51.14
Wanda	11.33 ± 0.02	50.31 ± 0.08	47.38 ± 0.40	39.21 ± 0.17	56.16 ± 0.12	56.80 ± 0.20	40.83 ± 0.25	61.48 ± 0.16
Wisp	11.18 ± 0.00	<u>50.49 ± 0.10</u>	<u>47.64 ± 0.27</u>	38.96 ± 0.08	56.43 ± 0.05	57.75 ± 0.12	40.85 ± 0.17	61.30 ± 0.50
Wisp+	10.86 ± 0.01	50.46 ± 0.08	47.24 ± 0.06	38.62 ± 0.14	<u>56.80 ± 0.11</u>	57.40 ± 0.16	41.32 ± 0.12	61.40 ± 0.48
SparseGPT	9.04 ± 0.02	51.12 ± 0.18	49.37 ± 0.53	35.68 ± 0.45	59.23 ± 0.15	54.50 ± 0.85	42.25 ± 0.28	65.67 ± 0.25
Whisper	8.82 ± 0.01	51.45 ± 0.12	49.72 ± 0.36	35.81 ± 0.13	60.23 ± 0.10	55.08 ± 0.35	42.72 ± 0.53	65.11 ± 0.16

Table 20: Language modeling and evaluation performance for Qwen3 8B Base at 2:4 sparsity. Bold indicates best performance and underline indicates best performance without weight updates. Results acquired over three trials. Error indicates one standard error of the mean. Raw values for Table 5.

Method	PPL	Mean	ARC-C	MathQA	HS	MMLU	TQA	WinoG
Dense	5.95	71.70	69.20	61.78	82.50	82.23	55.07	79.40
Magnitude	121.28	41.57	39.08	24.86	40.91	45.66	45.48	53.43
Wanda	8.81 ± 0.00	56.66 ± 0.14	55.38 ± 0.23	42.12 ± 0.67	64.98 ± 0.05	65.55 ± 0.33	42.53 ± 0.09	69.40 ± 0.21
Wisp	8.68 ± 0.00	56.65 ± 0.03	54.92 ± 0.17	42.42 ± 0.21	65.45 ± 0.14	66.00 ± 0.27	41.94 ± 0.15	69.19 ± 0.22
Wisp+	<u>8.55 ± 0.00</u>	<u>57.03 ± 0.16</u>	<u>55.75 ± 0.11</u>	42.94 ± 0.65	<u>65.57 ± 0.10</u>	66.42 ± 0.23	41.99 ± 0.12	69.51 ± 0.09
SparseGPT	7.80 ± 0.01	57.82 ± 0.08	57.17 ± 0.87	40.70 ± 0.32	67.03 ± 0.08	66.11 ± 0.09	44.13 ± 0.10	71.80 ± 0.30
Whisper	7.65 ± 0.01	58.11 ± 0.12	57.25 ± 0.65	40.08 ± 0.39	68.34 ± 0.05	66.37 ± 0.17	44.58 ± 0.41	72.03 ± 0.47

Table 21: Language modeling and evaluation performance for Qwen3 14B Base at 2:4 sparsity. Bold indicates best performance and underline indicates best performance without weight updates. Results acquired over three trials. Error indicates one standard error of the mean. Raw values for Table 5.

A.11.5 Perplexity for Granite 4.1

Method	0%	2:4	Sparsity	
			50%	65%
Dense	6.53			
Magnitude		297.40	244.80	1620449.25
Wanda		12.06 ± 0.01	8.59 ± 0.00	16.60 ± 0.02
Wisp		11.69 ± 0.01	8.58 ± 0.01	15.68 ± 0.03
Wisp+		<u>11.52 ± 0.02</u>	<u>8.56 ± 0.01</u>	<u>14.98 ± 0.02</u>
SparseGPT		9.80 ± 0.00	8.19 ± 0.01	12.84 ± 0.07
Whisper		9.56 ± 0.01	8.09 ± 0.00	11.27 ± 0.06

Table 22: Language modeling performance for Granite 4.1 8B Base. Bold indicates best performance and underline indicates best performance without weight updates. Results acquired over three trials. Error indicates one standard error of the mean.

Method	0%	2:4	Sparsity	
			50%	65%
Dense	5.29			
Magnitude		28.98	40.08	140585.61
Wanda		8.41 ± 0.00	<u>6.69 ± 0.00</u>	9.89 ± 0.01
Wisp		8.36 ± 0.00	<u>6.69 ± 0.01</u>	9.87 ± 0.02
Wisp+		<u>8.35 ± 0.00</u>	6.70 ± 0.01	<u>9.65 ± 0.03</u>
SparseGPT		7.56 ± 0.01	6.46 ± 0.01	8.44 ± 0.01
Whisper		7.49 ± 0.01	6.45 ± 0.00	8.17 ± 0.01

Table 23: Language modeling performance for Granite 4.1 30B Base. Bold indicates best performance and underline indicates best performance without weight updates. Results acquired over three trials. Error indicates one standard error of the mean.

A.11.6 Perplexity for Llama 2 with stronger pruning formulations

Method	2:4	<u>Sparsity</u> 50%	65%	Time (s)
RIA	10.24 $\pm$ 0.01	6.25 $\pm$ 0.00	18.23 $\pm$ 0.03	53.0
RIA-Wisp	9.57 $\pm$ 0.01	6.22 $\pm$ 0.00	15.83 $\pm$ 0.01	56.0
RIA-Wisp+	<u>9.34 $\pm$ 0.01</u>	<u>6.21 $\pm$ 0.00</u>	<u>14.52 $\pm$ 0.04</u>	149
ALPS	7.22 $\pm$ 0.02	5.88 $\pm$ 0.01	8.24 $\pm$ 0.03	1059
ALPS-Whisper	7.04 $\pm$ 0.01	5.89 $\pm$ 0.01	7.94 $\pm$ 0.01	1017

Table 24: Language modeling performance for Llama 2 7B with stronger pruning methods. Bold indicates best performance and underline indicates best performance without weight updates. Results acquired over three trials. Error indicates one standard error of the mean. Raw values for Table 6.

Method	2:4	<u>Sparsity</u> 50%	65%	Time (s)
RIA	7.48 $\pm$ 0.01	5.39 $\pm$ 0.00	10.22 $\pm$ 0.02	94.3
RIA-Wisp	7.19 $\pm$ 0.01	5.38 $\pm$ 0.00	9.30 $\pm$ 0.01	94.3
RIA-Wisp+	<u>7.13 $\pm$ 0.01</u>	<u>5.37 $\pm$ 0.00</u>	<u>8.94 $\pm$ 0.00</u>	265
ALPS	6.11 $\pm$ 0.01	5.17 $\pm$ 0.00	6.80 $\pm$ 0.01	2302
ALPS-Whisper	5.97 $\pm$ 0.01	5.15 $\pm$ 0.01	6.54 $\pm$ 0.01	2232

Table 25: Language modeling performance for Llama 2 13B with stronger pruning methods. Bold indicates best performance and underline indicates best performance without weight updates. Results acquired over three trials. Error indicates one standard error of the mean. Raw values for Table 6.

Method	2:4	<u>Sparsity</u> 50%	65%	Time (s)
RIA	4.91 $\pm$ 0.00	3.84 $\pm$ 0.00	5.79 $\pm$ 0.00	472
RIA-Wisp	4.85 $\pm$ 0.00	<u>3.83 $\pm$ 0.00</u>	5.59 $\pm$ 0.00	462
RIA-Wisp+	<u>4.81 $\pm$ 0.00</u>	<u>3.83 $\pm$ 0.00</u>	<u>5.46 $\pm$ 0.01</u>	1516
ALPS	4.50 $\pm$ 0.01	3.74 $\pm$ 0.00	4.80 $\pm$ 0.01	17407
ALPS-Whisper	4.41 $\pm$ 0.01	3.72 $\pm$ 0.00	4.66 $\pm$ 0.01	17623

Table 26: Language modeling performance for Llama 2 70B with stronger pruning methods. Bold indicates best performance and underline indicates best performance without weight updates. Results acquired over three trials. Error indicates one standard error of the mean. Raw values for Table 6.