

Router Sensitivity Under Lightweight Fine-Tuning Identifies Prunable Experts in Mixture-of-Experts Models

Ali Janati^{1,2,*} Kaoutar El Maghraoui² Chengke Zou²
Xinyi Luo² Wenyuan Shen²

¹Data Science Institute, Columbia University, New York, NY, USA

²Department of Computer Science, Columbia University, New York, NY, USA

Abstract

Mixture-of-Experts (MoE) models decouple parameter count from per-token compute, but deployment still requires hosting every expert in memory. Recent theory shows that experts whose router weights change least during fine-tuning can be pruned with provable accuracy preservation, yet the guarantee assumes full fine-tuning. We show that the signal can be elicited through a brief parameter-efficient adaptation. We fine-tune with a lightweight adapter, rank experts by the induced router change, and prune the least-changed experts in one shot. On Mixtral-8×7B-Instruct, router-only LoRA trains 0.002% of parameters and retains 27.54% MMLU-Pro accuracy with half the experts removed, against roughly 16% for magnitude and random pruning. Signal quality improves monotonically with adapter size, reaching 28.76%, and declines as adaptation spreads beyond the router. Under their shared budget, IA3 reaches 28.04% while Houlsby reaches 25.39%. The criterion transfers to Qwen1.5-MoE fine-tuned for mathematical reasoning, retaining 49.7% mean accuracy over eleven benchmarks with half the experts removed. Structural pruning reduces memory by 49% and per-token latency by 37%. Lightweight router sensitivity therefore makes provably motivated, task-conditioned expert pruning practical at scale.

1 Introduction

MoE architectures route each token to a small subset of expert subnetworks, separating total parameter count from active computation [8, 18, 28]. The saving is in computation rather than memory: every expert must remain resident even though only a few are active per token. Mixtral-8×7B contains 46.7B parameters while activating 13B, and this gap restricts deployment on constrained hardware [15]. Removing entire experts addresses the memory cost directly, but the central question is which experts can be removed.

Recent work locates a pruning signal in the router. Chowdhury et al. [3] prove that prioritizing experts with smaller router-norm changes during fine-tuning preserves test accuracy on a simplified MoE, and validate the criterion on vision models. The quantity is almost free to read once adaptation has occurred, but the original criterion assumes full fine-tuning. Fully fine-tuning a 46.7B-parameter MoE only to decide which experts to delete inverts the economics of pruning.

We ask whether the same signal can be recovered from an adaptation cheap enough to run at scale. A brief parameter-efficient adaptation (PEFT) acts as a measuring instrument: it places the model under task pressure, and the router records which experts that pressure recruits. We then discard the adapter and structurally prune the original checkpoint. Our contributions are:

* contact: aj3238@columbia.edu

- To our knowledge, no prior work combines router norm-change pruning with PEFT on MoE language models; router-only LoRA (0.002% trainable) recovers the signal.
- We show that the signal is governed by adapter location, size, and perturbation geometry. Confining LoRA to the router is best; larger adapters produce better rankings; under a shared budget, multiplicative IA3 outperforms additive Housby at maximal pruning.
- We demonstrate transfer across benchmarks and to Qwen1.5-MoE under full mathematical fine-tuning. We also provide the first MMLU-Pro and BIG-Bench Hard evaluation of expert-pruned Mixtral, compare against recent one-shot methods on shared benchmarks, and measure near-linear deployment savings.

Training-free criteria score frozen checkpoints using routing frequency, activations, reconstruction, or expert weights [14, 17, 23, 24]. Router sensitivity is complementary and task-conditioned: router-only adaptation trains 0.002% of Mixtral’s parameters, and deployments already using adaptation obtain the ranking as a byproduct. Appendices A and H review this distinction and compare recent one-shot methods.

2 Router sensitivity from lightweight adaptation

For an MoE layer with E experts, the router has weight matrix $W_g \in \mathbb{R}^{E \times d}$. Its e -th row w_e produces logit $\ell_e(x) = \langle w_e, x \rangle$, and top- k routing selects the experts used for token representation x . Writing $w_e^{(0)}$ and $w_e^{(T)}$ for the router vectors before and after adaptation, we score expert e by the magnitude of its router-norm revision,

$$s_e = \left| \|w_e^{(T)}\|_2 - \|w_e^{(0)}\|_2 \right|. \quad (1)$$

We rank experts independently within each layer and remove those with the smallest scores. The absolute value treats both expansion and contraction as evidence that adaptation engaged an expert. The theorem covers full fine-tuning of a simplified MoE with signed norm changes; it motivates but does not guarantee our PEFT, absolute-change, or logit-delta extensions (Appendix B.2).

Methods that leave W_g frozen still change the representations reaching it. For those methods, we collect router logits from the base and adapted models over N held-out tokens and use

$$s_e^{\text{logit}} = \frac{1}{\sqrt{N}} \|L_{:,e}^{\text{adapt}} - L_{:,e}^{\text{base}}\|_2. \quad (2)$$

This places direct low-rank router updates, multiplicative IA3 modulation [22], and additive Housby adapters [10] in one framework. LoRA rank r indexes the adapter’s internal width and parameter budget [11]. For the $8 \times d$ Mixtral router, $r = 16$ is a larger parameterization whose algebraic update rank remains capped at eight. We sweep $r \in \{2, 4, 8, 16\}$ while scaling α with r .

Pruning is structural and one-shot. We delete selected experts and their router rows from the original pretrained checkpoint, retain top- k routing over the survivors, and perform no retraining, distillation, or router calibration. The adapted model is only the instrument that produces the ranking; no adapter parameter survives into deployment.

3 Experimental setting

Our primary model is Mixtral-8×7B-Instruct-v0.1, with 32 layers, eight experts per layer, and two active experts per token. Adaptation uses a generic text-generation instruction corpus at sequence length 1024. The controlled LoRA runs use 500 optimizer steps of 8-bit AdamW, learning rate 2×10^{-4} , weight decay 0.01, cosine decay, five warmup steps, bfloat16 compute, and a 4-bit frozen base. The reference attaches rank-8 LoRA only to router weights. We separately vary target modules and adapter size. IA3 and Housby share a separate matched 2,000-example, one-epoch budget; Appendix C gives their configurations.

We structurally remove one through four experts from every Mixtral layer and evaluate with LightEval [9]. MMLU-Pro is primary [31]; GSM8K, ARC-Challenge, BIG-Bench Hard, and BoolQ test cross-benchmark behavior. We additionally study a 20-expert-per-layer Qwen1.5-MoE-A2.7B-Chat checkpoint [27], fully fine-tune it on mathematical reasoning, and evaluate pruning over eleven mathematics benchmarks. Full model, data, configuration, replication, and implementation details appear in the appendix.

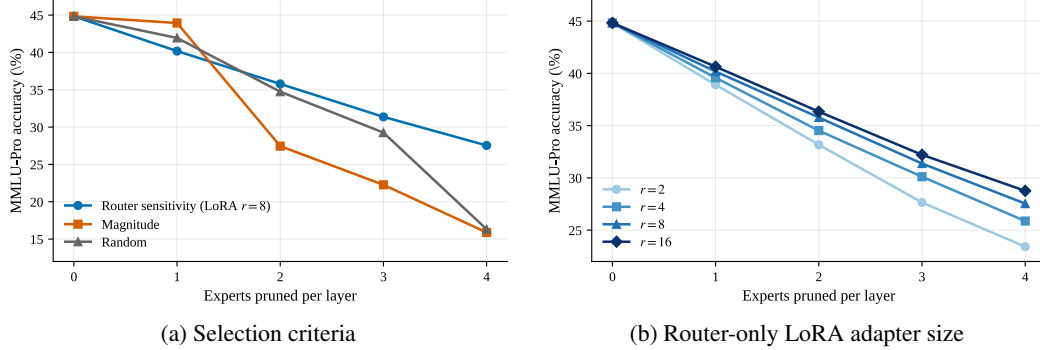


Figure 1: MMLU-Pro accuracy after expert pruning on Mixtral-8 $\times$ 7B-Instruct. (a) Router sensitivity decays quasi-linearly while magnitude and random selection collapse. (b) Larger adapter parameterizations produce better rankings at every pruning depth, with the endpoint ordering preserved across two independent runs.

Table 1: Controlled Mixtral results at 50% expert pruning. The adapter is discarded after ranking, so every pruned model has the same 24.2B parameters.

Selection	Score	Trainable	MMLU-Pro
Magnitude	static weights	0	15.88
Random	none	0	16.31
All-module LoRA, $r = 8$	weight delta	0.26%	24.42
Router LoRA, $r = 2$	weight delta	0.0006%	23.42
Router LoRA, $r = 4$	weight delta	0.0011%	25.87
Router LoRA, $r = 8$	weight delta	0.0022%	27.54
Router LoRA, $r = 16$	weight delta	0.0045%	28.76
IA3	logit delta	$\sim 0.01\%$	28.04
Houlsby	logit delta	$\sim 0.14\%$	25.39

4 Results

Router sensitivity survives lightweight adaptation. The unpruned model scores 44.83% MMLU-Pro. Router-only LoRA at rank 8 retains 40.18%, 35.78%, 31.37%, and 27.54% as one through four experts are removed per layer. At one expert pruned, magnitude and random lead by 3.76 and 1.76 points; router sensitivity becomes advantageous beyond the marginal expert. At maximal compression, magnitude and random selection retain 15.88% and 16.31%. Router-guided pruning therefore retains roughly 1.7 times their accuracy, and its decay is quasi-linear across all five compression points, making the accuracy cost of a target compression ratio predictable.

The signal concentrates at the router. At matched rank, attaching LoRA to every linear module yields 24.42% at four experts pruned, against 27.54% when adaptation is confined to the router. Accuracy declines steadily as query and output projections, full attention, expert weights, and finally all linear modules are added. The optimizer otherwise gains ways to lower loss by changing what experts compute rather than which experts are recruited, diluting the measurement at the router.

Larger adapters recover a better ranking. Across router-only LoRA sizes $r = 2, 4, 8, 16$, every MMLU-Pro column is monotonically ordered at all four pruning depths. At maximal compression, accuracy rises from 23.42% to 25.87%, 27.54%, and 28.76%. Since the adapter is discarded, these models differ only in the experts retained. Larger adapter parameterizations therefore inject a richer task-conditioned revision and produce a more faithful ranking. The endpoint ordering is replicated: rank 16 remains best and rank 2 worst in both runs at every pruning depth. Paired runs differ by 0.76 points on average and at most 2.24 points, so we treat 2.2 points as the resolution of a single comparison.

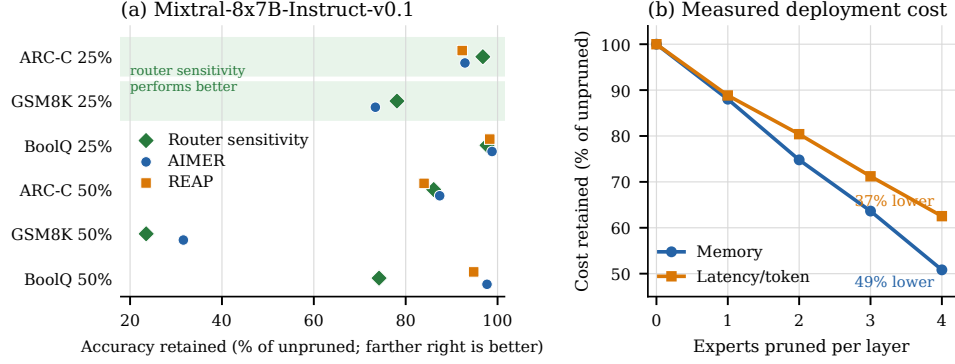


Figure 2: Modern-method positioning and deployment cost. (a) Mixtral retention normalized to each study’s unpruned baseline. Pale green: router sensitivity is better than AIMER and REAP. Cross-study values; unreported results omitted. (b) Memory and latency relative to unpruned Mixtral.

Constrained perturbations preserve the signal. IA3 reaches 28.04% without writing to the router, within resolution of router-only LoRA. Under their shared budget, it leads Houlsby (25.39%) by 2.65 points, above the 2.2-point resolution. Because this budget differs from LoRA’s, the experiment does not isolate geometry. The ordering is consistent with constrained multiplicative modulation preserving router distinctions better than an unconstrained additive residual, suggesting separate roles for capacity and faithfulness.

The signal transfers. Across additional Mixtral benchmarks, ARC-Challenge and BIG-Bench Hard decline gently, GSM8K has a late cliff, and BoolQ is non-monotonic, exposing the adaptation corpus as a control surface for protected capabilities. On Qwen1.5-MoE fully fine-tuned for mathematics, router sensitivity retains 58.1% and 49.7% mean accuracy after five and ten of twenty experts are removed. Magnitude retains 55.2% and 39.1%; random pruning falls from 37.6% to 4.4%. The criterion thus transfers across model family, adaptation regime, and domain.

Comparison with recent one-shot pruning methods. AIMER scores frozen-weight concentration, while REAP combines router weights with expert activation norms [17, 23]. All three use Mixtral-8×7B-Instruct-v0.1, but harnesses differ, so Figure 2a normalizes to each study’s unpruned baseline. At 25% pruning, router sensitivity leads both on ARC-Challenge and AIMER on GSM8K, but trails AIMER by 1.1 points and REAP by 0.6 on BoolQ. At 50%, it leads REAP by 2.1 points and trails AIMER by 1.3 on ARC-Challenge; both retain more on BoolQ, and AIMER retains more on GSM8K. Router sensitivity is therefore competitive at moderate compression while providing a task-conditioned signal from lightweight adaptation. Appendix H includes DiEP and MoE Pathfinder.

5 Deployment efficiency

Structural pruning yields measured deployment savings (Figure 2b). With 4-bit weights on one A100, pruning four experts per layer cuts memory from 24.2 to 12.3 GB (49%) and latency from 40.3 to 25.2 ms (37%), raising single-stream throughput by 60%. Under this implementation, we attribute the latency gain to a smaller resident expert set and reduced memory traffic; top-2 routing and expert FLOPs remain unchanged, and the magnitude is implementation-dependent.

6 Conclusion

Router sensitivity turns lightweight adaptation into an expert-selection instrument: adapt on protected-capability data, rank by router change, discard the adapter, and prune the original checkpoint. Near-linear accuracy and deployment-cost curves make the tradeoff predictable. The monotone rank effect, geometry dependence, and sign question lie beyond the current guarantee. We release our fine-tuning and pruning code, training data, and evaluated checkpoints through the anonymous links in Appendix L.

References

- [1] Sikai Bai, Haoxi Li, Jie Zhang, Zicong Hong, and Song Guo. DiEP: Adaptive mixture-of-experts compression through differentiable expert pruning. *arXiv preprint arXiv:2509.16105*, 2025.
- [2] Tianyu Chen, Shaohan Huang, Yuan Xie, Binxing Jiao, Daxin Jiang, Haoyi Zhou, Jianxin Li, and Furu Wei. Task-specific expert pruning for sparse mixture-of-experts. *arXiv preprint arXiv:2206.00277*, 2022.
- [3] Mohammed Nowaz Rabbani Chowdhury, Meng Wang, Kaoutar El Maghraoui, Naigang Wang, Pin-Yu Chen, and Christopher Carothers. A provably effective method for pruning experts in fine-tuned sparse mixture-of-experts. In *Proceedings of the 41st International Conference on Machine Learning (ICML)*, 2024. arXiv:2405.16646.
- [4] Christopher Clark, Kenton Lee, Ming-Wei Chang, Tom Kwiatkowski, Michael Collins, and Kristina Toutanova. BoolQ: Exploring the surprising difficulty of natural yes/no questions. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics (NAACL)*, pages 2924–2936, 2019.
- [5] Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. Think you have solved question answering? try ARC, the AI2 reasoning challenge. *arXiv preprint arXiv:1803.05457*, 2018.
- [6] Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021.
- [7] Tim Dettmers, Artidoro Pagnoni, Ari Holtzman, and Luke Zettlemoyer. QLoRA: Efficient fine-tuning of quantized LLMs. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023. arXiv:2305.14314.
- [8] William Fedus, Barret Zoph, and Noam Shazeer. Switch transformers: Scaling to trillion parameter models with simple and efficient sparsity. *Journal of Machine Learning Research*, 23 (120):1–39, 2022.
- [9] Cl  mentine Fourrier, Nathan Habib, Thomas Wolf, and Lewis Tunstall. LightEval: A lightweight framework for LLM evaluation. <https://github.com/huggingface/lighteval>, 2023.
- [10] Neil Houlsby, Andrei Giurgiu, Stanislaw Jastrzebski, Bruna Morrone, Quentin de Laroussilhe, Andrea Gesmundo, Mona Attariyan, and Sylvain Gelly. Parameter-efficient transfer learning for NLP. In *Proceedings of the 36th International Conference on Machine Learning (ICML)*, pages 2790–2799, 2019.
- [11] Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-rank adaptation of large language models. In *International Conference on Learning Representations (ICLR)*, 2022. arXiv:2106.09685.
- [12] Guimin Hu, Meng Li, Qiwei Peng, Lijie Hu, Boyan Xu, and Ruichu Cai. What gets activated: Uncovering domain and driver experts in MoE language models. *arXiv preprint arXiv:2601.10159*, 2026.
- [13] Sieun Hyeon and Jaeyoung Do. Is retraining-free enough? the necessity of router calibration for efficient MoE compression. *arXiv preprint arXiv:2603.02217*, 2026.
- [14] Ajay Jaiswal, Jianyu Wang, Yixiao Li, Pingzhi Li, Tianlong Chen, Zhangyang Wang, Chong Wang, Ruoming Pang, and Xianzhi Du. Finding fantastic experts in MoEs: A unified study for expert dropping strategies and observations. *arXiv preprint arXiv:2504.05586*, 2025.
- [15] Albert Q. Jiang, Alexandre Sablayrolles, Antoine Roux, Arthur Mensch, Blanche Savary, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Emma Bou Hanna, Florian Bressand, et al. Mixtral of experts. *arXiv preprint arXiv:2401.04088*, 2024.

- [16] Yeskendir Koishekenov, Alexandre Berard, and Vassilina Nikoulina. Memory-efficient NLLB-200: Language-specific expert pruning of a massively multilingual machine translation model. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (ACL)*, pages 3567–3585, 2023.
- [17] Mike Lasby, Ivan Lazarevich, Nish Sinnadurai, Sean Lie, Yani Ioannou, and Vithursan Thangarasa. REAP the experts: Why pruning prevails for one-shot MoE compression. In *International Conference on Learning Representations (ICLR)*, 2026. arXiv:2510.13999v3.
- [18] Dmitry Lepikhin, HyoukJoong Lee, Yuanzhong Xu, Dehao Chen, Orhan Firat, Yanping Huang, Maxim Krikun, Noam Shazeer, and Zhifeng Chen. GShard: Scaling giant models with conditional computation and automatic sharding. In *International Conference on Learning Representations (ICLR)*, 2021. arXiv:2006.16668.
- [19] Pingzhi Li, Zhenyu Zhang, Prateek Yadav, Yi-Lin Sung, Yu Cheng, Mohit Bansal, and Tianlong Chen. Merge, then compress: Demystify efficient SMoE with hints from its routing policy. In *International Conference on Learning Representations (ICLR)*, 2024. arXiv:2310.01334.
- [20] Xiang Lisa Li and Percy Liang. Prefix-tuning: Optimizing continuous prompts for generation. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics (ACL)*, pages 4582–4597, 2021.
- [21] Enshu Liu, Junyi Zhu, Zinan Lin, Xuefei Ning, Matthew B. Blaschko, Shengen Yan, Guohao Dai, Huazhong Yang, and Yu Wang. Efficient expert pruning for sparse mixture-of-experts language models: Enhancing performance and reducing inference costs. *arXiv preprint arXiv:2407.00945*, 2024.
- [22] Haokun Liu, Derek Tam, Mohammed Muqeeth, Jay Mohta, Tenghao Huang, Mohit Bansal, and Colin Raffel. Few-shot parameter-efficient fine-tuning is better and cheaper than in-context learning. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2022. arXiv:2205.05638.
- [23] Zongfang Liu, Guangyi Chen, Shengkun Tang, Yifan Shen, Huan Wang, and Xin Yuan. AIMER: Calibration-free task-agnostic MoE expert pruning. *arXiv preprint arXiv:2603.18492v3*, 2026.
- [24] Xudong Lu, Qi Liu, Yuhui Xu, Aojun Zhou, Siyuan Huang, Bo Zhang, Junchi Yan, and Hongsheng Li. Not all experts are equal: Efficient expert pruning and skipping for mixture-of-experts large language models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (ACL)*, pages 6159–6172, 2024.
- [25] Ilyas Moutawwakil and Hugging Face. Optimum-benchmark: A framework for benchmarking the performance of transformers models with different hardwares, backends and optimizations. <https://github.com/huggingface/optimum-benchmark>, 2023.
- [26] Alexandre Muzio, Alex Sun, and Churan He. SEER-MoE: Sparse expert efficiency through regularization for mixture-of-experts. *arXiv preprint arXiv:2404.05089*, 2024.
- [27] Qwen Team. Qwen1.5-MoE: Matching 7B model performance with 1/3 activated parameters. <https://qwenlm.github.io/blog/qwen-moe/>, 2024. Accessed 2026.
- [28] Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarczyk, Andy Davis, Quoc Le, Geoffrey Hinton, and Jeff Dean. Outrageously large neural networks: The sparsely-gated mixture-of-experts layer. In *International Conference on Learning Representations (ICLR)*, 2017. arXiv:1701.06538.
- [29] Mirac Suzgun, Nathan Scales, Nathanael Schärli, Sebastian Gehrmann, Yi Tay, Hyung Won Chung, Aakanksha Chowdhery, Quoc V. Le, Ed H. Chi, Denny Zhou, and Jason Wei. Challenging BIG-Bench tasks and whether chain-of-thought can solve them. In *Findings of the Association for Computational Linguistics (ACL Findings)*, 2023. arXiv:2210.09261.
- [30] Thinking Machines Lab. LoRA without regret. <https://thinkingmachines.ai/blog/lora/>, 2025. Accessed 2026.

- [31] Yubo Wang, Xueguang Ma, Ge Zhang, Yuansheng Ni, Abhranil Chandra, Shiguang Guo, Weiming Ren, Aaran Arulraj, Xuan He, Ziyang Jiang, et al. MMLU-Pro: A more robust and challenging multi-task language understanding benchmark. In *Advances in Neural Information Processing Systems (NeurIPS) Datasets and Benchmarks Track*, 2024. arXiv:2406.01574.
- [32] Yanyue Xie, Zhi Zhang, Ding Zhou, Cong Xie, Ziang Song, Xin Liu, Yanzhi Wang, Xue Lin, and An Xu. MoE-Pruner: Pruning mixture-of-experts large language model using the hints from its router. *arXiv preprint arXiv:2410.12013*, 2024.
- [33] Xican Yang, Yuanhe Tian, and Yan Song. MoE pathfinder: Trajectory-driven expert pruning. *arXiv preprint arXiv:2512.18425*, 2025.

A Related work

Expert pruning in MoE models. Because MoE layers hold most of a model’s parameters, removing whole experts is the most direct route to a smaller checkpoint. Early work pruned experts progressively during task-specific fine-tuning until a single expert remained per layer [2], and Koishekenov et al. [16] showed that language-specific experts in a multilingual translation model could be removed without any further training. Subsequent criteria have grown more selective: Muzio et al. [26] rank experts by accumulated router gate values, Lu et al. [24] search for the expert subset that minimizes reconstruction loss against the original layer output, and Liu et al. [21] use a gradient-free evolutionary search over expert subsets. Lasby et al. [17] combine gate value with expert activation norm and report near-lossless compression at 50% of experts removed on models up to 1T parameters. Jaiswal et al. [14] survey sixteen criteria on Mixtral and find activation-norm scoring strongest overall. Liu et al. [23] instead score the concentration pattern of frozen expert weights, requiring neither calibration data nor activation statistics, and report balanced retention across five MoE families including Mixtral. Bai et al. [1] relax the selection into a differentiable optimization that learns a nonuniform pruning rate per layer, and Yang et al. [33] cast expert retention as global path planning over activation trajectories. A related line prunes weights within experts rather than experts themselves [32]. What unites these methods is that they score experts from a frozen checkpoint using calibration data, with no adaptation step.

Router-derived importance signals. Several of the above criteria read the router, but they read its *current state*: gate values on calibration data [17, 26], or the ℓ_2 norm of each expert’s row in the gate matrix, which Jaiswal et al. [14] report to be the strongest of the weight-based scores they evaluate. A different signal is available when the model is adapted. Chowdhury et al. [3] define the sensitivity of expert e as the change in its router norm over fine-tuning, $\Delta_e = \|w_e^{(T)}\| - \|w_e^{(0)}\|$, and prove that removing the experts with smallest Δ_e preserves test accuracy. The distinction matters for what the score can express: a static norm measures how much the pretrained router relies on an expert, whereas Δ_e measures how much adaptation to a task revises that reliance. Their analysis covers binary classification on a simplified MoE, and their empirical validation uses vision MoE models fine-tuned on image classification benchmarks. Adapting the router alone is itself an established technique: Hu et al. [12] attach LoRA to the gating projection of Mixtral, DeepSeek and Qwen to study expert attribution, though they do not use the resulting weight changes to prune. We take the sensitivity criterion as our starting point and ask what happens when the adaptation producing Δ_e is made parameter-efficient rather than full, and when the model is a MoE language model rather than a vision classifier.

Expert merging and post-compression repair. Rather than discarding experts, merging collapses similar experts into one, clustering by router-logit similarity and averaging weights [19]. Merging has been reported to beat pruning on multiple-choice benchmarks, but Lasby et al. [17] show it introduces an irreducible error by tying gate values that the router previously controlled independently, and that the advantage reverses on generative tasks. Independently of the criterion used, some accuracy is usually recoverable afterwards: Xie et al. [32] restore 99% of baseline performance through expert-wise distillation, and Jaiswal et al. [14] find iterative dropping with interleaved retraining preferable to one-shot removal. Hyeon and Do [13] argue more strongly that compression leaves the router mismatched to the surviving experts, and recover much of the loss by distilling into the router alone. They find this recovery far larger for fine-grained architectures than for Mixtral, whose eight experts per layer admit only $\binom{8}{2}$ routing configurations. We evaluate in the one-shot, uncalibrated regime throughout, which isolates the quality of the selection criterion from the quality of any subsequent repair, and Appendix J returns to what calibration would add.

Parameter-efficient fine-tuning. PEFT methods adapt a frozen model through a small set of additional trainable parameters. LoRA [11] adds a low-rank product to selected weight matrices, and QLoRA [7] makes this feasible on a single node by keeping the base weights in 4-bit precision. Housby adapters [10] insert bottleneck MLPs with a residual connection, prefix tuning [20] prepends learned vectors to each layer’s input, and IA3 [22] learns per-channel multiplicative scalings of inner activations. These differ in trainable parameter count, but for our purposes the more consequential difference is geometric: LoRA modifies weights additively in a low-rank subspace, Housby adapters modify activations additively through a nonlinear bottleneck, and IA3 modifies them multiplicatively without changing their direction. Appendix F finds that this geometric distinction, and not the parameter budget, is what orders the three as instruments.

PEFT as an instrument rather than a training method. The PEFT literature evaluates these methods by how closely they approach full fine-tuning on task loss, and existing guidance about where to attach adapters follows from that objective. We use them differently. Here the adapted model is not the deliverable; the fine-tuning run is an instrument, and what we read off it is which experts the task recruits. The two objectives can favor different configurations, and Appendix J returns to the case where they visibly diverge.

B Measuring router sensitivity

B.1 Preliminaries: MoE routing

We consider a decoder-only transformer in which the feed-forward block of each layer is replaced by an MoE layer holding E experts $f_1, \dots, f_E$, each a map $\mathbb{R}^d \rightarrow \mathbb{R}^d$, together with a router. The router is a single linear map with weight matrix $W_g \in \mathbb{R}^{E \times d}$ whose e -th row $w_e \in \mathbb{R}^d$ is the gate vector of expert e . For a token representation $x \in \mathbb{R}^d$, the router produces logits

$$\ell(x) = W_g x \in \mathbb{R}^E, \quad \ell_e(x) = \langle w_e, x \rangle, \quad (3)$$

and top- k routing selects the index set $\mathcal{T}_k(x)$ of the k largest logits. Gate values are normalized over the selected experts alone, so the layer output is

$$y(x) = \sum_{e \in \mathcal{T}_k(x)} g_e(x) f_e(x), \quad g_e(x) = \frac{\exp \ell_e(x)}{\sum_{j \in \mathcal{T}_k(x)} \exp \ell_j(x)}. \quad (4)$$

In Mixtral-8×7B-Instruct, every one of the 32 layers carries $E = 8$ experts with $k = 2$ active per token. Because each expert is a full SwiGLU feed-forward block while w_e is a single d -dimensional vector, the router accounts for a negligible share of parameters yet fully determines which experts contribute to any given token.

B.2 Sensitivity scores

Router norm change. The criterion we build on measures how far adaptation moves an expert’s gate vector. Writing $w_e^{(0)}$ for the gate vector of expert e in the pretrained model and $w_e^{(T)}$ for its value after fine-tuning, Chowdhury et al. [3] define the signed change

$$\Delta_e = \|w_e^{(T)}\|_2 - \|w_e^{(0)}\|_2 \quad (5)$$

and retain the experts with the largest values of Δ_e . The intuition is that fine-tuning revises the router’s reliance on experts the task actually recruits, while experts the task does not use are left near their pretrained gating.

We score experts by the *magnitude* of this revision,

$$s_e = \left| \|w_e^{(T)}\|_2 - \|w_e^{(0)}\|_2 \right|, \quad (6)$$

and prune the experts with the smallest s_e . The two scores agree whenever gate norms only grow, and diverge when a norm contracts: such an expert has a large s_e and is retained under Equation 6, but has a strongly negative Δ_e and would be an early pruning candidate under Equation 5. We adopt the direction-agnostic form because our question is how much adaptation perturbs the router’s treatment of an expert, not in which direction, and because a contracting gate is still evidence that the task engaged that expert. We note that the theoretical guarantee is stated for the signed quantity, and return in Appendix J to whether the sign carries usable information.

Logit deltas when the router is frozen. Equations 5 and 6 require W_g to be trainable. Several adaptation methods leave the router weights untouched and alter only the representations reaching it, in which case $s_e = 0$ for every expert and the score is vacuous. The routing behavior nonetheless changes, because the logits in Equation 4 are a function of the incoming representation as much as of W_g . We therefore extend the criterion to act on logits rather than weights. Let $\mathcal{X}$ be a held-out batch of N token representations, and let $L^{\text{base}}, L^{\text{adapt}} \in \mathbb{R}^{N \times E}$ collect the router logits produced by the pretrained and adapted models on $\mathcal{X}$. With $\Delta L = L^{\text{adapt}} - L^{\text{base}}$, we define

$$s_e^{\text{logit}} = \frac{1}{\sqrt{N}} \|\Delta L_{:,e}\|_2, \quad (7)$$

the root-mean-square shift in expert e 's logit across tokens. The normalization makes the score comparable across batch sizes. Equation 7 reduces to a measure of the same underlying quantity as Equation 6, the extent to which adaptation revises the router's treatment of an expert, but reads it downstream of the gate rather than in its weights, and is therefore defined for every method we consider.

B.3 Adaptation families and their perturbation geometry

Throughout, a parameter-efficient method is applied for a short fine-tuning run whose only purpose is to induce a measurable change in routing. We consider three families, which differ less in parameter count than in how they perturb the quantities entering Equation 4.

LoRA [11] reparameterizes a weight matrix W as $W + BA$ with $B \in \mathbb{R}^{d_{\text{out}} \times r}$, $A \in \mathbb{R}^{r \times d_{\text{in}}}$ and $r \ll \min(d_{\text{in}}, d_{\text{out}})$. Applied to W_g , it perturbs the gate vectors directly and additively within an r -dimensional subspace, so w_e changes and Equation 6 applies. Applied elsewhere, it perturbs the representation x that reaches an unchanged router. The rank r sets the adapter's internal width and parameter budget and is swept in Appendix E.

IA3 [22] learns a per-channel scaling vector α and replaces x by $x \odot \alpha$. Router logits become $\ell(x) = W_g(x \odot \alpha)$, so gating is modulated multiplicatively while W_g is untouched. Because scaling acts coordinate-wise on the input, the induced logit shift is a reweighting of contributions already present in $\langle w_e, x \rangle$.

Houlsby adapters [10] insert a bottleneck $x \mapsto x + U \sigma(D \text{LN}(x))$ with $D \in \mathbb{R}^{r \times d}$, $U \in \mathbb{R}^{d \times r}$ and a nonlinearity σ . The perturbation is additive in representation space and passes through a nonlinearity, so it is unconstrained in direction: the residual may point anywhere in $\mathbb{R}^d$, including directions with no relation to any w_e .

Only the first of these updates the router weights, so LoRA on the gate admits either score while IA3 and Houlsby require Equation 7. The three perturbation geometries, low-rank additive in weight space, multiplicative in representation space, and unconstrained additive in representation space, are compared in Appendix F, where the results are consistent with a role for geometry beyond parameter budget without isolating it as the sole cause.

B.4 One-shot pruning procedure

Scores are computed and applied independently per layer (Figure 3). Within layer ℓ we rank its E experts by s_e (or s_e^{logit}), remove the n experts with the smallest scores, and delete their parameters from the checkpoint. We prune the same number n from every layer, so a model with n pruned retains $E - n$ experts throughout. The corresponding rows of W_g are removed with them, which leaves Equation 4 well-formed on the surviving experts: top- k selection and gate normalization are simply carried out over $E - n$ logits instead of E . For Mixtral with $k = 2$, pruning up to $n = 4$ leaves at least two experts per layer and requires no change to the routing rule.

Two properties of this procedure are worth stating explicitly. Pruning is applied to the original pretrained checkpoint, not to the adapted one: the adapter supplies the ranking and is then discarded, so the deployed model contains no adapter parameters. And pruning is one-shot, with no retraining, distillation, or router recalibration afterwards. This isolates the quality of the selection criterion, which is what we set out to measure, at the cost of forgoing recoverable accuracy; Appendix J discusses what a repair step would add.

C Experimental setup

Models. Our primary model is Mixtral-8×7B-Instruct-v0.1 [15], a decoder-only transformer with 32 layers, $E = 8$ experts per layer and $k = 2$ active per token, totalling 46.7B parameters of which 13B are active. It is a deliberate choice for this study: with only eight coarse experts per layer, each removal is a large intervention, so a pruning criterion has little room to be accidentally right. To test whether the criterion survives a change of model family, training regime and domain, we additionally use a 20-expert-per-layer Qwen1.5-MoE-A2.7B-Chat checkpoint [27] with $k = 4$ active, as a fine-grained counterpart to Mixtral.

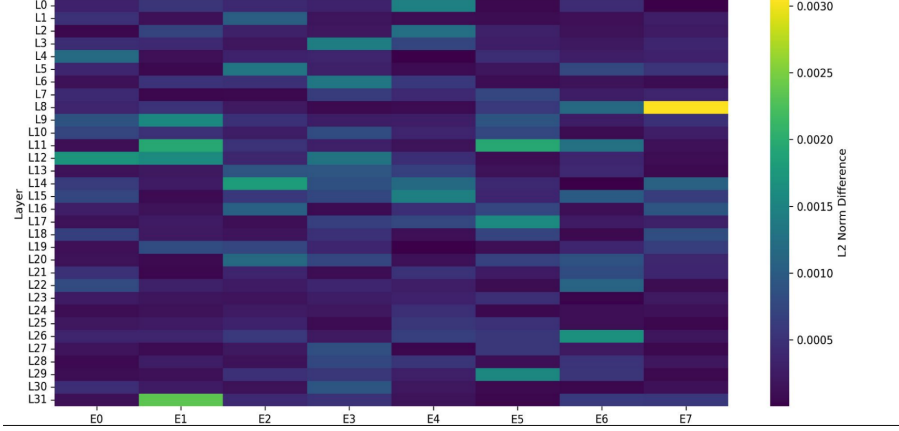


Figure 3: Router sensitivity across Mixtral-8×7B-Instruct: the per-expert ℓ_2 norm change s_e of Equation 6, for all 32 layers and 8 experts, from an all-module LoRA adaptation at rank 16. The other adaptation runs in this study produce maps with the same scattered structure, differing mainly in overall scale. Sensitivity is not concentrated: most cells sit near their layer’s median while a few expert-layer pairs stand out by an order of magnitude (the strongest here is expert 7 of layer 8), and no single expert column or band of layers dominates. This scatter is why experts are ranked *within* each layer rather than against a global threshold (Appendix B.4).

Data. All Mixtral adaptation runs use an anonymized augmented supervised fine-tuning corpus of general text-generation instructions, training on the completion field at a maximum sequence length of 1024 tokens. The corpus is deliberately generic: we ask which experts a broad instruction distribution recruits, rather than tailoring the signal to any evaluation benchmark. The mathematical-reasoning runs of Appendix G instead use a mixture of MathInstruct and Belle Math, making that transfer test a change of domain as well as of model.

Adaptation configurations. Except where a factor is deliberately varied, runs share one recipe: 500 optimizer steps of 8-bit AdamW at learning rate 2×10^{-4} , weight decay 0.01, a cosine schedule with 5 warmup steps, bfloat16 compute, per-device batch size 1 with gradient accumulation, and LoRA dropout 0.1, from seed 3407. Accumulation is 20 for the router-only reference and is held fixed within each sweep; per-run values are given in Appendix L. Mixtral adaptation runs hold the base weights in 4-bit precision following QLoRA [7]; the Qwen router adaptation runs unquantized. Our reference configuration applies LoRA of rank $r = 8$ with $\alpha = 8$ to the router weights alone. From that reference we vary one factor at a time: rank over $\{2, 4, 8, 16\}$ with the target set fixed (Appendix E), and the target module set over router-only, router with query and output projections, router with full attention, router with expert feed-forward weights, and all linear modules, with rank fixed at 8 (Appendix D). Every configuration in this sweep includes the router, since excluding it leaves W_g untouched and Equation 6 identically zero. Such configurations could in principle be scored with Equation 7 instead, and we return to this gap in Appendix J.

The multiplicative and additive-adapter runs use a fixed budget of 2000 training examples for one epoch at learning rate 10^{-4} , with context length 2048, micro-batch size 1 and gradient accumulation 16. IA3 [22] attaches scaling vectors to the router, the attention projections and the expert feed-forward weights; Houlisby adapters [10] use a reduction factor of 16 with a GELU nonlinearity. Because this budget differs from that of the LoRA sweeps, Appendix F compares adaptation geometries under their own settings rather than under a matched budget, and we read those results accordingly.

Full fine-tuning reference. One setting updates every parameter rather than an adapter. On Qwen we fully fine-tune the 20-expert model on mathematical reasoning, which is feasible only with aggressive offloading: DeepSpeed ZeRO stage 3 with both optimizer states and parameters offloaded to CPU, gradient checkpointing, and an effective batch size of 512 formed from micro-batches of 1 with 256 accumulation steps, using AdamW at learning rate 2×10^{-4} with weight decay 0.01. Sensitivity is then read from Equation 6 directly, since W_g is trainable.

Pruning implementation. Pruning is structural rather than masked. For each layer we delete the selected experts from the module list and remove the corresponding rows of W_g , so the router’s

output dimension shrinks from E to $E - n$ and top- k selection with softmax renormalization proceeds over the surviving experts exactly as in Equation 4. We remove the same number $n \in \{1, 2, 3, 4\}$ from all 32 layers, corresponding to 12.5% through 50% of experts. Pruning is applied to the original pretrained checkpoint rather than to the adapted one, so no adapter parameters survive into any evaluated model. Pruned models are saved with the foundation model’s tokenizer and a corrected expert count in the configuration, then evaluated as ordinary checkpoints.

Evaluation. We evaluate with LightEval [9]. MMLU-Pro [31] is the primary benchmark throughout, chosen because its ten-option format and reasoning-heavy questions leave less headroom for a degraded model to guess well than four-option multiple choice does; the unpruned Mixtral baseline is 44.83%. Appendix G widens the evaluation to GSM8K [6], ARC-Challenge [5], BIG-Bench Hard [29] and BoolQ [4], which span chain-of-thought arithmetic, science question answering, multi-step reasoning and binary reading comprehension, and which we use to test whether the shape of the accuracy curve is a property of the criterion or of MMLU-Pro. The Qwen study is evaluated on eleven mathematical-reasoning benchmarks covering college, high school and elementary mathematics, algebra, precalculus, probability, induction and MathQA.

Implementation and hardware. Adaptation uses PEFT and TRL’s `SFTTrainer` over HuggingFace Transformers, with bitsandbytes supplying 4-bit base weights and the 8-bit optimizer. Experiments ran on NVIDIA A100-SXM4 GPUs with 80 GB HBM2 under CUDA 12.8 and driver 550.54.15, using a single GPU for adaptation and up to three for pruning and serialization of the full checkpoint. The memory and latency measurements of Appendix I are taken with Optimum-Benchmark [25] under 4-bit weights on a single A100, which is why the unpruned model is reported at 24.2 GB rather than at its half-precision footprint. Pruned checkpoints, run configurations, and the scoring and pruning code are released.

Measurement resolution. Three configurations were run twice over the course of the project under nominally identical settings. Across the twelve resulting pairs of accuracies, repeated runs differ by 0.76 points on average and by at most 2.24. We take 2.2 points as the resolution of a single comparison in what follows, and distinguish throughout between differences that exceed it and orderings that are supported instead by their consistency across many comparisons. Appendix G.1 reports these replications in full.

Two measurement pipelines. Results were produced in two phases whose evaluation settings differ. The first, from which every result in Sections D through F is drawn, uses the recipe above and gives an unpruned MMLU-Pro baseline of 44.83%. The second, reported in Appendix G.1 and in the benchmark study of Appendix G, comprises four independently configured runs that differ in rank, target modules, step budget, batch shape, weight decay and schedule, and that additionally use gradient clipping at maximum norm 0.3, sequence packing and length-grouped batching; their unpruned baselines are 45.35% and 45.57%. The Qwen study is a third setting with its own model, training regime and benchmarks, and is reported against its own unpruned scores throughout. Every comparison is computed within a setting against that setting’s own baseline, and we do not mix settings in any single table or figure. Full configurations appear in Appendix L.

D Where does the pruning signal live?

The criterion of Appendix B.2 says to read expert importance off the router, but it does not say how the router should be made to move. This section fixes the adapter rank at 8 and varies only which modules it is attached to, so the adapted rows of Table 2 differ in nothing except the location of the adaptation. Two selection rules that require no adaptation at all are included as a floor. Figure 4 plots the resulting accuracy against pruning depth.

Confining adaptation to the router improves the signal. At matched rank, data, and training schedule, attaching LoRA to every linear module yields 24.42% MMLU-Pro accuracy with four experts pruned per layer, compared with 27.54% when LoRA is confined to the router. The gap is 3.1 points at equal rank, equal data, and an identical pruned model size; the two runs differ only in where the adapter was attached. Adapting the whole network is the stronger configuration for producing a capable fine-tuned model, and is what the parameter-efficient fine-tuning literature recommends when task loss is the objective. It is the weaker configuration for deciding what to delete.

Table 2: MMLU-Pro accuracy (%) after removing n experts from every layer of Mixtral-8 $\times$ 7B-Instruct. The unpruned model scores 44.83% at 46.7B parameters. All adapted rows use LoRA of rank 8 and include the router; rows below the first add further target modules. Remaining parameter counts are identical across selection criteria at a given n . Bold marks the best adapted configuration in each column.

Selection criterion	Experts pruned per layer			
	1 (41.1B)	2 (35.4B)	3 (29.8B)	4 (24.2B)
<i>Without adaptation</i>				
Magnitude	43.94	27.45	22.27	15.88
Random	41.94	34.74	29.26	16.31
<i>Router sensitivity, LoRA $r = 8$</i>				
Router only	40.18	35.78	31.37	27.54
+ q, o	40.06	35.32	30.81	26.74
+ q, k, v, o	39.94	34.98	30.40	25.93
+ expert MLP	39.82	34.85	29.97	24.97
+ all linear modules	39.87	34.86	30.04	24.42

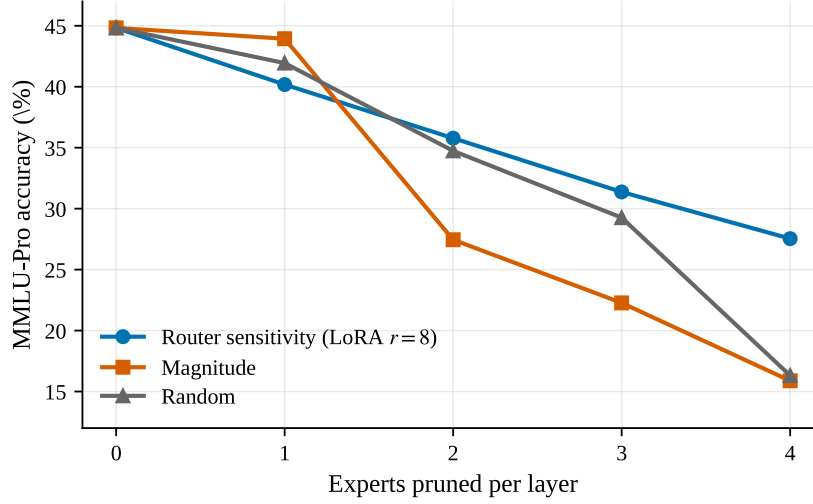


Figure 4: MMLU-Pro accuracy as experts are removed from every layer of Mixtral-8 $\times$ 7B-Instruct, by selection criterion. Router sensitivity is the router-only LoRA reference at rank 8 (Table 2); all curves share the 44.83% unpruned baseline at zero experts pruned. Router-guided selection decays quasi-linearly, whereas magnitude and random selection collapse once more than one expert per layer is removed.

The penalty grows with the modules adapted and with pruning depth. At four experts pruned the five adapted rows form a ladder: 27.54% for the router alone, then 26.74%, 25.93% and 24.97% as query and output projections, full attention, and the expert feed-forward weights are added, and 24.42% with every linear module adapted. At shallower pruning the ordering is not strict. The five configurations span 0.36 points at one expert pruned, 0.93 at two and 1.40 at three, and within those bands the two largest-footprint configurations exchange places, and no single step of the ladder exceeds the measurement resolution. What the data support is the span rather than the individual rungs: the 3.1 points between confining the adapter to the router and spreading it across the whole network is the one comparison here larger than repeated-run variation. Target module choice is close to irrelevant when one expert is removed and worth three points when four are, because a criterion only needs to be right about the marginal expert until it has to be right about half of them.

Reference points without adaptation. Neither adaptation-free rule survives past the first removal. Magnitude selection is the best entry in the $n = 1$ column at 43.94%, since every layer holds

Table 3: MMLU-Pro accuracy (%) after pruning, for router-only LoRA at four ranks. Trainable parameters are given as a percentage of the 46.7B-parameter model. The unpruned model scores 44.83%.

Rank	Trainable	Experts pruned per layer			
		1	2	3	4
$r = 2$	0.0006%	38.91	33.17	27.65	23.42
$r = 4$	0.0011%	39.58	34.52	30.11	25.87
$r = 8$	0.0022%	40.18	35.78	31.37	27.54
$r = 16$	0.0045%	40.64	36.34	32.21	28.76

one expert the pretrained model already weights lightly and any criterion correlated with that weighting will find it, but it falls 16.5 points at $n = 2$ against 4.4 for router sensitivity and ends at 15.88%. Random selection ends at 16.31% and, in the middle of the range, is the better of the two, which indicates that small weight magnitude is not merely a weak indicator of redundancy but an actively misleading one. We do not treat these rules as competitive baselines; they establish that the comparisons in the rest of the paper are made above a floor rather than against one.

Interpretation. The router is the point at which revised expert recruitment becomes observable, whether the change is induced by modifying the router weights directly or by changing the representations reaching them. When the adapter also reaches attention and expert weights, the same reduction in loss becomes available by changing what the experts compute rather than which are consulted. The router then moves less, and less distinctively, and the measurement is diluted by the alternatives available to the optimizer. This reading predicts the two results that follow: capacity spent on the router should sharpen the signal (Appendix E), and adaptations that reach the router only indirectly should be judged by how faithfully they preserve its structure rather than by how many parameters they train (Appendix F).

E How much adaptation capacity is needed?

Appendix D fixed the adapter rank and moved its location. This section does the reverse: the adapter stays on the router and we sweep its rank over $\{2, 4, 8, 16\}$, scaling α with r and holding data, schedule and step budget constant, in order to isolate the effect of adapter size (Figure 5). Rank sets the internal width and parameter budget of the adapter, so it controls how rich a task-induced revision the adapter can inject into the router. Since the Mixtral router has only eight rows, the algebraic rank of its update is capped at eight; $r = 16$ denotes a larger parameterization and a different optimization path, not an update matrix with rank greater than eight.

Accuracy after pruning increases monotonically with rank. Every column of Table 3 is ordered, without exception: rank 4 beats rank 2, rank 8 beats rank 4 and rank 16 beats rank 8 at all four pruning depths. No single doubling clears the measurement resolution on its own; what supports the trend is that all twelve adjacent comparisons point the same way, and that the endpoints are separated by 5.34 points at four experts pruned. This is worth stating carefully, because rank here does not act on the pruned model. The adapter is discarded once experts have been ranked, and the four rows of Table 3 describe models with identical architecture and identical parameter counts, differing only in which experts were removed. Rank changes the selection, not the artifact. A monotone trend therefore says that larger adapters identify better pruning candidates, not that they leave behind a better model.

Returns diminish with each doubling. Averaged across pruning depths, moving from rank 2 to rank 4 is worth 1.73 points, rank 4 to rank 8 a further 1.20, and rank 8 to rank 16 a further 0.77. At the most aggressive setting the same pattern holds with larger absolute values: +2.45, +1.67 and +1.22 points as rank doubles. The curve is concave in $\log r$, and the practical reading is that rank 8 captures most of what is available, with rank 16 buying a final point at twice the adapter size. Since even rank 16 trains 0.0045% of the model, the argument for stopping at 8 is not cost but the shape of the curve.

Capacity matters more the more is pruned. The spread between the smallest and largest rank widens with pruning depth: 1.73 points at one expert pruned, 3.17 at two, 4.56 at three and 5.34 at four. This mirrors the widening observed across target modules in Appendix D, and for the same reason. Ranking the single least-used expert is a coarse decision that a small adapter can get right;

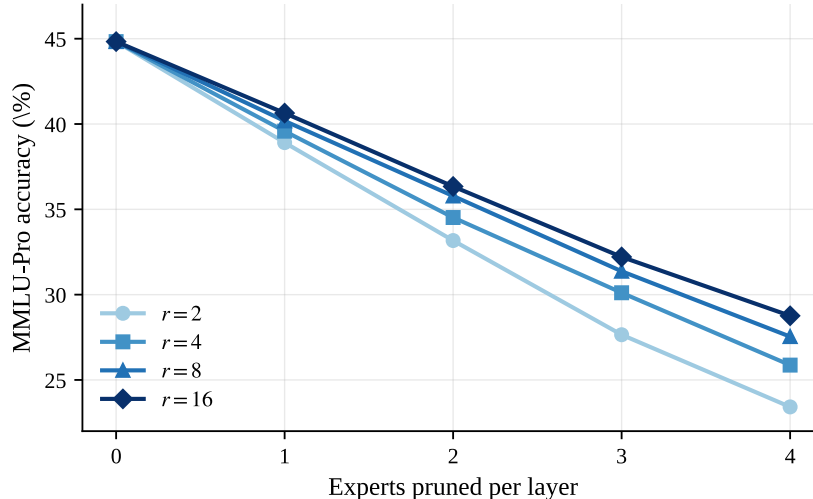


Figure 5: MMLU-Pro accuracy after pruning for router-only LoRA at ranks $r \in \{2, 4, 8, 16\}$ (Table 3). Each curve lies above the next-lower rank at all four pruning depths, and the spread widens with pruning depth. The adapter is discarded after ranking, so the curves describe models of identical size that differ only in which experts were kept.

Table 4: MMLU-Pro accuracy (%) after pruning, by adaptation form. The unpruned model scores 44.83%. LoRA is the router-only reference at rank 8 and is scored on router weights; IA3 and Houlshby leave W_g frozen and are scored on router logits. IA3 and LoRA differ by less than the measurement resolution at every depth; Houlshby trails both under the tested budgets.

Adaptation	Perturbation	Experts pruned per layer			
		1	2	3	4
IA3	multiplicative, diagonal	40.27	36.11	32.48	28.04
LoRA (router)	additive, low-rank	40.18	35.78	31.37	27.54
Houlshby	additive, unconstrained	40.08	35.52	30.71	25.39

ordering half the experts in a layer benefits from the richer task-conditioned revision injected by a larger parameterization. Rank-2 selection is in fact worse than random removal at one, two and three experts pruned, and only overtakes it at four, where random selection collapses. An adapter too small to express the revision the task induces is not a weak instrument but a misleading one.

Interpretation. Rank controls the adapter’s internal width and parameter budget. A smaller adapter injects a narrower task-conditioned revision, while a larger parameterization can register more of the distinctions the task exposes between experts. The monotone trend indicates that no adapter size we tested overfits the selection: within this range, a larger adapter yields a more faithful ranking. Where that trend would turn is not determined by these experiments. Appendix F turns instead to adaptations that cannot write to W_g at all.

F How should adaptation perturb the model?

The two preceding sections varied where an adapter is attached and how much capacity it has, holding its form fixed. This section varies the form (Figure 6). LoRA writes a low-rank additive update into W_g itself. IA3 leaves W_g untouched and rescales the representation reaching it, coordinate by coordinate. Houlshby adapters leave W_g untouched and add a nonlinear residual to that representation. Only the first admits the weight score of Equation 6; the other two are read through the logit score of Equation 7. These runs use the budget given in Appendix C, which differs from that of the LoRA sweeps, so Table 4 compares three geometries each under its own settings rather than under a matched budget.

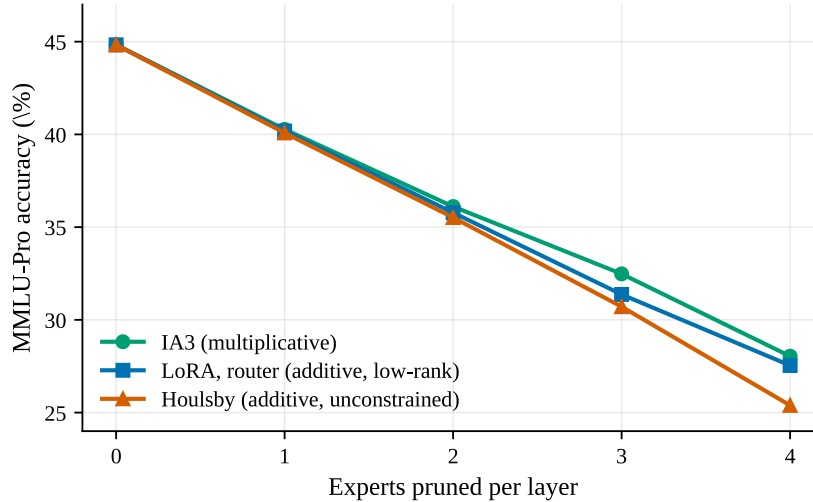


Figure 6: MMLU-Pro accuracy after pruning by adaptation form (Table 4). IA3, which never writes to the router, tracks router-only LoRA within the measurement resolution at every depth, while the unconstrained additive Housby adapter separates downward as pruning deepens under its tested budget.

An adaptation that never writes to the router matches one that does. IA3 leads at every pruning depth, by 0.09, 0.33, 1.11 and 0.50 points over router-only LoRA. None of these margins clears the measurement resolution of Appendix C, and the budgets are unmatched, so we read the table as a tie rather than a win. The tie is itself the finding: a method that modifies no router parameter identifies prunable experts as well as one that modifies them directly. The criterion does not require writing to the object being measured. It requires only that the object be observed while the model is under task pressure.

The constrained perturbation preserves a cleaner signal. Housby adapters trail at every depth and the gap widens with pruning, from 0.10 points at one expert removed to 2.15 at four. The endpoint gap to IA3, 2.65 points, is the one comparison in this section that exceeds the measurement resolution, and the widening is consistent across all four depths. Because the configurations are unmatched, this ordering does not isolate geometry as the cause. Measured end to end, accuracy falls 14.69 points between one and four experts pruned under Housby, against 12.64 for LoRA and 12.23 for IA3. Housby is nonetheless far above the adaptation-free floor of Appendix D, so its selections carry real information; they are simply noisier.

The scoring rule alone does not explain the ordering. IA3 and Housby are both scored using logit deltas on held-out data, whereas LoRA is scored using router-weight changes. If the logit score alone were responsible for IA3’s performance, Housby would be expected to show a similar advantage over LoRA. Instead, Housby performs worst at every pruning depth despite using the same scoring rule as IA3. This suggests that differences in how the adaptation methods perturb the model contribute to the observed ordering. Because the methods are trained under unmatched budgets and configurations, however, the experiment does not isolate perturbation geometry as the sole causal factor.

Reconciling this with Appendix D. IA3 attaches to the router, the attention projections and the expert feed-forward weights, which is the spread configuration that Appendix D found harmful for LoRA. The two results are consistent once dilution is understood as a function of capacity available away from the router rather than of mere presence there. LoRA at rank 8 on all modules gives attention and experts substantial capacity, and the optimizer can lower loss by changing what experts compute instead of which are consulted, leaving the router less distinctly moved. IA3 assigns each module a single scaling vector, on the order of 0.01% of parameters in total, which is too little capacity to absorb the task anywhere. Housby sits between the two in budget yet performs worst, which shows that capacity alone does not order these methods either.

Table 5: Four independently configured adaptation runs, second pipeline. MMLU-Pro accuracy (%) by experts pruned per layer, each against its own unpruned baseline. All selections use the weight score of Equation 6.

Run	Rank	Target modules	Steps	Experts pruned			
				1	2	3	4
A	16	all linear	1000	41.81	38.40	32.73	26.62
B	4	router + experts	500	41.03	36.46	32.35	26.42
C	4	all linear	200	40.53	36.46	29.87	24.60
D	4	router + attn + gate_proj	100	39.91	35.68	29.75	24.39

Interpretation: constraint as an instrument property. The three geometries differ in how freely they can reorganize routing for reasons unrelated to expert utility. IA3 multiplies the representation by a vector shared across every expert in a layer, so it cannot introduce a distinction between two experts that their existing weight vectors do not already express; it can only amplify or attenuate distinctions that are there. LoRA writes directly into W_g within an r -dimensional subspace, which is more free but still bounded. A Houlsby residual passes through a nonlinearity and may point anywhere in representation space, including directions that happen to align with one expert’s gate vector for reasons having nothing to do with the task. Read alongside Appendix E, this suggests that capacity and faithfulness are separate axes. Within a fixed geometry, more capacity gives a better ranking, since the adapter can express more of the revision the task actually induces. Across geometries, less freedom gives a better ranking, since the perturbation is more tightly bound to structure the model already had. An instrument should be expressive enough to register the effect and constrained enough not to create one.

G Does the signal generalize?

The controlled sweeps of Sections D through F vary one factor at a time inside a single pipeline. This section asks what survives outside it: across independently chosen configurations and repeated runs, across benchmarks other than the one used throughout, and across a different model family, adaptation regime and domain.

G.1 Robustness across runs and configurations

Four adaptation runs were configured independently, before the controlled sweeps existed, by different members of the project. They differ in rank, target modules, step budget, learning rate, batch shape, weight decay and schedule (Table 5; full settings in Appendix L), and each produced its own expert selection, pruned models and evaluation under the second pipeline of Appendix C.

Configuration moves the result by about as much as rerunning does. The four runs span 1.90 points at one expert pruned, 2.72 at two, 2.98 at three and 2.23 at four. The largest difference we observe between repeated runs of a single configuration is 2.24 points (below). Choosing a different rank, module set, budget and schedule therefore displaces the outcome by roughly the same amount as holding everything fixed and rerunning, and every one of the four curves decays gradually, with a maximum deviation from a straight line between baseline and endpoint of 0.81 to 2.41 points and no collapse anywhere. The shape of the result is a property of the criterion, not of a configuration.

The controlled trends reappear as correlations. Ranked by final accuracy, the four runs order exactly by adaptation steps: 1000, 500, 200 and 100 steps give 26.62%, 26.42%, 24.60% and 24.39%. The two longer runs also lose less from their own baselines (18.7 and 18.9 points at four pruned) than the two shorter ones (21.0 and 21.0). The best run combines the highest rank with the longest budget, consistent with the monotone rank effect of Appendix E, though since these runs vary several factors at once we read the ordering as corroboration rather than as an independent measurement.

What replication preserves and what it does not. Across the twelve paired accuracies of Table 6, repeated runs differ by 0.76 points on average, 0.51 at the median, and 2.24 at most; these are the figures behind the resolution adopted in Appendix C. Within that noise, the claims of Appendix E are exactly the ones that survive. Rank 16 is best and rank 2 worst in both runs at every pruning level. What does not survive is finer: in the first run, rank 4 exceeds rank 8 at three experts pruned by 0.98

Table 6: Replication of the rank sweep. Three configurations were run twice during the project under nominally identical settings; rank 8 was run once. Cells give both runs as first / second. MMLU-Pro (%).

Rank	Experts pruned per layer			
	1	2	3	4
2	39.13 / 38.91	33.09 / 33.17	25.97 / 27.65	23.46 / 23.42
4	40.11 / 39.58	33.27 / 34.52	32.35 / 30.11	27.21 / 25.87
16	41.12 / 40.64	36.96 / 36.34	32.66 / 32.21	28.94 / 28.76

Table 7: Accuracy (%) by experts pruned, on benchmarks beyond MMLU-Pro. Each row uses pruned models from one selection of Table 5 (BBH from two). Reported standard errors are 1.4 points for GSM8K and ARC.

Benchmark	Selection	Experts pruned per layer				
		0	1	2	3	4
GSM8K	D	51.25	52.08	40.03	27.29	12.05
ARC-Challenge	D	54.10	54.52	52.39	51.11	46.59
BIG-Bench Hard	A	43.70	41.50	40.75	39.82	36.04
BIG-Bench Hard	B	43.70	43.09	40.86	37.92	33.25
BoolQ	B	83.70	77.30	81.80	81.40	62.10

points, the one inversion of adjacent ranks anywhere in either run, and its size is characteristic of the noise. Replication thus draws the same line the resolution analysis drew: endpoint orderings are stable, adjacent orderings are not guaranteed, and single comparisons below two points should not be read.

G.2 Across benchmarks

MMLU-Pro has carried every result so far. Table 7 evaluates pruned models from the selections of Table 5 on four further benchmarks; each suite is evaluated on one selection, and BIG-Bench Hard on two. Figure 7 shows the retention curves.

The shape of the curve is task-dependent. Quasi-linear decay, the signature result on MMLU-Pro, is not universal. ARC-Challenge and BIG-Bench Hard decline gently, losing 7.5 and 7.7 to 10.5 points across the full range. GSM8K is flat to one expert pruned and then collapses, from 52.08% to 12.05%, the steepest fall we observe anywhere on Mixtral. BoolQ is non-monotonic, dipping 6.4 points at one expert pruned, returning to within 2.3 points of baseline at two and three, then dropping 19 points at four. For the same selection D, MMLU-Pro loses 21.0 points end to end, placing the primary benchmark mid-pack rather than at either extreme. The selections preserve broad capability at substantial compression while multi-step generative arithmetic degrades first and fastest, which is consistent with such computation depending on a small set of experts that mid-ranked removals eventually reach.

The signal is conditioned on the adaptation task. These selections were produced by adapting on a generic text-generation corpus that is disjoint from every benchmark evaluated here, so nothing in the procedure was tuned to the tests. Read in that light, the table shows both faces of task conditioning. A generic corpus recruits the experts that generic instruction-following uses, and pruning by that signal preserves broad capabilities in proportion to how broadly they are exercised; a capability the corpus exercises lightly, such as chained arithmetic, receives no protection, and its experts sit in the middle of the ranking where deeper pruning reaches them. The practical lever this implies is that the adaptation corpus is a control surface: a practitioner who needs arithmetic preserved should adapt on arithmetic. The lever is not specific to our criterion; Bai et al. [1] report that switching a pruning method’s calibration data from generic text to mathematics lifts GSM8K accuracy at half the experts by nine points or more, for their method and for an enumeration baseline alike. Appendix G.3 evaluates exactly that regime for router sensitivity, with the adaptation domain matched to the evaluation domain.

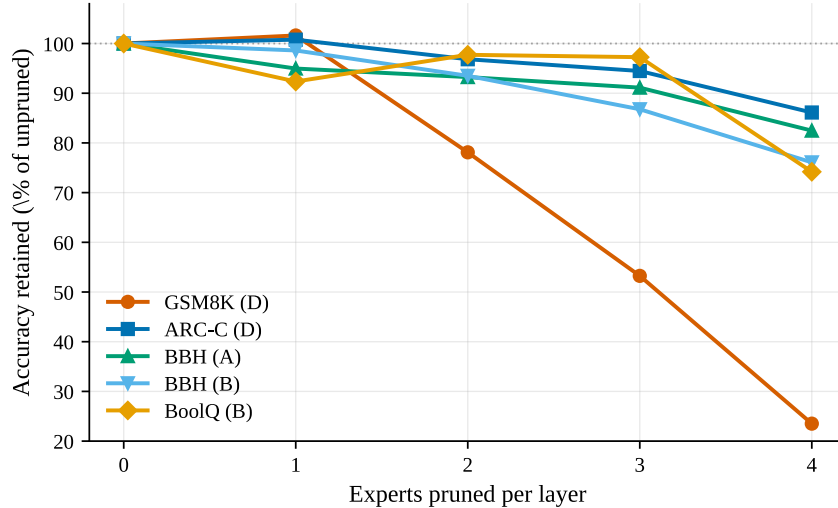


Figure 7: Accuracy retained relative to each benchmark’s own unpruned score, for pruned models from the selections of Table 5 (Table 7). Plotting retention rather than raw accuracy makes the task-dependent *shape* of the decay comparable across benchmarks with different baselines: ARC-Challenge and BIG-Bench Hard fall gently, GSM8K is flat then collapses, and BoolQ is non-monotonic. The dotted line marks the unpruned level.

Table 8: Qwen1.5-MoE fully fine-tuned on mathematical reasoning: mean accuracy (%) over eleven mathematics benchmarks, with one representative benchmark shown.

Selection criterion	Experts pruned (of 20)		
	0	5	10
<i>Mean over eleven benchmarks</i>			
Router sensitivity	61.5	58.1	49.7
Magnitude	61.5	55.2	39.1
Random	61.5	37.6	4.4
<i>MMLU College Mathematics</i>			
Router sensitivity	62.4	59.0	50.8
Magnitude	62.4	56.2	39.8
Random	62.4	38.2	4.5

Flat is not improved. Two curves tick upward at one expert pruned, GSM8K by 0.83 points and ARC by 0.42. Both movements are inside the reported standard errors of 1.4 points, so we read them as flat: removing the lowest-sensitivity expert from every layer leaves these capabilities measurably unchanged, which is itself the behavior the criterion promises at its first increment.

G.3 Across models and domains

The remaining question is whether any of this is specific to Mixtral, to parameter-efficient adaptation, or to general instruction data. The setting of Appendix C changes all three at once: Qwen1.5-MoE with 20 experts per layer, full fine-tuning of every parameter, and a domain-matched corpus in place of a generic one, with adaptation on mathematical reasoning and evaluation on eleven mathematics benchmarks, experts removed five and ten at a time, half the experts at the deepest cut (Figure 8).

The criterion transfers, and the alternatives do not. With half the experts removed, router sensitivity retains 49.7% on average against 39.1% for magnitude selection, while random selection falls to 4.4%, single-digit accuracy on generative mathematics, a model that has effectively stopped producing correct answers. The collapse is not an artifact of our setting: Bai et al. [1] report random expert removal at the same ratio scoring 0.68% on GSM8K. The gap to magnitude at ten experts pruned, more than ten points on the mean and present in every one of the eleven benchmarks, is far

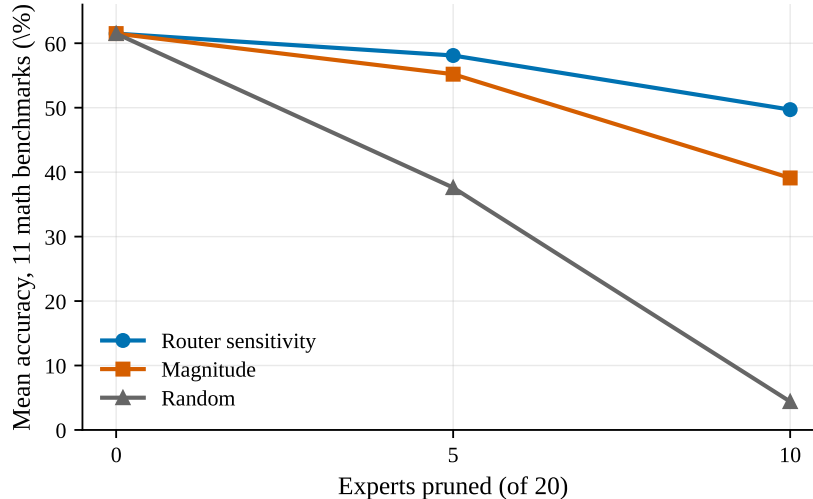


Figure 8: Qwen1.5-MoE fully fine-tuned on mathematical reasoning: mean accuracy over eleven mathematics benchmarks as experts are removed (Table 8). Router sensitivity degrades gradually while random selection collapses to single digits with half the experts removed; magnitude selection lies between them.

beyond any noise scale in this paper. The signal read from a fully fine-tuned router on domain data behaves as it did when read from a rank-8 adapter on general instructions.

The location result recurs. In preliminary Qwen adaptations, router-only LoRA reached 29.31% MMLU-Pro against 28.13% for LoRA on all modules. The gap of 1.18 points sits within the measurement resolution; its direction repeats, on a second model family, the central finding of Appendix D.

H Positioning against one-shot pruning methods

This work evaluates what the literature does not. To our knowledge, no published study reports MMLU-Pro for expert-pruned Mixtral. REAP evaluates its Mixtral compressions on ARC, BoolQ, HellaSwag, MMLU, OpenBookQA, RTE and WinoGrande [17]; DiEP on MMLU, OpenBookQA, BoolQ and RTE [1]; trajectory-based selection on MMLU, HellaSwag, WinoGrande, ARC, GSM8K and MedQA [33]; the task-agnostic line on MMLU, BoolQ, OpenBookQA and RTE [14]. Standard MMLU is the common denominator of that literature, and its four-option format leaves a degraded model substantial guessing headroom. None of the five suites includes BIG-Bench Hard either. Every MMLU-Pro and BBH number in Sections D through G is therefore the first characterization of expert-pruned Mixtral on these benchmarks, and the quasi-linear decay established on MMLU-Pro across five compression points is a property no previous study, reporting two points on four-option MMLU, was positioned to observe.

On the benchmarks the literature does report, the signal is competitive. Table 9 compares retention, each pruned score normalized by its own study’s unpruned baseline, on the three benchmarks where our evaluations and published ones overlap. At 25% compression the signal sits inside the published band everywhere: BoolQ retention of 97.7% against 98.3% for REAP and 99.1% for DiEP, ARC retention of 96.8% above both reported values, and GSM8K retention of 78.1%, above AIMER’s 73.4% on the same Mixtral checkpoint under a different harness [23]. These are methods built on full activation statistics, differentiable search over expert subsets, and global trajectory planning; the row they bracket comes from rank-4 LoRA selections of Table 5, and in its leanest router-only form the signal trains 0.002% of parameters.

At 50% the ordering is task-dependent and tracks conditioning. ARC retention of 86.1% exceeds REAP’s 84.0% and matches trajectory selection’s 85.0%. BoolQ and GSM8K fall below the published values. The GSM8K column is the conditioning effect of Appendix G.2 measured across papers: the

Table 9: Retention (%) of each study’s own unpruned baseline after expert pruning on Mixtral-8×7B-Instruct, at 25% and 50% expert sparsity, on the benchmarks where evaluations overlap. Published figures are computed within their own harness and settings; AIMER’s and REAP’s ARC values use normalized accuracy, ours ordinary accuracy; DiEP and trajectory selection allocate experts nonuniformly across layers, whereas we remove uniformly; the trajectory GSM8K result is calibrated on task data, whereas our selections are conditioned on a generic corpus. Dashes mark benchmarks a study does not report.

Selection criterion	BoolQ		ARC-Challenge		GSM8K	
	25%	50%	25%	50%	25%	50%
Router sensitivity (this work)	97.7	74.2	96.8	86.1	78.1	23.5
AIMER v3 [23]	98.8	97.7	92.9	87.4	73.4	31.6
REAP v3 [17]	98.3	94.8	92.3	84.0	–	–
DiEP [1]	99.1	96.7	–	–	–	–
MoE Pathfinder [33]	–	–	94.4	85.0	83.9	46.3

published figure is task-calibrated, ours is generically conditioned, and DiEP’s own ablation prices that difference at nine points or more of GSM8K accuracy at this compression [1].

Competitive at moderate compression, and the economics run in one direction. The value of the criterion is a combination that the table cannot show in one column. On overlapping benchmarks at moderate compression it is competitive with methods that consume full activation statistics or learned allocations, and the economics run in one direction twice over. Against the full fine-tuning the criterion originally required, the router-only signal trains 0.002% of the parameters. Against calibration statistics, which are always a dedicated expense, the common deployment path already includes parameter-efficient adaptation, so the ranking arrives as a byproduct of work performed anyway, at zero marginal cost. It uniquely covers the benchmark class the literature avoids, where it establishes predictable quasi-linear decay. And it is the one criterion whose knobs this paper has mapped: Sections D through F identify which adaptation choices sharpen the ranking, and Appendix G.2 shows the adaptation corpus steers which capabilities pruning protects, a steering that external ablations confirm for calibration data as well [1] but that no other criterion arrives with characterized.

I Deployment efficiency

Accuracy retention is only half of the pruning case; the other half is what removal buys at inference time. We measure GPU memory and per-token generation latency with Optimum-Benchmark [25] on a single A100, with base weights quantized to 4 bits as in adaptation, for the unpruned model and the four router-sensitivity pruned variants of Appendix D.

Table 10: Inference cost by experts retained, measured with Optimum-Benchmark on one A100 under 4-bit weights. Memory is in GB and is a 4-bit measurement, so the unpruned figure of 24.2 GB is unrelated to the 24.2B *parameter* count of the four-experts-pruned model elsewhere in the paper. Relative throughput is the reciprocal of per-token latency and therefore describes single-stream decoding.

Model	Experts	Memory (GB)	Latency/token (ms)	Rel. throughput
Unpruned	8	24.2	40.3	100%
1 pruned	7	21.3	35.8	112.6%
2 pruned	6	18.1	32.4	124.4%
3 pruned	5	15.4	28.7	140.4%
4 pruned	4	12.3	25.2	159.9%

Costs fall near-linearly in experts removed. Memory decreases by 2.7 to 3.2 GB per expert removed, 2.97 on average, against the 2.8 GB that one expert’s 5.6B parameters occupy at 4 bits; the small surplus is the removed rows’ share of activation and dequantization overhead. Latency decreases by 3.4 to 4.5 ms per expert. Neither series deviates from a straight line between its endpoints by more

than 0.15 GB or 0.73 ms. At the deepest cut the model uses 49% less memory and generates each token 37% faster, and single-stream throughput rises 60%.

Under this implementation, we attribute the latency gain to memory traffic rather than FLOPs. Top-2 routing is unchanged by pruning: every token activates two experts before and after, so the arithmetic per token is constant across the rows of Table 10. What shrinks in the measured implementation is the set of distinct expert weights touched per forward pass. Across the tokens of a sequence the router reaches most resident experts in every layer, so the weights streamed from memory scale with the number retained. The observed 37% reduction is real for this stack, but its magnitude may depend on expert dispatch, quantization, and kernel implementation.

Both sides of the trade are predictable. The cost curves here are near-linear in experts removed, and Appendix D showed the MMLU-Pro accuracy curve under router-sensitivity selection to be quasi-linear over the same range. A practitioner can therefore price a compression target in advance from the endpoints alone: on this hardware, each expert removed buys roughly 3 GB of memory and 3.5 to 4.5 ms per token, at a quasi-linear accuracy cost whose slope Sections D through F showed how to minimize. Neither the naive selection rules, which collapse abruptly past two experts, nor benchmarks with cliff behavior such as GSM8K offer that predictability, which is why we regard the shape of the decay, as much as its level, as the practically valuable property of the criterion.

J Discussion

Why the router concentrates the signal. The results of Sections D through F admit a single mechanism. The gate matrix is the one place in the network where the decision of which experts serve a token is expressed as parameters, so it is the one place where a task’s revision of expert recruitment must appear if it appears at all. Whether it appears cleanly depends on the alternatives the optimizer has. Give the adapter access to attention and expert weights and loss can fall by changing what experts compute rather than which are consulted, and the gate moves less distinctively (27.54% against 24.42% at four experts pruned). Give the router adapter too little internal width and parameter budget, and it registers a weaker task-conditioned revision, degrading the ranking monotonically as size shrinks. Give the adaptation freedom to inject arbitrary directions into the representation and the gate moves for reasons unrelated to expert utility, which is where Houlsby adapters lose to multiplicative scaling. The signal is faithful when the perturbation reaching the router is both forced, because the task cannot be absorbed away from routing, and disciplined, because the perturbation cannot reorganize routing for reasons unrelated to expert utility. Every degradation we measure violates one of the two, and Appendix F shows the perturbation need not write to W_g at all to satisfy both.

An instrument objective inverts training guidance. Practical guidance for LoRA as a training method recommends attaching it broadly, with the feed-forward and expert layers mattering most, because that configuration best matches full fine-tuning on task loss [7, 30]. Our measurements agree with that guidance on its own terms and invert it on ours: the all-modules configuration is the better way to produce a capable model and the worse way to decide what to delete. The divergence is principled rather than paradoxical. Training optimizes the model’s outputs; an instrument optimizes the legibility of a specific internal change. Sections D through F can be read as the beginning of a configuration guide for the second objective, for which the PEFT literature’s first-objective guidance does not transfer.

What the empirics say back to the theory. The guarantee of Chowdhury et al. [3] is stated for full fine-tuning and for the signed norm change. Our results extend its empirical reach and, in three places, ask questions the theory does not yet answer. First, the monotone rank effect: scaling the adapter’s internal width changes the ranking gracefully and monotonically rather than abruptly, which invites an analysis of the criterion under parameter-efficient adaptation. Second, perturbation geometry: a multiplicative rescaling that never writes to W_g ranks experts as well as a direct low-rank update while the additive alternative ranks them worse under the tested budgets, a distinction absent from the current analysis. Third, the sign: our score is the magnitude of the norm change, the guarantee concerns its signed value, and our sensitivity maps show gate norms that contract as well as grow under adaptation. Whether contraction marks an expert as recruited or as released is a well-posed question settled by re-ranking gate norms from the adapted checkpoints at no training cost, and the answer would sharpen both the theory and the practice.

The module ladder has two unscored rungs. Attention-only and expert-only adaptation were excluded from the module sweep because they leave W_g untouched and Equation 6 identically zero. Equation 7 scores them anyway, by reading the logits the frozen router produces over shifted representations. Running the module ladder under the logit score would separate two claims this paper currently cannot distinguish: that the router must be adapted for the signal to exist, and that it must merely be observed while the model is under task pressure. Appendix F already shows the second suffices for IA3; completing the ladder is the cleanest single experiment this work leaves open.

Calibration, and where the one-shot numbers sit. Every result in this paper is one-shot and uncalibrated by design, isolating the selection criterion from any repair applied after it. Hyeon and Do [13] show that distilling into the router after compression recovers substantial accuracy on fine-grained architectures while yielding only marginal recovery on Mixtral, whose eight experts per layer admit few routing configurations. Read together, the two results place our Mixtral numbers near the ceiling of what router-side repair would add, and mark the fine-grained regime, including the Qwen setting of Appendix G.3, as where a calibration stage is the natural extension; recovery through retraining the surviving experts is a separate and larger budget that our one-shot scope deliberately excludes. Quasi-linear uncalibrated decay is the floor that stage would build on.

Scope. The controlled sweeps cover one model family, and a controlled head-to-head evaluation remains future work. Sweep results are single runs read against a 2.2-point replication resolution, with the twice-run configurations reported as ranges in Appendix G.1 and Appendix M. The IA3 and Housley comparisons use their own training budget rather than one matched to the LoRA sweeps. Configuration selection throughout was keyed to MMLU-Pro, and Appendix G.2 quantifies how far that choice generalizes. The signed-score question above is open, and costs only a re-ranking from the adapted checkpoints to close.

K Conclusion and future work

A provably motivated criterion for expert pruning, previously defined against full fine-tuning, is practical at the scale of current MoE language models: a brief parameter-efficient adaptation moves the router enough to rank experts, the magnitude of each gate vector’s norm change (or, when the router is frozen, the shift in its logits) supplies the ranking, and one-shot removal of the lowest-ranked experts yields models whose MMLU-Pro accuracy decays quasi-linearly with compression while memory and latency fall near-linearly. The signal concentrates where the decision it measures is expressed. Confining adaptation to the router sharpens it, capacity spent there improves it monotonically, and the tested constrained perturbation preserves it better than the additive alternative under their shared budget. The ranking survives changes of configuration, benchmark, model family, adaptation regime and domain, and on the benchmarks it shares with recent one-shot pruning methods it is competitive at moderate compression from a fraction of their signal cost.

For a practitioner the recipe is short. Attach LoRA to the router alone at moderate rank, adapt briefly on a corpus that exercises the capabilities the pruned model must keep, rank by norm change, and remove experts uniformly per layer to the target budget, stopping earlier for capabilities that cliff. The corpus is a control surface and the rank a fidelity knob, both cost a negligible fraction of the model they compress, and where deployment already includes parameter-efficient adaptation the ranking arrives as a byproduct, at no additional training cost.

Several directions follow directly. Owing to computational constraints, the controlled sweeps concentrate on a single coarse-grained family; validating the configuration findings across MoE families, from fine-grained architectures with many small experts and shared-expert designs to larger Mixtral variants, is the most direct extension, and the Qwen results of Appendix G.3 mark the path. Running a controlled evaluation of every criterion on the same checkpoint, calibration corpus, and sample budget would extend the published-method comparison in Appendix H. Such an evaluation should remove the same number of experts per layer, apply no post-pruning repair, and use identical LightEval prompts and configurations across MMLU-Pro, GSM8K, ARC-Challenge, BIG-Bench Hard, and BoolQ. Completing the module ladder under the logit score separates adaptation of the router from observation of it, and re-ranking stored gate norms answers whether the sign of the change carries information. Beyond the one-shot scope, iterative pruning with interleaved healing and a router-calibration stage are the natural recovery mechanisms, with the most to gain in the fine-grained

regime. On the theoretical side, the monotone rank effect and the role of perturbation geometry are regularities the current guarantee does not predict, and extending the analysis to constrained adaptation would close the loop this paper opens. Each direction sharpens the same instrument this work set out to build.

Table 11: Adaptation configurations. Canonical denotes the reference run of the controlled sweeps; A through D are the independently configured runs of Appendix G.1. Batch is per-device batch size $\times$ gradient accumulation.

	Canonical	A	B	C	D
Rank r / α	8/8	16/16	4/4	4/4	4/4
Target modules	router	all linear	router + experts	all linear	router + attn + gate_proj
Steps	500	1000	500	200	100
Learning rate	2×10^{-4}	2×10^{-4}	1×10^{-5}	2×10^{-4}	1.5×10^{-4}
Batch	1×20	1×16	1×16	8×2	1×4
Warmup	5 steps	5 steps	ratio 0.05	5 steps	ratio 0.03
Weight decay	0.01	0.01	0.03	0.01	0.04
Schedule	cosine	cosine	cosine	cosine	cosine, restarts
Max grad norm	–	0.3	0.3	0.3	0.3
LoRA dropout	0.1	0.1	0.1	0.1	0.1

L Artifacts and full hyperparameter configurations

Code for adaptation, sensitivity scoring, pruning and evaluation is available through the anonymous GitHub artifact:

<https://anonymous.4open.science/r/artifact-6D4A/>

The training data are available through the anonymous training-dataset repository:

<https://anonymous-hf.com/a/rxjfbuoo5zxx/>

Model checkpoints and artifacts can also be found here:

<https://anonymous-hf.com/a/7bjup33ji154/>
<https://anonymous-hf.com/a/ekmzulxio004/>
<https://anonymous-hf.com/a/d7z6korisx25/>
<https://anonymous-hf.com/a/b07b4zwy5qgy/>
<https://anonymous-hf.com/a/h58hobr9e27o/>
<https://anonymous-hf.com/a/3tvgrhreeej0/>
<https://anonymous-hf.com/a/4ir76kywtq2/>
<https://anonymous-hf.com/a/k6a3109417om/>
<https://anonymous-hf.com/a/cj1xhabmpypj/>
<https://anonymous-hf.com/a/bv2wgxy85ko8/>
<https://anonymous-hf.com/a/e51pezzaiqvc/>
<https://anonymous-hf.com/a/gjwmb67bsgp7/>
<https://anonymous-hf.com/a/2whwmav8qhn9/>
<https://anonymous-hf.com/a/3mr0r5n6qv0p/>

Table 11 lists the settings governing each adaptation run reported in the paper; the multiplicative and additive-adaptor budgets and the two full fine-tuning references are given in Appendix C. All runs use the 8-bit AdamW optimizer.

M Replication tables

Table 6 in the main text reports the three rank configurations run twice under nominally identical settings; their twelve paired accuracies differ by 0.76 points on average, 0.51 at the median and 2.24 at most, which fixes the measurement resolution of Appendix C. Two module-sweep configurations also exist in both project phases under differing names, and Table 12 reports them under the mapping that identifies the phase-one names Router+Attention and Router+Experts with the phase-two target sets gate+ q, k, v, o and gate+MLP. Their eight paired accuracies differ by 0.43 points on average and 0.97 at most, tightening rather than loosening the resolution; the main text conservatively counts only the three rank configurations, whose identity across phases is unambiguous.

Table 12: Module-sweep configurations run in both project phases, under the name mapping stated in the text. Cells give both runs as first/second. MMLU-Pro (%).

Target modules	Experts pruned per layer			
	1	2	3	4
gate + q, k, v, o	40.13 / 39.94	35.68 / 34.98	31.11 / 30.40	26.90 / 25.93
gate + MLP	39.96 / 39.82	35.03 / 34.85	30.33 / 29.97	25.19 / 24.97

N Router sensitivity across configurations

Figure 3 shows the sensitivity map for the all-module rank-16 run; the maps from the other independently configured runs of Appendix G.1 share its qualitative structure, differing mainly in overall scale with the adaptation budget. In every case sensitivity is far from uniform, most cells sitting near their layer median while a few expert-layer pairs are an order of magnitude larger, and in no case is the mass concentrated in a single expert column or a single band of layers, which is what motivates per-layer ranking rather than a global threshold (Appendix B.4). The signed variant of these maps shows gate norms that contract as well as grow under adaptation, the observation behind the sign question of Appendix J.

O Sensitivity scoring code

The two scores of Appendix B.2, written over a generic accessor because the router attribute path differs by model family (`block_sparse_moe.gate` in HuggingFace Mixtral, `mlp.gate` in Qwen-MoE).

```
def router(layer):
    # Mixtral: layer.block_sparse_moe.gate ; Qwen-MoE: layer.mlp.gate
    return layer.block_sparse_moe.gate.weight      # [num_experts, hidden]

def weight_scores(base, adapted):
    # s_e = ||w_e(T)|| - ||w_e(0)|| | per layer (main-text Eq. 1)
    scores = []
    for lb, la in zip(base.model.layers, adapted.model.layers):
        wb = router(lb)
        wa = router(la)
        n0 = torch.linalg.norm(wb, ord=2, dim=1)
        nT = torch.linalg.norm(wa, ord=2, dim=1)
        scores.append((nT - n0).abs())
    return scores      # rank ascending, prune the smallest per layer

def logit_scores(base, adapted, batch):
    # s_e = ||dL[:, e]||_2 / sqrt(N) over held-out tokens (main-text Eq. 2)
    # Shape: [layers, N, num_experts]
    L0 = collect_router_logits(base, batch)
    LT = collect_router_logits(adapted, batch)
    d = LT - L0
    return d.norm(dim=1) / math.sqrt(d.shape[1])  # [layers, num_experts]
```