

Benchmarking Post-Training Quantization in LLMs: Comprehensive Taxonomy, Unified Evaluation, and Comparative Analysis

Jiaqi Zhao^{1*}, Ming Wang^{1*}, Miao Zhang^{1†}, Yuzhang Shang^{2†}, Xuebo Liu¹, Yaowei Wang¹,
Min Zhang¹, Liqiang Nie¹

¹ Harbin Institute of Technology (Shenzhen)

² Illinois Institute of Technology

jiaqizhao0455@outlook.com, 190110509@stu.hit.edu.cn, yshang4@hawk.iit.edu
{zhangmiao, liuxuebo, wangyaowei, zhangmin2021}@hit.edu.cn, nieliqiang@gmail.com

Abstract

Post-training Quantization (PTQ) technique has been extensively adopted for large language models (LLMs) compression. However, existing research lacks in-depth analysis of the strengths and applicable scenarios of different PTQ strategies, making it difficult for future researchers to choose suitable foundational framework for development based on their specific needs. To mitigate these confusions, we start by proposing a detailed taxonomy for existing mainstream methods based on their computational strategies (e.g., optimization-based, compensation-based, etc.). Subsequently, we establish a comprehensive benchmark for LLMs PTQ, named PTQ-Bench, to help select foundational framework, which evaluates the cross-bitwidth robustness, cross-structure robustness and cross-modality robustness of PTQ frameworks. Using PTQ-Bench, we conduct extensive experiments with the baseline of each categorized PTQ strategy, covering models with various sizes (7B-70B), bitwidths, structures (LLaMA1/2/3/3.1, Mixtral, DeepSeekMoE and Mamba) and modality (LLaVA1.5 and VILA1.5) on a wide range of evaluation metrics, followed by comparative analysis on the results to summarize the superior of each PTQ strategy. For example, our benchmark reveals that rotation-based technique demonstrates outstanding low-bit robustness. Finally, beyond benchmarking we present two critical implications: (1) extremely low-bit PTQ for ultra large models should be reexamined, and (2) a practical combination of compensation and other PTQ strategy can achieve SOTA various robustness. We believe our PTQ-Bench will provide valuable recommendations for future research on advanced PTQ methods. The repository for our PTQ-Bench is available at <https://github.com/zjq0455/PTQ-Bench>.

1 Introduction

Large language models (LLMs) have achieved remarkable success in text generation and various reasoning tasks, with representative ChatGPT [1] and LLaMA family [65, 66, 16]. However, their massive parameter scale imposes significant memory and inference overhead, which constrain their practical deployment. To address the issue, numerous model compression techniques have been proposed, such as quantization [37, 60], pruning [19, 8, 9], low-rank decomposition [29, 75], and knowledge-distillation [23]. Among these, Post-training Quantization (PTQ) [73, 38], a technique

*Equal Contribution

†Corresponding Author

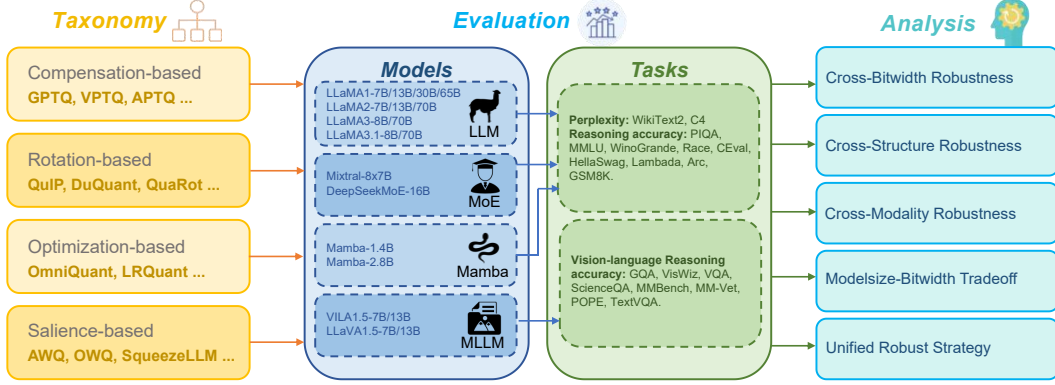


Figure 1: An overview of our paper. To provide guidelines for future research, we first establish a comprehensive taxonomy for existing milestone PTQ methods. Then we establish a novel benchmark named PTQ-Bench for evaluating several critical characteristics of foundational PTQ strategies. Based on it, extensive and unified evaluation of the categorized PTQ strategies is provided which contains a broad range of model sizes, structures, modalities and bitwidth. Finally, we summarize in-depth comparative analysis based on the experimental results and offer valuable recommendations for the advancement of LLM PTQ research.

unlike Quantization-aware Training (QAT) [46, 69, 71] which requires heavily retraining, has been widely employed due to its efficiency and resource-friendly nature. As illustrated by Figure 3, the number of papers about PTQ for LLMs takes up nearly 70% of total quantization papers since 2022.

Despite the growing prominence of PTQ, current research still exhibits the following limitation: the present reviews lack of in-depth insights into the characteristic of different PTQ frameworks so as to provide limited guidance for the development on advanced PTQ methods. These reviews either exhibit a lack of adequate focus on quantization [64, 72], incorporate insufficient experimental setups [22, 34], or offer inadequate analytical insights [39]. Admittedly, it would hold greater value for future researchers to get the information on selecting foundational PTQ frameworks for further exploration on their specific scenarios. For example, a typical question might be: *Which foundational PTQ framework should I choose to achieve better robustness across various model structure?*

To fill this confusion, in this paper we introduce a novel benchmark for foundational PTQ framework selection named PTQ-Bench. As illustrated by Figure 1, our benchmark is built upon a comprehensive taxonomy of PTQ methods, unified evaluation including extensive experiments, and comparative analysis on the results to offer valuable recommendations. Particularly, we make full attention on weight-only PTQ methods, as they have been adopted in a greater number of practical applications, enables a wider range of bitwidth support, exhibits a richer diversity of strategies and demonstrates superior performance compared to weight-activation methods [76]. Our contributions are revealed in four dimensions:

(1) Comprehensive Taxonomy. We first review the vast majority of mainstream weight-only PTQ techniques and categorize them into four classes based on their designing strategies and optimization mechanisms: **compensation-based strategy** represented by GPTQ [20], **optimization-based strategy** exemplified by OmniQuant [61], **rotation-based strategy** typified by QuIP [7], and **saliency-based strategy** characterized by AWQ [42]. Our proposed taxonomy can provide a clear understanding for researchers and support our subsequent benchmarking experiments.

(2) PTQ-Bench for Unified Evaluation. To provide guidelines for facilitating the development of more advanced PTQ methods, we establish a comprehensive benchmark, namely PTQ-Bench, by evaluating the **cross-bitwidth robustness**, **cross-structure robustness** and **cross-modality robustness** of each PTQ strategy through extensive experiments to derive their characteristics. In detail, the experiments are mainly constructed on the most widely used open-sourced LLMs LLaMA family (LLaMA-1/2/3/3.1) with a large range of model size (7B to 70B). For comprehensiveness and unification, Mixture-of-Experts (MoE) LLMs, Mamba [24] and multimodal LLMs (MLLMs) are also included. Extremely low-bit quantization (2-bit) to common 4-bit quantization are applied to all

LLMs using representative baselines from the each PTQ strategy and various evaluation tasks are covered such as language modeling and reasoning.

(3) Comparative Analysis. Based on the unified evaluation, we summarize the characteristics of each PTQ strategy in different scenarios, thus offering practical recommendations for the future researchers to select foundational PTQ frameworks based on their requirements. For example, we suggest to select compensation-based strategy when facing cross-structure scenario and avoid choosing naive optimization-based strategy at extremely low-bit quantization.

(4) Beyond Benchmarking. We also present the following two critical conclusion in LLMs PTQ deriving from PTQ-bench: a) Even the largest model at 2-bit performs worse than the smallest model at 4-bit in the same LLM family, so we accordingly argue that the extremely low-bit PTQ for ultra large models need to be reexamined; b) We innovatively claim that practical combination of compensation-based scheme and other PTQ strategy can achieve SOTA various robustness.

2 Taxonomy

Most previous reviews have also categorized PTQ techniques, such as symmetric or asymmetric [21] and group-wise or channel-wise quantization [62]. Such taxonomies have become increasingly inadequate to meet the research requirements of subsequent studies as PTQ techniques continue to proliferate, because such taxonomies are relatively coarse-grained, making them challenging to conduct in-depth analysis of the characteristics of each category. In this section, we compile a comprehensive list of existing mainstream weight-only PTQ algorithms and categorize them based on their underlying principles. Specifically, they are classified into four categories: **compensation-based strategy**, **rotation-based strategy**, **salience-based strategy** and **optimization-based strategy**.

2.1 Compensation-based Quantization

The strategy of compensation-based technique is to dynamically update the weights to compensate for quantization errors during the process. Specifically, these methods typically calculate the bad impact of quantization and then derive the required compensation in order to mitigate this impact.

This strategy is pioneered by GPTQ [20] and is one of the most influential quantization techniques currently. GPTQ first reformulates the quantization error involving the Hessian matrix and then calculates the update formula for the unquantized weights after a specific weight is quantized, which can be expressed as:

$$\delta = -\frac{w_q - \text{quant}(w_q)}{[\mathbf{H}^{-1}]_{qq}} \cdot (\mathbf{H}^{-1})_{:,q}, \quad (1)$$

where δ denotes the optimal update of the unquantized weights, w_q is the weight as position q and $\mathbf{H}$ indicates Hessian. Unlike LeCun et al. [36] and Frantar and Alistarh [18] which require a greedy search to identify the position that minimizes the errors for each quantization step, GPTQ partitions the weight matrix into multiple blocks and performs column-wise operations sequentially, during which the residual weights within the current block are compensated accordingly. Following GPTQ, more advanced error compensation strategies are proposed by QuantEase [5], VPTQ [44] and APTQ [25], achieving nearly no performance degradation even at 3-bit quantization.

2.2 Rotation-based Quantization

The development of rotation-based methods stems from the observation that the distribution of pretrained weights in LLMs does not facilitate the direct quantification, such as the existence of outliers. Targeting this issue, researchers typically apply transformations to process the weight matrix to enhance quantization performance.

QuIP [7] is considered as the innovator of this strategy. Their insights reveal that quantization will be more effective when weights and proxy Hessian are incoherent, where a weight matrix $W \in \mathbb{R}^{n \times m}$ is μ -incoherent if:

$$\max_{i,j} |W_{ij}| = \max_{i,j} |e_i^T W e_j| \leq \mu \|W\|_F / \sqrt{mn}. \quad (2)$$

Specifically, QuIP multiplies a weight matrix by Kronecker-structured orthogonal matrices [78] on the left and right. Such process can be thought of as a principled form of outlier reduction because

the weights are similar in magnitudes, ensuring the rounding errors are not particularly large in any direction along the coordinate axes.

Inspired by QuIP, rotation-based methods rapidly gained traction. QuIP# [67] employs Hadamard matrices [27] for rotation, achieving more efficient and superior quantization performance. QuaRot [4] and SpinQuant [47] further extend the Hadamard-rotation method to weight-activation quantization to eliminate the extreme outliers in activation channels.

2.3 Saliency-based Quantization

Saliency-based strategy asserts the weights in LLMs exhibit varying degrees of importance, and quantization performance would be improved by selectively handling them based on their saliency. Generally, the motivation behind these algorithms primarily revolves around the criteria for determining saliency and the treatment methods applied to the weights from different groups.

Mixed-precision quantization methods constitute the largest subset within saliency-based technique. These methods retain salient weights at higher precision while quantizing the others to lower bits. LLM.int8() [13] performs 8-bit quantization while preserving the weights with the top-0.1% magnitudes at 16-bit. SpQR [14] saves more unstructured salient weights at higher precision and employs a finer-grained group-wise quantization approach. PB-LLM [59] adopts Hessian which is considered as a more advanced metric to isolate salient weights for 8-bit quantization while binarizing the others.

Although yielding promising results, mixed-precision quantization is not hardware-friendly which may harm the inference speed and requires specialized design to accommodate the varying bit widths. Taking it into considerations, AWQ [42], the representative method of saliency-based technique, is proposed. Firstly, AWQ relies on input activation as the measure instead of the previous ones that use the weights themselves as the criterion for saliency. Following this, they conclude that scaling the salient weights will reduce quantization errors, thereby avoiding the deployment challenges associated with mixed-precision quantization. The scaling quantization for salient weights can be elaborated as:

$$Q(w \cdot s) \cdot \frac{x}{\Delta} = \Delta \cdot \text{Round}\left(\frac{ws}{\Delta}\right) \cdot x \cdot \frac{1}{s}, \quad (3)$$

where Δ is the quantization scalar and s denotes the scaling hyper-parameter. AWQ is currently one of the most widely applied PTQ method like GPTQ.

2.4 Optimization-based Quantization

A common characteristic of the three categories above is leveraging the intrinsic properties of the weights to influence the quantization outcome. Meanwhile, some researchers indicate that it is also effective to employ efficient optimization framework to update the quantization parameters. Since LLM weights are frozen and the optimization process is highly efficient, such approaches are also referred to as PTQ techniques.

OmniQuant [61] is the first to introduce optimization strategy into PTQ. To avoid insufferable computational resources cost during training, an efficient block-wise learning framework is proposed, where the output of full-precision blocks serves as supervisory information to update the clipping range of the scaling factors, achieving nearly lossless performance at 4-bit quantization. The optimization objective is:

$$\arg \min_{\Theta_1, \Theta_2} \|F(W, X) - F(Q_w(W; \Theta), X)\|, \quad (4)$$

where F means the mapping function for the current block and X denotes the full-precision activation. $Q_w(\cdot)$ represents the weight quantizer. Θ indicates learnable scaling factors.

Following OmniQuant, CBQ [15] devises a two-branch framework to improve the robustness. LRQuant [79] discovers the directional gaps between full-precision outputs and their quantized counterparts and propose a novel loss function named NLC loss to minimize the quantization error. AffineQuant [49] incorporates affine transformations into the PTQ process and optimizes the transformation matrix to reduce quantization errors.

Despite our definitive taxonomy of existing milestone PTQ methods, the specific performance traits and suitable application contexts of each strategy are still unclear. The future researchers are

Table 1: The average perplexity($\downarrow$)/accuracy(%) comparison results on LLaMA-1/2. For detailed results please refer to Table 6 and 7 in Appendix B.2.

Methods	W4	W3				W2			
LLaMA-	7B	7B	13B	30B	65B	7B	13B	30B	65B
AWQ	6.50/51.32	7.08/49.91	6.30/53.28	5.48/58.73	4.94/61.97	2.7e5/22.15	2.5e5/22.88	2.3e5/22.98	7.4e4/22.86
GPTQ	7.07/50.19	9.29/41.33	6.40/51.95	5.70/57.39	5.10/60.85	35.86/25.48	16.74/30.89	13.38/33.98	9.53/43.44
QuIP	7.11/49.16	8.87/44.66	6.42/52.44	5.61/57.07	5.22/59.47	20.66/31.73	12.60/35.97	10.14/40.49	7.90/47.54
OmniQ	6.61/51.01	7.38/48.21	6.51/51.28	5.67/56.87	5.08/59.71	29.77/29.12	16.13/34.16	11.78/38.76	9.37/42.81
LLaMA2-	7B	7B	13B	70B	-	7B	13B	70B	-
AWQ	6.36/53.05	7.02/50.69	6.14/55.30	4.78/64.35	-	1.9e5/22.51	1.1e5/22.61	6.9e4/22.50	-
GPTQ	6.45/52.86	7.20/49.23	6.28/55.44	4.88/63.19	-	57.92/25.21	19.50/29.55	9.00/43.44	-
QuIP	6.75/50.44	19.55/35.23	6.39/53.98	5.25/61.60	-	43.75/26.27	14.23/33.98	7.70/48.47	-
OmniQ	6.55/51.11	7.62/47.57	6.49/53.34	5.00/62.58	-	58.04/25.22	22.48/30.47	10.36/38.46	-

Table 2: The average perplexity($\downarrow$)/accuracy(%) comparison results on LLaMA-3/3.1. For detailed results please refer to Table 8 and 9 in Appendix B.2.

Methods	W4	W3		W2	
LLaMA3-	8B	8B	70B	8B	70B
AWQ	7.98/61.23	9.83/54.65	6.30/69.53	1.9e6/22.26	1.6e6/22.54
GPTQ	7.96/60.77	10.84/52.19	7.16/40.51	647.68/22.82	23.43/29.93
QuIP	8.73/58.53	10.09/53.20	68.60/26.76	130.32/23.05	53.18/24.60
OmniQ	8.82/57.36	17.53/36.09	7.4e4/22.22	1.5e3/22.67	4.1e4/22.30
LLaMA3.1-	8B	8B	70B	8B	70B
AWQ	8.09/61.60	9.91/55.50	6.39/68.62	1.7e6/22.22	1.7e6/22.42
GPTQ	8.13/61.09	10.06/54.65	6.58/60.55	510.33/23.20	23.19/35.04
QuIP	10.40/58.42	9.93/55.05	23.09/30.82	254.04/23.75	42.58/25.58
OmniQ	10.41/51.98	14.94/40.79	3.4e4/22.35	852.10/22.22	1.6e5/21.85

still confused by the selection of foundational PTQ framework based on their requirements, this necessitating further analysis based on experiments.

3 PTQ-Bench: Benchmarking PTQ in LLMs

To clearly grasp the specific performance trait of each PTQ strategy and provide useful recommendations, in this section we first introduce our PTQ-Bench, then with its guidance we conduct extensive experiments to benchmark each PTQ strategy. The detailed experimental results are listed in each subsection with corresponding analysis, conclusions and recommendations. We also list the FP16 results of all the evaluated LLMs in Table 13 and 14 in Appendix B.3.

3.1 PTQ-Bench Setup

General setup For assisting in selecting foundational PTQ strategies based on requirements, we select AWQ [42], GPTQ [20], OmniQuant [61], and QuIP [7] as representatives of the four PTQ strategies, owing to their superior performance and broad practical deployment. We mainly focus on the LLaMA family (LLaMA-1/2/3/3.1) [65, 66, 16], the most widely deployed open-sourced LLMs. Besides, Mixtral [32], DeepSeeK-MoE [12], Mamba [24], LLaVA-1.5 [43], and VILA-1.5 [41] are also included. The evaluation metrics contains perplexity and average inference accuracy on 16 single/multi-modal reasoning tasks. Please refer to Appendix B.1 for detailed experimental settings.

Cross-Bitwidth Robustness Cross-bitwidth robustness quantifies an algorithm’s performance stability across varying quantization bitwidths. In PTQ-bench, we evaluate this capability by comparing the performance degradation from 4-bit to 2-bit mainly on LLaMA families.

Cross-structure Robustness Cross-structure robustness evaluates an algorithm’s scalability and performance consistency when deployed across diverse model structures, characterizing its generalization capability beyond specific network structures. In PTQ-bench, we compare the results on MLLMs/Mamba and LLMs with traditional structures (*i.e.*, LLaMA) to achieve this goal.

Cross-Modality Robustness Cross-modality robustness indicates the performance consistency of an LLM PTQ method when deployed on MLLMs. In PTQ-Bench, we mainly evaluate this capability by comparing the performance trend on LLMs and MLLMs.

3.2 Cross-Bitwidth Robustness

To comprehensively evaluate the cross-bitwidth robustness of the four PTQ strategies, we use LLaMA families, which are the most widely deployed open-sourced LLMs. We present the average perplexity and accuracy in Table 1 and Table 2. In our exploration, we observe that even under identical experimental conditions, the performance of each PTQ strategy varies significantly across bitwidths.

Salience-based Strategy Demonstrates Superiority at Higher-bit. As Table 1 and Table 2 shown, when applying 4-bit quantization, all baselines perform comparable and satisfactory, while AWQ holds a slight advantage. When it comes to 3-bit, the performance of different baselines begins to diverge but AWQ consistently performs the best. For example, on LLaMA3-8B, AWQ achieves 7.98/61.23% and OmniQuant is 8.82/57.36% at 4-bit. Then at 3-bit the performance of OmniQuant decline visibly with 17.53/36.09%, but AWQ still achieves 9.83/54.65%. *This suggests that the salience-based strategy is suitable for higher-bit PTQ.*

Extremely Low-bit PTQ Performance Varies According to the results in Table 1 and Table 2, we observe that the performance of each PTQ strategy varies significantly at 2-bit, as summarized in three dimensions below:

- *Salience-based methods collapse on All LLMs:* As listed in Table 1 and Table 2, AWQ exhibits extremely poor performance at 2-bit across all LLMs, completely losing any language capabilities, e.g., on LLaMA-65B AWQ only delivers 7.4e4/22.86%.
- *Optimization-based methods collapse on LLaMA-3/3.1:* Although OmniQuant performs well on LLaMA-1/2, its performance drastically declines on LLaMA-3/3.1, particularly at 3-bit where other baselines still maintain decent performance, OmniQuant has already collapsed. For instance, on 3-bit LLaMA3-70B, OmniQuant achieves 7.4e4/22.22%, whereas GPTQ is 7.16/40.51%.
- *Rotation-based and Compensation-based methods demonstrate diverse low-bit robustness on LLaMA-1/2 and LLaMA-3/3.1:* It is evident that GPTQ and QuIP consistently achieve satisfactory results across any model and bitwidth. For example, GPTQ scores 19.50/29.55% while AWQ scores 1.1e5/22.61% on 2-bit LLaMA2-13B, and on 2-bit LLaMA3.1-70B, QuIP is 42.58/25.58%, whereas OmniQuant achieves 1.6e5/21.85%. Specifically, QuIP is more suitable for LLaMA-1/2, while GPTQ demonstrates stronger robustness for 2-bit quantization of LLaMA-3/3.1. For instance, QuIP (7.70/48.47%) outperforms GPTQ (9.00/43.44%) on LLaMA2-70B while on LLaMA3-70B GPTQ (23.43/29.9%) surpasses QuIP (53.18/24.60%). To elucidate this multifaceted phenomenon, we provide the following analysis: As the technical report [16], the training dataset of LLaMA-3/3.1 is several times larger than that of LLaMA-1/2. The more extensive training leads to greater information loss when quantizing LLaMA-3/3.1, especially for extremely low-bit PTQ (2-bit). Our experimental results in Table 1 and Table 2 substantiate this inference and align with the recently proposed quantization scaling law [33, 53].

Overall, the observation in low-bit evaluation suggests that both compensation and rotation methods are applicable for low-bit PTQ, with rotation is better suited for undertrained LLMs (LLaMA-1/2) and compensation is more advantageous for fully trained LLMs (LLaMA-3/3.1).

3.3 Cross-Structure Robustness

LLMs constructed by stacking traditional transformer modules suffer from high computational costs and poor long-sequence modeling capability. Consequently, various novel structures for LLMs have emerged recently, such as MoE [17] and Mamba [24]. However, changes in model structure may lead to potential issues of algorithm compatibility or performance degradation. Therefore, in PTQ-Bench we further evaluate the four PTQ strategies on novel-structure LLMs to analyze their cross-structure robustness. Specifically, we select Mamba-1.4B/2.8B as the representatives of Mamba families, while Mixtral 8×7B [32] and DeepSeekMoE-16B [12] are chosen for benchmarking MoE LLMs. The results are shown in Table 3. For more details data please refer to Appendix B.2.

Salience-based method cannot be generalized to Mamba and MoE LLMs. AWQ requires determining the scaling hyper-parameters which must based on the input activation during runtime. To ensure output invariance, this parameter must be integrated into the preceding linear layer. For Mamba, there is only an RMSNorm layer before *in_proj* layer while no linear layers precede the

Table 3: The average perplexity($\downarrow$)/accuracy(%) comparison results on MoE and Mamba LLMs. For detailed results please refer to Table 10 and 11 in Appendix B.2.

Model	Methods	W4	W3	W2
Mixtral-8×7B	AWQ	-	-	-
	GPTQ	5.65/64.59	6.43/59.04	22.92/28.19
	QuIP	30.42/31.20	39.97/28.40	155.14/23.52
	OmniQ	5.69/64.50	6.91/56.89	4.7e3/22.21
DeepSeekMoE-16B	AWQ	-	-	-
	GPTQ	7.95/53.44	8.75/50.35	49.10/27.20
	QuIP	8.61/52.69	8.97/ 50.55	23.39/32.79
	OmniQ	8.21/52.36	9.62/46.27	75.41/25.04
Mamba-1.4B	AWQ	-	-	-
	GPTQ	12.74/43.12	15.64/40.18	882.35/24.53
	QuIP	14.53/41.63	17.64/38.79	287.48/25.24
	OmniQ	4.2e4/25.66	1.6e3/27.36	2.9e4/23.05
Mamba-2.8B	AWQ	-	-	-
	GPTQ	11.30/45.69	13.35/43.84	696.21/24.06
	QuIP	12.30/45.11	14.15/41.97	119.95/28.23
	OmniQ	20.16/38.28	36.92/34.93	1.2e4/23.23

other projection layers, this making the output invariance cannot be ensured. For MoE LLMs, a router may choose different experts in the routing mechanism, which makes it hard to fuse the scaling hyper-parameters offline.

Optimization-based method is highly unstable. As shown in Table 3, OmniQuant completely collapses on Mamba LLMs. Meanwhile, on Mixtral 8×7B and DeepSeekMoE-16B, its performance is also unsatisfactory, particularly at 2-bit. *The aforementioned two phenomena demonstrate that AWQ and OmniQuant exhibit poor cross-structure generalization capabilities.*

Rotation-based and compensation-based exhibit distinct robustness characteristics. The results in Table 3 indicate that GPTQ and QuIP achieve superior performance across bitwidths for both MoE LLMs and Mamba. Taking the performance on LLaMA into consideration, it is evident that these two PTQ strategies maintain stability across different model-structure. Interestingly, their robustness exhibit distinct nature. Specifically, in most cases, GPTQ performs better at higher bit, while QuIP is more suitable for 2-bit quantization. For example, GPTQ achieves 11.30/45.69% on Mamba-2.8B (W4) while QuIP is 12.30/45.11%, but at W2 QuIP outperforms GPTQ with 119.95/28.23%. And on 2-bit DeepSeekMoE-16B, QuIP shows significant advantages with 23.29/32.79% compared with GPTQ. In addition, we can notice that QuIP exhibits unstable performance on MoE LLMs, especially on Mixtral 8×7B where GPTQ significantly outperforms QuIP across all quantization bitwidths. For instance, GPTQ and QuIP exhibit 22.92/28.19% and 155.14/23.52% on Mixtral at W2, respectively. *The observed phenomenon suggests that compensation-based is the most cross-structure robust strategy but rotation-based strategy excels particularly at 2-bit PTQ in most cases.*

3.4 Cross-Modality Robustness

Quantization may undermine the inherent cross-modal alignment capabilities, leading to degraded performance on multimodal tasks. In PTQ-Bench, we further evaluate the four PTQ strategies in visual-language reasoning tasks on VILA [41] and LLaVA [43] to explore cross-modality robustness, and the results are presented in Table 4. For more details please refer to Appendix B.2.

Higher-bit performance remains stable and comparable. Similar to LLMs, at 3/4-bit, the performance differences among various PTQ strategies are negligible, and all exhibit outstanding performance. For instance, on LLaVA1.5-13B the largest average accuracy gap is only 1.7% at 3-bit.

Rotation and compensation methods consistently demonstrate superiority at 2-bit. As shown in Table 4, the phenomenon at 2-bit is consistent with that in LLMs, where only models quantized by GPTQ and QuIP exhibit effective reasoning capabilities while AWQ and OmniQuant completely collapse. For instance, on VILA1.5-13B AWQ shows 7.69% and QuIP remains 54.18%. *The experimental observations suggest that at higher bit, any strategy exhibits commendable cross-*

Table 4: The average accuracy (%) comparison on VILA1.5 and LLaVA1.5. For detailed results please refer to Table 12 in Appendix B.2.

Methods	W4	W3		W2	
VILA1.5-	7B	7B	13B	7B	13B
AWQ	68.55	66.30	69.91	7.56	7.69
GPTQ	68.59	65.95	69.33	19.30	45.93
QuIP	63.52	64.46	68.96	29.42	54.17
OmniQ	67.71	65.37	67.68	19.99	8.39
LLaVA1.5-	7B	7B	13B	7B	13B
AWQ	61.97	60.76	64.08	7.61	7.77
GPTQ	61.74	59.36	63.75	17.45	38.46
QuIP	61.32	56.18	64.02	24.80	45.59
OmniQ	61.27	56.94	62.38	8.61	7.80

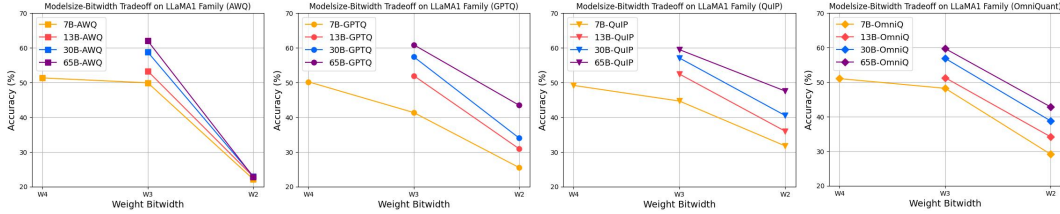


Figure 2: Performance varies with model size and quantization bitwidth on LLMs. Regardless of the PTQ strategy used, the performance of a 2-bit large model is always inferior to that of a 4-bit smaller model, exemplified by 2-bit LLaMA-65B and 4-bit LLaMA-7B. In addition, 3-bit PTQ can still showcase the performance benefits associated with larger model sizes.

modal robustness, whereas at extremely low-bit, rotation-based and compensation-based strategies emerge as the sole viable alternatives.

After all evaluation, we theoretically analyze the reason why certain methods fail or work better in specific scenarios for providing deeper insights into these PTQ strategies, please refer to Appendix C.

4 Beyond Benchmarking: Extended Insights and Implications

In addition to the comprehensive evaluation for the categorized PTQ strategies and recommendations in different scenarios in Section 3, in this section we present two innovative and critical implications deriving from PTQ-Bench: a) Modelsize-bitwidth tradeoff; b) compensation is the unified robust foundational strategy.

4.1 Trade-off among Bitwidth, Model Size and Performance

When deploying quantized LLMs in real system, people often grapple with the decision regarding the size and the bitwidth of the model to deploy. For instance, a straightforward question arises: *Which one is better, a higher-bit smaller model or a lower-bit larger model?* In order to clarify this confusion, we comprehensively explore the trade-off between model size and quantization bitwidth from the performance perspective. The experimental results in previous tables indicate that the perplexity of text generation exhibits a strictly positive correlation with reasoning ability reflected in accuracy. As perplexity exhibits a much larger distribution range, we choose accuracy as the evaluation metric and then create intuitive visualizations to explore the trade-off (see Figure 2).

The ultra-large model at 2-bit even falls short in performance when compared to the 4-bit smallest model. The scaling law claims that, within the same LLM family, larger models generally exhibit superior performance. However, Figure 2 indicates that even the largest models, like LLaMA-65B, when quantized to extremely low-bit (2-bit), demonstrate inferior performance compared to the smallest models operating at 4-bit, such as LLaMA-7B. This observation remains valid across any LLM family, any structure and any PTQ strategy as the results in the tables above. For instance, LLaMA2-70B quantized to 2-bit using OmniQuant achieves 10.36/38.46%, which is worse than

LLaMA2-7B at 4-bit with 6.55/51.11%; Mamba-2.8B at 2-bit is also worse than Mamba-1.4B at 4-bit quantized by any baseline. *This fresh finding suggests that for the present moment, deploying smaller models at higher bitwidths appears to be the optimal choice. Additionally, specific research on extremely low-bit PTQ for ultra-large models seems essential.* Most previous PTQ methods usually validated their performance across various model sizes, which ignored the fact that pushing ultra-large models to extremely low-bit does not surpass the performance of higher-bit smaller models so as to cause the unnecessary expenditure of computational resources. This highlights the need for the development of specialized designs for extremely low-bit PTQ on ultra-large models to ensure their performance exceeds that of higher-bit small models.

3-bit is an effective and competitive target for PTQ. As illustrated in Figure 2, compared to the 4-bit smaller model, the performance advantage conferred by the large amounts of weights in the larger model remains fully evident at 3-bit, aligning with the scaling law. For example, LLaMA2-13B quantized by GPTQ exhibits 6.28/55.44%, outperforming 4-bit LLaMA2-7B with 6.45/52.86%. *Given that 3-bit quantization still offers a considerable target bitwidth, it can serve as a viable quantization target for those seeking to harness the performance benefits of larger models.*

4.2 Compensation-based PTQ: A Unified Robust Foundational Strategy

In Section 3, we have provided several recommendations for the selection of foundational PTQ strategy based on different requirements. But when developing novel PTQ algorithm, researchers usually strive for an ideal form, one where the designed method can be effectively generalized to any quantization scenario. To address this issue, in this part we further explore this valuable requirement to improve our benchmark.

Based on the results in Section 3, it is evident that rotation-based and compensation-based strategies exhibit better generalization ability. Subsequently, we broaden our focus to more advanced algorithms within compensation-based and rotation-based strategies, *i.e.*, VPTQ and QuaRot. However, when validating on Mamba and MoE LLMs, we discovered that QuaRot [4], the state-of-the-art rotation-based method, could not be applied to Mamba and MoE LLMs, because QuaRot introduces additional rotation matrices that need to be integrated into the nearby linear layers. However, due to changes in the model structure, this integration process cannot be achieved. In contrast, any compensation-based method remains unaffected, as this strategy only relies on the weights themselves to complete error compensation.

Subsequently, we combine GPTQ with other strategies and compare them with more advanced algorithms in other strategies to highlight the superiority in challenging scenarios including extremely low-bit (2-bit), high training level (LLaMA3.1-8B), and cross-structure (Mixtral 8×7B) settings. We select naive GPTQ, OWQ (SOTA salience-based method) [37], LRQuant (SOTA optimization-based method) [79], QuaRot+GPTQ (rotation+compensation), and PBLLM (salience+compensation) [59]. Table 5 reveals the PBLLM and QuaRot+GPTQ exhibit consistently high stability, outperforming more advanced salience-based and optimization-based methods as well as naive GPTQ. *Our exploration claims that compensation-based PTQ is the most unified robust strategy, and its combination with other strategies can significantly elevate the performance ceiling.*

5 Conclusion

Existing PTQ research lacks in-depth analysis of the superiority and applicable scenarios of various PTQ frameworks, presenting a challenge for future researchers in selecting foundational frameworks that align with their specific requirements for development. To address this issue, in this paper we first propose a comprehensive taxonomy for existing baselines. Then we establish a novel benchmark

Table 5: The average perplexity(↓)/ accuracy(%) comparison among different PTQ strategy combination.

Model	Methods	Strategy	PPL ↓	Acc %
LLaMA 3.1-8B	GPTQ	Compen.	510.33	23.20
	OWQ	Salien.	305.77	24.33
	LRQuant	Optim.	193.83	26.05
	PBLLM	Compen.+Salien.	<u>84.45</u>	<u>33.27</u>
	QuaRot+GPTQ	Compen.+Rot.	33.33	35.28
Mixtral 8×7B	GPTQ	Compen.	22.92	28.19
	OWQ	Salien.	35.60	32.89
	LRQuant	Optim.	41.81	29.77
	QuIP+GPTQ	Compen.+Rot.	<u>9.59</u>	<u>45.26</u>
	PBLLM	Compen.+Salien.	7.60	56.28

for LLMs PTQ, named PTQ-Bench, to help select foundational strategies by evaluating the cross-bitwidth, cross-structure and cross-modality robustness of the categorized strategies on a wide range of LLMs and metrics. Based on the results, we provide a series of analysis and recommendations. For example, rotation-based method shows excellent low-bit robustness. In addition, we also discover two critical insights deriving from PTQ-Bench including modelsize-bitwidth tradeoff and the most robustness strategy combination across various scenarios. We believe our PTQ-Bench will provide valuable guidelines for future development on PTQ methods.

References

- [1] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- [2] Zeyuan Allen-Zhu and Yuanzhi Li. Physics of language models: Part 3.3, knowledge capacity scaling laws. *arXiv preprint arXiv:2404.05405*, 2024.
- [3] Stanislaw Antol, Aishwarya Agrawal, Jiasen Lu, Margaret Mitchell, Dhruv Batra, C Lawrence Zitnick, and Devi Parikh. Vqa: Visual question answering. In *Proceedings of the IEEE international conference on computer vision*, pages 2425–2433, 2015.
- [4] Saleh Ashkboos, Amirkeivan Mohtashami, Maximilian L Croci, Bo Li, Martin Jaggi, Dan Alistarh, Torsten Hoefler, and James Hensman. Quarot: Outlier-free 4-bit inference in rotated llms. *arXiv preprint arXiv:2404.00456*, 2024.
- [5] Kayhan Behdin, Ayan Acharya, Sathiya Keerthi Aman Gupta, and Rahul Mazumder. Quantease: Optimization-based quantization for language models-an efficient and intuitive algorithm. *stat*, 1050:5, 2023.
- [6] Yonatan Bisk, Rowan Zellers, Jianfeng Gao, Yejin Choi, et al. Piqa: Reasoning about physical commonsense in natural language. In *Proceedings of the AAAI conference on artificial intelligence*, volume 34, pages 7432–7439, 2020.
- [7] Jerry Chee, Yaohui Cai, Volodymyr Kuleshov, and Christopher M De Sa. Quip: 2-bit quantization of large language models with guarantees. *Advances in Neural Information Processing Systems*, 36, 2024.
- [8] Hongrong Cheng, Miao Zhang, and Javen Qinfeng Shi. Influence function based second-order channel pruning: Evaluating true loss changes for pruning is possible without retraining. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2024.
- [9] Hongrong Cheng, Miao Zhang, and Javen Qinfeng Shi. A survey on deep neural network pruning: Taxonomy, comparison, analysis, and recommendations. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2024.
- [10] Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. Think you have solved question answering? try arc, the ai2 reasoning challenge. *arXiv preprint arXiv:1803.05457*, 2018.
- [11] Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021.
- [12] Damai Dai, Chengqi Deng, Chenggang Zhao, RX Xu, Huazuo Gao, Deli Chen, Jiashi Li, Wangding Zeng, Xingkai Yu, Y Wu, et al. Deepseekmoe: Towards ultimate expert specialization in mixture-of-experts language models. *arXiv preprint arXiv:2401.06066*, 2024.
- [13] Tim Dettmers, Mike Lewis, Younes Belkada, and Luke Zettlemoyer. Gpt3. int8 (): 8-bit matrix multiplication for transformers at scale. *Advances in Neural Information Processing Systems*, 35:30318–30332, 2022.

- [14] Tim Dettmers, Ruslan Svirschevski, Vage Egiazarian, Denis Kuznedelev, Elias Frantar, Saleh Ashkboos, Alexander Borzunov, Torsten Hoefer, and Dan Alistarh. Spqr: A sparse-quantized representation for near-lossless llm weight compression. *arXiv preprint arXiv:2306.03078*, 2023.
- [15] Xin Ding, Xiaoyu Liu, Zhijun Tu, Yun Zhang, Wei Li, Jie Hu, Hanting Chen, Yehui Tang, Zhiwei Xiong, Baoqun Yin, et al. Cbq: Cross-block quantization for large language models. *arXiv preprint arXiv:2312.07950*, 2023.
- [16] Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, et al. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024.
- [17] William Fedus, Barret Zoph, and Noam Shazeer. Switch transformers: Scaling to trillion parameter models with simple and efficient sparsity. *Journal of Machine Learning Research*, 23 (120):1–39, 2022.
- [18] Elias Frantar and Dan Alistarh. Optimal brain compression: A framework for accurate post-training quantization and pruning. *Advances in Neural Information Processing Systems*, 35: 4475–4488, 2022.
- [19] Elias Frantar and Dan Alistarh. Sparsegpt: Massive language models can be accurately pruned in one-shot. In *International Conference on Machine Learning*, pages 10323–10337. PMLR, 2023.
- [20] Elias Frantar, Saleh Ashkboos, Torsten Hoefer, and Dan Alistarh. Gptq: Accurate post-training quantization for generative pre-trained transformers. *arXiv preprint arXiv:2210.17323*, 2022.
- [21] Amir Gholami, Sehoon Kim, Zhen Dong, Zhewei Yao, Michael W Mahoney, and Kurt Keutzer. A survey of quantization methods for efficient neural network inference. In *Low-Power Computer Vision*, pages 291–326. Chapman and Hall/CRC, 2022.
- [22] Ruihao Gong, Yifu Ding, Zining Wang, Chengtao Lv, Xingyu Zheng, Jinyang Du, Haotong Qin, Jinyang Guo, Michele Magno, and Xianglong Liu. A survey of low-bit large language models: Basics, systems, and algorithms. *arXiv preprint arXiv:2409.16694*, 2024.
- [23] Jianping Gou, Baosheng Yu, Stephen J Maybank, and Dacheng Tao. Knowledge distillation: A survey. *International Journal of Computer Vision*, 129(6):1789–1819, 2021.
- [24] Albert Gu and Tri Dao. Mamba: Linear-time sequence modeling with selective state spaces. *arXiv preprint arXiv:2312.00752*, 2023.
- [25] Ziyi Guan, Hantao Huang, Yupeng Su, Hong Huang, Ngai Wong, and Hao Yu. Aptq: Attention-aware post-training mixed-precision quantization for large language models. In *Proceedings of the 61st ACM/IEEE Design Automation Conference*, pages 1–6, 2024.
- [26] Danna Gurari, Qing Li, Abigale J Stangl, Anhong Guo, Chi Lin, Kristen Grauman, Jiebo Luo, and Jeffrey P Bigham. Vizwiz grand challenge: Answering visual questions from blind people. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 3608–3617, 2018.
- [27] Nathan Halko, Per-Gunnar Martinsson, and Joel A Tropp. Finding structure with randomness: Probabilistic algorithms for constructing approximate matrix decompositions. *SIAM review*, 53 (2):217–288, 2011.
- [28] Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding. *arXiv preprint arXiv:2009.03300*, 2020.
- [29] Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. *arXiv preprint arXiv:2106.09685*, 2021.

- [30] Yuzhen Huang, Yuzhuo Bai, Zhihao Zhu, Junlei Zhang, Jinghan Zhang, Tangjun Su, Junteng Liu, Chuancheng Lv, Yikai Zhang, Jiayi Lei, Yao Fu, Maosong Sun, and Junxian He. C-eval: A multi-level multi-discipline chinese evaluation suite for foundation models. In *Advances in Neural Information Processing Systems*, 2023.
- [31] Drew A Hudson and Christopher D Manning. Gqa: A new dataset for real-world visual reasoning and compositional question answering. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 6700–6709, 2019.
- [32] Albert Q Jiang, Alexandre Sablayrolles, Antoine Roux, Arthur Mensch, Blanche Savary, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Emma Bou Hanna, Florian Bressand, et al. Mixtral of experts. *arXiv preprint arXiv:2401.04088*, 2024.
- [33] Tanishq Kumar, Zachary Ankner, Benjamin F Spector, Blake Bordelon, Niklas Muennighoff, Mansheej Paul, Cengiz Pehlevan, Christopher Ré, and Aditi Raghunathan. Scaling laws for precision. *arXiv preprint arXiv:2411.04330*, 2024.
- [34] Eldar Kurtic, Alexandre Marques, Shubhra Pandit, Mark Kurtz, and Dan Alistarh. " give me bf16 or give me death"? accuracy-performance trade-offs in llm quantization. *arXiv preprint arXiv:2411.02355*, 2024.
- [35] Guokun Lai, Qizhe Xie, Hanxiao Liu, Yiming Yang, and Eduard Hovy. Race: Large-scale reading comprehension dataset from examinations. *arXiv preprint arXiv:1704.04683*, 2017.
- [36] Yann LeCun, John Denker, and Sara Solla. Optimal brain damage. *Advances in neural information processing systems*, 2, 1989.
- [37] Changhun Lee, Jungyu Jin, Taesu Kim, Hyungjun Kim, and Eunhyeok Park. Owq: Outlier-aware weight quantization for efficient fine-tuning and inference of large language models. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 13355–13364, 2024.
- [38] Qingyuan Li, Yifan Zhang, Liang Li, Peng Yao, Bo Zhang, Xiangxiang Chu, Yerui Sun, Li Du, and Yuchen Xie. Fptq: Fine-grained post-training quantization for large language models. *arXiv preprint arXiv:2308.15987*, 2023.
- [39] Shiyao Li, Xuefei Ning, Luning Wang, Tengxuan Liu, Xiangsheng Shi, Shengen Yan, Guohao Dai, Huazhong Yang, and Yu Wang. Evaluating quantized large language models. *arXiv preprint arXiv:2402.18158*, 2024.
- [40] Yifan Li, Yifan Du, Kun Zhou, Jinpeng Wang, Wayne Xin Zhao, and Ji-Rong Wen. Evaluating object hallucination in large vision-language models. *arXiv preprint arXiv:2305.10355*, 2023.
- [41] Ji Lin, Hongxu Yin, Wei Ping, Yao Lu, Pavlo Molchanov, Andrew Tao, Huizi Mao, Jan Kautz, Mohammad Shoeybi, and Song Han. Vila: On pre-training for visual language models, 2023.
- [42] Ji Lin, Jiaming Tang, Haotian Tang, Shang Yang, Wei-Ming Chen, Wei-Chen Wang, Guangxuan Xiao, Xingyu Dang, Chuang Gan, and Song Han. Awq: Activation-aware weight quantization for on-device llm compression and acceleration. *Proceedings of Machine Learning and Systems*, 6:87–100, 2024.
- [43] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *Advances in neural information processing systems*, 36, 2024.
- [44] Yifei Liu, Jicheng Wen, Yang Wang, Shengyu Ye, Li Lyna Zhang, Ting Cao, Cheng Li, and Mao Yang. Vptq: Extreme low-bit vector post-training quantization for large language models. *arXiv preprint arXiv:2409.17066*, 2024.
- [45] Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan, Jiaqi Wang, Conghui He, Ziwei Liu, et al. Mmbench: Is your multi-modal model an all-around player? In *European conference on computer vision*, pages 216–233. Springer, 2025.
- [46] Zechun Liu, Barlas Oguz, Changsheng Zhao, Ernie Chang, Pierre Stock, Yashar Mehdad, Yangyang Shi, Raghuraman Krishnamoorthi, and Vikas Chandra. Llm-qat: Data-free quantization aware training for large language models. *arXiv preprint arXiv:2305.17888*, 2023.

- [47] Zechun Liu, Changsheng Zhao, Igor Fedorov, Bilge Soran, Dhruv Choudhary, Raghuraman Krishnamoorthi, Vikas Chandra, Yuandong Tian, and Tijmen Blankevoort. Spinquant–llm quantization with learned rotations. *arXiv preprint arXiv:2405.16406*, 2024.
- [48] Pan Lu, Swaroop Mishra, Tanglin Xia, Liang Qiu, Kai-Wei Chang, Song-Chun Zhu, Oyvind Tafjord, Peter Clark, and Ashwin Kalyan. Learn to explain: Multimodal reasoning via thought chains for science question answering. *Advances in Neural Information Processing Systems*, 35: 2507–2521, 2022.
- [49] Yuexiao Ma, Huixia Li, Xiawu Zheng, Feng Ling, Xuefeng Xiao, Rui Wang, Shilei Wen, Fei Chao, and Rongrong Ji. Affinequant: Affine transformation quantization for large language models. *arXiv preprint arXiv:2403.12544*, 2024.
- [50] Stephen Merity, Caiming Xiong, James Bradbury, and Richard Socher. Pointer sentinel mixture models. *arXiv preprint arXiv:1609.07843*, 2016.
- [51] Xupeng Miao, Gabriele Oliaro, Zhihao Zhang, Xinhao Cheng, Hongyi Jin, Tianqi Chen, and Zhihao Jia. Towards efficient generative large language model serving: A survey from algorithms to systems. *arXiv preprint arXiv:2312.15234*, 2023.
- [52] Markus Nagel, Marios Fournarakis, Rana Ali Amjad, Yelysei Bondarenko, Mart Van Baalen, and Tijmen Blankevoort. A white paper on neural network quantization. *arXiv preprint arXiv:2106.08295*, 2021.
- [53] Xu Ouyang, Tao Ge, Thomas Hartvigsen, Zhisong Zhang, Haitao Mi, and Dong Yu. Low-bit quantization favors undertrained llms: Scaling laws for quantized llms with 100t training tokens. *arXiv preprint arXiv:2411.17691*, 2024.
- [54] Denis Paperno, Germán Kruszewski, Angeliki Lazaridou, Quan Ngoc Pham, Raffaella Bernardi, Sandro Pezzelle, Marco Baroni, Gemma Boleda, and Raquel Fernández. The lambada dataset: Word prediction requiring a broad discourse context. *arXiv preprint arXiv:1606.06031*, 2016.
- [55] Seungcheol Park, Jaehyeon Choi, Sojin Lee, and U Kang. A comprehensive survey of compression algorithms for language models. *arXiv preprint arXiv:2401.15347*, 2024.
- [56] Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, et al. Pytorch: An imperative style, high-performance deep learning library. *Advances in neural information processing systems*, 32, 2019.
- [57] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of machine learning research*, 21(140):1–67, 2020.
- [58] Keisuke Sakaguchi, Ronan Le Bras, Chandra Bhagavatula, and Yejin Choi. Winogrande: An adversarial winograd schema challenge at scale. *Communications of the ACM*, 64(9):99–106, 2021.
- [59] Yuzhang Shang, Zhihang Yuan, Qiang Wu, and Zhen Dong. Pb-llm: Partially binarized large language models. *arXiv preprint arXiv:2310.00034*, 2023.
- [60] Yuzhang Shang, Gaowen Liu, Ramana Rao Kompella, and Yan Yan. Enhancing post-training quantization calibration through contrastive learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15921–15930, 2024.
- [61] Wenqi Shao, Mengzhao Chen, Zhaoyang Zhang, Peng Xu, Lirui Zhao, Zhiqian Li, Kaipeng Zhang, Peng Gao, Yu Qiao, and Ping Luo. Omniquant: Omnidirectionally calibrated quantization for large language models. *arXiv preprint arXiv:2308.13137*, 2023.
- [62] Sheng Shen, Zhen Dong, Jiayu Ye, Linjian Ma, Zhewei Yao, Amir Gholami, Michael W Mahoney, and Kurt Keutzer. Q-bert: Hessian based ultra low precision quantization of bert. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 8815–8821, 2020.

- [63] Amanpreet Singh, Vivek Natarajan, Meet Shah, Yu Jiang, Xinlei Chen, Dhruv Batra, Devi Parikh, and Marcus Rohrbach. Towards vqa models that can read. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 8317–8326, 2019.
- [64] Yehui Tang, Yunhe Wang, Jianyuan Guo, Zhijun Tu, Kai Han, Hailin Hu, and Dacheng Tao. A survey on transformer compression. *arXiv preprint arXiv:2402.05964*, 2024.
- [65] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023.
- [66] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
- [67] Albert Tseng, Jerry Chee, Qingyao Sun, Volodymyr Kuleshov, and Christopher De Sa. Quip#: Even better llm quantization with hadamard incoherence and lattice codebooks. *arXiv preprint arXiv:2402.04396*, 2024.
- [68] Zhongwei Wan, Xin Wang, Che Liu, Samiul Alam, Yu Zheng, Jiachen Liu, Zhongnan Qu, Shen Yan, Yi Zhu, Quanlu Zhang, et al. Efficient large language models: A survey. *arXiv preprint arXiv:2312.03863*, 2023.
- [69] Hongyu Wang, Shuming Ma, Li Dong, Shaohan Huang, Huaijie Wang, Lingxiao Ma, Fan Yang, Ruiping Wang, Yi Wu, and Furu Wei. Bitnet: Scaling 1-bit transformers for large language models. *arXiv preprint arXiv:2310.11453*, 2023.
- [70] Wenxiao Wang, Wei Chen, Yicong Luo, Yongliu Long, Zhengkai Lin, Liye Zhang, Binbin Lin, Deng Cai, and Xiaofei He. Model compression and efficient inference for large language models: A survey. *arXiv preprint arXiv:2402.09748*, 2024.
- [71] Yuzhuang Xu, Xu Han, Zonghan Yang, Shuo Wang, Qingfu Zhu, Zhiyuan Liu, Weidong Liu, and Wanxiang Che. Onebit: Towards extremely low-bit large language models. *arXiv preprint arXiv:2402.11295*, 2024.
- [72] Ge Yang, Changyi He, Jinyang Guo, Jianyu Wu, Yifu Ding, Aishan Liu, Haotong Qin, Pengliang Ji, and Xianglong Liu. Llmcbench: Benchmarking large language model compression for efficient deployment. *arXiv preprint arXiv:2410.21352*, 2024.
- [73] Zhewei Yao, Reza Yazdani Aminabadi, Minjia Zhang, Xiaoxia Wu, Conglong Li, and Yuxiong He. Zeroquant: Efficient and affordable post-training quantization for large-scale transformers. *Advances in Neural Information Processing Systems*, 35:27168–27183, 2022.
- [74] Weihao Yu, Zhengyuan Yang, Linjie Li, Jianfeng Wang, Kevin Lin, Zicheng Liu, Xinchao Wang, and Lijuan Wang. Mm-vet: Evaluating large multimodal models for integrated capabilities. *arXiv preprint arXiv:2308.02490*, 2023.
- [75] Zhihang Yuan, Yuzhang Shang, Yue Song, Qiang Wu, Yan Yan, and Guangyu Sun. Asvd: Activation-aware singular value decomposition for compressing large language models. *arXiv preprint arXiv:2312.05821*, 2023.
- [76] Zhihang Yuan, Yuzhang Shang, Yang Zhou, Zhen Dong, Zhe Zhou, Chenhao Xue, Bingzhe Wu, Zhikai Li, Qingyi Gu, Yong Jae Lee, et al. Llm inference unveiled: Survey and roofline model insights. *arXiv preprint arXiv:2402.16363*, 2024.
- [77] Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, and Yejin Choi. Hellaswag: Can a machine really finish your sentence? *arXiv preprint arXiv:1905.07830*, 2019.
- [78] Xu Zhang, Felix X Yu, Ruiqi Guo, Sanjiv Kumar, Shengjin Wang, and Shi-Fu Chang. Fast orthogonal projection based on kronecker product. In *Proceedings of the IEEE International Conference on Computer Vision*, pages 2929–2937, 2015.

- [79] Jiaqi Zhao, Miao Zhang, Chao Zeng, Ming Wang, Xuebo Liu, and Liqiang Nie. Lrquant: Learnable and robust post-training quantization for large language models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2240–2255, 2024.
- [80] Xunyu Zhu, Jian Li, Yong Liu, Can Ma, and Weiping Wang. A survey on model compression for large language models. *arXiv preprint arXiv:2308.07633*, 2023.

Appendix

A Background

A.1 Quantization Preliminaries

Quantization aims to reduce inference and storage overheads by converting high precision floating-point values into their corresponding low precision integer counterparts [52]. The asymmetric weight-only quantization is formulated as:

$$W_q = \text{clamp}(\lfloor \frac{W}{s_q} \rfloor + z_q, 0, 2^b - 1), \quad (5)$$

where $W \in \mathbb{R}^{n \times m}$ and $W_q \in \mathbb{R}^{n \times m}$ indicate full-precision and quantized weights respectively. $\lfloor \cdot \rfloor$ denotes round-to-nearest operator. s_q is the scaling factor and z_q is the zero-point.

A.2 Quantization Surveys and Benchmarks

Most model compression reviews summarize ample concepts, principles, and a coarse-grained classification of commonly used compression methods [64, 55, 51, 68, 80, 72], but limited focus is placed on quantization. The other literature contributes a more detailed exploration of quantization. Wang et al. [70] provides comprehensive explanations of quantization frameworks but lacks detailed taxonomy and summaries of their specific characteristics, so that the followers are still confused by how to select a basic framework to further develop. Gong et al. [22] delves deeper into the existing methods and provides finer distinctions but no experiments are conducted to evaluate the performance of each category. Kurtic et al. [34] explores the accuracy-performance trade-off for popular quantization formats via broad and automated benchmarks, but only 3 models are included into examination which undermines the persuasiveness of the study. Li et al. [39] focus on synthesizing experimental results but offers limited valuable guidance for future research. It is evident that, there is still a lack of a technical and development guideline for LLMs PTQ which enables researchers to select correct model for deployment or foundational PTQ strategy based on their requirements. Our benchmark fills this gap by experimentally analyzing the characteristics of different PTQ strategies and providing recommendations for researchers to consider.

A.3 The Trend of PTQ Research

PTQ is more favored by LLMs compression due to its efficiency, convenience, and ease of reproducibility. As illustrated by Figure 3, in the first year of the emergence of LLMs (2022), 6 PTQ papers were published on Arxiv. By 2023, this number doubled, while there were only 6 QAT papers. By 2024, there was an explosive growth in the number of quantization papers, with 33 out of a total of 44 papers belonging to PTQ. Overall, PTQ papers account for 69.23% of the total number of quantization papers on LLMs, which demonstrates the intense attention on PTQ research.

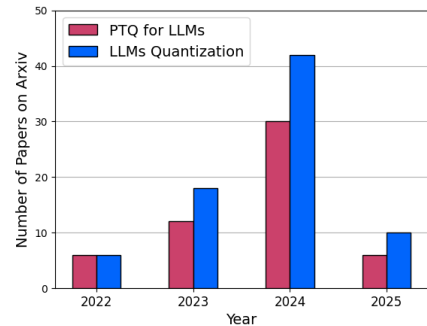


Figure 3: The number of quantization papers since 2022.

B Details of Evaluation

B.1 Detailed Experimental Setup

Baselines AWQ [42], GPTQ [20], OmniQuant [61], and QuIP [7] serve as representatives of the four PTQ strategies in our taxonomy, owing to their superior performance and broad practical deployment in numerous released LLMs. All baselines perform channel-wise quantization and set up as their description.

Models To demonstrate the universality and generalizability of our benchmark, we select LLaMA family, the most influential and widely used open-source LLM family, for performance evaluation.

Specifically, this includes LLaMA-1 (7B to 70B) [65], LLaMA-2 (7B to 70B) [66], as well as LLaMA-3 and LLaMA-3.1 (8B and 70B) [16], covering a substantial range of model sizes. Unlike other benchmarks, we further broaden our scope to investigate the cross-modality and cross-structure capabilities of different PTQ strategies. Particularly, Mixtral [32], DeepSeeK-MoE [12] and Mamba [24] are used to evaluate cross-structure capabilities. LLaVA-1.5 [43] and VILA-1.5 [41] are employed to assess cross-modality capabilities.

Datasets For LLMs, MoE LLMs and Mamba, we evaluate the perplexity on WikiText2 [50] and C4 [57], and zero-shot accuracies on 9 commonsense reasoning tasks, including WinoGrande [58], Race [35], LAMBADA [54], PIQA [6], MMLU [28], CEval [30], GSM8K [11], HellaSwag [77] and ARC [10]. For MLLMs, we evaluate their visual-language reasoning abilities on VQA [3], GQA [31], VizWiz [26], ScienceQA [48], TextVQA [63], POPE [40], MMBench [45] and MMVet [74].

Implementation Details For all evaluated models, the calibration data consists of 128 random 2048 token-segments from WikiText2. Using a batch size of 1, the entire quantization and inference processes are implemented using PyTorch [56] package and deployed on 8 NVIDIA A800-80G GPUs. Codes for evaluation will be packed and open-sourced in the future.

B.2 Detailed Evaluation Results

In this section, we present the detailed perplexity and reasoning accuracy on specific tasks. Table 6, 7, 8 and 9 show the detailed results on LLaMA families (correspond to Table 1 and 2). Table 10 and 11 show the detailed results on MoE and Mamba LLMs (correspond to Table 3). Table 12 shows the detailed results on Multimodal LLMs (correspond to Table 4). Although our experimental evaluation is comprehensive and covers all major strategies of existing weight-only PTQ frameworks, the scale of the experiments limits us to evaluating only the most representative algorithms within each category and several latest baselines. We regard this as a limitation of this paper and will be fixed in our future work.

B.3 Full-precision Results of LLMs

In this section, we present the detailed full-precision perplexity and reasoning accuracy on specific tasks of all the evaluated LLMs. Table 13 shows the results on LLaMA families, MoE LLMs and Mamba LLMs. Table 14 demonstrates the results on VILA1.5 and LLaVA1.5 families.

C Analysis on Certain Scenarios

C.1 Why Saliency-based Strategy Collapses at 2-bit?

AWQ employs scaling hyper-parameters to adjust salient weight channels, but the scaling hyper-parameters are too small. Given that 2-bit quantization restricts weights to only 4 discrete values, most scaled salient weights will be ultimately mapped to the same quantization grid as their unscaled counterparts, making 2-bit AWQ almost degenerate into 2-bit naive RTN (round to nearest).

C.2 Why Optimization-based Strategy Collapses for LLaMA-3/3.1?

Compared with other strategies, OmniQuant’s optimization mechanism is particularly vulnerable to quantization error accumulation due to its reliance on quantized outputs from preceding layers as supervisory information for current-layer optimization. In fully trained LLMs like LLaMA-3/3.1, their pretrained weights carry higher information density so quantization will bring more negative impacts on them [33, 2]. This triggers a cascading effect: severe error accumulation degrades current-layer output validity, which in turn corrupts the quantization supervision for subsequent layers, ultimately creating a detrimental feedback loop.

C.3 Why Compensation-based and Rotation-based Strategies Demonstrate Robustness?

We summarize that compensation-based method (GPTQ) and rotation-based method (QuIP) demonstrate superior robustness at cross-structure, low-bit and cross training-level scenario in Section 3. Our analysis about this is as follows:

Table 6: Detailed performance of the four baselines on LLaMA models.

Models	Methods	WinoG	Race	Lamb-o	Lamb-s	PiQA	MMLU	CEval	GSM8K	HellaS	ARC-e	ARC-c	Wiki	C4
LLaMA-7B-w4	GPTQ	68.51	39.33	67.84	61.85	77.75	33.81	26.23	6.44	55.29	73.91	41.13	6.39	7.75
	OmniQ	68.67	39.33	71.92	65.36	78.45	32.52	25.78	8.79	55.86	74.45	39.93	5.87	7.34
	QuIP	69.85	39.43	70.54	61.56	77.31	28.53	23.63	5.53	54.28	72.39	37.71	6.37	7.84
	AWQ	69.93	39.43	73.10	66.21	77.86	32.30	25.11	8.19	56.41	75.04	40.96	5.78	7.21
LLaMA-7B-w3	GPTQ	60.22	34.83	55.97	47.08	71.82	23.10	23.40	1.97	45.51	61.24	29.52	8.63	9.95
	OmniQ	68.11	39.14	68.52	59.46	76.06	27.37	25.85	5.23	52.95	70.79	36.86	6.52	8.23
	QuIP	64.48	36.65	57.27	52.03	74.05	27.92	23.92	2.50	49.50	68.39	34.56	7.89	9.85
	AWQ	68.75	38.76	69.28	63.03	78.82	31.04	26.89	5.31	54.64	72.85	39.59	6.89	7.81
LLaMA-7B-w2	GPTQ	50.30	27.07	5.37	5.17	57.39	25.34	25.03	0.00	29.38	32.68	22.54	27.71	44.01
	OmniQ	53.75	28.42	15.51	10.27	63.33	23.80	23.63	0.00	36.50	42.38	22.78	26.66	32.88
	QuIP	52.41	32.25	23.68	12.77	63.76	25.25	24.67	0.08	36.25	52.61	25.34	15.26	26.06
	AWQ	49.49	22.10	0.00	0.00	52.72	22.95	23.03	0.00	25.36	25.46	22.53	2.6e5	2.9e5
LLaMA-13B-w3	GPTQ	71.11	39.33	72.64	64.54	77.80	37.24	25.78	9.55	57.48	73.65	42.32	5.63	7.16
	OmniQ	69.53	39.33	71.34	60.8	77.91	35.14	23.85	10.54	57.27	75.46	42.92	5.69	7.33
	QuIP	70.01	38.28	74.09	67.82	77.48	38.95	24.37	10.16	57.46	74.58	43.60	5.67	7.17
	AWQ	70.48	39.71	74.33	66.37	78.56	37.11	29.94	11.3	58.08	75.80	44.45	5.52	7.07
LLaMA-13B-w2	GPTQ	53.51	30.05	20.43	17.52	63.11	23.07	25.26	0.00	38.29	45.54	23.04	7.52	15.96
	OmniQ	56.20	32.73	23.40	17.85	67.14	23.57	23.03	0.76	42.06	59.47	29.52	13.36	18.89
	QuIP	58.72	34.64	37.94	24.55	69.31	24.09	22.88	0.45	41.07	54.76	27.22	12.18	13.02
	AWQ	48.62	22.01	0.00	0.00	53.16	26.89	26.30	0.00	25.60	26.18	22.87	2.8e5	2.3e5
LLaMA-30B-w3	GPTQ	74.27	39.81	74.42	68.64	79.76	51.60	29.49	25.55	61.41	78.58	47.78	4.89	6.50
	OmniQ	75.06	39.62	73.49	67.65	79.76	50.13	26.67	26.08	60.83	78.87	47.44	4.74	6.59
	QuIP	73.40	40.19	76.19	70.21	79.16	46.62	29.05	28.20	60.86	77.90	45.99	4.76	6.45
	AWQ	74.66	39.33	76.46	71.14	80.20	52.73	33.28	26.38	61.69	79.80	50.34	4.61	6.35
LLaMA-30B-w2	GPTQ	58.33	33.21	36.04	20.43	65.07	24.00	22.96	0.07	41.11	48.82	23.72	13.17	13.58
	OmniQ	58.17	34.93	41.88	31.75	70.78	24.15	23.03	1.36	43.98	64.60	31.74	8.79	14.77
	QuIP	63.30	35.69	52.45	36.64	72.42	26.22	23.85	0.15	45.64	58.80	30.20	9.36	10.97
	AWQ	50.43	22.78	0.00	0.00	52.72	26.89	26.30	0.00	25.43	24.87	23.38	2.4e5	2.4e5
LLaMA-65B-w3	GPTQ	76.24	41.24	77.76	73.45	80.58	56.15	32.54	38.74	62.89	79.92	49.83	4.16	6.04
	OmniQ	75.37	40.48	76.4	69.34	80.3	54.88	31.05	37.15	62.86	79.17	49.83	4.09	6.07
	QuIP	75.22	42.87	76.69	72.19	80.52	53.62	31.58	31.01	61.69	79.46	49.32	4.28	6.16
	AWQ	75.45	42.11	78.69	74.89	80.63	57.71	36.03	41.24	63.7	80.68	50.51	3.96	5.92
LLaMA-65B-w2	GPTQ	64.88	37.51	59.40	43.99	73.50	26.47	23.25	3.79	48.12	64.27	32.68	8.82	10.23
	OmniQ	59.35	37.61	56.61	39.10	73.78	24.39	23.40	2.27	50.46	69.74	34.22	7.69	11.04
	QuIP	68.67	38.09	63.44	54.22	75.73	31.14	26.60	6.90	52.99	69.11	36.09	7.19	8.61
	AWQ	51.14	23.35	0.00	0.00	53.05	25.51	25.56	0.00	25.59	24.87	22.44	7.4e4	7.5e4

Cross-structure robustness Unlike AWQ and OmniQuant, the pipeline of both GPTQ and QuIP don't depends on previous layers (e.g. fuse some hyper-parameters into previous layers) or quantized outputs from preceding layers, instead they make full concentration on the weights in current layer and full-precision outputs from preceding layers.

Low-bit and cross training-level robustness GPTQ achieves real-time dynamic compensation during its column-wise quantization process, where the more quantization error current weight column generates, the more compensation will be added to the remaining unquantized weights. This error-adaptive mechanism significantly reduces the overall quantization error across the entire weight matrix. QuIP employs random orthogonal matrices to preprocess model weights to enhance incoherence among weights so that the mutual interference post-quantization will be reduced. In addition, this preprocessing induces more uniform magnitude distributions along quantization directions, and the improved uniformity minimizes rounding errors during quantization, ultimately mitigating the performance degradation caused by quantization.

Table 7: Detailed performance of the four baselines on LLaMA-2 models.

Models	Methods	WinoG	Race	Lamb-o	Lamb-s	PiQA	MMLU	CEval	GSM8K	HellaS	ARC-e	ARC-c	Wiki	C4
LLaMA2-7B-w4	GPTQ	68.67	39.90	72.52	66.91	77.58	41.55	27.86	12.74	56.40	75.00	42.32	5.67	7.22
	OmniQ	68.82	40.00	70.72	64.08	76.93	32.67	28.60	9.93	55.67	74.12	40.70	5.74	7.36
	QuIP	68.22	39.38	70.43	62.86	76.59	31.90	27.45	8.74	55.58	73.87	39.78	5.88	7.61
	AWQ	68.35	39.71	73.53	67.18	77.53	40.86	28.08	13.34	56.43	75.84	42.66	5.60	7.12
LLaMA2-7B-w3	GPTQ	65.82	37.03	68.54	59.75	76.44	36.24	27.79	3.87	52.94	73.36	39.76	6.44	7.95
	OmniQ	65.51	39.14	65.46	51.76	74.65	32.80	26.45	5.91	52.41	71.00	38.14	6.62	8.62
	QuIP	61.09	31.00	28.06	27.44	65.45	22.94	23.03	1.44	44.81	56.57	25.68	18.66	20.44
	AWQ	68.11	40.10	70.33	63.63	76.33	32.32	28.53	7.58	54.77	73.95	41.89	6.24	7.80
LLaMA2-7B-w2	GPTQ	48.93	26.60	7.72	9.06	57.13	22.97	24.44	0.00	28.15	32.11	20.22	36.77	79.06
	OmniQ	51.54	27.37	3.98	1.47	57.40	22.95	23.03	0.00	30.11	38.89	20.73	37.32	78.76
	QuIP	51.07	27.56	11.20	4.77	59.25	22.97	23.18	0.00	32.85	35.40	20.73	35.27	52.22
	AWQ	49.57	23.06	0.00	0.00	52.39	25.51	25.56	0.00	25.74	24.75	20.99	2.2e5	1.7e5
LLaMA2-13B-w3	GPTQ	71.90	40.96	74.69	67.67	77.91	47.88	31.20	14.94	57.74	77.86	47.10	5.49	7.06
	OmniQ	69.38	40.96	70.64	60.66	77.97	46.07	28.53	15.09	57.45	76.60	43.34	5.58	7.39
	QuIP	69.69	40.67	73.98	65.52	77.31	44.92	29.94	16.00	57.71	75.38	42.66	5.61	7.16
	AWQ	71.74	40.10	75.16	67.07	77.20	45.14	32.62	17.36	58.57	77.82	45.48	5.32	6.95
LLaMA2-13B-w2	GPTQ	52.09	31.48	20.92	13.02	62.24	23.00	23.70	0.00	34.80	42.59	21.25	20.05	19.10
	OmniQ	52.17	30.81	20.07	10.17	62.89	22.95	23.11	0.00	40.16	48.23	24.66	17.22	27.74
	QuIP	55.72	31.58	33.86	22.67	65.45	23.76	23.03	0.61	39.65	51.56	25.85	13.75	14.71
	AWQ	47.99	22.39	0.00	0.00	53.26	26.89	26.30	0.00	25.81	23.04	23.04	1.2e5	9.5e4
LLaMA2-70B-w3	GPTQ	76.64	41.63	78.96	73.63	80.79	62.75	38.56	46.17	63.08	81.19	51.71	3.88	5.88
	OmniQ	75.22	42.68	78.05	72.58	80.30	60.41	37.30	44.81	62.40	81.36	53.24	3.93	6.06
	QuIP	75.06	40.29	78.98	73.51	80.52	60.36	38.48	41.39	60.43	79.08	49.49	4.28	6.21
	AWQ	75.53	41.63	79.49	74.85	81.72	63.57	42.87	48.52	63.56	82.07	54.01	3.74	5.81
LLaMA2-70B-w2	GPTQ	65.04	36.84	57.77	43.57	72.36	32.51	24.96	3.41	47.91	62.63	30.80	8.38	9.53
	OmniQ	56.51	37.61	47.89	25.34	68.77	30.35	22.51	2.20	44.08	59.64	28.16	8.01	11.70
	QuIP	70.88	39.04	65.77	54.55	75.63	30.98	23.25	12.89	51.64	70.54	37.97	6.94	8.46
	AWQ	49.17	22.39	0.00	0.00	52.34	24.65	25.11	0.00	25.47	25.88	22.53	7.2e4	6.5e4

Table 8: Detailed performance of the four baselines on LLaMA-3 models.

Models	Methods	WinoG	Race	Lamb-o	Lamb-s	PiQA	MMLU	CEval	GSM8K	HellaS	ARC-e	ARC-c	Wiki	C4
LLaMA3-8B-w4	GPTQ	72.69	40.00	74.54	66.56	79.54	60.30	43.98	44.05	59.41	78.66	48.72	6.56	9.36
	OmniQ	71.43	39.71	69.96	61.11	78.40	55.77	40.49	33.06	58.27	77.15	45.65	7.18	10.46
	QuIP	72.45	40.00	71.67	62.90	77.80	56.83	41.90	37.98	57.53	79.00	45.82	7.16	10.29
	AWQ	73.56	40.38	73.90	67.57	79.27	60.55	46.66	43.37	59.33	79.42	49.57	6.55	9.41
LLaMA3-8B-w3	GPTQ	71.11	39.23	69.40	58.24	73.34	52.15	27.41	17.89	55.49	71.17	38.65	9.39	12.28
	OmniQ	57.14	34.45	28.78	20.20	68.12	26.20	25.48	1.82	46.96	59.68	28.16	14.70	20.36
	QuIP	69.61	39.04	67.18	57.38	75.79	52.55	35.14	21.83	54.96	72.01	39.68	8.48	11.70
	AWQ	70.88	39.14	69.67	60.74	77.75	49.18	37.00	21.53	55.43	75.80	44.02	8.16	11.49
LLaMA3-8B-w2	GPTQ	52.80	24.21	0.97	0.17	52.01	23.92	24.07	0.00	27.10	24.83	20.90	934.03	361.33
	OmniQ	50.12	23.06	0.02	0.02	54.08	22.95	23.48	0.00	26.50	28.75	20.39	796.82	2.4e3
	QuIP	51.22	24.02	3.32	1.86	52.83	23.19	21.77	0.08	28.57	26.64	20.05	154.39	106.25
	AWQ	49.01	22.01	0.00	0.00	52.61	24.65	25.11	0.00	25.59	23.99	21.84	1.7e6	2.2e6
LLaMA3-70B-w3	GPTQ	62.04	23.64	26.78	58.55	53.26	71.16	52.90	0.00	50.46	26.60	20.22	5.88	8.44
	OmniQ	49.88	22.78	0.00	0.00	54.30	22.96	23.03	0.00	25.59	25.55	20.31	4.9e4	1.0e5
	QuIP	51.54	27.37	10.38	10.95	59.96	23.11	23.03	0.53	29.65	39.10	18.77	61.04	76.16
	AWQ	78.93	42.01	77.06	71.65	82.26	72.82	59.51	73.46	64.23	84.76	58.11	4.69	7.91
LLaMA3-70B-w2	GPTQ	57.30	33.01	25.60	17.81	56.04	24.17	23.92	0.00	39.90	32.83	18.60	21.64	25.21
	OmniQ	49.64	21.44	0.00	0.00	52.34	22.90	25.63	0.00	25.70	25.04	22.61	2.8e4	5.5e4
	QuIP	49.80	25.55	7.84	9.28	55.60	23.00	23.25	0.00	27.67	29.92	18.69	51.73	54.63
	AWQ	50.28	21.72	0.00	0.00	52.18	24.65	25.11	0.00	25.58	25.42	23.04	1.7e6	1.4e6

Table 9: Detailed performance of the four baselines on LLaMA-3.1 models.

Models	Methods	WinoG	Race	Lamb-o	Lamb-s	PiQA	MMLU	CEval	GSM8K	HellaS	ARC-e	ARC-c	Wiki	C4
LLaMA3.1-8B-w4	GPTQ	72.93	39.68	74.85	64.69	80.01	61.04	43.54	46.05	59.73	79.88	49.64	6.70	9.56
	OmniQ	70.48	38.47	68.60	60.70	78.94	57.83	43.09	35.41	57.84	78.87	47.53	7.19	10.41
	QuIP	72.69	39.71	67.82	59.38	78.89	57.76	43.39	39.73	57.76	77.95	47.53	7.32	10.40
	AWQ	73.56	39.62	74.36	65.81	80.09	60.80	47.10	45.34	59.44	80.98	50.51	6.66	9.52
LLaMA3.1-8B-w3	GPTQ	73.40	39.43	70.15	59.40	72.25	53.24	33.21	26.91	55.39	74.90	42.85	8.53	11.59
	OmniQ	60.14	37.03	35.46	28.43	71.27	34.85	25.78	4.78	49.78	67.47	33.70	12.30	17.57
	QuIP	70.25	37.70	69.20	59.50	77.15	53.02	37.89	23.73	55.62	77.65	43.86	8.36	11.50
	AWQ	71.03	39.90	68.83	58.99	77.86	54.14	37.22	25.40	55.38	77.23	44.54	8.23	11.58
LLaMA3.1-8B-w2	GPTQ	52.57	23.25	1.13	0.62	52.99	23.89	25.04	0.00	27.03	26.81	21.84	731.53	289.13
	OmniQ	51.14	23.06	0.14	0.04	56.42	22.95	24.22	0.00	26.79	28.84	18.26	538.42	1.2e3
	QuIP	49.80	25.55	3.20	1.73	56.26	23.09	25.33	0.00	28.54	28.07	19.71	294.35	213.72
	AWQ	48.86	21.53	0.00	0.00	52.18	24.65	25.11	0.00	25.62	24.24	22.18	1.6e6	1.9e6
LLaMA3.1-70B-w3	GPTQ	77.90	39.71	75.86	70.10	69.42	71.06	54.46	49.81	63.28	61.99	32.42	5.09	8.07
	OmniQ	50.99	22.11	0.00	0.00	51.63	23.22	24.89	0.00	25.74	25.25	22.01	2.9e4	3.9e4
	QuIP	56.04	27.56	17.99	18.67	64.85	24.52	22.51	1.29	32.80	50.21	22.53	18.99	27.19
	AWQ	77.82	40.77	76.93	70.89	81.23	71.55	58.25	71.87	63.72	83.80	58.02	4.81	7.97
LLaMA3.1-70B-w2	GPTQ	60.54	34.16	33.79	25.48	66.59	26.32	21.99	0.99	42.59	47.01	26.02	19.28	27.09
	OmniQ	48.46	20.96	0.00	0.00	51.14	23.10	24.44	0.00	25.47	25.51	21.25	8.1e4	2.4e5
	QuIP	49.96	28.90	4.95	5.67	58.92	23.05	23.03	0.45	30.72	36.45	19.28	40.35	44.80
	AWQ	49.41	21.44	0.00	0.00	52.07	24.65	25.11	0.00	25.61	25.46	22.87	1.8e6	1.5e6

Table 10: Detailed performance of the four baselines on MoE LLMs.

Models	Methods	WinoG	Race	Lamb-o	Lamb-s	PiQA	MMLU	CEval	GSM8K	HellaS	ARC-e	ARC-c	Wiki	C4
Mixtral-8 × 7B -w4	GPTQ	75.85	40.19	76.36	71.20	81.66	65.96	44.73	54.06	62.08	83.16	55.20	4.18	7.11
	OmniQ	75.45	40.38	76.36	70.35	81.72	65.46	44.80	53.53	63.15	83.33	54.95	4.18	7.20
	QuIP	57.46	28.13	13.93	12.13	67.25	23.42	22.21	1.06	33.47	56.90	27.22	27.01	33.83
Mixtral-8 × 7B -w3	GPTQ	72.38	39.52	72.46	64.23	80.03	59.66	34.55	35.63	60.53	80.26	50.17	4.99	7.86
	OmniQ	71.51	39.81	67.28	58.78	81.34	57.20	38.04	24.56	58.50	79.17	49.57	5.20	8.62
	QuIP	55.25	27.66	13.88	13.86	62.19	23.10	22.96	0.38	31.69	40.74	20.73	37.52	42.42
Mixtral-8 × 7B -w2	GPTQ	51.85	28.42	13.14	8.67	60.34	24.35	26.00	0.15	34.02	42.55	20.56	21.02	24.81
	OmniQ	49.72	22.49	0.00	0.00	52.18	22.97	23.03	0.00	25.96	26.68	21.33	3.4e3	6.0e3
	QuIP	48.70	24.69	1.82	2.97	55.39	22.98	24.37	0.00	27.55	29.55	20.73	142.09	168.18
DeepSeekMoE -16B-w4	GPTQ	68.59	38.85	72.06	67.81	79.54	37.12	31.43	14.56	57.56	76.26	44.03	6.65	9.25
	OmniQ	68.82	39.14	68.60	62.80	78.35	36.45	34.70	12.96	56.56	74.71	42.83	6.85	9.57
	QuIP	69.53	39.71	69.09	64.64	78.94	35.79	35.59	12.21	56.31	75.34	42.41	7.21	10.01
DeepSeekMoE -16B-w3	GPTQ	67.88	38.28	66.89	60.80	78.56	33.42	29.87	8.87	55.10	73.86	40.27	7.35	10.14
	OmniQ	65.43	35.69	59.56	51.99	77.04	24.87	25.85	5.23	53.99	72.05	37.29	8.01	11.23
	QuIP	68.98	37.41	68.66	59.36	77.09	34.51	31.35	9.55	54.24	73.40	41.47	7.58	10.36
DeepSeekMoE -16B-w2	GPTQ	53.20	28.61	10.63	1.26	62.73	24.75	26.52	0.30	33.30	40.28	23.12	55.45	42.75
	OmniQ	50.67	25.45	2.33	2.33	60.83	23.11	23.11	0.15	30.53	36.15	20.73	72.41	78.40
	QuIP	56.83	30.43	32.95	8.67	67.08	24.01	24.96	0.30	37.91	52.36	25.17	22.40	24.38

Table 11: Detailed performance of the four baselines on Mamba.

Models	Methods	WinoG	Race	Lamb-o	Lamb-s	PiQA	MMLU	CEval	GSM8K	HellaS	ARC-e	ARC-c	Wiki	C4
Mamba-1.4B -w4	GPTQ	59.35	33.30	64.06	55.79	73.39	25.24	22.96	2.05	44.19	64.35	29.61	11.24	14.24
	OmniQ	51.93	28.13	2.99	1.42	59.19	22.92	26.15	0.00	29.08	36.28	24.15	1.1e4	7.3e4
	QuIP	59.35	32.54	59.40	52.01	71.87	25.49	23.03	0.45	42.80	62.79	28.16	13.05	16.00
Mamba-1.4B -w3	GPTQ	57.06	32.25	53.66	45.95	71.93	26.79	22.96	0.99	41.61	60.06	28.67	13.96	17.31
	OmniQ	49.88	26.79	7.86	9.80	59.19	24.90	26.15	0.00	31.85	40.19	24.32	1.7e3	1.6e3
	QuIP	55.56	31.29	51.25	41.72	70.29	25.82	23.03	0.76	39.80	59.47	27.65	16.07	19.20
Mamba-1.4B -w2	GPTQ	51.38	24.50	2.64	1.11	58.05	23.93	22.66	0.00	29.04	35.23	21.33	1.2e3	577.89
	OmniQ	48.78	24.69	0.00	0.00	54.24	23.22	25.78	0.00	26.33	31.36	19.11	3.6e4	2.3e4
	QuIP	52.09	24.59	3.12	1.46	59.47	24.88	22.73	0.00	29.58	35.52	24.15	345.15	229.81
Mamba-2.8B -w4	GPTQ	64.17	32.63	67.53	60.64	74.65	25.56	24.74	1.29	48.53	68.86	33.96	9.88	12.71
	OmniQ	60.30	32.92	43.26	40.42	69.31	23.58	22.88	0.99	41.28	58.96	27.22	18.38	21.94
	QuIP	62.51	33.59	68.62	60.61	73.50	25.97	24.52	1.44	46.57	67.34	31.57	10.89	13.70
Mamba-2.8B -w3	GPTQ	62.59	33.49	63.24	55.00	73.72	25.76	23.18	0.76	46.75	65.91	31.83	11.92	14.78
	OmniQ	56.91	32.15	26.59	21.68	68.01	26.19	25.04	0.15	40.91	56.36	30.29	35.21	38.62
	QuIP	59.91	32.15	55.11	49.82	72.58	26.21	24.29	0.61	45.29	65.74	29.95	12.72	15.57
Mamba-2.8B -w2	GPTQ	49.25	25.26	0.37	0.37	57.34	25.22	23.25	0.00	28.45	35.23	19.88	854.82	537.60
	OmniQ	48.78	22.78	0.64	0.29	56.04	24.85	23.40	0.00	28.47	29.97	20.31	1.7e4	6.7e3
	QuIP	53.43	26.60	12.17	6.13	61.48	23.91	24.15	0.00	32.55	46.30	23.81	136.19	103.70

Table 12: Detailed performance of the four baselines on Multimodal LLMs.

Models	Methods	VQAv2	GQA	Vizwiz	ScienceQA	TextVQA	POPE	MMBench	MMBench-cn	MM-Vet	Avg.
LLaVA1.5-7B-w4	GPTQ	78.30	61.80	50.79	69.25	57.58	86.90	64.26	55.41	31.40	61.74
	OmniQ	77.80	61.44	49.28	68.12	56.30	87.40	62.89	54.73	33.50	61.27
	QuIP	78.00	61.65	49.77	68.30	57.43	87.20	62.47	54.07	33.00	61.32
	AWQ	78.20	61.73	49.27	69.75	57.67	87.00	64.18	56.70	33.20	61.97
LLaVA1.5-7B-w3	GPTQ	77.06	60.64	52.11	67.72	55.11	84.30	62.03	47.25	28.30	59.36
	OmniQ	76.21	58.07	52.54	62.70	51.98	81.30	59.71	42.78	27.20	56.94
	QuIP	74.50	57.51	53.07	62.61	49.71	87.50	46.31	44.60	29.80	56.18
	AWQ	77.43	60.48	53.61	66.73	55.97	85.80	64.95	52.66	29.20	60.76
LLaVA1.5-7B-w2	GPTQ	41.89	24.65	0.08	1.96	13.65	68.60	0.95	0.69	4.60	17.45
	OmniQ	0.11	0.00	0.00	0.75	0.87	68.00	1.29	1.63	4.80	8.61
	QuIP	47.26	30.83	19.76	20.77	18.45	71.40	4.81	1.80	8.10	24.80
	AWQ	0.00	0.00	0.00	0.00	0.00	68.00	0.00	0.00	0.50	7.61
LLaVA1.5-13B-w3	GPTQ	79.50	62.70	48.67	72.46	59.68	87.00	67.87	60.91	35.00	63.75
	OmniQ	78.80	62.01	50.82	70.55	58.23	89.20	64.52	54.73	32.60	62.38
	QuIP	79.20	62.60	54.45	71.87	59.70	87.90	67.87	58.85	33.70	64.02
	AWQ	78.80	62.69	52.99	71.78	59.84	88.50	67.78	60.05	34.30	64.08
LLaVA1.5-13B-w2	GPTQ	67.15	47.52	37.27	26.88	35.98	88.20	23.54	2.66	16.90	38.46
	OmniQ	0.01	0.00	0.00	0.00	0.00	68.00	1.46	0.77	0.00	7.80
	QuIP	72.40	56.25	50.30	38.65	41.93	76.00	44.76	11.25	18.80	45.59
	AWQ	0.00	0.00	0.00	0.00	0.00	68.00	0.60	0.43	0.90	7.77
VILA1.5-7B-w4	GPTQ	82.18	63.00	64.22	78.76	66.01	87.50	71.39	63.32	40.90	68.59
	OmniQ	81.91	62.95	62.80	78.14	65.69	86.80	70.96	61.77	38.40	67.71
	QuIP	81.22	61.53	56.56	73.38	63.09	87.40	66.15	45.96	36.40	63.52
	AWQ	82.17	63.26	63.87	79.01	65.95	87.80	71.65	63.23	40.00	68.55
VILA1.5-7B-w3	GPTQ	81.10	60.93	61.53	76.35	64.48	83.90	68.56	60.22	36.50	65.95
	OmniQ	80.88	61.58	59.83	74.53	63.27	86.10	67.01	56.62	38.50	65.37
	QuIP	77.11	53.50	47.34	51.29	53.35	81.40	45.19	5.93	36.00	50.12
	AWQ	81.38	62.09	62.06	76.75	64.06	85.80	68.04	58.33	38.20	66.30
VILA1.5-7B-w2	GPTQ	32.81	18.66	4.32	28.20	13.32	66.10	2.23	1.46	6.60	19.30
	OmniQ	40.97	15.88	9.51	2.00	16.09	74.90	4.98	0.34	15.20	19.99
	QuIP	60.13	38.20	23.80	25.47	20.48	79.20	0.86	0.17	16.50	29.42
	AWQ	0.00	0.00	0.00	0.00	0.00	68.00	0.00	0.00	0.00	7.56
VILA1.5-13B-w3	GPTQ	82.30	63.98	62.32	81.58	65.17	86.80	74.31	63.66	43.90	69.33
	OmniQ	80.60	60.35	62.37	78.07	65.00	89.90	70.88	61.94	40.00	67.68
	QuIP	82.20	62.98	63.44	80.92	66.12	86.90	73.02	63.23	41.80	68.96
	AWQ	82.30	63.17	61.75	81.75	66.29	89.20	73.97	66.24	44.50	69.91
VILA1.5-13B-w2	GPTQ	72.70	51.34	45.70	49.78	44.54	80.30	38.66	2.66	27.70	45.93
	OmniQ	0.15	0.00	0.10	0.21	1.75	67.90	1.03	0.26	4.10	8.39
	QuIP	76.30	55.70	46.53	63.17	50.16	82.60	56.01	25.43	31.70	54.18
	AWQ	0.00	0.00	0.00	0.00	0.00	68.00	0.52	0.69	0.00	7.69

Table 13: Detailed FP16 performance of all evaluated LLMs, MoE LLMs and Mamba LLMs.

Models	WinoG	Race	Lamb-o	Lamb-s	PiQA	MMLU	CEval	GSM8K	HellaS	ARC-e	ARC-c	Wiki	C4
LLaMA-7B	70.01	40.29	73.57	67.82	78.67	32.18	26.89	9.02	56.99	75.29	41.81	5.68	7.08
LLaMA-13B	72.77	39.62	76.15	71.08	79.16	43.48	24.44	17.13	59.92	77.36	46.42	5.09	6.61
LLaMA-30B	75.69	40.57	77.59	73.34	80.96	54.63	32.10	33.06	63.34	80.39	52.82	4.10	5.98
LLaMA-65B	77.35	41.53	79.10	74.89	81.34	59.37	38.93	46.85	64.57	81.36	52.82	3.53	5.62
LLaMA2-7B	69.06	39.52	73.86	68.23	78.07	41.84	29.87	13.57	57.14	76.30	43.34	5.47	6.97
LLaMA2-13B	72.14	40.57	76.77	70.33	79.11	52.10	36.85	23.12	60.04	79.46	48.46	4.88	6.47
LLaMA2-70B	77.90	42.58	79.58	74.69	82.21	65.46	44.28	53.30	64.79	82.70	54.35	3.31	5.52
LLaMA3-8B	73.24	40.29	75.65	68.72	79.54	62.23	48.44	50.87	60.14	80.09	50.17	6.14	8.88
LLaMA3-70B	80.66	42.01	79.33	73.94	82.32	75.20	64.56	80.14	66.29	86.78	60.41	2.86	6.73
LLaMA3.1-8B	73.95	39.04	75.45	67.13	80.14	63.35	49.03	49.28	59.99	81.40	51.54	6.27	8.99
LLaMA3.1-70B	79.72	40.19	78.75	73.86	82.86	75.32	63.37	80.52	66.44	87.21	60.92	2.83	6.70
Mixtral-8x7B	76.48	39.90	78.01	73.10	82.43	68.00	48.66	58.76	64.79	84.01	56.74	3.84	6.88
DeepSeekMoE-16B	70.09	39.23	72.97	69.36	78.89	37.79	35.81	16.45	58.04	76.05	44.54	6.51	9.05
Mamba-130m	52.49	27.37	44.23	33.86	64.53	22.67	23.03	0.76	30.81	47.98	19.80	20.66	22.82
Mamba-370m	55.17	29.67	55.58	47.25	69.48	22.89	22.59	0.61	37.19	55.05	24.91	14.34	17.28
Mamba-790m	56.12	33.01	61.42	54.18	72.09	23.77	23.85	1.29	42.31	61.15	26.45	12.04	14.94
Mamba-1.4B	61.40	34.35	64.91	56.72	74.10	24.87	22.88	0.99	45.03	65.49	29.78	10.76	13.61
Mamba-2.8B	63.14	33.78	69.09	61.32	75.19	26.45	23.77	1.74	49.49	69.78	34.39	9.46	12.28

Table 14: Detailed FP16 performance of all evaluated MLLMs.

Models	VQAv2	GQA	Vizwiz	ScienceQA	TextVQA	POPE-r	POPE-r	POPE-a	MMBench	MMBench-cn	MM-Vet
LLaVA1.5-7B	78.52	61.94	50.06	70.22	58.21	87.30	86.10	84.20	64.69	58.08	30.90
LLaVA1.5-13B	80.00	63.25	53.61	74.94	61.19	87.10	86.30	84.50	68.47	63.49	36.60
VILA1.5-7B	82.31	63.39	63.91	79.42	66.10	87.50	86.30	84.90	72.16	63.92	40.30
VILA1.5-13B	82.80	64.38	62.67	83.38	64.97	87.50	86.20	85.20	75.00	66.32	44.20