

XFP: Quality-Targeted Adaptive Codebook Quantization

with Sparse Outlier Separation for LLM Inference

Thomas Witt

Gemini Stiftung Leipzig

witt@gemini-stiftung.de

Code & Data: <https://github.com/flash7777/vllm/tree/multiquant>

Abstract

We introduce XFP, a dynamic weight quantizer for LLM inference that inverts the conventional quantization workflow: the operator specifies reconstruction quality floors on per-channel cosine similarity (one strict floor for attention and shared experts, one lazy floor for routed-expert MoE); XFP determines codebook size, outlier budget, and packing per layer automatically—no Hessian, no calibration data, no manual bit-width selection.

Each weight matrix is decomposed into a sparse fp16 outlier residual and a dense sub-byte index tensor into a per-group learned codebook (group size 128, configurable). The same auto-select frontend, the same outlier path, and the same fused decode kernel serve two codebook storage modes: **V2** (per-channel Lloyd codebook) and **V2a** (shared library of $L=32$ codebooks per layer, indexed per group). V2 is the headline configuration; V2a is an alternative trading codebook precision for ~ 1 KB constant per-CTA SMEM, useful where the activation-cache budget is tight.

Three contributions: **(C1)** The XFP quantizer with quality-targeted two-threshold auto-select, converging to ~ 3.97 effective bits on Qwen3.5-122B-A10B and to ~ 3.4 on Qwen3.5-397B-A17B under the H-Process (§6.3). **(C2)** Two codebook storage modes sharing one auto-select frontend and one fused decode kernel, covering 30B–397B on workstation-class GPUs without NVFP4 Tensor Cores. **(C3)** The H-Process: a quality-driven iteration over the two cosine thresholds that fits a 397B MoE into 2×96 GB at single-stream throughput exceeding INT4 with routed-expert pruning, without removing experts.

On Qwen3.5-122B-A10B under V2, XFP achieves 138 tok/s single-stream decode on workstation hardware (RTX PRO 6000 Blackwell, TP=2) at 94.49% GSM8K strict-match (3 seeds, $n = 3,957$), and is 49% faster than Marlin INT4 at TP=1. On Qwen3.5-397B-A17B under the H-Process at H1.5 ($\tau_{\text{strict}} = 0.96$, $\tau_{\text{lazy}} = 0.93$, ~ 3.4 effective bits), the same engine delivers 100.9 tok/s long-output decode at 66.72% GSM8K strict-match on the full 1,319-problem set (single seed at submission; multi-seed evaluation in progress).

1 Introduction

It was still snowing in Leipzig when we first tried to serve Qwen3.5-397B-A17B—a 397-billion-parameter Mixture-of-Experts model—on two freshly delivered RTX PRO 6000 Blackwell GPUs with 96 GB each. The uncompressed weights exceed 700 GB. At INT4 the model fits, but barely: KV cache is starved, context length is capped, and the quality loss from uniform 4-bit quantization is substantial. We tried aggressive quantization, expert pruning, and combi-

nations of both. The result was consistent: below a certain compression threshold, output quality collapses. The question that drove this work was not *how* to quantize—GPTQ, AWQ, and others have solved that—but *why the quality loss at 4 bits is as large as it is*.

Today’s quantization landscape offers two paradigms: **linear** quantization (the INT- N family), which maps weights to a uniform grid scaled by a single factor, and **logarithmic** quantization

(NVFP4 and related formats), which uses a fixed non-uniform codebook whose entries follow a floating-point-like spacing. Both add per-group or per-block scaling to absorb magnitude variation. Both apply the same grid—linear or logarithmic—to every layer, every expert, every projection matrix in the model. Weights, activations, KV cache: everything is forced through the same representational template.

Once this uniformity is acknowledged, the quality loss is unsurprising. A weight distribution with catastrophic outliers at 49σ (as we observed in GLM-4.7-Flash attention) and a weight distribution with a tight Gaussian bulk (as in the same model’s routed experts) receive the same codebook. The outlier-dominated layer wastes most of its representational budget on a range that contains 0.3% of its weights; the well-behaved layer is over-provisioned with entries it does not need.

We then looked at NVIDIA’s NVFP4—announced with considerable fanfare as a “4-bit floating-point” format with dedicated Tensor Core support on Blackwell. Upon inspection, the mechanism is straightforward: a fixed 16-entry codebook lookup. The same 16 values for every layer, every model, every architecture. The “floating point” in the name refers to the codebook entries, not to the representation. On our RTX PRO 6000 (SM120), the dedicated Tensor Core path for NVFP4 is unavailable—that hardware acceleration is reserved for datacenter Blackwell (SM100+). So we were left with a format that promises hardware support we cannot use and a universal codebook that ignores the distributions we can see.

This led to a straightforward idea: if the underlying primitive is a codebook lookup, why not learn the codebook *individually*—one per layer, one per group of output channels—from the actual weight distribution? And if the codebook is learned, why fix its size to 16 entries when some layers need only 4 or 8? XFP is our answer: a quantizer that learns a per-layer codebook of adaptive size, separates outliers into a sparse residual, and lets the operator specify quality rather than bit width.

Three structural problems in existing approaches frame the design:

P1—The Outlier Problem. Transformer weight matrices exhibit heavy-tailed distributions. A small fraction of weights (typically 0.3–2%) occupy a magnitude range far exceeding the bulk. Linear INT- N quantization accommodates this range in a single scale factor, degrading resolution for the dense cen-

tral region. At $N = 2$, outlier-driven scaling leaves effectively one usable non-zero level for the bulk.

P2—The MoE Heterogeneity Problem. In Mixture-of-Experts (MoE) models, individual experts and component classes exhibit distinct weight distributions. Routed experts are empirically more tolerant of coarse quantization than attention or shared experts; a single global quality floor cannot exploit this asymmetry.

P3—The Codebook-Storage Problem. A per-channel learned codebook occupies kernel shared memory in proportion to the output dimension; on workstation-class GPUs with 99 KB SMEM/CTA this caps the activation-row cache and forces an early split- K , limiting the reachable model size at single-stream decode.

1.1 Design Principle: Quality as Constraint

Existing quantization formats require the operator to choose a target bit width and accept whatever quality results. XFP inverts this: the operator specifies two **reconstruction quality floors** on per-channel cosine similarity—a strict floor for attention and shared-expert projections, a lazy floor for routed-expert MoE—and XFP determines the minimum bit width per layer that meets the relevant floor. Weights not captured by the codebook are separated into a sparse fp16 outlier residual.

Three consequences follow: (1) bit width becomes a per-layer derived quantity; (2) the outlier residual is not a heuristic add-on but the structural complement guaranteeing the quality floor; (3) the same algorithm adapts to different models without manual tuning, with the threshold gap as the single operator-tunable knob trading memory against quality on a fixed deployment target.

1.2 MultiQuant

XFP is developed within MultiQuant, a component-level quantization engine for vLLM [Kwon et al., 2023]. MultiQuant maintains independent precision policies per component class (attention, routed experts, shared experts, LM heads) through registry-based dispatch. This per-component architecture enables XFP’s sub-4-bit operation: at 3 or 2 bits, the margin between “works” and “collapses” is determined by the worst-case component class.

1.3 Contributions

(C1) A Dynamic, Quality-Targeted Quantizer.

The operator specifies two quality floors; XFP determines everything else—codebook size, outlier budget, packing—per layer, with a single auto-select frontend driving both supported codebook storage modes (§3–5).

(C2) Two Codebook Storage Modes, One Engine.

A per-channel Lloyd codebook (**V2**) and a per-group shared-library codebook (**V2a**) share the same outlier path, the same two-threshold auto-select, and the same fused decode kernel skeleton—covering the 30B–397B parameter range on workstation-class GPUs without NVFP4 Tensor Cores.

(C3) The H-Process: Constrained Compression on 397B.

A quality-driven iteration over the two cosine thresholds fits Qwen3.5-397B-A17B (512 routed experts/layer) on a 2×96 GB workstation at ~3.4 effective bits, retaining the full expert population, at 100.9 tok/s single-stream decode and 66.72% GSM8K strict-match on the full 1,319-problem set (§6.3).

2 Related Work

Linear quantization. Round-to-nearest (RTN) with per-group or per-channel scaling is the simplest post-training quantization scheme. GPTQ [Frantar et al., 2022] improves on RTN via column-wise quantization with Hessian-based error compensation, yielding substantially better perplexity at the cost of calibration data and $O(d^2)$ compute per layer. AWQ [Lin et al., 2023] identifies salient weight channels via activation statistics and applies per-channel scaling before quantization; it avoids the Hessian but still requires calibration data. Both operate in the linear INT- N paradigm—the codebook is implicitly a uniform grid, and outliers are handled through scale adjustment or error compensation, not separation.

Intel’s AutoRound [Cheng et al., 2024] takes a different approach: it optimizes weight rounding decisions via signed gradient descent on a small calibration set, achieving near-lossless INT4 quality in minutes. Independent benchmarks [Marie, 2025] show AutoRound INT4 consistently matching or exceeding NVIDIA’s own NVFP4 format in accuracy on identical models—a notable result given that NVFP4 has dedicated hardware support.

Codebook-based and non-linear quantization.

AQLM [Egiazarian et al., 2024] represents each weight vector as a sum of entries from multiple learned codebooks (typically 2), achieving strong results at 2 bits but requiring expensive calibration-data-driven multi-codebook optimization. QuIP/QuIP# [Chee et al., 2023, Tseng et al., 2024a] use random orthogonal transforms (incoherence processing) to spread outlier energy across all weights before quantization, achieving excellent 2-bit results at the cost of Hessian computation and a decode-time transform. QTIP [Tseng et al., 2024b] extends QuIP# with trellis-coded quantization for near-optimal rate-distortion at 2 bits.

SqueezeLLM [Kim et al., 2023] and SpQR [Dettmers et al., 2023a] are conceptually closest to XFP: both decompose weight matrices into a sparse high-precision component (for outliers or salient weights) and a dense low-precision component. The key difference is the identification criterion: SpQR uses the Hessian to determine which weights are “sensitive”; XFP uses the weight distribution itself ($|w - \mu| > k\sigma$), eliminating the Hessian entirely. SpQR’s dense component uses a fixed linear quantizer; XFP replaces it with a per-group learned codebook (group size 128 by default, configurable).

Expert pruning for MoE deployment. For very large MoE models that exceed a target memory envelope, an orthogonal family of methods reduces the routed-expert population rather than the per-weight precision. REAP [Lasby et al., 2024] identifies low-utility experts from a calibration set and removes them permanently. The approach is effective but introduces a sensitivity to the calibration distribution: experts deleted offline may have been load-bearing for a workload the calibration set did not represent. The authors’ REAP-it-Yourself (RIY) workflow addresses this by letting operators run the identification pass on their own traffic, producing deployment-specific expert profiles; a paper on RIY is in preparation separately. We compare to REAP/RIY as an alternative deployment path for the 397B case (§6.3): XFP+H trades per-weight bits for memory; REAP/RIY trades expert population for memory. Both are valid responses to the same constraint.

Hardware-specific formats and NVIDIA’s quantization ecosystem. NVIDIA has invested heavily in format-level quantization support across several generations. FP8 (E4M3/E5M2)

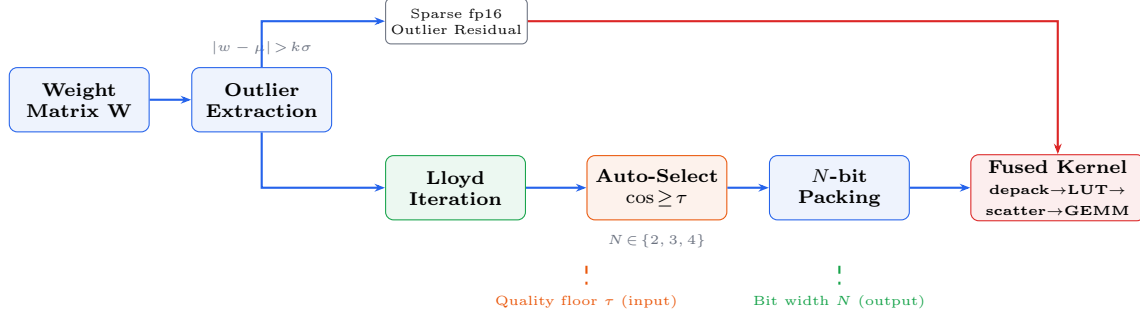


Figure 1: **XFP pipeline overview.** The operator specifies a quality floor τ ; XFP determines everything else. Outlier extraction separates high-magnitude weights into a sparse fp16 residual. Lloyd iteration learns a per-layer codebook on the cleaned bulk distribution. Auto-select (Algorithm 1) tests candidate codebook sizes and picks the minimum N meeting τ . The fused decode kernel reconstructs weights at inference via codebook gather + outlier scatter-add.

is supported on Hopper (SM90+) and Blackwell; NVFP4 [NVIDIA, 2024] adds a fixed 16-entry codebook with dedicated Tensor Core acceleration on datacenter Blackwell (SM100+). MXFP4/MXFP6 [OCP, 2023] (OCP Microscaling) provide block-scaled floating-point with shared exponents.

On workstation Blackwell (SM120/121), NVFP4 support was initially absent despite NVIDIA’s launch-day marketing. The CUTLASS NVFP4 MoE kernels failed on SM120 due to TMA work-sharing grouped-GEMM initialization errors; FlashInfer did not compile for the `sm120f` family target required for the FP4 conversion PTX instruction; and vLLM’s backend selection did not recognize SM120 as NVFP4-capable, falling back silently to Marlin INT4. Community-contributed patches to vLLM, FlashInfer, and the CUTLASS dispatch logic were required before NVFP4 checkpoints could run at all on RTX PRO 6000 or DGX Spark hardware. Even after these fixes, the native NVFP4 Tensor Core path on SM120 underperforms the Marlin W4A16 fallback on MoE workloads, as the grouped-GEMM specialization remains incomplete.

The software side is equally active: NVIDIA’s TensorRT Model Optimizer [NVIDIA, 2024b] bundles SmoothQuant, AWQ, and—since 2025—NVFP4 PTQ and QAT pipelines. Despite this investment, independent evaluations consistently find that NVFP4’s fixed universal codebook underperforms calibration-aware methods (AutoRound, AWQ) in accuracy at the same bit width. The format’s advantage is throughput via Tensor Core acceleration—an advantage unavailable on the workstation tier where memory pressure is most acute.

Inference kernels and practical deployment.

Marlin [Frantar & Alistarh, 2024] is the most optimized INT4 dequantization kernel for NVIDIA GPUs, using a 128-thread warp-level tile structure with cooperative shared-memory staging. It serves as our primary throughput reference. The llama.cpp project [Gerganov et al., 2023] provides block-level codebook quantization (Q2_K through Q6_K) for CPU inference—the closest practical precedent to per-block codebook quantization at deployment scale, though with fixed rather than learned codebooks and without outlier separation.

XFP is integrated into vLLM [Kwon et al., 2023] via the MultiQuant engine, which provides per-component-class quantization dispatch (§2, MultiQuant).

Positioning. XFP trades the rate-distortion optimality of Hessian-aware methods for a different optimization target: where GPTQ/AQLM/QuIP# produce the best reconstruction at a *given* bit width, XFP takes a quality floor as input and finds the *minimum* compression meeting it—automatically, per layer, without calibration. Where NVFP4 offers hardware-accelerated throughput with a universal codebook, XFP offers software-defined throughput with a learned codebook—and achieves higher throughput on workstation hardware where NVFP4’s Tensor Core path is unavailable.

Table 1: Positioning of XFP vs. existing methods.

	GPTQ	AQLM	QuIP#	SpQR	NVFP4	XFP
Learned CB	—	✓	—	—	—	✓
Hessian-free	—	—	—	—	✓	✓
Calib.-free	—	—	—	—	✓	✓
Outlier sep.	—	—	—	✓	—	✓
Auto bit sel.	—	—	—	—	—	✓
HW-agnostic	✓	✓	✓	✓	—	✓
MoE-native	—	—	—	—	—	✓

3 The XFP Format

3.1 Decomposition

XFP represents a weight matrix $\mathbf{W}$ as:

$$\mathbf{W} \approx \mathbf{W}_{\text{outlier}} + \text{Codebook}[\mathbf{Q}_{\text{bulk}}] \quad (1)$$

where $\mathbf{W}_{\text{outlier}}$ is a sparse fp16 matrix of high-magnitude weights at their original positions, and $\mathbf{Q}_{\text{bulk}}$ is a dense N -bit index matrix into a learned Codebook. The XFP engine supports two codebook storage modes behind a single auto-select frontend and a single fused decode kernel skeleton:

- **V2: per-channel codebook.** One independent fp16 codebook of 2^N entries per output channel, learned via per-channel Lloyd iteration. Supports $N \in \{2, 3, 4, 5, 6\}$.
- **V2a: shared codebook library.** A small fp16 library of L codebooks (default $L=32$) per layer; each weight group (default 128 contiguous weights along the output dimension) is assigned the best-fitting library entry. Supports $N \in \{2, 4\}$ (§3.4).

V2 is the production format for the 30B–122B reference experiments (§6); V2a is the format that brought a 397B MoE into single-node 2×96 GB deployment (§6.3).

3.2 Storage Layout

Per layer, V2 stores: packed bulk indices (N bits/weight), codebook (fp16, 2^N entries per output channel), and outlier triples (row index int64, column index int64, value fp16 = 18 bytes/outlier). At the default 2% outlier cap, outlier storage adds 0.36 bytes/weight.

V2a replaces the per-channel codebook by a per-layer library of L codebooks (fp16, 2^N entries each, $L=32$) plus a 5-bit group→library assignment, one assignment per 128-weight group along the output dimension. The per-group overhead is amortized across 128 weights: ~ 0.31 bits/weight for the assignment, group-scale, and mid-point. Across $N \in \{2, 4\}$

Table 2: XFP sub-byte packing schemes. V2 supports all listed N ; V2a imposes the additional constraint that $\text{LANES_PER_GROUP} = \text{group_size} / \text{values_per_word}$ be an integer with $\text{warpSize} \bmod \text{LANES_PER_GROUP} = 0$. At the default group size of 128 this selects $N \in \{2, 4\}$: $N = 3$ fails $128 \bmod 10 \neq 0$; $N = 5, 6$ exceed the warp-wide LUT budget (§3.4).

N	Vals/word	Word	Used	Reserve	V2	V2a
2	16	uint32	32	0	✓	✓
3	10	uint32	30	2	✓	—
4	8	uint32	32	0	✓	✓
5	3	uint16	15	1	✓	—
6	5	uint32	30	2	✓	—

this gives effective bit widths of ~ 2.31 (V2a at $N=2$) and ~ 4.31 (V2a at $N=4$) per parameter, before the sparse outlier residual.

3.3 Sub-Byte Packing

3.4 V2a: Shared Codebook Library

V2a is an alternative storage mode in which the per-channel codebook is replaced by a shared library at the layer level. Where V2 stores one codebook of 2^N entries per output channel, V2a stores a library of L codebooks (default $L=32$) per layer and a 5-bit group→library assignment per 128-weight group. The motivation is SMEM efficiency on workstation-class GPUs (99 KB opt-in SMEM per CTA on SM120/121, less than half the budget of data-center SMs): the V2 per-channel codebook occupies SMEM in proportion to the output dimension, while a V2a library of $L=32$, $N=4$ codebooks takes $32 \cdot 16 \cdot 2 \text{ B} = 1 \text{ KB}$ regardless of dimension. The freed budget extends the activation-row cache from $K \leq 8,192$ (V2 without split- K) to $K \leq 32,768$ on SM120/121.

V2 with split- K dispatch handles $K > 8,192$ as well at a 10–20% single-stream latency cost (§5); V2a is the alternative that avoids the split- K overhead at the cost of slightly lower codebook precision per group. On the 397B Front B deployment (§6.3), V2 with split- K is the headline configuration; V2a serves the same workload with equivalent functionality and lower single-stream throughput, and we report V2 numbers for clarity.

Library learning. Per layer, we collect the per-channel Lloyd codebooks that V2 would produce, then run a second Lloyd pass over the codebooks

themselves to condense them into a library of $L=32$ representative codebooks (*LibFit*). Each 128-weight group is then re-indexed to the closest library entry under a per-group scale and mid-point.

Lane geometry. The decode kernel walks 128-weight groups with LANES_PER_GROUP = 128/values_per_word threads of the warp per group, and CB_PER_ITER = 32/LANES_PER_GROUP groups per warp iteration. For $N=4$ this gives LANES_PER_GROUP=16, CB_PER_ITER=2; for $N=2$, LANES_PER_GROUP=8, CB_PER_ITER=4. $N=3$ fails the integer constraint at $g=128$ ($128 \bmod 10 \neq 0$) and would require a separate $g=80$ pack path (deferred); the group size itself is a tunable parameter not further explored in this work.

4 Encoding and Auto-Selection

4.1 Outlier Extraction

For each weight matrix $\mathbf{W}$: compute μ, σ ; extract weights where $|w - \mu| > k\sigma$ (default $k=4.0$, capped at 2%) into a sparse fp16 residual; replace extracted positions with μ in the bulk.

4.2 Learned Codebook via Lloyd Iteration

Initialize 2^N codebook entries via CDF-uniform quantiles of the bulk distribution; iterate 20 rounds of assignment (nearest-neighbor) and centroid update (conditional mean). The codebook is stored as fp16 per output channel.

4.3 Quality-Targeted Auto-Selection

Auto-mode tests codebook sizes in ascending order and returns the first achieving the active quality floor. The candidate set is $\mathcal{N} = \{2, 3, 4\}$ for V2 and $\mathcal{N} = \{2, 4\}$ for V2a (§3.4). The gate uses **per-channel cosine similarity**, aggregated via **median**—not mean (sensitive to outlier channels) or min (overly conservative at $N=2$).

Two thresholds, two regimes. A single global threshold (the earlier XFP convention, $\tau=0.98$) sufficed for 35B and 122B under V2 because $\mathcal{N}$ contained the intermediate option $N=3$: routed experts landed at xfp3, attention escalated to xfp4, no

Algorithm 1 XFP Auto-Select (two-threshold)

Require: Weight matrix $\mathbf{W}$, layer class c , candidate set $\mathcal{N}$, strict floor τ_{strict} , lazy floor $\tau_{\text{lazy}} \leq \tau_{\text{strict}}$

- 1: Extract outliers, compute $\mathbf{W}_{\text{bulk}}$
- 2: $\tau \leftarrow \tau_{\text{lazy}}$ if $c \in \text{MoE}_{\text{routed}}$ else τ_{strict}
- 3: **for** $N \in \mathcal{N}$ in ascending order **do**
- 4: $\text{cb} \leftarrow \text{LearnCodebook}(\mathbf{W}_{\text{bulk}}, 2^N)$ {V2: per-channel Lloyd; V2a: LibFit}
- 5: $\hat{\mathbf{W}} \leftarrow \text{Reconstruct}(\text{cb}, \mathbf{W}_{\text{outlier}})$
- 6: $\text{cos}_i \leftarrow \text{cos_sim}(\mathbf{W}_{i,:}, \hat{\mathbf{W}}_{i,:}) \forall i$
- 7: **if** $\text{median}(\text{cos}) \geq \tau$ **then**
- 8: **return** N
- 9: **end if**
- 10: **end for**
- 11: **return** $\max(\mathcal{N})$ {fallback}

class was forced to choose between coarse and excessive precision. V2a removes the $N=3$ slot (packing constraint, §3.4); on the 397B MoE this collapses auto-select to a binary choice between ~ 2.31 and ~ 4.31 effective bits per parameter for every layer class. Routed experts are empirically more robust to coarse quantization than attention or shared experts, but with a single threshold the binary choice forces 100% xfp4 (memory infeasible at 2×96 GB) or near-100% xfp2 (math collapses).

The two-threshold split decouples the regimes. τ_{strict} governs attention, linear-attention and shared-expert projections; τ_{lazy} governs the routed-expert path. The threshold gap controls the routed-expert xfp2/xfp4 mix and is the single parameter operators tune to trade memory against quality on a fixed deployment target (§6.3, Table 10). The strict floor defaults to 0.96 and the lazy floor to 0.93; we configure them via the environment variables XFP_MIN_COS_STRICT and XFP_MIN_COS_LAZY. The two-threshold mechanism is engine-wide: V2 and V2a use the same dispatch.

Why cosine similarity, not MSE. MSE is magnitude-sensitive; cosine similarity is direction-sensitive. In a GEMM ($\mathbf{y} = \mathbf{x} \cdot \mathbf{W}_{\text{col}}$), directional preservation matters more—activations absorb magnitude scaling via learned norms. Empirically, XFP2 on routed experts has $12\times$ higher MSE than XFP4 with identical math accuracy.

MoE sampling. For MoE layers with E experts, auto-select runs on 4 concatenated experts (not the full population). Offline validation on three models confirms: 0% disagreement on GLM (64 experts)

Table 3: Auto-mode convergence on GLM-4.7-Flash.

Component	Layers	Auto-selected
Attention	235	233×xfp3, 2×xfp4
Routed (64×)	46 groups	46×xfp3
Shared	92	92×xfp3
Total	~375	~3.0 eff. bits

and Qwen-35B (256), 11.5% on Qwen-122B (256)—with zero math impact from disagreements due to the sparse outlier path absorbing the error. We retain the 4-expert sample for V2a; on Qwen-397B (512 experts/layer) the auto-select cost is dominated not by sampling but by Lloyd convergence: the V2a MoE-LibFit benefits from a higher iteration budget (`XFP_MOE_LLOYD_ITERS` = 20 vs the V2 default of 5), since under-converged centroids systematically under-estimate xfp2 quality and bias auto-select toward xfp4.

4.4 Auto-Selection Results

On Qwen3.5-122B, auto-mode selects XFP3 for GatedDeltaNet and shared layers but XFP4 for routed experts (~3.97 eff. bits). The algorithm is identical; different models produce different—and appropriate—profiles.

4.5 Encoding Cost

Auto-mode bit-width selection (Algorithm 1 on 4 sampled experts per MoE layer) completes in under one minute. Full quantize-on-load — Lloyd codebook fitting (V2) or LibFit (V2a), outlier extraction, and sub-byte packing for all layers — takes ~10 minutes for Qwen3.5-35B-A3B and ~25 minutes for Qwen3.5-122B-A10B under V2, and ~30 minutes for Qwen3.5-122B-A10B and ~55 minutes for Qwen3.5-397B-A17B under V2a, on an RTX PRO 6000. Packed weights are cached to disk; subsequent loads are I/O-bound. By comparison, GPTQ requires comparable or longer calibration times with additional data-dependency.

5 Fused Decode Kernel

The decode kernel fuses four operations per layer forward pass: (1) depack N -bit indices to int8; (2) codebook gather from shared memory; (3) sparse outlier scatter-add (fp16→bf16); (4) bf16 GEMM via Tensor Cores. The codebook is loaded into SMEM

once per thread block, making the kernel bit-width-portable: the same gather path serves $N=2$ through $N=6$ in V2 and $N \in \{2, 4\}$ in V2a.

The kernel operates natively in bf16 for both activation input and output, eliminating the bf16→fp16→bf16 conversion overhead that earlier prototypes showed added 124% per call. It is wrapped as a `torch.library.custom_op` for `torch.compile` compatibility and CUDA Graph capture.

Activation-row caching. For $M = 1$ decode (the dominant autoregressive regime), the kernel caches the full K -dimensional activation row in shared memory once per CTA, then iterates output groups with codebook lookups against the cached row. This eliminates repeated global-memory reads of the activation—the dominant traffic at $M = 1$. The reachable K is bounded by the shared-memory budget per CTA after the codebook itself is loaded, which on SM120/121 is 99 KB of opt-in SMEM. Under V2 the per-channel codebook scales with the output dimension; once an activation row of $K = 8,192$ in bf16 is resident, the remaining SMEM is fully consumed. For $K > 8,192$ the V2 kernel dispatches a split- K variant that partitions the activation row across multiple CTAs at a ~10–20% single-stream latency cost. This is the default path for the linear-attention projections of Qwen3.5-397B-A17B and is what carries Front B (§6.3).

V2a: an alternative for $K > 8,192$. The V2a shared codebook library (§3.4) takes ~1 KB of SMEM regardless of output dimension, extending the single-CTA activation cache to $K \leq 32,768$ on SM120/121 without split- K . It is an alternative to the V2 split- K path: V2a avoids the partition overhead at the cost of slightly lower per-group codebook precision (one library entry per group instead of one codebook per channel). On the 397B Front B workload, V2 with split- K delivers modestly higher single-stream throughput than V2a; we use V2 for the headline numbers and report V2a as an option. The V2a kernel ships in three dispatched variants (split- N for the $M = 1$ decode path; split- M for batched prefill at $M \geq 16$; split- K for $K > 8,192$), all sharing the V2 depack, gather, outlier-scatter, GEMM skeleton.

Performance. On Qwen3.5-122B-A10B (RTX PRO 6000 Blackwell, TP=2), the V2 fused kernel delivers 138 tok/s single-stream decode at ~3.97 effective bits (§6). On Qwen3.5-397B-A17B at TP=2

with V2 plus split- K dispatch under the H1.5 quality profile (§6.3) the kernel delivers 98.2 tok/s at medium prompts and 100.9 tok/s at long prompts; the absolute throughput reflects the model being $3.3\times$ larger by parameter count combined with the split- K partition overhead on linear-attention rows. At $M = 1$ the kernel remains memory-bandwidth bound; XFP’s lower effective bit width reads fewer weight bytes per token than INT4, which is the structural source of its throughput advantage on the 122B and 397B headline workloads (§6).

6 Experiments

6.1 Setup

Platforms. Two workstation-class Blackwell platforms: (i) **NVIDIA DGX Spark** (GB10, SM121, 120 GB unified memory), single-GPU; (ii) **RTX PRO 6000 Blackwell** (SM120, 2×96 GB), with TP=2. Native NVFP4 Tensor Core paths on SM120/121 required community fixes to vLLM, FlashInfer, and CUTLASS dispatch and remain incomplete on grouped-GEMM MoE workloads (§2); XFP targets the bf16 SM path on this tier, which is what is reliably available.

Models. GLM-4.7-Flash (30B, MoE-64, pure self-attention), Qwen3.5-35B-A3B (35B, MoE-256), Qwen3.5-122B-A10B (122B, MoE-256, hybrid GatedDeltaNet + self-attention) under V2; Qwen3.5-397B-A17B (397B, MoE-512, hybrid GatedDeltaNet + self-attention) under V2a. All served via quantize-on-load.

Evaluation. For sample-size-sensitive accuracy claims, we use **lm-eval-harness 0.4.11** [Biderman et al., 2023]: GSM8K, 5-shot, **flexible-extract** and **strict-match**, 1,319 problems per seed, 3 seeds per configuration. For internal regression tracking and quick model-development feedback we also use **bench.py**: deterministic (seed=42), 5 performance rounds, 50 GSM8K-style problems.

FP8 KV-cache and LM-head qualification. All XFP configurations use fp8 KV-cache and fp8 LM-head. To verify this introduces no confounding accuracy loss, we measured the BF16 baseline of Qwen3.5-35B-A3B under both bf16 and fp8 KV/LM-head pipelines: 76.12% vs 76.35% GSM8K strict-match ($\Delta = 0.2$ pp, within single-seed variance). The fp8 infrastructure path is accuracy-neutral.

Table 4: XFP auto-mode (V2, $\tau_{\text{strict}} = 0.96$, $\tau_{\text{lazy}} = 0.93$). GSM8K via lm-eval-harness 0.4.11 (5-shot, 1,319 problems, 3 seeds, mean $\pm$ std). Throughput is single-stream wall-clock decode at 1,500 output tokens.

Model	Eff. bits	tok/s	GSM8K strict
Qwen 122B ^a	~ 3.97	138	94.49$\pm$0.57
Qwen 122B ^b	~ 3.97	110	94.62 $\pm$ 0.67
Qwen 35B ^b	~ 4.0	37	77.18 $\pm$ 0.72

6.2 Front A: Quality-Validated Deployment (V2)

Front A reports paper-grade GSM8K under the V2 per-channel codebook on models that fit comfortably within the workstation memory envelope. The operative question is quality: how well does two-threshold auto-select preserve accuracy against the best available 4-bit calibration-aware baseline (AutoRound INT4 via Marlin)?

^aRTX PRO 6000 Blackwell, TP=2. ^bRTX PRO 6000 Blackwell, TP=1.

Auto-mode adapts to model structure: on Qwen-122B-A10B routed experts require XFP4 due to broader distributions (~ 3.97 eff. bits); on Qwen-35B and GLM-4.7-Flash the same algorithm converges differently according to per-layer cosine similarity (Table 3).

6.2.1 Why Auto-Select Converges Differently per Class

Auto-mode’s per-class bit-width choices reflect the underlying weight distributions, not a hand-coded policy. Routed experts (95% of MoE parameters) tolerate XFP2 quantization with no measurable accuracy degradation against an XFP4 baseline; the sensitivity bottleneck is in attention and shared-expert projections. This is consistent with the per-layer reconstruction data (Table 5): routed experts show $\Delta\cos < 0.001$ from outlier extraction—near-Gaussian bulk distributions that a small codebook covers adequately. The two-threshold auto-select (§4) is the mechanism that exploits this asymmetry without operator intervention.

6.2.2 Outlier Extraction Ablation

Outlier extraction is decisive for attention ($1.9\times$ MSE improvement) but negligible for routed experts ($+0.0003$ cos). Cross-model: comparing GLM-4.7-Flash with Qwen3.5-35B-A3B, GLM concentrates catastrophic outliers (49σ) in `kv_a.proj` while Qwen

Table 5: Outlier extraction effect (XFP3, $k=4$, GLM-4.7-Flash). $\text{MSE ratio} = \text{MSE}_{\text{bulk}} / \text{MSE}_{\text{+outlier}}$ at population median.

Layer type	n	cos (bulk)	Δcos	MSE ratio
attn_kva	48	0.981	+0.009	$1.90\times$
attn_kvb	48	0.983	+0.004	$1.24\times$
shared_gate_up	94	0.981	+0.002	$1.13\times$
routed_gate_up	96	0.982	+0.0003	$1.02\times$
routed_down	96	0.982	+0.0003	$1.02\times$

distributes moderate tails uniformly; Qwen’s routed experts respond $6.7\times$ more strongly to outlier extraction. This is the data behind “the algorithm is identical; the profiles differ because distributions differ.”

6.2.3 Decoder Throughput vs. Marlin INT4

We use Marlin [Frantar & Alistarh, 2024] as the primary throughput reference: it is the most optimized INT4 dequantization kernel available on NVIDIA GPUs and serves AutoRound INT4 checkpoints [Cheng et al., 2024] that consistently match or exceed NVFP4 in calibration-aware accuracy. AutoRound and XFP take different methodological paths (uniform quantization with Hessian-aware rounding vs. per-group learned codebooks with cosine-targeted auto-select); the comparisons below are decoder-speed comparisons on identical hardware, with accuracy reported alongside as a documentary data point, not a verdict on either method.

RTX PRO 6000 Blackwell (SM120), TP=2.

On a workstation-class dual-GPU node (2×96 GB), the XFP V2 single-user reference kernel delivers 138 tok/s wall-clock single-stream decode at full GSM8K quality (Table 9). GPU utilization during single-stream decode is 98% on each device at 240 W, well below the 600 W TDP—kernel-launch overhead in the single-stream path dominates, leaving compute headroom that the present implementation does not yet exploit. Massively concurrent batched serving is not a goal of this work and would require a different kernel scheduling strategy (see §7.5).

DGX Spark (SM121), single-GPU. An earlier measurement on DGX Spark (SM121) shows the throughput characteristic on a second platform: XFP outperforms Marlin INT4 by 16–18% on long and medium decode (Table 6). The architectural argument—fewer effective bits per weight

Table 6: XFP vs. Marlin INT4 on Qwen3.5-122B-A10B, DGX Spark, SM121 (bench.py, 50 problems).

	long	medium	short	Math
XFP auto	29.9	34.8	2.6	98%
Marlin INT4	25.8	29.6	2.5	94%
Δ	+16%	+18%	~ 0	—

Table 7: XFP vs. Marlin INT4 (AutoRound) on Qwen3.5-122B-A10B, RTX PRO 6000 Blackwell, SM120. lm-eval-harness 0.4.11, GSM8K (5-shot, 1,319 problems, 3 seeds, mean $\pm$ std). Throughput is single-stream wall-clock at 1,500 output tokens.

Format	TP	tok/s	flex	strict	Bits
XFP V2 (auto)	1	110	94.54 ± 0.67	94.62 ± 0.67	~ 3.97
XFP V2 (auto)	2	138	94.41 ± 0.57	94.49 ± 0.57	~ 3.97
Marlin INT4	1	73.6	95.17 ± 0.09	95.27 ± 0.12	4.0

reads fewer bytes per token at $M=1$ —holds across platforms.

The math difference (98% vs 94%) is observed on the bench.py 50-problem sample but not isolated from the AutoRound calibration configuration of the Marlin checkpoint; the controlled comparison is the throughput.

Paper-grade head-to-head on RTX PRO 6000.

A controlled measurement at TP=1 on identical hardware (Table 7) shows XFP at 110 tok/s vs Marlin INT4 at 73.6 tok/s (+49% single-stream decode), with GSM8K strict-match of 94.62 ± 0.67 vs 95.27 ± 0.12 . The ~ 0.65 pp accuracy difference is within the Lloyd-init jitter envelope (~ 0.67 pp std on this scale); both formats land in the same 94–95% band, with the structural difference being throughput: XFP reads ~ 3.97 effective bits per weight versus Marlin’s 4.0, and the fused depack-gather-scatter-GEMM kernel exploits this directly at the memory-bandwidth limit.

6.2.4 V2a Storage Mode (probes)

The V2a storage mode (§3.4) shares the auto-select frontend and decode-kernel skeleton with V2 and differs only in codebook layout (per-group library entry vs. per-channel codebook). Bench-probe measurements ($n=50$ GSM8K, deterministic, seed=42, RTX PRO 6000 TP=1) on three models show the speed characteristic (Table 8):

On Qwen3.5-122B-A10B, V2a delivers +47% throughput vs Marlin INT4 at comparable footprint;

Table 8: V2a storage-mode decode throughput probes, `bench.py` ($n = 50$, RTX PRO 6000 TP=1). Marlin INT4 columns where available, on the same hardware in the same session.

Model	V2a tok/s	math ($n = 50$)	Marlin tok/s	vs. Marlin
Qwen3.5-35B-A3B	204.0	90%	(no Q3.5)	—
Qwen3.5-122B-A10B	108.1	96%	73.6	+47%
GLM-4.7-Flash	118.1	68%	121.1	-2.5%

Table 9: XFP on Qwen3.5-122B-A10B, RTX PRO 6000 Blackwell, TP=2, quantize-on-load. Decode throughput at 1,500-token output; GSM8K via lm-eval-harness 0.4.11.

Metric (single-stream reference)	Value
Single-stream decode (wall)	138 tok/s
Engine sustained	137 tok/s
GSM8K flex.-extract*	94.41 $\pm$ 0.57
GSM8K strict-match*	94.49 $\pm$ 0.57
Effective bits	~ 3.97
VRAM / GPU	57 / 96 GiB
GPU util. (single-stream)	98% / 98%
GPU power (single-stream)	240 / 240 W

*3 seeds, 1,319 problems/seed, mean $\pm$ std (%). All numbers from the single-user reference kernel; concurrent / batched serving is out of scope (§7.5).

on GLM-4.7-Flash, the two are within $\sim 2.5\%$ (XFP slightly slower, V2a math probe +4 pp on the $n = 50$ sample). Full-1,319 GSM8K runs under V2a on these models are in the queue (§6.3 status note). The 35B comparison is not currently fair: no Q3.5 INT4 Marlin checkpoint exists at the time of measurement; the Q3.6 Marlin path is on a different model variant.

Cross-platform consistency. The same V2 auto-mode quantization profile (~ 3.97 eff. bits) generalizes from a single-GPU 120 GB unified-memory device (DGX Spark) to a dual-GPU discrete TP=2 setup (RTX PRO 6000) without code changes. Together these two platforms span the workstation-class hardware tier where native NVFP4 Tensor Core support remains community-patched and incomplete on grouped-GEMM MoE workloads—and where, unlike server-class A100/H100 deployments, memory-bound 4-bit kernels matter most. XFP places this tier at top-of-class for 100B+ MoE inference.

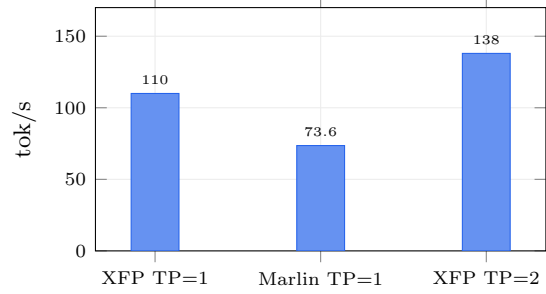


Figure 2: **Single-stream decode throughput on Qwen3.5-122B-A10B**, RTX PRO 6000 Blackwell (SM120), 1,500-token output. At identical TP=1 single-stream (the regime this work targets), XFP is +49% faster than Marlin INT4 (AutoRound); TP=2 extends this to +87%. Both XFP and Marlin are memory-bandwidth-bound at $M = 1$; XFP reads ~ 3.97 effective bits per weight versus Marlin’s 4.0. Concurrent / batched serving is out of scope (§7.5).

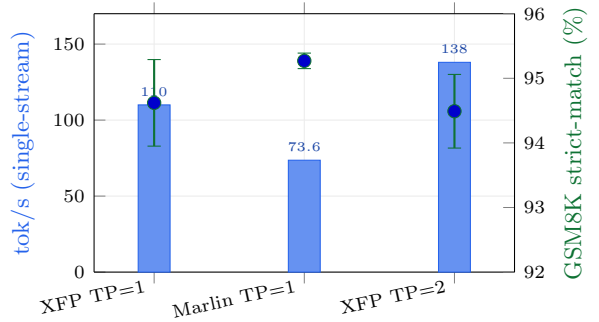


Figure 3: **XFP vs. Marlin INT4 on Qwen3.5-122B-A10B**, RTX PRO 6000 Blackwell. Bars (left): single-stream tok/s. Markers (right): GSM8K strict-match (3 seeds, mean $\pm$ std). At TP=1, XFP is 49% faster at -0.65 pp accuracy (within seed-variance).

6.3 Front B: The H-Process — Constrained Compression on a 397B Model

Qwen3.5-397B-A17B is a hybrid linear-/self-attention MoE with 512 routed experts per layer, 60 layers, and an unquantized BF16 footprint of ~ 795 GB—one order of magnitude above the 35B/122B platforms of Front A. At any conventional 4-bit format (~ 200 GB after quantization plus KV-cache, activations, and library buffers), the model does not fit on 2×96 GB. Front B reports the *H-Process*: a quality-driven iteration over the two cosine thresholds (§4) that finds the operating point at which the model just fits while still producing sensible output.

Three constraints define the H-Process search space. The operator-facing constraint is the pair $(\tau_{\text{strict}}, \tau_{\text{lazy}})$: bit widths are derived from these, not chosen directly. Two hard boundaries flank the operating window:

- **OOM at quantize-on-load.** High thresholds force more routed-expert groups into xfp4, raising the Lloyd-iteration spike past the 96 GB-per-GPU envelope. The boundary is set by the encoding spike, not the steady-state serving footprint: serving-side reductions (KV-cache, `max_model_len`, `gpu_memory_utilization`) do not help, because the spike occurs before serving allocation (Table 10, H1.7 entry).
- **Garbage output.** Low thresholds force most routed experts into xfp2; bit-width reconstruction passes the cosine gate numerically, but generation degenerates to repeated tokens despite apparently valid arithmetic. Cosine similarity is a chosen *indicator* for steering bit-width selection, not a quality guarantee. The garbage boundary exists strictly inside the cos-passes region and is the empirical reminder that the operating envelope is verified by benches, not by the indicator alone.

The H-Process iterates $(\tau_{\text{strict}}, \tau_{\text{lazy}})$ from aggressive toward conservative settings until both boundaries are clear and the resulting model serves with acceptable bench output.

Hardware and serving setup. 2×RTX PRO 6000 Blackwell (SM120, 96 GB each), TP=2, BF16 KV-cache (FlashInfer FP8-KV is incompatible with the model’s head_dim = 256 projections; the Triton attention backend with BF16 KV is the path that runs). `XFP_GROUP_SIZE=128`, `XFP_MOE_LLOYD_ITERS=20`, LM-head FP8, `max_model_len=65,536`, custom all-reduce disabled (a known SM120 issue at TP=2). The engine is V2 (per-group Lloyd codebook) with split- K dispatch on the linear-attention projections that exceed $K=8192$; under the V2a storage mode (§3.4) we observe equivalent functionality with slightly lower throughput, and use V2 for the headline numbers below.

The quality gradient. With the candidate set effectively $\{2, 4\}$ (xfp3 is rare on this model under either storage mode, see §3.4), the two-threshold split (§4) controls memory through the lazy-vs-strict gap. Table 10 reports five operating points; the strict floor is held at $\tau_{\text{strict}}=0.96$ throughout. The dependence

Table 10: H-Process operating points on Qwen3.5-397B-A17B, 2×RTX PRO 6000 TP=2, engine V2. Steady = post-load steady-state VRAM per GPU; Spike = max during quantize-on-load. Probe accuracy on `bench.py` ($n=50$ GSM8K, deterministic, seed=42); H1.5 also reports full-1,319 single-seed paper-grade GSM8K. H1.7 was attempted three times with successively more aggressive serving-side reductions (see text); all three attempts failed during the encoding spike. Multi-seed H1.5 evaluation is in progress.

Var.	τ_{strict}	τ_{lazy}	Steady GiB	Spike GiB	Eff bits	probe ($n=50$)	full-1319 (1 seed)
G	0.92	0.80	70	96	~2.3	garbage	—
H1	0.96	0.92	72	96	~2.6	0.52±0.07	—
H1.5	0.96	0.93	83	97	~3.4	0.60±0.07	0.6672
H1.7	0.96	0.935	OOM (3×)		—	—	—
H	0.96	0.94	OOM		—	—	—

on τ_{lazy} is steep and sharply non-linear: at 0.80 the routed-expert path collapses to near-100% xfp2 and math output degenerates to repeated tokens (cosine passes, benches do not); at 0.935 already enough routed-expert groups escalate to xfp4 that the Lloyd-iteration spike exceeds the 96 GB envelope. The OOM boundary is set by the encoding spike, not the steady-state serving footprint: H1.7 ($\tau_{\text{lazy}}=0.935$) failed across three load attempts even with aggressive serving-side reduction (`gpu_mem_util` 0.97, KV-cache 2 GB, `max_model_len` 8192), because the spike occurs before any serving allocation. Between the two boundaries the window is narrow: $\tau_{\text{lazy}}=0.92$ yields 52% GSM8K strict-match at $n=50$ and 72 GiB/GPU steady state; raising to 0.93 adds 11 GiB/GPU and shifts the $n=50$ probe by +8 pp. On the H1.5 configuration ($\tau_{\text{lazy}}=0.93$, ~3.4 effective bits) the full-1,319 single-seed GSM8K strict-match reaches **66.72%** at 100.9 tok/s long-output decode.

Per-class bit-width assignment under H1.5.

Auto-select picks xfp4 for 100% of self-attention, linear-attention and shared-expert projections, and xfp2 for the majority of routed-expert groups; xfp4 escalations on the routed path concentrate in layers 1–3 (the initial GatedDeltaNet transition) and layer 13. The pattern is stable across runs and is consistent with the per-component outlier-extraction sensitivity reported in Table 5: routed experts have near-Gaussian bulk distributions that admit aggressive quantization, attention does not.

Table 11: Qwen3.5-397B-A17B on 2×RTX PRO 6000 TP=2: H-Process versus AutoRound INT4 with REAP-style routed-expert pruning. INT4 numbers from earlier deployment runs of the same model on the same hardware; GSM8K via `bench.py` $n=50$ unless otherwise noted.

Format	Prune	Steady GiB/GPU	GSM8K strict	n	tok/s long
INT4 + RIY	−36%	~75	33%	50	~50
INT4 + RIY	−24%	~80	44%	50	~50
XFP H1	0%	72	52%	50	65
XFP H1.5	0%	83	66.72%	1319*	100.9

INT4 = AutoRound INT4 served via Marlin. *Single seed; multi-seed evaluation in progress.

Throughput. Single-stream wall-clock decode on H1.5: 73.4 tok/s at short outputs, 98.2 tok/s at medium, **100.9 tok/s at long outputs** ($n=5$ runs, `temp`=0, 1,500-token outputs). H1 throughput on the same setup is approximately 65–97 tok/s depending on output length.

An alternative path: routed-expert reduction. A different family of methods addresses the same memory constraint by reducing the routed-expert population at fixed 4-bit precision. We compare against the REAP-it-Yourself (RIY) workflow on the same model and hardware, applying AutoRound INT4 with REAP-style calibration-aware expert removal (§2). Table 11 reports two RIY operating points alongside the H-Process. The two approaches reach the same envelope along different axes: XFP+H reduces per-weight bits while retaining all experts; RIY retains 4-bit precision while removing routed experts. Both are legitimate responses to the constraint; the comparison documents how the axes trade off on this particular model.

On this model, the H-Process operates at a lower memory footprint than RIY-24% (72 vs 80 GiB/GPU at H1; 83 at H1.5), with the $n=50$ probe favoring XFP at both operating points and the full-1,319 H1.5 measurement extending the gap further. On throughput, the XFP fused decode kernel reads fewer bytes per token than INT4 at $M=1$ and exploits this directly at the memory-bandwidth limit; this is the structural reason for the speed difference, not a Marlin-specific shortfall (§2, Marlin is the most optimized INT4 dequantization kernel available and serves as our throughput reference).

Hardware projection. Reserving 8 GiB for KV-cache and 10 GiB for activations and compile buffers, the H1 steady state fits comfortably on 2×96 GB

(6 GiB/GPU headroom); H1.5 is marginal (effectively zero headroom). H100 80 GB SXM is not viable at TP=2 for either profile; H200 141 GB TP=2 has ~51 GiB headroom and should serve H1.5 comfortably. Single-device deployment on the DGX Spark (120 GB unified) is not viable at the present effective bit widths without further reduction.

Status. The H1.5 GSM8K strict-match (66.72%, full-1,319) is a single-seed measurement at submission time; multi-seed evaluation is in progress and will replace the single-seed value in the final version. H1 paper-grade evaluation and a full-1,319 measurement on the V2a storage mode are also in the queue.

7 Discussion

7.1 Two Quality Floors as Operator Knob

The two-threshold split ($\tau_{\text{strict}} = 0.96$ for attention/shared, $\tau_{\text{lazy}} = 0.93$ for routed-expert MoE, §4) collapses the per-layer auto-select into a single operator-facing parameter: the threshold gap. On the 397B sweep (Table 10), each +0.01 to τ_{lazy} shifts roughly one xfp2→xfp4 transition per routed-expert layer, costing ~11 GiB/GPU steady-state and yielding +8 pp GSM8K. The same two-threshold mechanism applied to 122B under V2 reproduces the single-threshold $\tau=0.98$ behaviour: with $\mathcal{N}=\{2,3,4\}$ the intermediate option $N=3$ absorbs the elasticity, and the lazy floor is rarely binding.

7.2 Storage Tradeoff: Bits vs. Outliers

On the linear path, each outlier costs 18 bytes. The break-even between XFP3 with elevated outlier fraction and XFP4 at 2% cap is: $0.375 + 18y = 0.5 + 0.02 \times 18 \implies y = 2.7\%$. The default 2% cap sits near this break-even—no hidden win from aggressive outlier extraction.

7.3 The Minimalist Device Dilemma

The $K \leq 8192$ bound under V2 is not driven by algorithmic constraints—the same kernel design works at $K \leq 32,768$ on data-center silicon. It is a direct consequence of how shared-memory capacity is segmented across the Blackwell generation:

The same building blocks are present on each tier; the per-CTA SMEM ceiling on the workstation tier

Table 12: Per-CTA opt-in shared-memory limit across NVIDIA SMs.

SM tier	Hardware	SMEM/CTA
SM90 (Hopper d/c)	H100, H200	228 KB
SM100 (Blackwell d/c)	B100, B200	228 KB
SM120 (Blackwell wkst.)	RTX PRO 6000	99 KB
SM121 (Blackwell SoC)	DGX Spark (GB10)	99 KB

is less than half that of data-center silicon. For memory-bound 4-bit GEMM kernels with activation-row caching, the largest contiguous K drops from $\sim 32K$ to $\sim 8K$ under V2’s per-channel codebook—a $4\times$ regression on the dimension governing single-user decode latency. V2a’s shared codebook library lifts the bound back to $K \leq 32,768$ on the workstation tier (§3.4, §5), restoring the data-center operating envelope at the cost of the per-channel codebook precision. For V2 users on the workstation tier, a split- K extension lifts the $K \leq 8192$ bound at ~ 10 – 20% latency cost (§7.5).

7.4 Lloyd Non-Determinism

Quantize-on-load does not produce bit-identical weights across runs. On Qwen-35B, identical bit-width decisions yield $\pm 8pp$ math variance due to Lloyd initialization jitter. Weight caching eliminates run-to-run variance after the first load.

7.5 Limitations and Scope

1. **Single-user reference implementation.** The XFP fused decode kernel presented here is optimized for low-latency single-stream inference. At concurrency ≥ 8 , per-request throughput collapses because the per-call kernel-launch overhead is not amortized across the batch. A high-throughput batched-serving variant is planned future work and is explicitly out of scope for this paper. All accuracy and throughput numbers reported here are from the single-user reference path.
2. **$K \leq 8192$ bound under V2 on the workstation tier.** The V2 fused decode kernel caches the full activation row in shared memory (~ 24 KB at $K = 8192$ in bf16; see §5). On the target workstation hardware (DGX Spark, RTX PRO 6000 Blackwell; both 99 KB opt-in SMEM per CTA) this bound covers the Qwen3.5 family but excludes models with wider intermediate dimensions. V2a lifts this bound to $K \leq 32,768$ via the shared-library codebook (§3.4); a split- K V2

variant is also available at a 10–20% single-stream latency cost.

3. **No Hessian feedback.** Hessian-weighted Lloyd is a planned extension.
4. **Lloyd non-determinism.** $\pm 8pp$ math variance on 50-problem benchmarks under `bench.py` probing (each problem = 2pp); under paper-grade lm-eval-harness with 1,319 problems and 3 seeds the cross-seed std drops to 0.57% on GSM8K (Table 9).
5. **Evaluation scope.** GSM8K under lm-eval-harness is the primary accuracy metric. MMLU and additional reasoning suites are natural extensions for future work.
6. **Hardware.** Validated on two workstation-class platforms (DGX Spark SM121, RTX PRO 6000 Blackwell SM120). Native NVFP4 Tensor Core paths on these SMs required community fixes to vLLM, FlashInfer, and CUTLASS dispatch (§2); server-class A100/H100 evaluation is not part of this work as it would not meaningfully test the memory-bound regime XFP targets.
7. **Auto-mode range.** V2 tests $N \in \{2, 3, 4\}$; V2a tests $N \in \{2, 4\}$ (the $g = 128$ packing constraint excludes $N = 3$). A $g = 80$ V2a path supporting $N = 3$ is deferred.

8 Conclusion

XFP is a quality-targeted, adaptive weight quantizer that inverts the conventional workflow: the operator specifies a cosine-similarity floor; XFP picks bit widths, outlier budgets, and packing per layer to meet it. The format and its supporting auto-select frontend, fused decode kernel, and two storage modes (per-channel V2 and shared-library V2a) are not the contribution by themselves—they are means to an end. The end is appliance-class deployment: large language models serving on workstation hardware, without datacenter backends and without NVFP4-accelerated Tensor Core paths that arrived late and remain incomplete on this tier.

Four results support this trajectory: (1) the same auto-select frontend drives both codebook storage modes, covering the 30B–397B parameter range on the same workstation platforms; (2) auto-mode converges to ~ 3.97 effective bits on Qwen3.5-122B-A10B and to ~ 2.6 – 3.4 on Qwen3.5-397B-A17B depending on the H-Process operating point; (3) XFP on Qwen3.5-122B-A10B (RTX PRO 6000, TP=2) under V2 reaches 138 tok/s single-stream decode at

94.49% GSM8K strict-match (3 seeds, $n=3,957$ problems)—paper-grade accuracy preservation on workstation-class dual-GPU hardware; (4) the H-Process on Qwen3.5-397B-A17B (512 routed experts/layer) serves the full expert population in 2×96 GB at ~ 3.4 effective bits and 100.9 tok/s long-output decode, with 66.72% GSM8K strict-match on the full 1,319-problem set (single seed, multi-seed in progress).

The H-Process closes the loop to the motivation. The H-Process (§6.3) is the application that makes the format into a process. The motivation was appliance deployment of models that do not fit; the H-Process is the quality-driven iteration over the two cosine thresholds that finds the operating point at which a given model just fits on a given hardware envelope while still producing sensible output. Three constraints define its search space: the operator-set $(\tau_{\text{strict}}, \tau_{\text{lazy}})$ pair, the OOM boundary at quantize-on-load, and the garbage boundary in generation. The garbage boundary is the empirical reminder that cosine similarity is a chosen *indicator* for steering bit-width selection—a much better indicator than bit width alone, but not a guarantee. Quality is verified by benches; cosine steers. The H-Process puts both in the operator’s hands as explicit knobs, where fixed-bit-width formats have neither.

A different family of methods. XFP belongs to a family of per-group codebook approaches; the dominant 4-bit deployment formats are uniform quantizers with calibration-aware corrections (AutoRound, AWQ, GPTQ) decoded by Marlin or NVFP4-class kernels. These are different methodological choices for the same goal, with different strengths. XFP requires no Hessian, no calibration data, and no specialized hardware—and provides the operator a tunable quality knob that uniform formats do not. The trade-off is the per-group codebook overhead and the encoding-time Lloyd iterations. On the deployments measured here, the trade-off favors XFP at the workstation tier; on other workloads it may not. The choice is a deployment decision, not a benchmark verdict. Code is available at the project repository linked above.

A Per-Expert Reconstruction Tables

All tables report per-layer metrics aggregated across n layers per component type, at XFP3 ($N=3$) with outlier threshold $k=4.0$.

Column definitions: **cos bulk**—cosine similarity of codebook-only reconstruction (no outlier path); **cos outlier**—cosine similarity with sparse fp16 outlier extraction enabled; **$\Delta\text{cos mean}$ / max** —improvement from outlier extraction across the layer population; **MSE p50 / p90**—ratio of $\text{MSE}_{\text{bulk-only}}$ to $\text{MSE}_{\text{with-outliers}}$ at the 50th and 90th percentile of the layer population (values $> 1\times$ indicate outlier extraction reduces error; e.g. $1.90\times$ means the bulk-only MSE is $1.9\times$ larger).

A.1 GLM-4.7-Flash (XFP3, $k=4$)

Type	n	cos bulk	cos outlier	$\Delta\text{cos mean}$	$\Delta\text{cos max}$	MSE p50	MSE p90
attn_kva	48	0.98070	0.98973	+0.00903	+0.01495	$1.90\times$	$2.26\times$
attn_kvb	48	0.98294	0.98654	+0.00360	+0.01051	$1.24\times$	$1.36\times$
shared_gate_up	94	0.98114	0.98356	+0.00242	+0.00600	$1.13\times$	$1.23\times$
shared_down	47	0.97964	0.98195	+0.00231	+0.00828	$1.07\times$	$1.27\times$
attn_o	48	0.98212	0.98391	+0.00179	+0.00627	$1.06\times$	$1.14\times$
attn_qb	48	0.98173	0.98336	+0.00163	+0.00964	$1.06\times$	$1.17\times$
attn_qa	48	0.98191	0.98264	+0.00073	+0.00303	$1.03\times$	$1.08\times$
routed_down	96	0.98238	0.98265	+0.00027	+0.00053	$1.02\times$	$1.02\times$
routed_gate_up	96	0.98237	0.98265	+0.00028	+0.00050	$1.02\times$	$1.02\times$

Table 13: GLM-4.7-Flash per-expert reconstruction statistics.

A.2 Qwen3.5-35B-A3B (XFP3, $k=4$)

Type	n	cos bulk	cos outlier	$\Delta\text{cos mean}$	$\Delta\text{cos max}$	MSE p50	MSE p90
shared_gate_up	96	0.96555	0.98279	+0.01724	+0.06805	$1.39\times$	$4.70\times$
shared_down	41	0.97757	0.98220	+0.00463	+0.01780	$1.24\times$	$1.29\times$
attn_other	33	0.97900	0.98431	+0.00531	+0.02224	$1.21\times$	$1.46\times$
attn_o	11	0.97909	0.98302	+0.00393	+0.01109	$1.17\times$	$1.28\times$
routed_down	96	0.98025	0.98207	+0.00182	+0.01174	$1.07\times$	$1.20\times$
routed_gate_up	96	0.98059	0.98238	+0.00180	+0.00963	$1.08\times$	$1.16\times$

Table 14: Qwen3.5-35B-A3B per-expert reconstruction statistics.

B Codebook Analysis Detail

B.1 Cross-Model Distribution Profiles

C MoE Sampling Validation

Offline validation of the 4-expert sampling approximation for auto-select bit-width decisions, comparing against full-population auto-select (Table 16), and live end-to-end corroboration of the resulting bit-width decisions on running models (Table 17):

Component	GLM $3\sigma\%$	Qwen $3\sigma\%$	GLM $\max w $	Qwen $\max w $
attn_k	1.48	0.94	1.63 (49σ)	0.22 (14σ)
attn_v	—	0.82	—	0.20
dense_mlp	0.40	1.19	0.94	0.32
routed_down	0.28	0.40	0.26	0.32
shared_gate_up	0.54	1.02	0.49	0.13

Table 15: Weight distribution profiles: GLM-4.7-Flash vs. Qwen3.5-35B-A3B.

Model	Experts	MoE blocks	4-sample $\neq$ full	%	Failure mode
GLM-4.7-Flash	64	94	0	0%	—
Qwen3.5-35B-A3B	256	80	0	0%	—
Qwen3.5-122B-A10B	256	96	11	11.5%	$10\times$ under, $1\times$ over

Table 16: Offline bit-width agreement: 4-expert sample vs. full population.

Model	4-sample tok/s / Math	All-experts tok/s / Math	Δ
GLM-4.7-Flash	59.8 / 52%	59.5 / 52%	Byte-identical
Qwen3.5-35B-A3B	55.4 / 82%	54.7 / 90%	Bits identical; Δ Math = Lloyd noise
Qwen3.5-122B	29.9 / 98%	(UMA-blocked)	2 layers flip as predicted

Table 17: Live E2E corroboration: 4-expert sample vs. all-experts.

Across 178 validated MoE blocks (all GLM + 35B + 32 live layers on 122B), live bit-width decisions agree 100% with offline predictions. The ± 8 pp math variance on Qwen-35B reflects Lloyd non-determinism (identical bit decisions, different codebook centroids), not a sampling effect.

References

- L. Gao, J. Tow, B. Abbasi, S. Biderman, S. Black, A. DiPofi, C. Foster, L. Golding, J. Hsu, A. Le Noac'h, H. Li, K. McDonell, N. Muennighoff, C. Ociepa, J. Phang, L. Reynolds, H. Schoelkopf, A. Skowron, L. Sutawika, E. Tang, A. Thite, B. Wang, K. Wang, and A. Zou. A framework for few-shot language model evaluation. <https://github.com/EleutherAI/lm-evaluation-harness>, v0.4.11, 2024.
- J. Chee, Y. Cai, V. Kuleshov, and C. De Sa. QuIP: 2-Bit Quantization of Large Language Models with Guarantees. *arXiv:2307.13304*, 2023.
- T. Dettmers, M. Lewis, Y. Belkada, and L. Zettlemoyer. LLM.int8(): 8-bit Matrix Multiplication for Transformers at Scale. In *NeurIPS*, 2022.
- T. Dettmers, R. Svirschevski, V. Egiazarian, D. Kuznedelev, E. Frantar, S. Ashkboos, A. Borzunov, T. Hoefer, and D. Alistarh. SpQR: A Sparse-Quantized Representation for Near-Lossless LLM Weight Compression. *arXiv:2306.03078*, 2023.
- T. Dettmers, A. Pagnoni, A. Holtzman, and L. Zettlemoyer. QLoRA: Efficient Finetuning of Quantized LLMs. In *NeurIPS*, 2023.
- V. Egiazarian, A. Panferov, D. Kuznedelev, E. Frantar, A. Babenko, and D. Alistarh. AQLM: Extreme Compression of Large Language Models via Additive Quantization. In *ICML*, 2024.
- E. Frantar, S. Ashkboos, T. Hoefer, and D. Alistarh. GPTQ: Accurate Post-Training Quantization for Generative Pre-trained Transformers. In *ICLR*, 2023.
- W. Cheng, W. Lu, et al. Optimize Weight Rounding via Signed Gradient Descent for the Quantization of LLMs. *arXiv:2309.05516*, 2024.
- E. Frantar and D. Alistarh. Marlin: Near-Ideal 4-Bit LLM Inference on NVIDIA GPUs. *GitHub, IST Austria*, 2024.
- B. Marie. NVFP4: Same Accuracy with 2.3x Higher Throughput for 4-Bit LLMs. *The Kaichup – AI on a Budget*, 2025.
- NVIDIA. TensorRT Model Optimizer: Post-Training Quantization for LLMs. <https://github.com/NVIDIA/TensorRT-Model-Optimizer>, 2024.
- G. Gerganov et al. llama.cpp. <https://github.com/ggerganov/llama.cpp>, 2023.
- M. Lasby et al. REAP: Reaping Experts for Activation-Aware Pruning of MoE Models. *arXiv preprint*, 2024.
- S. Kim, C. Hooper, A. Gholami, Z. Dong, X. Li, S. Shen, M. Mahoney, and K. Keutzer. SqueezeLLM: Dense-and-Sparse Quantization. *arXiv:2306.07629*, 2023.
- W. Kwon, Z. Li, S. Zhuang, Y. Sheng, L. Zheng, C. Yu, J. Gonzalez, H. Zhang, and I. Stoica. Efficient Memory Management for Large Language Model Serving with PagedAttention. In *SOSP*, 2023.
- J. Lin, J. Tang, H. Tang, S. Yang, X. Dang, and S. Han. AWQ: Activation-aware Weight Quantization for LLM Compression and Acceleration. In *MLSys*, 2024.
- S.P. Lloyd. Least Squares Quantization in PCM. *IEEE Trans. Information Theory*, 28(2):129–137, 1982.
- NVIDIA. NVFP4 Tensor Core Quantization—Blackwell Architecture Whitepaper. 2024.
- Open Compute Project. OCP Microscaling (MX) Specification, v1.0. 2023.
- A. Tseng, J. Chee, Q. Sun, V. Kuleshov, and C. De Sa. QuIP#: Even Better LLM Quantization with Hadamard Incoherence and Lattice Codebooks. *arXiv:2402.04396*, 2024.
- A. Tseng, Q. Sun, D. Yin, C. De Sa, and V. Kuleshov. QTIP: Quantization with Trellises and Incoherence Processing. *arXiv:2406.11235*, 2024.