

Fractal KV-Cache Archives: Lossless Symbolic Storage with In-Place Retrieval for Long-Context LLM Inference

Vladimir Gusev

Independent Researcher

vladimir@scriptum.ru

ORCID: 0009-0006-4236-9190

August 7, 2026

Abstract

The key-value (KV) cache dominates the memory cost of long-context autoregressive inference, and a growing body of work compresses it through quantization, eviction, or offloading. We study a complementary question: once a position’s KV state has been quantized to codebook indices, how should the resulting *symbol stream* be stored, and can the storage layer do more than store? A family of contractive iterated-map codes that serialize a symbol sequence into a sequence of low-dimensional real vectors is revisited, and it is shown that they form a natural *archive* format for a quantized KV cache with the following features. The method provides exactly the access pattern a growing cache requires. It is lossless, it runs in linear time, and supports $O(1)$ random access and $O(1)$ amortized append. A controlled study of the quantizer feeding this archive is conducted on GPT-2 with 1024-token contexts. Keeping a small exact window (4 attention sinks + 32 recent tokens) and archiving the rest, per-head residual vector quantization reduces the archived cache by $36\text{--}54\times$ relative to an fp16 cache at a perplexity cost of 11–15%, and we quantify a sharp key/value asymmetry—quantizing keys is roughly $4\times$ more damaging than quantizing values, consistent with prior low-bit KV work—and use it to allocate bits in a hybrid scheme. Finally, we show the archive is simultaneously a search index: approximate substring queries execute directly on the stored vectors, and matched context is decoded from the matched vector without ever materializing the surrounding text. We further characterize the archive’s operating range: truncating the stored points yields a lossy regime whose distortion we localize, and probability-weighting the contraction maps recovers arithmetic coding, exposing a trade-off between rate efficiency, random access, and memory. We release all code; every number reproduces from a single command on a laptop CPU.

1 Introduction

Serving a transformer language model over a long context is increasingly a memory problem rather than a compute problem. To generate each new token the model attends to cached key and value vectors for every previous position in every layer; for GPT-2 this KV cache is $2 \times 12 \times 12 \times 64 = 18,432$ scalars per token, and for production-scale models it reaches hundreds of kilobytes per token, so that for long documents the cache dwarfs the model weights and becomes the binding constraint on batch size and context length. The dominant responses are lossy: low-bit quantization of the cached tensors, eviction of “unimportant” positions, and offloading of cold cache to slower memory [1, 2, 3, 4].

This paper isolates a question that sits *downstream* of the lossy step and is usually left implicit. Suppose a position’s KV state has already been reduced to a handful of codebook indices by vector quantization. Those indices are a symbol stream. How should the stream be *stored*, and—more interestingly—can the storage layer serve retrieval and random access rather than being an inert blob? We show that a lossless contractive iterated-map code answers both. Concretely, we test three claims: (i) the code is a lossless, linear-time store with sub-millisecond random access and append; (ii) with a small exact window, per-head residual VQ archives the remaining cache at more than 30× compression versus an fp16 cache for a bounded, measured perplexity cost; and (iii) substring queries resolve directly on the stored vectors at full recall. The success criterion for each is stated with its experiment.

The code. We use a contractive iterated-map code that reads a symbol sequence over an alphabet of size N and produces a trajectory of points in the plane: a regular N -gon is fixed, one vertex per symbol, and each symbol c_k maps the running point by $p_k = V(c_k) + r(p_{k-1} - V(c_k))$ for a contraction ratio r . These N contractions form an iterated function system, and the set of points it can reach is self-similar: each symbol’s “cell” is a scaled copy of the whole hull, which itself contains a scaled copy for every next symbol, and so on at every depth. That self-similar attractor — the Sierpinski gasket in the three-symbol midpoint case — is the *fractal* the title refers to; the code is simply a walk on it, one step per symbol. Decoding inverts the map: the symbol is the vertex whose contracted image (“cell”) contains the point, and $p_{k-1} = (p_k - (1-r)V(c_k))/r$. Uniqueness requires the N cells to be disjoint, which bounds the ratio by a packing (“kissing”) constant $r \leq r_N$; the familiar midpoint code $r = \frac{1}{2}$ is exactly the boundary case for $N \leq 4$ and must be tightened for larger alphabets. Because inversion amplifies floating-point error by $1/r$ per step, one IEEE-754 double reliably carries $\approx 44/\log_2(1/r)$ symbols, so a practical codec stores one point per fixed-length span and reconstructs each span by anchored backward search. The construction is classical in the alignment-free sequence-analysis literature, where it is known as chaos game representation and its generalization to arbitrary alphabets as universal sequence maps [7, 8]; our contribution is not the code, nor vector quantization of the KV cache under a random-access constraint (a concurrently active topic [5, 6]), but the use of this particular code as a KV archive that is at once a store, a random-access decoder, and an in-place search index.

Contributions.

1. **A KV-archive format.** We frame a lossless contractive iterated-map code as the serialization layer for a quantized KV cache, and verify it is lossless, linear-time, and offers $O(1)$ random access to any past position and $O(1)$ amortized append—the operations a growing cache needs and that a general-purpose byte compressor does not provide (Section 2).
2. **A controlled quantizer study on long contexts.** With a small exact window and the remainder archived, we sweep pooled vs. per-head codebooks and residual depth on GPT-2 at 1024-token contexts. Per-head codebooks Pareto-dominate pooled ones at equal bit budget (Fig. 2), and we quantify a $\sim 4\times$ key/value damage asymmetry (direction consistent with [4]) that a bit-asymmetric hybrid exploits (Section 3).
3. **The archive is also an index.** Approximate substring retrieval runs *directly* on the stored vectors—nearest-neighbor distance is a graded suffix-similarity—and matched context is decoded from the matched vector with no access to the surrounding text (Section 5).

Table 1: Codec primitives on natural text (single CPU). All round-trips lossless.

Operation	Cost
Encode (linear, 25K–400K chars)	$0.68 \mu\text{s} / \text{char}$
Random access (10^6 -char document)	$311 \mu\text{s} / \text{lookup}$
Append (token by token)	$175 \mu\text{s} / \text{token}$ (amortized)

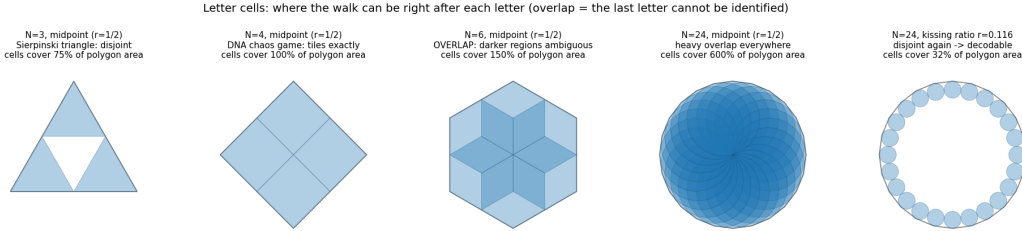


Figure 1: Decodability of the code. Each symbol maps the polygon into a contracted “cell”; decoding the last symbol asks which cell a point lies in, so cells must be disjoint. A half-scale (midpoint) cell has $\frac{1}{4}$ of the polygon’s area, so N cells need $N/4$ polygon-areas: $N=3$ leaves gaps, $N=4$ tiles exactly, $N>4$ overlaps (ambiguous), and shrinking r to the kissing ratio restores disjointness for large alphabets.

All experiments use GPT-2 (124M) on a public-domain text and run in minutes on a single CPU; code and scripts are released for full reproduction at <https://github.com/eighteight/fractal-kv>.

2 The codec as a KV archive

We first establish that the code is a usable storage primitive independent of any model. Table 1 reports a self-contained benchmark of the codec on natural text: encoding is lossless across ASCII, Unicode, and degenerate inputs; encoding time is linear in length ($0.68 \mu\text{s}/\text{char}$, flat from 25K to 400K characters); random access to an arbitrary character in a 10^6 -character document costs $311 \mu\text{s}$ (decoding only the span that contains it); and appending a token costs $175 \mu\text{s}$ amortized, re-walking only from the last stored anchor. These are the primitives a KV archive requires: append as the cache grows, and random access when a position is read back.

Figure 1 makes the alphabet/ratio constraint concrete: the contraction ratio must adapt to alphabet size for the code to remain uniquely decodable, which in turn sets the per-symbol precision budget and hence the span length used by the codec.

3 Quantizer study for the KV archive

Setup. We evaluate on GPT-2 (124M) using *The Time Machine* (Project Gutenberg, public domain). Perplexity is measured token-by-token over a 1024-token passage. Codebooks are trained by k -means on KV vectors collected from a *disjoint* span of the same book. During evaluation we keep an exact window—the first 4 positions (attention sinks [1]) and the most recent 32—and, once a position ages out of that window, overwrite its cached K and V with their nearest codebook entries, so all later tokens attend to the quantized archive. This is the regime of interest: at 1024

Table 2: KV-archive quantization on GPT-2, 1024-token contexts, 4-sink + 32-recent exact window. Perplexity increase is over the exact-cache baseline (35.97); “2nd half” isolates the document half where archived context dominates. Storage is the index stream via the fractal codec, and compression is relative to an fp16 cache.

Configuration	Δ PPL	Δ PPL (2nd half)	B/token	vs. fp16
Pooled VQ, $k=256$	+51.0%	+72.6%	342	108×
Pooled VQ, $k=1024$	+38.1%	+51.0%	445	83×
Pooled RVQ, $k=1024 \times 2$	+29.2%	+40.1%	889	41×
Per-head VQ, $k=256$	+23.7%	+32.0%	342	108×
Per-head RVQ, $k=256 \times 2$	+15.0%	+22.4%	684	54×
<i>values only (keys exact)</i>	+4.0%	+6.7%	—	—
<i>keys only (values exact)</i>	+14.5%	+20.7%	—	—
Per-head hybrid ($K \times 4$, $V \times 2$)	+11.2%	+16.6%	1025	36×

tokens the exact window is 3.5% of context and the model attends almost entirely to archived, quantized memory. Residual vector quantization (RVQ) of depth s stores each vector as s indices whose centroids sum to the reconstruction. Storage is reported as bytes/token of the serialized index stream (fractal codec) and as compression ratio against an fp16 cache (36,864 B/token); the exact baseline perplexity is 35.97.

Per-head codebooks dominate. Table 2 and Figure 2 give the main result. Sharing one codebook across all heads of a layer (“pooled”) is substantially worse than a codebook per head at *equal bit budget*. Single-stage per-head VQ costs +23.7% perplexity versus +51.0% for pooled, and two-stage per-head RVQ costs +15.0% versus +37.2%; in both cases per-head codebooks move the entire rate–distortion curve down. Each doubling of the index budget along the RVQ axis buys back a roughly constant 8–9 perplexity points, indicating a smooth operating curve rather than a cliff. Per-head codebooks add a one-time 36 MB of centroids (288 codebooks), trained in 108 s on CPU.

Keys are $\sim 4\times$ more fragile than values. Reusing the two-stage per-head codebooks, we quantize only values (keys kept exact) and only keys (values kept exact). Quantizing values costs +4.0% perplexity; quantizing keys costs +14.5%—nearly the entire +15.0% of quantizing both, and the two effects compose almost independently ($1.145 \times 1.040 \approx 1.19$). The asymmetry has a clear mechanism: values enter attention through a weighted average, which attenuates per-vector error, whereas keys enter through the query–key dot product that decides *which* memories are read, so key error corrupts attention routing itself. The direction of this effect matches the key/value distinction reported by KIVI [4]; our contribution is to express it as a perplexity budget and to convert that budget into a bit allocation.

A bit-asymmetric hybrid. Allocating four RVQ stages to keys and two to values lowers the cost to **+11.2%** perplexity at 1025 B/token (36× vs. fp16), with keys-only- $\times 4$ at +9.4% confirming the key axis is where the budget is best spent. This is the best operating point in our sweep and the recommended default; the key-bit scaling law suggests further stages would continue to trade ~ 5 points of perplexity per doubling.

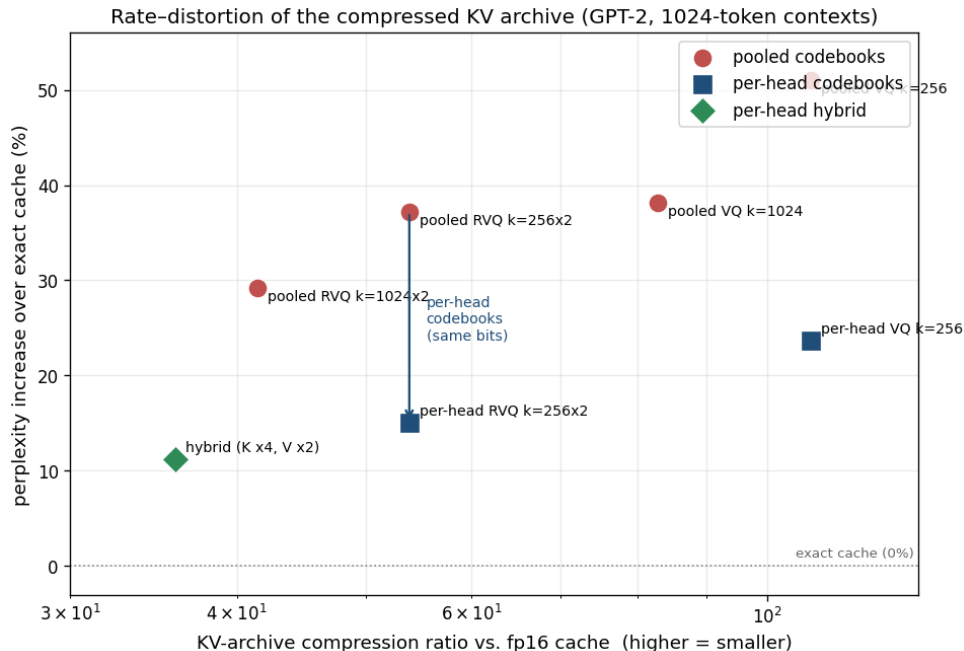


Figure 2: Rate-distortion of the compressed KV archive. Per-head codebooks (blue/green) Pareto-dominate pooled codebooks (red); the vertical arrow marks the perplexity drop from pooling to per-head codebooks at an identical bit budget. The bit-asymmetric hybrid attains the lowest perplexity cost (+11.2%) at $36\times$ compression.

On the storage layer’s role. We are explicit that the compression *ratio* in Table 2 is produced by the vector quantizer; the fractal codec is the serialization of the resulting index stream, and on these high-entropy indices its size is comparable to bit-packing and to a general-purpose byte compressor (within a few percent either way). Its value is not a smaller blob but a richer one: unlike a byte compressor, the archive supports $O(1)$ random access to any archived position and $O(1)$ append, and—as we show next—doubles as a retrieval index over its own contents.

4 Lossy operation: trading precision for memory

The archive so far is lossless, but a KV cache does not require exact recovery of distant context, so it is natural to ask what is bought by spending fewer bits per stored point and what is lost in return. Truncating the code point to B bits yields such a lossy code, and moves the relevant bound from the entropy H to the rate-distortion function $R(D)$. The useful observation is *where* the distortion falls. Because each successive symbol refines the interval, the least significant bits of the point describe the symbols coded last. Truncation therefore destroys the tail of the coded sequence and leaves a contiguous exact prefix. Coding the sequence in reverse inverts this: the exact region becomes a contiguous *suffix*, and the distant past degrades first.

Table 3 shows the effect: under reversed coding the exact horizon extends monotonically with the retained budget (36, 70, 150 and 222 exact trailing characters).

The single-interval gradient does not survive segmentation. The preceding analysis assumes the whole sequence is carried by one point, which finite precision forbids: the codec stores

Table 3: Lossy truncation of a 240-character code point (order-0 model). Forward coding preserves a contiguous prefix; reversed coding preserves a contiguous suffix, i.e. recent context is recovered exactly while the distant past degrades.

Bits kept	Forward		Reversed	
	errors	exact region	errors	exact region
200	195	[0..38]	196	[204..239]
400	158	[0..72]	161	[170..239]
800	86	[0..151]	83	[90..239]
1200	16	[0..223]	17	[18..239]

one point per fixed-length span (Section 2). Truncating every span’s point uniformly therefore damages the far end of *each* span, producing one damaged region per span rather than a single contiguous one. Measuring this at a fixed budget of 1.45 bits/char on a 960-character string, one interval yields a single exact prefix, whereas four and sixteen intervals yield a periodic pattern of alternating exact and damaged regions spanning the entire sequence:

```

1 span      .....XXXXXXXXXXXXXXXXXXXXXXXXXXXX
4 spans     ....XXXXXXXXXXXXX...XXXXXXXXXXXXX...XXXXXXXXXXXXX
16 spans    .XXXXXxXXxXXx.XXXxXXxXXx.XXXxXXx.XXXx.XXXxXXx.XX

```

(. exact, x/X partially/mostly wrong.) Because a practical codec is necessarily multi-span, uniform truncation degrades recent context as much as distant context, which is the opposite of what an attention workload requires. Coding order then governs only the placement of damage *within* each short span and is of little consequence. A recency gradient must instead be produced by allocating precision *across* spans—holding recent spans exact and truncating distant ones—which is precisely the explicit exact-window policy of Section 3. We therefore do not claim the lossy code supplies that policy for free; the geometry contributes only the within-span ordering, and the cross-span allocation remains a deliberate design choice.

Two further caveats bound the regime. First, a pure recency gradient is not the correct importance ordering for attention: the earliest positions carry disproportionate attention mass [1], so a practical scheme must still pin a small sink prefix, and our long-context measurements show that degradation of distant context is what costs accuracy on retrieval-style workloads. Second, the weighted and reversed variants are inherently sequential to decode, so adopting them forfeits the random access and in-place search that motivate the uniform archive. We report this regime as a characterization of the design space rather than as a drop-in replacement.

5 The archive is also a retrieval index

A property of the code makes the stored archive searchable without decompression. Because each step contracts by r , a stored point is dominated by the most recent symbols, older ones decaying geometrically; two positions sharing an s -symbol suffix therefore have points within $2r^s$ of each other. Nearest-neighbor distance in point space is thus a *graded* suffix similarity, and thresholding at $2r^\ell$ retrieves all positions whose length- ℓ suffix matches a query—a property known for the midpoint code in the sequence-analysis literature [9] and which we measure directly and exploit for KV-archive retrieval.

Figure 3 confirms the decay law across seven orders of magnitude on a 100K-character corpus and reports retrieval quality. We encode a query from the origin and threshold squared distance

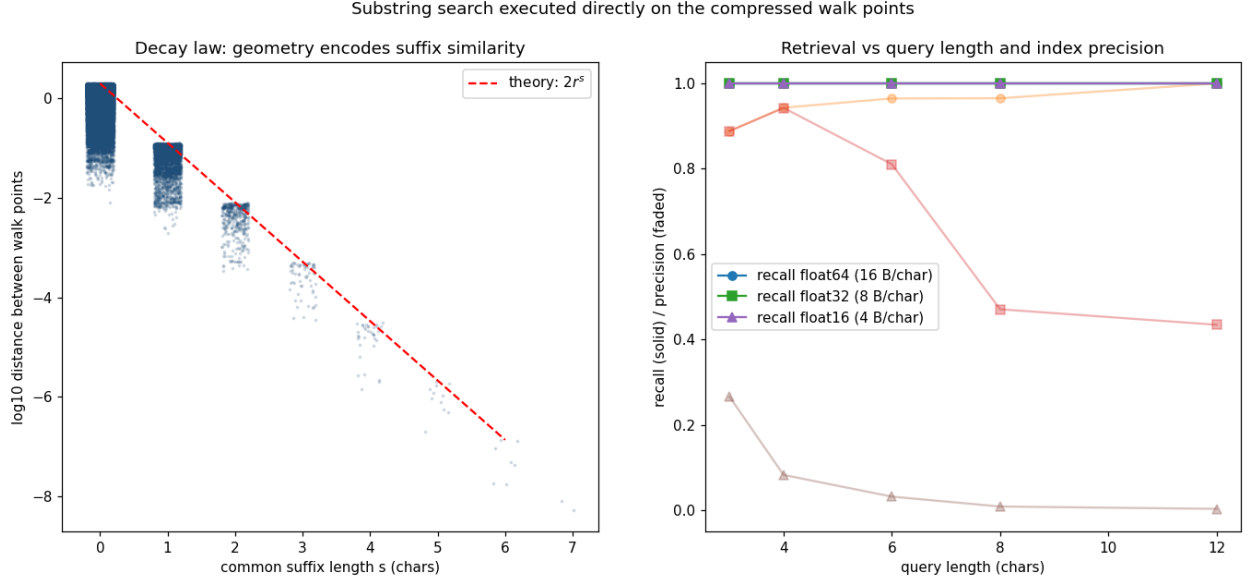


Figure 3: Retrieval directly on the compressed archive. **Left:** distance between stored points versus common-suffix length follows the $2r^s$ decay law over seven decades. **Right:** retrieval recall (solid) is 1.00 at all query lengths; precision (faded) is governed by index numerical precision relative to r^ℓ , so a double-precision index stays near-perfect while lower precision serves as a coarse pre-filter.

over the stored points. Recall is 1.00 at every query length by construction—a true match *must* fall inside the ball—while precision is set by the index’s numerical precision relative to r^ℓ : with a double-precision index (16 B/char) precision is 0.89–1.00; with single precision (8 B/char) recall is still 1.00 and the modest false-positive set is removable by decode verification, which itself runs inside the representation. Because the index lives in the plane rather than in the model’s hidden dimension, brute-force nearest-neighbor over the two-dimensional points costs only ≈ 0.9 ms/query over 100K positions (and is trivially accelerated by any spatial index)—this is a 2D search, not high-dimensional approximate nearest neighbor, and should not be compared to embedding-space retrieval benchmarks. Crucially, the end-to-end loop touches no external text: a query returns a matched point, and the surrounding context is decoded *backward from that point* through stored anchors, reproducing the ground-truth context character for character. In an inference setting this is exactly the operation a retrieval-augmented decoder needs from its own past—locate archived positions whose recent context matches a probe, and rehydrate only those, without scanning or decompressing the rest of the cache.

6 Relation to entropy coding

The archive of Section 2 is lossless but makes no use of source statistics: every symbol consumes $\log_2 N$ bits regardless of its probability. This section places that design choice against the entropy bound, to be explicit about what the choice costs and why it is nonetheless the right one for an addressable archive.

The code is a degenerate arithmetic coder. Writing the contraction ratio per symbol rather than globally, let symbol c occupy a sub-interval of width $p(c)$ with cumulative offset $F(c)$. Encoding

Table 4: Rate on 60K characters of non-repetitive English prose (alphabet $N = 70$). The uniform (model-free) code is the row the archive of Section 2 implements.

Method	bits/char
Uniform code, $\log_2 N$ (this archive)	6.129
Probability-weighted, adaptive order-0	4.391
Probability-weighted, adaptive order-1	3.611
Probability-weighted, adaptive order-2	3.577
zlib -9	3.161
lzma	2.970
Shannon estimate for English (reference)	$\sim 1\text{--}1.5$

maintains $[lo, hi)$ and applies

$$lo' = lo + w F(c), \quad hi' = lo + w (F(c) + p(c)), \quad w = hi - lo, \quad (1)$$

which is an iterated function system whose maps are sized by the model. The code length of a string is then $-\sum_k \log_2 p(c_k)$, the model’s cross-entropy. Setting $p(c) = 1/N$ for all c recovers the uniform construction used above; sizing the maps by a source model recovers arithmetic coding. The uniform code is therefore the special case of an entropy coder under a uniform (i.e. worst-case) source model, and its rate is bounded below by $\log_2 N$ rather than by $H(X)$. We note this equivalence to situate the construction, not as a new result: chaos game representation is a standard IFS on symbolic sequences [7, 8], and interval subdivision by probability is the textbook definition of arithmetic coding.

The cost, measured. Table 4 reports adaptive (prequential, add-one smoothed) n -gram code lengths on 60,000 characters of non-repetitive English prose, alongside general-purpose compressors. The uniform code spends 6.13 bits/char; a trivial order-2 model spends 3.58, so the uniform parameterization forgoes roughly 2.55 bits/char, a factor of 1.71. Against Shannon’s 1–1.5 bits/char estimate for English the achievable gap is larger still. We also observe the familiar sparsity effect: orders above two degrade under add-one smoothing, as high-order contexts are mostly unseen at this corpus size.

The conclusion we draw is deliberately narrow. As a *compressor* on structured text the uniform code is not competitive, and no tuning closes that gap, because the gap *is* the absent source model. What the uniform parameterization buys instead is the structural property the weighted version destroys: a fixed, position-addressable geometry, hence $O(1)$ random access, $O(1)$ append, and in-place suffix search. Arithmetic coding attains the entropy bound but emits a single opaque number that must be decoded sequentially from the start. The design space is therefore a three-way trade-off—rate efficiency, random access, and memory—and the two parameterizations sit at opposite corners of it.

7 Related work

KV-cache compression spans low-bit quantization [3, 4], eviction of low-importance positions [2], and the observation that a few initial “sink” tokens carry disproportionate attention mass [1]; our exact-window scheme is a minimal combination of a sink prefix and a recency window. The

key/value asymmetry we measure is not new: KIVI [4] already reports that keys and values have distinct distributions and require different quantization treatment (keys per-channel, values per-token); our contribution here is only to quantify the asymmetry as a perplexity budget on long contexts and to use it to allocate residual-VQ depth. Vector quantization of the KV cache under a random-access constraint is likewise an active topic: the concurrent FibQuant [5] is, like us, a fixed-rate vector quantizer for random-access KV compression evaluated on GPT-2, tracing a 5–34 $\times$ memory–fidelity frontier, and vector storage engines for long-context inference are emerging [6]. Relative to FibQuant, which optimizes the codebook geometry, our quantizer study is deliberately plain (k-means / residual VQ) and our distinct claim is about the *storage representation*: the contractive iterated-map code—chaos game representation [7] and its arbitrary-alphabet generalization, universal sequence maps [8]—is simultaneously a lossless, randomly-accessible, appendable store *and* an in-place suffix-search index, the latter resting on a decay property established for that code [9]. To our knowledge that unification of storage and in-representation retrieval has not been applied to the KV-archive setting; it, rather than the quantizer or the code in isolation, is what this paper contributes. We developed this representation independently of, and contemporaneously with, FibQuant [5]; we became aware of it, and of RetroInfer [6], only after the experiments reported here were complete, and we cite both as related work rather than claiming priority over the overlap.

8 Limitations

Our study is deliberately small-scale and the claims should be read accordingly. All results are on a single 124M-parameter model, a single public-domain corpus, and a single 1024-token context length, using perplexity as the only quality metric; downstream-task accuracy and larger models are untested, and larger models are empirically more tolerant of KV quantization, so these numbers are plausibly conservative but not validated as such. The compression comes from the vector quantizer, and our per-head codebooks are trained per corpus rather than amortized across data; a deployable system would need corpus-independent or online codebooks. The retrieval demonstration is exact/approximate *suffix* matching over token strings, not semantic retrieval over embeddings—the stored vectors are not shown to encode meaning, only sequence structure. Finally, our serialization ties rather than beats byte-oriented coders on raw size; its advantage is the access pattern, not the ratio. We also do not benchmark against concurrent random-access KV quantizers such as FibQuant [5], whose codebook design is complementary to and likely stronger than our plain k-means; a fair head-to-head, and combining their quantizer with our retrieval-capable storage, is left to future work.

9 Conclusion

Treating the storage of a quantized KV cache as a first-class design choice, we showed that a lossless contractive iterated-map code is a practical *archive* format: linear-time, randomly accessible, appendable, and—uniquely—searchable in place. Around it we conducted a controlled quantizer study on long contexts, finding that per-head residual VQ Pareto-dominates pooled codebooks, that key quantization is about 4 $\times$ more damaging than value quantization, and that a bit-asymmetric hybrid compresses the archived cache 36 $\times$ versus fp16 at +11% perplexity on GPT-2. The retrieval result points to the most interesting direction: an inference-time memory that is stored, decoded, and searched in one representation, so that a query can locate the archived positions whose context resembles it without rehydrating the cache. We release all code and scripts at

<https://github.com/eighteight/fractal-kv>; every figure and table reproduces from a single command on a laptop CPU.

References

- [1] G. Xiao, Y. Tian, B. Chen, S. Han, and M. Lewis. Efficient Streaming Language Models with Attention Sinks. *ICLR*, 2024. arXiv:2309.17453. <https://arxiv.org/abs/2309.17453>
- [2] Z. Zhang, Y. Sheng, T. Zhou, T. Chen, L. Zheng, R. Cai, Z. Song, Y. Tian, C. Ré, C. Barrett, Z. Wang, and B. Chen. H2O: Heavy-Hitter Oracle for Efficient Generative Inference of Large Language Models. *NeurIPS*, 2023. arXiv:2306.14048. <https://arxiv.org/abs/2306.14048>
- [3] C. Hooper, S. Kim, H. Mohammadzadeh, M. W. Mahoney, Y. S. Shao, K. Keutzer, and A. Gholami. KVQuant: Towards 10 Million Context Length LLM Inference with KV Cache Quantization. *NeurIPS*, 2024. arXiv:2401.18079. <https://arxiv.org/abs/2401.18079>
- [4] Z. Liu, J. Yuan, H. Jin, S. Zhong, Z. Xu, V. Braverman, B. Chen, and X. Hu. KIVI: A Tuning-Free Asymmetric 2bit Quantization for KV Cache. *ICML*, 2024. arXiv:2402.02750. <https://arxiv.org/abs/2402.02750>
- [5] N. Lee and Y. Kim. FibQuant: Universal Vector Quantization for Random-Access KV-Cache Compression. arXiv preprint, 2026. arXiv:2605.11478. <https://arxiv.org/abs/2605.11478>
- [6] Y. Chen, J. Zhang, B. Lu, Q. Zhang, C. Zhang, J. Luo, D. Liu, H. Jiang, Q. Chen, J. Liu, B. Ding, X. Yan, J. Jiang, C. Chen, M. Zhang, Y. Yang, F. Yang, and M. Yang. RetroInfer: A Vector-Storage Approach for Scalable Long-Context LLM Inference. arXiv preprint, 2025. arXiv:2505.02922. <https://arxiv.org/abs/2505.02922>
- [7] H. J. Jeffrey. Chaos game representation of gene structure. *Nucleic Acids Research*, 18(8):2163–2170, 1990. DOI:10.1093/nar/18.8.2163. <https://doi.org/10.1093/nar/18.8.2163>
- [8] J. S. Almeida and S. Vinga. Universal sequence map (USM) of arbitrary discrete sequences. *BMC Bioinformatics*, 3:6, 2002. DOI:10.1186/1471-2105-3-6. <https://doi.org/10.1186/1471-2105-3-6>
- [9] S. Vinga, A. M. Carvalho, A. P. Francisco, L. M. S. Russo, and J. S. Almeida. Pattern matching through Chaos Game Representation: bridging numerical and discrete data structures for biological sequence analysis. *Algorithms for Molecular Biology*, 7:10, 2012. DOI:10.1186/1748-7188-7-10. <https://doi.org/10.1186/1748-7188-7-10>