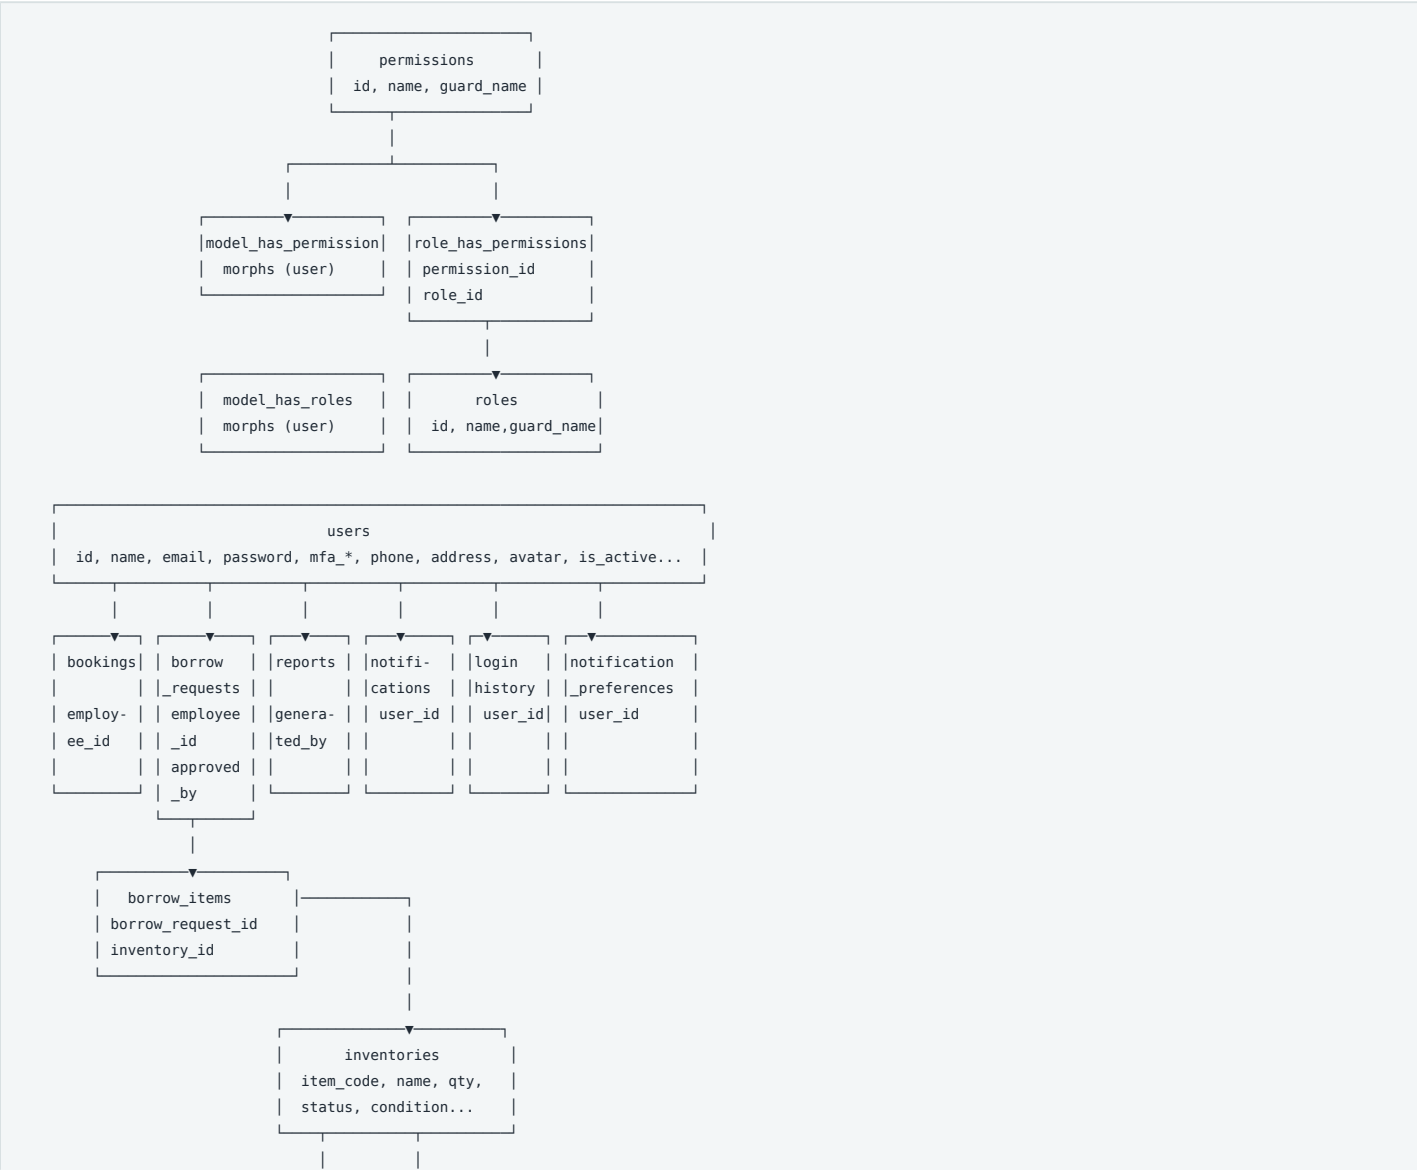
RGV Database Schema

> **RGV Multi-Tech Services** — Complete Database Schema Reference
>
> Tables: 32 | Migrations: 30 | Models: 17 | ORM: Laravel Eloquent | Last Updated: October 2, 2026

Table of Contents

1. Entity Relationship Diagram
2. Table Groups Overview
3. Core Business Tables
4. Auth & User Tables
5. Permissions & Roles (Spatie)
6. Platform & Operational Tables
7. Laravel Infrastructure Tables
8. Index Reference
9. SQL Dump Reference

Entity Relationship Diagram



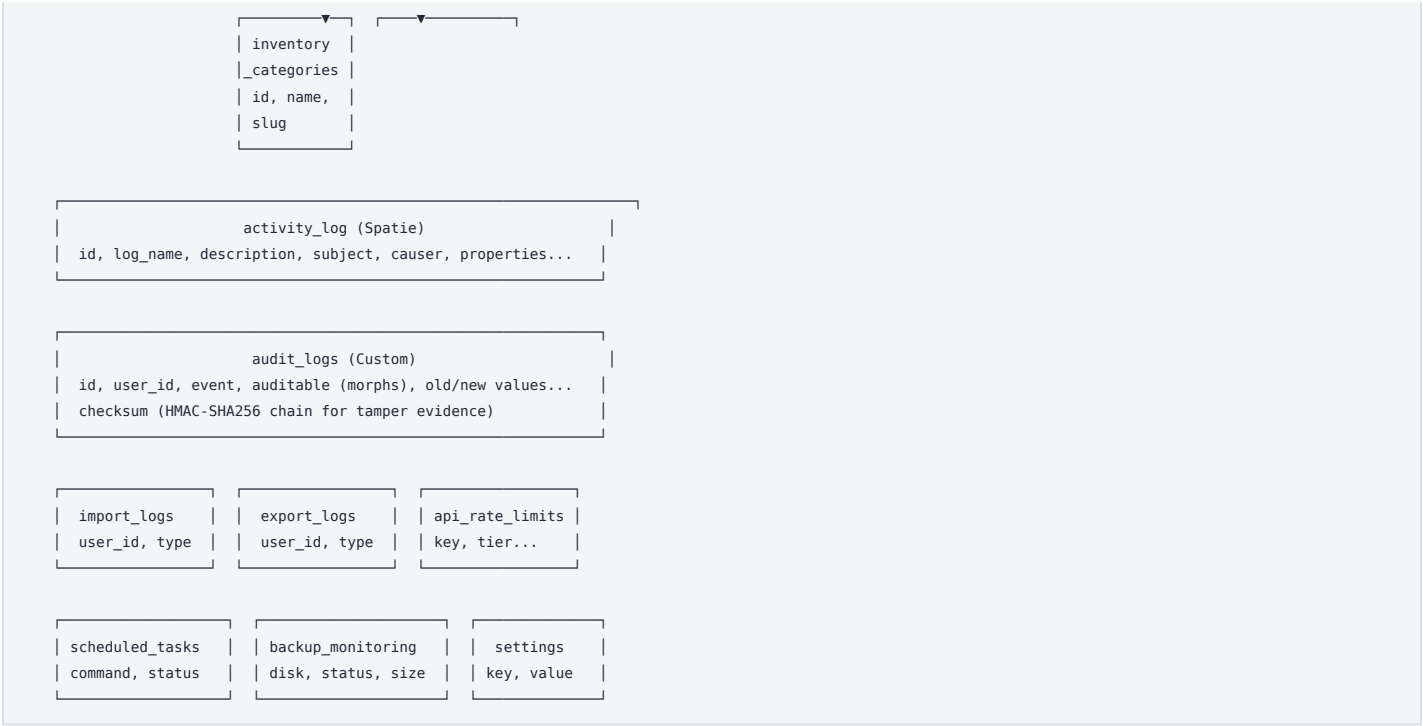


Table Groups Overview

Group	Tables	Description
Auth / User Core	`users`, `password_reset_tokens`, `sessions`, `login_history`, `personal_access_tokens`	Web sessions, Sanctum mobile tokens, login tracking
Permissions	`permissions`, `roles`, `model_has_permissions`, `model_has_roles`, `role_has_permissions`	Spatie RBAC
Activity Logging	`activity_log`, `audit_logs`	Spatie activitylog + custom tamper-evident audit
Core Business	`bookings`, `inventories`, `inventory_categories`, `borrow_requests`, `borrow_items`, `borrow_return_evidences`, `notifications`, `reports`	Main business domain; evidence rows are retained for historical returns
Platform Ops	`import_logs`, `export_logs`, `scheduled_tasks`, `api_rate_limits`, `backup_monitoring`, `settings`, `notification_preferences`	System operations
Infrastructure	`cache`, `cache_locks`, `jobs`, `job_batches`, `failed_jobs`	Laravel framework tables

---

Core Business Tables

`bookings`

Service booking requests submitted by the public.

Column	Type	Nullable	Default	Description
`id`	BIGINT PK	NO	AUTO_INCREMENT	Primary key
`reference_number`	VARCHAR UNIQUE	NO	`BK-{uniqid}`	Auto-generated reference number
`full_name`	VARCHAR	NO	—	Customer full name
`email`	VARCHAR	NO	—	Customer email
`contact_number`	VARCHAR	NO	—	Customer phone
`address`	TEXT	NO	—	Customer address
`preferred_date`	DATE	NO	—	Preferred service date
`preferred_time`	TIME	NO	—	Preferred service time
`purpose_category`	VARCHAR	NO	—	Service category

Column	Type	Nullable	Default	Description
reason	TEXT	YES	—	Detailed reason/description
status	VARCHAR	NO	pending	pending/approved/rejected/completed/cancelled
employee_id	FK → users.id	YES	SET NULL	Assigned employee
remarks	TEXT	YES	—	Admin/employee remarks
attachment_path	VARCHAR	YES	—	Uploaded file path
approved_at	TIMESTAMP	YES	—	Approval timestamp
rejected_at	TIMESTAMP	YES	—	Rejection timestamp
completed_at	TIMESTAMP	YES	—	Completion timestamp
cancelled_at	TIMESTAMP	YES	—	Cancellation timestamp
lock_version	UNSIGNED INT	NO	1	Optimistic locking
created_at	TIMESTAMP	NO	—	—
updated_at	TIMESTAMP	NO	—	—
deleted_at	TIMESTAMP	YES	—	Soft delete

Indexes: `[status, preferred_date]`, `reference_number`

Relationships:

- `employee()` → BelongsTo → `User` on `employee_id`

Status Flow:

```
pending → approved → completed
pending → rejected
pending → cancelled
approved → cancelled
```

`inventories`

Inventory/asset items tracked in the system.

Column	Type	Nullable	Default	Description
id	BIGINT PK	NO	AUTO_INCREMENT	Primary key
item_code	VARCHAR UNIQUE	NO	—	Unique item code
qr_token	VARCHAR UNIQUE	NO	—	Server-generated, immutable QR lookup token
name	VARCHAR	NO	—	Item name
description	TEXT	YES	—	Item description
category_id	FK → inventory_categories.id	NO	CASCADE	Item category
quantity	INT	NO	0	Current stock quantity
unit	VARCHAR	NO	pcs	Unit of measurement
unit_cost	DECIMAL(10,2)	YES	—	Cost per unit
status	VARCHAR	NO	available	available/borrowed/maintenance/damaged
condition	VARCHAR	NO	good	new/good/fair/poor
location	VARCHAR	YES	—	Storage location
image_path	VARCHAR	YES	—	Item image
low_stock_threshold	INT	NO	5	Low stock warning threshold
date_added	DATE	NO	—	Date added to inventory
is_active	BOOLEAN	NO	true	Active status
lock_version	UNSIGNED INT	NO	1	Optimistic locking
created_at	TIMESTAMP	NO	—	—

Column	Type	Nullable	Default	Description
updated_at	TIMESTAMP	NO	—	—
deleted_at	TIMESTAMP	YES	—	Soft delete

Indexes: `[category_id, status]`, `item_code`

Relationships:

- `category()` → BelongsTo → `InventoryCategory`
- `borrowItems()` → HasMany → `BorrowItem`

`inventory_categories`

Categories for inventory items.

Column	Type	Nullable	Default	Description
id	BIGINT PK	NO	AUTO_INCREMENT	Primary key
name	VARCHAR	NO	—	Category name
slug	VARCHAR UNIQUE	NO	—	URL-friendly slug
description	TEXT	YES	—	Category description
icon	VARCHAR	YES	—	Icon identifier
is_active	BOOLEAN	NO	true	Active status
created_at	TIMESTAMP	NO	—	—
updated_at	TIMESTAMP	NO	—	—
deleted_at	TIMESTAMP	YES	—	Soft delete

Relationships:

- `inventories()` → HasMany → `Inventory`

`borrow_requests`

Employee requests to borrow inventory items.

Column	Type	Nullable	Default	Description
id	BIGINT PK	NO	AUTO_INCREMENT	Primary key
request_number	VARCHAR UNIQUE	NO	`BR-{uniqid}`	Auto-generated reference
employee_id	FK → users.id	NO	CASCADE	Requesting employee
approved_by	FK → users.id	YES	SET NULL	Approving admin
status	VARCHAR	NO	`pending`	pending/approved/rejected/borrowed/returned
reason	TEXT	NO	—	Reason for borrowing
borrow_date	DATE	NO	—	Date borrowed
due_date	DATE	NO	—	Expected return date
return_date	DATE	YES	—	Actual return date
return_location	VARCHAR	YES	—	Location where items were returned
admin_remarks	TEXT	YES	—	Admin notes
approved_at	TIMESTAMP	YES	—	Approval timestamp
rejected_at	TIMESTAMP	YES	—	Rejection timestamp
cancelled_at	TIMESTAMP	YES	—	Cancellation timestamp
borrowed_at	TIMESTAMP	YES	—	When items taken
returned_at	TIMESTAMP	YES	—	When items returned

Column	Type	Nullable	Default	Description
lock_version	UNSIGNED INT	NO	1	Optimistic locking
created_at	TIMESTAMP	NO	—	—
updated_at	TIMESTAMP	NO	—	—
deleted_at	TIMESTAMP	YES	—	Soft delete

Indexes: `[employee_id, status], request_number`

Relationships:

- `employee()` → BelongsTo → `User` on `employee_id`
- `approvedBy()` → BelongsTo → `User` on `approved_by`
- `borrowItems()` → HasMany → `BorrowItem`

Status Flow:

```
pending → approved → borrowed → returned
pending → rejected
```

Overdue indicators are computed from a borrowed request's due date; overdue is not a persisted status and penalty notes are not stored.

`borrow_items`

Pivot table linking borrow requests to inventory items, with additional tracking fields.

Column	Type	Nullable	Default	Description
id	BIGINT PK	NO	AUTO_INCREMENT	Primary key
borrow_request_id	FK → borrow_requests.id	NO	CASCADE	Parent borrow request
inventory_id	FK → inventories.id	NO	CASCADE	Borrowed item
quantity	INT	NO	1	Quantity borrowed
reserved_quantity	UNSIGNED INT	NO	0	Quantity reserved while request is pending
return_evidence_id	FK → borrow_return_evidences.id	YES	SET NULL	Photo evidence for this return
condition_borrowed	VARCHAR	NO	good	Condition when borrowed
condition_returned	VARCHAR	YES	—	Condition when returned
is_returned	BOOLEAN	NO	false	Return status
returned_at	TIMESTAMP	YES	—	Return timestamp
damage_notes	TEXT	YES	—	Damage description if any
created_at	TIMESTAMP	NO	—	—
updated_at	TIMESTAMP	NO	—	—

Indexes: `[borrow_request_id, inventory_id]`

Relationships:

- `borrowRequest()` → BelongsTo → `BorrowRequest`
- `inventory()` → BelongsTo → `Inventory`
- `returnEvidence()` → BelongsTo → `BorrowReturnEvidence`

`borrow_return_evidences`

Legacy return-evidence metadata retained for backward compatibility. The current mobile return workflow does not upload photos to Google Drive and does not rely on `drive_file_id` for normal processing.

Column	Type	Nullable	Default	Description
id	BIGINT PK	NO	AUTO_INCREMENT	Primary key
borrow_request_id	FK → borrow_requests.id	NO	CASCADE	Parent request
idempotency_key	VARCHAR UNIQUE	NO	—	Prevent duplicate processing on retry

Column	Type	Nullable	Default	Description
drive_file_id	VARCHAR	YES	—	Legacy external-file reference retained for historical records; not used by the current workflow
file_name	VARCHAR	NO	—	Stored evidence filename
mime_type	VARCHAR	YES	—	Uploaded file MIME type
uploaded_by	FK → users.id	YES	SET NULL	Employee who uploaded the evidence
uploaded_at	TIMESTAMP	YES	—	Upload timestamp
created_at	TIMESTAMP	YES	—	—
updated_at	TIMESTAMP	YES	—	—

Indexes: Unique `idempotency_key`, `[borrow_request_id, uploaded_at]`

Relationships:

- `borrowRequest()` → BelongsTo → `BorrowRequest`
- `uploadedBy()` → BelongsTo → `User`

`notifications`

In-app system notifications for users.

Column	Type	Nullable	Default	Description
id	BIGINT PK	NO	AUTO_INCREMENT	Primary key
user_id	FK → users.id	YES	CASCADE	Target user
type	VARCHAR	NO	—	booking/borrow_request/inventory/system
title	VARCHAR	YES	—	Notification title
message	TEXT	YES	—	Notification body
link	VARCHAR	YES	—	Action link URL
is_read	BOOLEAN	NO	false	Read status
read_at	TIMESTAMP	YES	—	When read
created_at	TIMESTAMP	NO	—	—
updated_at	TIMESTAMP	NO	—	—

Indexes: `[user_id, is_read]`

Relationships:

- `user()` → BelongsTo → `User`

Model: `SystemNotification` (maps to `notifications` table)

`reports`

Generated reports (PDF, Excel, CSV) with optional AI generation.

Column	Type	Nullable	Default	Description
id	BIGINT PK	NO	AUTO_INCREMENT	Primary key
report_number	VARCHAR UNIQUE	NO	RPT-{uniqid}	Auto-generated reference
generated_by	FK → users.id	NO	CASCADE	User who generated
type	VARCHAR	NO	—	booking/inventory/borrow/ai_analytics/monthly
title	VARCHAR	NO	—	Report title
summary	TEXT	YES	—	Report summary
data	JSON	YES	—	Report data
file_path	VARCHAR	YES	—	Generated file path
file_format	VARCHAR	NO	pdf	pdf/excel/csv

Column	Type	Nullable	Default	Description
report_date	DATE	NO	—	Report date
start_date	DATE	YES	—	Data start date
end_date	DATE	YES	—	Data end date
is_ai_generated	BOOLEAN	NO	false	AI-generated flag
created_at	TIMESTAMP	NO	—	—
updated_at	TIMESTAMP	NO	—	—

Indexes: `[type, report_date]`

Relationships:

- `generatedBy()` → BelongsTo → `User`

Auth & User Tables

users

Column	Type	Nullable	Default	Description
id	BIGINT PK	NO	AUTO_INCREMENT	Primary key
name	VARCHAR	NO	—	Full name
email	VARCHAR UNIQUE	NO	—	Email (login)
email_verified_at	TIMESTAMP	YES	—	Verification timestamp
password	VARCHAR	NO	—	Bcrypt hashed
mfa_enabled	BOOLEAN	NO	false	MFA toggle
mfa_secret	VARCHAR	YES	—	TOTP secret
mfa_type	VARCHAR	NO	email	email/totp
mfa_verified_at	TIMESTAMP	YES	—	MFA setup verified
mfa_recovery_codes	JSON	YES	—	8 recovery codes
remember_token	VARCHAR	YES	—	Remember-me token
phone	VARCHAR	YES	—	Phone number
address	TEXT	YES	—	Address
avatar_path	VARCHAR	YES	—	Avatar image path
is_active	BOOLEAN	NO	true	Account active
last_login_at	TIMESTAMP	YES	—	Last login timestamp
lock_version	UNSIGNED INT	NO	1	Optimistic locking
created_at	TIMESTAMP	NO	—	—
updated_at	TIMESTAMP	NO	—	—

Relationships:

- `bookings()` → HasMany → `Booking`
- `borrowRequests()` → HasMany → `BorrowRequest`
- `approvedBorrowRequests()` → HasMany → `BorrowRequest`
- `reports()` → HasMany → `Report`
- `notifications()` → HasMany → `SystemNotification`
- `notificationPreferences()` → HasMany → `NotificationPreference`
- `loginHistory()` → HasMany → `LoginHistory`

login_history

Column	Type	Nullable	Default	Description

id	BIGINT PK	NO	AUTO_INCREMENT	Primary key
user_id	FK → users.id	NO	CASCADE	User
ip_address	VARCHAR(45)	YES	—	Login IP
user_agent	TEXT	YES	—	Browser user agent
logged_in_at	TIMESTAMP	YES	—	Login time
logged_out_at	TIMESTAMP	YES	—	Logout time
session_id	VARCHAR	YES	—	Session ID
is_impersonation	BOOLEAN	NO	false	Impersonation flag
created_at	TIMESTAMP	NO	—	—
updated_at	TIMESTAMP	NO	—	—

Indexes: `logged_in_at`

`password_reset_tokens` (Laravel built-in)

Column	Type	Nullable
email	VARCHAR PK	NO
token	VARCHAR	NO
created_at	TIMESTAMP	YES

`sessions` (Laravel built-in)

Column	Type	Nullable
id	VARCHAR PK	NO
user_id	FK → users.id	YES
ip_address	VARCHAR(45)	YES
user_agent	TEXT	YES
payload	LONGTEXT	NO
last_activity	INT	NO

`personal_access_tokens` (Laravel Sanctum)

Bearer tokens used by the Android employee app. Tokens are hashed in storage; the plaintext token is returned only when issued.

Column	Type	Nullable	Description
id	BIGINT PK	NO	Primary key
tokenable_type	VARCHAR	NO	Model type for polymorphic owner
tokenable_id	BIGINT	NO	User identifier
name	TEXT	NO	Device/token name
token	VARCHAR(64) UNIQUE	NO	Hashed bearer token
abilities	TEXT	YES	Token abilities
last_used_at	TIMESTAMP	YES	Last authenticated use
expires_at	TIMESTAMP	YES	Optional expiry
created_at	TIMESTAMP	YES	—
updated_at	TIMESTAMP	YES	—

Indexes: Unique `token`; `expires_at`

Permissions & Roles (Spatie)

permissions

Column	Type	Nullable	Notes
id	BIGINT PK	NO	—
name	VARCHAR	NO	Permission name
guard_name	VARCHAR	NO	web
created_at	TIMESTAMP	NO	—
updated_at	TIMESTAMP	NO	—

Unique: `[name, guard_name]`

roles

Column	Type	Nullable	Notes
id	BIGINT PK	NO	—
name	VARCHAR	NO	admin/employee
guard_name	VARCHAR	NO	web
created_at	TIMESTAMP	NO	—
updated_at	TIMESTAMP	NO	—

Unique: `[name, guard_name]`

model_has_permissions

Column	Type	Nullable	Notes
permission_id	FK → permissions.id	NO	CASCADE delete
model_type	VARCHAR	NO	Morph type
model_id	BIGINT	NO	Morph id

Primary: `[permission_id, model_id, model_type]`

model_has_roles

Column	Type	Nullable	Notes
role_id	FK → roles.id	NO	CASCADE delete
model_type	VARCHAR	NO	Morph type
model_id	BIGINT	NO	Morph id

Primary: `[role_id, model_id, model_type]`

role_has_permissions

Column	Type	Nullable	Notes
permission_id	FK → permissions.id	NO	CASCADE delete
role_id	FK → roles.id	NO	CASCADE delete

Primary: `[permission_id, role_id]`

Platform & Operational Tables

`activity_log` (Spatie ActivityLog)

Column	Type	Nullable	Description
`id`	BIGINT PK	NO	Primary key
`log_name`	VARCHAR	YES	Log category
`description`	TEXT	NO	Activity description
`subject_type`	VARCHAR	YES	Morph type (subject)
`subject_id`	BIGINT	YES	Morph id (subject)
`causer_type`	VARCHAR	YES	Morph type (causer)
`causer_id`	BIGINT	YES	Morph id (causer)
`event`	VARCHAR	YES	created/updated/deleted
`properties`	JSON	YES	Changed attributes
`batch_uuid`	UUID	YES	Batch identifier
`created_at`	TIMESTAMP	NO	—
`updated_at`	TIMESTAMP	NO	—

`audit_logs` (Custom — Tamper-Evident)

Column	Type	Nullable	Description
`id`	BIGINT PK	NO	Primary key
`user_id`	FK → users.id	YES	SET NULL
`event`	VARCHAR	NO	Action performed
`auditable_type`	VARCHAR	YES	Morph type
`auditable_id`	BIGINT	YES	Morph id
`old_values`	JSON	YES	Values before change
`new_values`	JSON	YES	Values after change
`ip_address`	VARCHAR	YES	Request IP
`user_agent`	TEXT	YES	Browser info
`url`	VARCHAR	YES	Request URL
`checksum`	VARCHAR(64)	NO	HMAC-SHA256 chain
`previous_checksum`	VARCHAR(64)	YES	Previous entry hash
`archived_at`	TIMESTAMP	YES	Archive timestamp
`created_at`	TIMESTAMP	NO	—
`updated_at`	TIMESTAMP	NO	—

Indexes: `[event, created_at]`

Tamper Evidence: Each entry's `checksum` is computed as `HMAC-SHA256(previous_checksum + entry_data)`, creating an immutable chain.

`import_logs`

Column	Type	Nullable	Default	Description
`id`	BIGINT PK	NO	AUTO_INCREMENT	Primary key
`user_id`	FK → users.id	YES	SET NULL	Importing user
`type`	VARCHAR	NO	`inventory`	Import type
`file_name`	VARCHAR	YES	—	Uploaded file name
`status`	VARCHAR	NO	`pending`	pending/processing/completed/failed

Column	Type	Nullable	Default	Description
total_rows	UNSIGNED INT	NO	0	Total rows in file
processed_rows	UNSIGNED INT	NO	0	Rows processed
successful_rows	UNSIGNED INT	NO	0	Successfully imported
failed_rows	UNSIGNED INT	NO	0	Failed rows
duplicate_strategy	VARCHAR	NO	skip	skip/update/error
errors	JSON	YES	—	Error details
error_report_path	VARCHAR	YES	—	Error file path
started_at	TIMESTAMP	YES	—	Start time
completed_at	TIMESTAMP	YES	—	End time
created_at	TIMESTAMP	NO	—	—
updated_at	TIMESTAMP	NO	—	—

Indexes: [type, status]

export_logs

Column	Type	Nullable	Default	Description
id	BIGINT PK	NO	AUTO_INCREMENT	Primary key
user_id	FK → users.id	YES	SET NULL	Exporting user
type	VARCHAR	NO	—	Export type
format	VARCHAR	NO	xlsx	xlsx/csv/pdf
status	VARCHAR	NO	pending	pending/processing/completed/failed
filters	JSON	YES	—	Applied filters
columns	JSON	YES	—	Selected columns
record_count	UNSIGNED INT	NO	0	Records exported
file_path	VARCHAR	YES	—	Output file path
failure_message	TEXT	YES	—	Error message
started_at	TIMESTAMP	YES	—	Start time
completed_at	TIMESTAMP	YES	—	End time
created_at	TIMESTAMP	NO	—	—
updated_at	TIMESTAMP	NO	—	—

Indexes: [type, status]

scheduled_tasks

Column	Type	Nullable	Default	Description
id	BIGINT PK	NO	AUTO_INCREMENT	Primary key
command	VARCHAR	NO	—	Artisan command
status	VARCHAR	NO	started	started/running/completed/failed
started_at	TIMESTAMP	YES	—	Start time
finished_at	TIMESTAMP	YES	—	End time
duration_ms	UNSIGNED INT	YES	—	Duration in ms
output	TEXT	YES	—	Command output
failure_message	TEXT	YES	—	Error if failed
created_at	TIMESTAMP	NO	—	—
updated_at	TIMESTAMP	NO	—	—

Indexes: `[command, status]`

`api_rate_limits`

Column	Type	Nullable	Default	Description
`id`	BIGINT PK	NO	AUTO_INCREMENT	Primary key
`user_id`	FK → users.id	YES	SET NULL	Authenticated user
`tier`	VARCHAR	NO	`public`	public/standard/premium/admin
`key`	VARCHAR	NO	—	Rate limit key
`ip_address`	VARCHAR	YES	—	Request IP
`limit_per_minute`	UNSIGNED INT	NO	—	Max requests/min
`remaining`	UNSIGNED INT	NO	—	Remaining requests
`blocked`	BOOLEAN	NO	false	Blocked flag
`reset_at`	TIMESTAMP	YES	—	Reset timestamp
`created_at`	TIMESTAMP	NO	—	—
`updated_at`	TIMESTAMP	NO	—	—

Indexes: `[key, reset_at]`, `[tier, blocked]`

`backup_monitoring`

Column	Type	Nullable	Default	Description
`id`	BIGINT PK	NO	AUTO_INCREMENT	Primary key
`disk`	VARCHAR	NO	`local`	Backup disk
`status`	VARCHAR	NO	`unknown`	queued/processing/success/failed
`file_path`	VARCHAR	YES	—	Backup file path (e.g., `Laravel/2026-05-17-10-15-46.zip`)
`size_bytes`	UNSIGNED BIGINT	NO	0	File size in bytes
`checksum`	VARCHAR(64)	YES	—	SHA-256 hash of the backup file
`message`	TEXT	YES	—	Status message
`started_at`	TIMESTAMP	YES	—	Start time
`completed_at`	TIMESTAMP	YES	—	End time
`created_at`	TIMESTAMP	NO	—	—
`updated_at`	TIMESTAMP	NO	—	—

Indexes: `[disk, status]`

Backup File Location: Backups are stored in the `local` disk under a directory named after the application (`config('backup.backup.name')`). The default `APP_NAME` is `"RGV Multi-Tech Services"`. Files use `.zip` extension.

`settings` (Key-Value Store)

Column	Type	Nullable	Default	Description
`id`	BIGINT PK	NO	AUTO_INCREMENT	Primary key
`key`	VARCHAR UNIQUE	NO	—	Setting key
`value`	TEXT	YES	—	Setting value
`type`	VARCHAR	NO	`string`	string/int/bool/json
`group`	VARCHAR	NO	`general`	Setting group
`created_at`	TIMESTAMP	NO	—	—
`updated_at`	TIMESTAMP	NO	—	—

notification_preferences

Column	Type	Nullable	Default	Description
id	BIGINT PK	NO	AUTO_INCREMENT	Primary key
user_id	FK → users.id	NO	CASCADE	User
type	VARCHAR	NO	—	Notification type
email_enabled	BOOLEAN	NO	true	Email notifications
in_app_enabled	BOOLEAN	NO	true	In-app notifications
created_at	TIMESTAMP	NO	—	—
updated_at	TIMESTAMP	NO	—	—

Unique: `[user_id, type]`

Laravel Infrastructure Tables

cache

Column	Type	Nullable
key	VARCHAR PK	NO
value	MEDIUMTEXT	NO
expiration	INT	NO

cache_locks

Column	Type	Nullable
key	VARCHAR PK	NO
owner	VARCHAR	NO
expiration	INT	NO

jobs

Column	Type	Nullable
id	BIGINT PK	NO
queue	VARCHAR	NO
payload	LONGTEXT	NO
attempts	UNSIGNED TINYINT	NO
reserved_at	UNSIGNED INT	YES
available_at	UNSIGNED INT	NO
created_at	UNSIGNED INT	NO

job_batches

Column	Type	Nullable
id	VARCHAR PK	NO
name	VARCHAR	NO
total_jobs	INT	NO
pending_jobs	INT	NO
failed_jobs	INT	NO
failed_job_ids	LONGTEXT	NO
options	MEDIUMTEXT	YES

Column	Type	Nullable
cancelled_at	INT	YES
created_at	INT	NO
finished_at	INT	YES

failed_jobs

Column	Type	Nullable
id	BIGINT PK	NO
uuid	VARCHAR UNIQUE	NO
connection	TEXT	NO
queue	TEXT	NO
payload	LONGTEXT	NO
exception	LONGTEXT	NO
failed_at	TIMESTAMP	NO

Index Reference

Composite Indexes

Table	Index Name	Columns	Purpose
bookings	—	[status, preferred_date]	Booking listing/sorting
inventories	—	[category_id, status]	Inventory filtering
borrow_requests	—	[employee_id, status]	Employee borrow listing
reports	—	[type, report_date]	Report queries
borrow_items	—	[borrow_request_id, inventory_id]	Borrow item lookup
borrow_return_evidences	—	[borrow_request_id, uploaded_at]	Legacy evidence history
inventories	—	qr_token	Unique immutable QR lookup

SQL Dump Reference

Create Core Tables

```
-- Users
CREATE TABLE users (
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    name VARCHAR(255) NOT NULL,
    email VARCHAR(255) UNIQUE NOT NULL,
    email_verified_at TIMESTAMP NULL,
    password VARCHAR(255) NOT NULL,
    mfa_enabled BOOLEAN NOT NULL DEFAULT FALSE,
    mfa_secret VARCHAR(255) NULL,
    mfa_type VARCHAR(255) NOT NULL DEFAULT 'email',
    mfa_verified_at TIMESTAMP NULL,
    mfa_recovery_codes JSON NULL,
    remember_token VARCHAR(100) NULL,
    phone VARCHAR(255) NULL,
    address TEXT NULL,
    avatar_path VARCHAR(255) NULL,
    is_active BOOLEAN NOT NULL DEFAULT TRUE,
    last_login_at TIMESTAMP NULL,
    lock_version INT UNSIGNED NOT NULL DEFAULT 1,
    created_at TIMESTAMP NULL,
    updated_at TIMESTAMP NULL
```

```
);

-- Sanctum tokens for mobile API authentication
CREATE TABLE personal_access_tokens (
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    tokenable_type VARCHAR(255) NOT NULL,
    tokenable_id BIGINT NOT NULL,
    name TEXT NOT NULL,
    token VARCHAR(64) UNIQUE NOT NULL,
    abilities TEXT NULL,
    last_used_at TIMESTAMP NULL,
    expires_at TIMESTAMP NULL,
    created_at TIMESTAMP NULL,
    updated_at TIMESTAMP NULL,
    INDEX (tokenable_type, tokenable_id),
    INDEX (expires_at)
);

-- Bookings
CREATE TABLE bookings (
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    reference_number VARCHAR(255) UNIQUE NOT NULL,
    full_name VARCHAR(255) NOT NULL,
    email VARCHAR(255) NOT NULL,
    contact_number VARCHAR(255) NOT NULL,
    address TEXT NOT NULL,
    preferred_date DATE NOT NULL,
    preferred_time TIME NOT NULL,
    purpose_category VARCHAR(255) NOT NULL,
    reason TEXT NULL,
    status VARCHAR(255) NOT NULL DEFAULT 'pending',
    employee_id BIGINT NULL,
    remarks TEXT NULL,
    attachment_path VARCHAR(255) NULL,
    approved_at TIMESTAMP NULL,
    rejected_at TIMESTAMP NULL,
    completed_at TIMESTAMP NULL,
    cancelled_at TIMESTAMP NULL,
    lock_version INT UNSIGNED NOT NULL DEFAULT 1,
    created_at TIMESTAMP NULL,
    updated_at TIMESTAMP NULL,
    deleted_at TIMESTAMP NULL,
    INDEX (status, preferred_date),
    INDEX (reference_number),
    FOREIGN KEY (employee_id) REFERENCES users(id) ON DELETE SET NULL
);

-- Inventory Categories
CREATE TABLE inventory_categories (
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    name VARCHAR(255) NOT NULL,
    slug VARCHAR(255) UNIQUE NOT NULL,
    description TEXT NULL,
    icon VARCHAR(255) NULL,
    is_active BOOLEAN NOT NULL DEFAULT TRUE,
    created_at TIMESTAMP NULL,
    updated_at TIMESTAMP NULL,
    deleted_at TIMESTAMP NULL
);

-- Inventories
CREATE TABLE inventories (
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    item_code VARCHAR(255) UNIQUE NOT NULL,
    qr_token VARCHAR(40) UNIQUE NOT NULL,
    name VARCHAR(255) NOT NULL,
    description TEXT NULL,
    category_id BIGINT NOT NULL,
    quantity INT NOT NULL DEFAULT 0,
    unit VARCHAR(255) NOT NULL DEFAULT 'pcs',
    unit_cost DECIMAL(10,2) NULL,
    status VARCHAR(255) NOT NULL DEFAULT 'available',
    condition VARCHAR(255) NOT NULL DEFAULT 'good',
    location VARCHAR(255) NULL,
    image_path VARCHAR(255) NULL,
```

```
    low_stock_threshold INT NOT NULL DEFAULT 5,
    date_added DATE NOT NULL,
    is_active BOOLEAN NOT NULL DEFAULT TRUE,
    lock_version INT UNSIGNED NOT NULL DEFAULT 1,
    created_at TIMESTAMP NULL,
    updated_at TIMESTAMP NULL,
    deleted_at TIMESTAMP NULL,
    INDEX (category_id, status),
    INDEX (item_code),
    FOREIGN KEY (category_id) REFERENCES inventory_categories(id) ON DELETE CASCADE
);

-- Borrow Requests
CREATE TABLE borrow_requests (
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    request_number VARCHAR(255) UNIQUE NOT NULL,
    employee_id BIGINT NOT NULL,
    approved_by BIGINT NULL,
    status VARCHAR(255) NOT NULL DEFAULT 'pending',
    reason TEXT NOT NULL,
    borrow_date DATE NOT NULL,
    due_date DATE NOT NULL,
    return_date DATE NULL,
    return_location VARCHAR(255) NULL,
    admin_remarks TEXT NULL,
    approved_at TIMESTAMP NULL,
    rejected_at TIMESTAMP NULL,
    cancelled_at TIMESTAMP NULL,
    borrowed_at TIMESTAMP NULL,
    returned_at TIMESTAMP NULL,
    lock_version INT UNSIGNED NOT NULL DEFAULT 1,
    created_at TIMESTAMP NULL,
    updated_at TIMESTAMP NULL,
    deleted_at TIMESTAMP NULL,
    INDEX (employee_id, status),
    INDEX (request_number),
    FOREIGN KEY (employee_id) REFERENCES users(id) ON DELETE CASCADE,
    FOREIGN KEY (approved_by) REFERENCES users(id) ON DELETE SET NULL
);

-- Legacy return-evidence metadata retained for historical compatibility.
-- The current return workflow does not use Google Drive uploads.
CREATE TABLE borrow_return_evidences (
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    borrow_request_id BIGINT NOT NULL,
    idempotency_key VARCHAR(255) UNIQUE NOT NULL,
    drive_file_id VARCHAR(255) NULL,
    file_name VARCHAR(255) NOT NULL,
    mime_type VARCHAR(255) NULL,
    uploaded_by BIGINT NULL,
    uploaded_at TIMESTAMP NULL,
    created_at TIMESTAMP NULL,
    updated_at TIMESTAMP NULL,
    INDEX (borrow_request_id, uploaded_at),
    FOREIGN KEY (borrow_request_id) REFERENCES borrow_requests(id) ON DELETE CASCADE,
    FOREIGN KEY (uploaded_by) REFERENCES users(id) ON DELETE SET NULL
);

-- Borrow Items
CREATE TABLE borrow_items (
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    borrow_request_id BIGINT NOT NULL,
    inventory_id BIGINT NOT NULL,
    quantity INT NOT NULL DEFAULT 1,
    reserved_quantity INT UNSIGNED NOT NULL DEFAULT 0,
    return_evidence_id BIGINT NULL,
    condition_borrowed VARCHAR(255) NOT NULL DEFAULT 'good',
    condition_returned VARCHAR(255) NULL,
    is_returned BOOLEAN NOT NULL DEFAULT FALSE,
    returned_at TIMESTAMP NULL,
    damage_notes TEXT NULL,
    created_at TIMESTAMP NULL,
    updated_at TIMESTAMP NULL,
    INDEX (borrow_request_id, inventory_id),
    FOREIGN KEY (borrow_request_id) REFERENCES borrow_requests(id) ON DELETE CASCADE,
```

```
    FOREIGN KEY (inventory_id) REFERENCES inventories(id) ON DELETE CASCADE,
    FOREIGN KEY (return_evidence_id) REFERENCES borrow_return_evidences(id) ON DELETE SET NULL
);

-- Notifications
CREATE TABLE notifications (
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    user_id BIGINT NULL,
    type VARCHAR(255) NOT NULL,
    title VARCHAR(255) NULL,
    message TEXT NULL,
    link VARCHAR(255) NULL,
    is_read BOOLEAN NOT NULL DEFAULT FALSE,
    read_at TIMESTAMP NULL,
    created_at TIMESTAMP NULL,
    updated_at TIMESTAMP NULL,
    INDEX (user_id, is_read),
    FOREIGN KEY (user_id) REFERENCES users(id) ON DELETE CASCADE
);

-- Reports
CREATE TABLE reports (
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    report_number VARCHAR(255) UNIQUE NOT NULL,
    generated_by BIGINT NOT NULL,
    type VARCHAR(255) NOT NULL,
    title VARCHAR(255) NOT NULL,
    summary TEXT NULL,
    data JSON NULL,
    file_path VARCHAR(255) NULL,
    file_format VARCHAR(255) NOT NULL DEFAULT 'pdf',
    report_date DATE NOT NULL,
    start_date DATE NULL,
    end_date DATE NULL,
    is_ai_generated BOOLEAN NOT NULL DEFAULT FALSE,
    created_at TIMESTAMP NULL,
    updated_at TIMESTAMP NULL,
    INDEX (type, report_date),
    FOREIGN KEY (generated_by) REFERENCES users(id) ON DELETE CASCADE
);
```

Create Platform Tables

```
-- Audit Logs (Tamper-Evident)
CREATE TABLE audit_logs (
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    user_id BIGINT NULL,
    event VARCHAR(255) NOT NULL,
    auditable_type VARCHAR(255) NULL,
    auditable_id BIGINT NULL,
    old_values JSON NULL,
    new_values JSON NULL,
    ip_address VARCHAR(255) NULL,
    user_agent TEXT NULL,
    url VARCHAR(255) NULL,
    checksum VARCHAR(64) NOT NULL,
    previous_checksum VARCHAR(64) NULL,
    archived_at TIMESTAMP NULL,
    created_at TIMESTAMP NULL,
    updated_at TIMESTAMP NULL,
    INDEX (event, created_at),
    FOREIGN KEY (user_id) REFERENCES users(id) ON DELETE SET NULL
);

-- Import Logs
CREATE TABLE import_logs (
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    user_id BIGINT NULL,
    type VARCHAR(255) NOT NULL DEFAULT 'inventory',
    file_name VARCHAR(255) NULL,
    status VARCHAR(255) NOT NULL DEFAULT 'pending',
    total_rows INT UNSIGNED NOT NULL DEFAULT 0,
    processed_rows INT UNSIGNED NOT NULL DEFAULT 0,
    successful_rows INT UNSIGNED NOT NULL DEFAULT 0,
```

```
    failed_rows INT UNSIGNED NOT NULL DEFAULT 0,
    duplicate_strategy VARCHAR(255) NOT NULL DEFAULT 'skip',
    errors JSON NULL,
    error_report_path VARCHAR(255) NULL,
    started_at TIMESTAMP NULL,
    completed_at TIMESTAMP NULL,
    created_at TIMESTAMP NULL,
    updated_at TIMESTAMP NULL,
    INDEX (type, status),
    FOREIGN KEY (user_id) REFERENCES users(id) ON DELETE SET NULL
);

-- Export Logs
CREATE TABLE export_logs (
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    user_id BIGINT NULL,
    type VARCHAR(255) NOT NULL,
    format VARCHAR(255) NOT NULL DEFAULT 'xlsx',
    status VARCHAR(255) NOT NULL DEFAULT 'pending',
    filters JSON NULL,
    columns JSON NULL,
    record_count INT UNSIGNED NOT NULL DEFAULT 0,
    file_path VARCHAR(255) NULL,
    failure_message TEXT NULL,
    started_at TIMESTAMP NULL,
    completed_at TIMESTAMP NULL,
    created_at TIMESTAMP NULL,
    updated_at TIMESTAMP NULL,
    INDEX (type, status),
    FOREIGN KEY (user_id) REFERENCES users(id) ON DELETE SET NULL
);

-- Settings
CREATE TABLE settings (
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    `key` VARCHAR(255) UNIQUE NOT NULL,
    value TEXT NULL,
    type VARCHAR(255) NOT NULL DEFAULT 'string',
    `group` VARCHAR(255) NOT NULL DEFAULT 'general',
    created_at TIMESTAMP NULL,
    updated_at TIMESTAMP NULL
);

-- Login History
CREATE TABLE login_history (
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    user_id BIGINT NOT NULL,
    ip_address VARCHAR(45) NULL,
    user_agent TEXT NULL,
    logged_in_at TIMESTAMP NULL,
    logged_out_at TIMESTAMP NULL,
    session_id VARCHAR(255) NULL,
    is_impersonation BOOLEAN NOT NULL DEFAULT FALSE,
    created_at TIMESTAMP NULL,
    updated_at TIMESTAMP NULL,
    INDEX (logged_in_at),
    FOREIGN KEY (user_id) REFERENCES users(id) ON DELETE CASCADE
);

-- Notification Preferences
CREATE TABLE notification_preferences (
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    user_id BIGINT NOT NULL,
    type VARCHAR(255) NOT NULL,
    email_enabled BOOLEAN NOT NULL DEFAULT TRUE,
    in_app_enabled BOOLEAN NOT NULL DEFAULT TRUE,
    created_at TIMESTAMP NULL,
    updated_at TIMESTAMP NULL,
    UNIQUE (user_id, type),
    FOREIGN KEY (user_id) REFERENCES users(id) ON DELETE CASCADE
);

-- Scheduled Tasks
CREATE TABLE scheduled_tasks (
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    command VARCHAR(255) NOT NULL,
```

```
    status VARCHAR(255) NOT NULL DEFAULT 'started',
    started_at TIMESTAMP NULL,
    finished_at TIMESTAMP NULL,
    duration_ms INT UNSIGNED NULL,
    output TEXT NULL,
    failure_message TEXT NULL,
    created_at TIMESTAMP NULL,
    updated_at TIMESTAMP NULL,
    INDEX (command, status)
);

-- API Rate Limits
CREATE TABLE api_rate_limits (
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    user_id BIGINT NULL,
    tier VARCHAR(255) NOT NULL DEFAULT 'public',
    `key` VARCHAR(255) NOT NULL,
    ip_address VARCHAR(255) NULL,
    limit_per_minute INT UNSIGNED NOT NULL,
    remaining INT UNSIGNED NOT NULL,
    blocked BOOLEAN NOT NULL DEFAULT FALSE,
    reset_at TIMESTAMP NULL,
    created_at TIMESTAMP NULL,
    updated_at TIMESTAMP NULL,
    INDEX (`key`, reset_at),
    INDEX (tier, blocked),
    FOREIGN KEY (user_id) REFERENCES users(id) ON DELETE SET NULL
);

-- Backup Monitoring
CREATE TABLE backup_monitoring (
    id BIGINT AUTO_INCREMENT PRIMARY KEY,
    disk VARCHAR(255) NOT NULL DEFAULT 'local',
    status VARCHAR(255) NOT NULL DEFAULT 'unknown',
    file_path VARCHAR(255) NULL,
    size_bytes BIGINT UNSIGNED NOT NULL DEFAULT 0,
    checksum VARCHAR(64) NULL,
    message TEXT NULL,
    started_at TIMESTAMP NULL,
    completed_at TIMESTAMP NULL,
    created_at TIMESTAMP NULL,
    updated_at TIMESTAMP NULL,
    INDEX (disk, status)
);
```

Relationship Summary

Parent	Relationship	Child	Foreign Key
users	HasMany	bookings	employee_id
users	HasMany	borrow_requests	employee_id
users	HasMany	borrow_requests	approved_by
users	HasMany	reports	generated_by
users	HasMany	notifications	user_id
users	HasMany	notification_preferences	user_id
users	HasMany	login_history	user_id
inventory_categories	HasMany	inventories	category_id
borrow_requests	HasMany	borrow_items	borrow_request_id
inventories	HasMany	borrow_items	inventory_id

Polymorphic (Morph) Relationships

Table	Morph Field	Related To
model_has_permissions	model_type+model_id	Any model (typically User)

Table	Morph Field	Related To
model_has_roles	model_type+model_id	Any model (typically User)
activity_log	subject_type+subject_id	Any model
activity_log	causer_type+causer_id	Any model (typically User)
audit_logs	auditable_type+auditable_id	Any model