

# R Notebook

## Parametros:

```
Measure = F1 measure
Columns = sampling, weight_space, underbagging
Performance = holdout_measure
Filter keys = imba.rate
Filter values = 0.001
```

```
library("scmamp")
library(dplyr)
```

## Tratamento dos dados

Carregando data set compilado

```
ds = read.csv("/home/rodrigo/Dropbox/UNICAMP/IC/estudo_cost_learning/SummaryResults/summary_compilation.csv")
ds = filter(ds, learner != "classif.rusboost")
summary(ds)
```

```
##           learner      weight_space
## classif.ksvm      :17100  Mode :logical
## classif.randomForest:17100 FALSE:41040
## classif.rusboost   :    0  TRUE :10260
## classif.xgboost    :17100  NA's :0
##
##
##
##           measure      sampling      underbagging
## Accuracy              :10260  ADASYN:10260  Mode :logical
## Area under the curve   :10260  FALSE :30780  FALSE:41040
## F1 measure              :10260  SMOTE :10260  TRUE :10260
## G-mean                 :10260              NA's :0
## Matthews correlation coefficient:10260
##
##
## tuning_measure  holdout_measure  holdout_measure_residual
## Min.      :-0.1277  Min.      :-0.2120  Min.      :-0.4658
## 1st Qu.: 0.6911  1st Qu.: 0.4001  1st Qu.: 0.1994
## Median : 0.9700  Median : 0.8571  Median : 0.5581
## Mean   : 0.7903  Mean   : 0.6718  Mean   : 0.5298
## 3rd Qu.: 0.9975  3rd Qu.: 0.9900  3rd Qu.: 0.8755
## Max.    : 1.0000  Max.    : 1.0000  Max.    : 1.0000
## NA's    :1077    NA's    :1077    NA's    :1077
## iteration_count      dataset      imba.rate
## Min.      :1         abalone      : 900  Min.      :0.0010
## 1st Qu.:1          adult         : 900  1st Qu.:0.0100
## Median :2          bank          : 900  Median :0.0300
## Mean   :2          car           : 900  Mean   :0.0286
```

```
## 3rd Qu.:3      cardiocography-10clases: 900 3rd Qu.:0.0500
## Max. :3      cardiocography-3clases : 900 Max. :0.0500
## NA's :1077 (Other) :45900
```

Filtrando pela metrica

```
ds = filter(ds, measure == params$measure)
```

Filtrando o data set

```
if(params$filter_keys != 'NULL' && !is.null(params$filter_keys)){
  dots = paste0(params$filter_keys, " == '",params$filter_values, "'")
  ds = filter_(ds, .dots = dots)
}
```

```
summary(ds)
```

```
##          learner      weight_space
## classif.ksvm      :600  Mode :logical
## classif.randomForest:600 FALSE:1440
## classif.rusboost   : 0  TRUE :360
## classif.xgboost    :600 NA's :0
##
##
##
##          measure      sampling      underbagging
## Accuracy           : 0  ADASYN: 360  Mode :logical
## Area under the curve : 0  FALSE :1080 FALSE:1440
## F1 measure          :1800 SMOTE : 360  TRUE :360
## G-mean              : 0              NA's :0
## Matthews correlation coefficient: 0
##
##
## tuning_measure  holdout_measure  holdout_measure_residual
## Min. :0.0000  Min. :0.0000  Min. :0.00000
## 1st Qu.:0.1444  1st Qu.:0.0000  1st Qu.:0.02254
## Median :0.8072  Median :0.3333  Median :0.21133
## Mean :0.6196  Mean :0.4116  Mean :0.32573
## 3rd Qu.:0.9987  3rd Qu.:0.8000  3rd Qu.:0.59294
## Max. :1.0000  Max. :1.0000  Max. :1.00000
## NA's :60      NA's :60      NA's :60
## iteration_count      dataset      imba.rate
## Min. :1      abalone      : 45  Min. :0.001
## 1st Qu.:1      adult      : 45  1st Qu.:0.001
## Median :2      bank      : 45  Median :0.001
## Mean :2      car      : 45  Mean :0.001
## 3rd Qu.:3      cardiocography-10clases: 45  3rd Qu.:0.001
## Max. :3      cardiocography-3clases : 45  Max. :0.001
## NA's :60      (Other)      :1530
```

Computando as médias das iteracoes

```
ds = group_by(ds, learner , weight_space , measure , sampling , underbagging , dataset , imba.rate)
ds = summarise(ds, tuning_measure = mean(tuning_measure), holdout_measure = mean(holdout_measure),
               holdout_measure_residual = mean(holdout_measure_residual))

ds = as.data.frame(ds)
```

Criando dataframe

```
# Dividindo o ds em n, um para cada técnica
splited_df = ds %>% group_by_at(.vars = params$columns) %>% do(vals = as.data.frame(.)) %>% select(vals)

# Juntando cada uma das partes horizontalmente em um data set
df_tec_wide = do.call("cbind", splited_df)

# Renomeando duplicacao de nomes
colnames(df_tec_wide) = make.unique(colnames(df_tec_wide))

# Selecionando apenas as medidas da performance escolhida
df_tec_wide_residual = select(df_tec_wide, matches(paste("^", params$performance, "$|", params$performance)))

# Renomeando colunas
new_names = NULL
for(i in (1:length(splited_df))){
  id = toString(sapply(splited_df[[i]][1, params$columns], as.character))
  new_names = c(new_names, id)
}
colnames(df_tec_wide_residual) = new_names

# Verificando a dimensao do df
dim(df_tec_wide_residual)
```

```
## [1] 120 5
```

```
# Renomeando a variavel
df = df_tec_wide_residual
```

```
head(df)
```

```
## ADASYN, FALSE, FALSE FALSE, FALSE, FALSE FALSE, FALSE, TRUE
## 1 0.0000000 0.00000000 0.02321195
## 2 0.0000000 0.01886792 0.06800533
## 3 0.0000000 0.00000000 0.04408668
## 4 0.4333333 0.83333333 1.00000000
## 5 0.0000000 0.57777778 0.00000000
## 6 0.1666667 0.70000000 0.43333333
## FALSE, TRUE, FALSE SMOTE, FALSE, FALSE
## 1 0.00000000 0.00000000
## 2 0.01626016 0.02145474
## 3 0.00000000 0.00000000
## 4 0.83333333 0.60000000
## 5 0.57777778 0.13333333
## 6 0.70000000 0.16666667
```

```
summary(df)
```

```
## ADASYN, FALSE, FALSE FALSE, FALSE, FALSE FALSE, FALSE, TRUE
## Min. :0.0000 Min. :0.0000 Min. :0.0000
## 1st Qu.:0.0000 1st Qu.:0.0000 1st Qu.:0.06456
## Median :0.3368 Median :0.4333 Median :0.15845
## Mean :0.4298 Mean :0.4509 Mean :0.28676
## 3rd Qu.:0.8180 3rd Qu.:0.8625 3rd Qu.:0.44273
## Max. :1.0000 Max. :1.0000 Max. :1.0000
```

```
## NA's :9          NA's :2          NA's :1
## FALSE, TRUE, FALSE SMOTE, FALSE, FALSE
## Min. :0.0000    Min. :0.0000
## 1st Qu.:0.0000    1st Qu.:0.0000
## Median :0.4333    Median :0.3723
## Mean :0.4551     Mean :0.4382
## 3rd Qu.:0.8405    3rd Qu.:0.8381
## Max. :1.0000     Max. :1.0000
## NA's :1          NA's :7
```


## Verificando a média de cada coluna selecionada

```
for(i in (1:dim(df)[2])){
  print(paste("Media da coluna ", colnames(df)[i], " = ", mean(df[,i], na.rm = TRUE), sep=""))
}

## [1] "Media da coluna ADASYN, FALSE, FALSE = 0.42979278336109"
## [1] "Media da coluna FALSE, FALSE, FALSE = 0.450886145088682"
## [1] "Media da coluna FALSE, FALSE, TRUE = 0.286762647798807"
## [1] "Media da coluna FALSE, TRUE, FALSE = 0.455082816592443"
## [1] "Media da coluna SMOTE, FALSE, FALSE = 0.438200490136649"
```

## Fazendo teste de normalidade

```
plotDensities(data = na.omit(df))
```

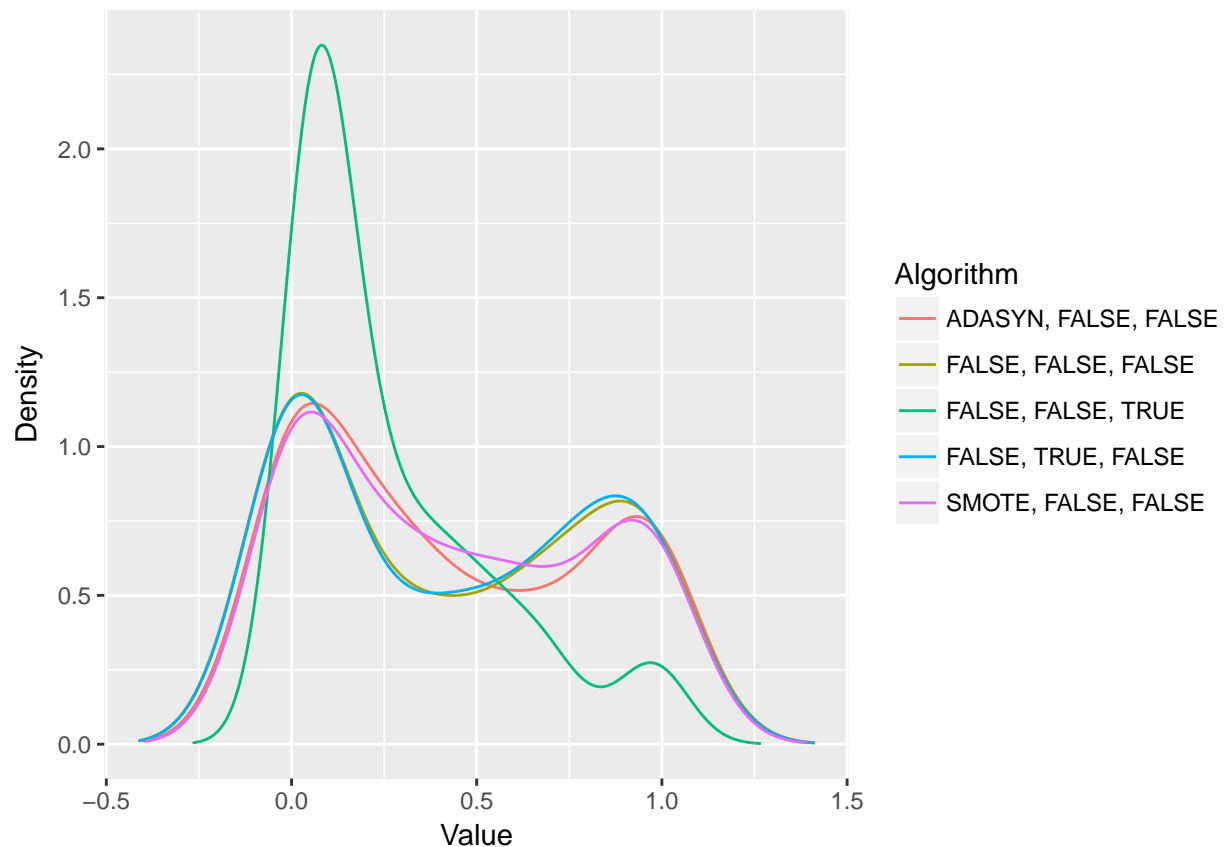

## Testando as diferencas

```
friedmanTest(df)
```

```
##
## Friedman's rank sum test
##
## data: df
## Friedman's chi-squared = 6.6083, df = 4, p-value = 0.1581
```

## Testando as diferencas par a par

```
test <- nemenyiTest (df, alpha=0.05)
abs(test$diff.matrix) > test$statistic
```

```
##      ADASYN, FALSE, FALSE FALSE, FALSE, FALSE FALSE, FALSE, TRUE
## [1,]          FALSE          FALSE          FALSE
## [2,]          FALSE          FALSE          FALSE
## [3,]          FALSE          FALSE          FALSE
## [4,]          FALSE          FALSE          FALSE
## [5,]          FALSE          FALSE          FALSE
##      FALSE, TRUE, FALSE SMOTE, FALSE, FALSE
## [1,]          FALSE          FALSE
```

```
## [2,]          FALSE          FALSE
## [3,]          FALSE          FALSE
## [4,]          FALSE          FALSE
## [5,]          FALSE          FALSE
```

## Plotando os ranks

```
print(colMeans(rankMatrix(df)))
```

```
## ADASYN, FALSE, FALSE  FALSE, FALSE, FALSE  FALSE, FALSE, TRUE
##          2.825000          3.004167          3.308333
##  FALSE, TRUE, FALSE  SMOTE, FALSE, FALSE
##          2.895833          2.966667
```

## Plotando grafico de Critical Difference

```
result = tryCatch({
  plotCD(df, alpha=0.05, cex = 0.35)
}, error = function(e) {})
```

