

R Notebook

Parametros:

```
Measure = Accuracy
Columns = learner
Performance = holdout_measure_residual
Filter keys = sampling, weight_space, underbagging, imba.rate
Filter values = FALSE, FALSE, FALSE, 0.03
```

```
library("scmamp")
library(dplyr)
```

Tratamento dos dados

Carregando data set compilado

```
ds = read.csv("/home/rodrigo/Dropbox/UNICAMP/IC/estudo_cost_learning/SummaryResults/summary_compilation.csv")
ds = filter(ds, learner != "classif.rusboost")
summary(ds)
```

```
##           learner      weight_space
## classif.ksvm      :17100  Mode :logical
## classif.randomForest:17100 FALSE:41040
## classif.rusboost   :    0  TRUE :10260
## classif.xgboost    :17100  NA's :0
##
##
##
##           measure      sampling      underbagging
## Accuracy              :10260  ADASYN:10260  Mode :logical
## Area under the curve    :10260  FALSE :30780  FALSE:41040
## F1 measure              :10260  SMOTE :10260  TRUE :10260
## G-mean                 :10260              NA's :0
## Matthews correlation coefficient:10260
##
##
## tuning_measure  holdout_measure  holdout_measure_residual
## Min.   :-0.1277  Min.   :-0.2120  Min.   :-0.4658
## 1st Qu.: 0.6911  1st Qu.: 0.4001  1st Qu.: 0.1994
## Median : 0.9700  Median : 0.8571  Median : 0.5581
## Mean   : 0.7903  Mean   : 0.6718  Mean   : 0.5298
## 3rd Qu.: 0.9975  3rd Qu.: 0.9900  3rd Qu.: 0.8755
## Max.   : 1.0000  Max.   : 1.0000  Max.   : 1.0000
## NA's   :1077    NA's   :1077    NA's   :1077
## iteration_count      dataset      imba.rate
## Min.   :1           abalone      : 900  Min.   :0.0010
## 1st Qu.:1           adult        : 900  1st Qu.:0.0100
## Median :2           bank         : 900  Median :0.0300
## Mean   :2           car          : 900  Mean   :0.0286
```

```
## 3rd Qu.:3      cardiocography-10classes: 900 3rd Qu.:0.0500
## Max. :3      cardiocography-3classes : 900 Max. :0.0500
## NA's :1077 (Other) :45900
```

Filtrando pela metrica

```
ds = filter(ds, measure == params$measure)
```

Filtrando o data set

```
if(params$filter_keys != 'NULL' && !is.null(params$filter_keys)){
  dots = paste0(params$filter_keys, " == '",params$filter_values,"'")
  ds = filter_(ds, .dots = dots)
}
```

```
summary(ds)
```

```
##          learner      weight_space
## classif.ksvm      :198 Mode :logical
## classif.randomForest:198 FALSE:594
## classif.rusboost   : 0  NA's :0
## classif.xgboost    :198
##
##
##
##          measure      sampling  underbagging
## Accuracy              :594 ADASYN: 0 Mode :logical
## Area under the curve   : 0 FALSE :594 FALSE:594
## F1 measure              : 0 SMOTE : 0 NA's :0
## G-mean                  : 0
## Matthews correlation coefficient: 0
##
##
## tuning_measure  holdout_measure  holdout_measure_residual
## Min. :0.9455 Min. :0.9419 Min. :0.03709
## 1st Qu.:0.9699 1st Qu.:0.9714 1st Qu.:0.32716
## Median :0.9779 Median :0.9800 Median :0.63378
## Mean :0.9802 Mean :0.9818 Mean :0.61970
## 3rd Qu.:0.9901 3rd Qu.:0.9911 3rd Qu.:0.94861
## Max. :1.0000 Max. :1.0000 Max. :1.00000
## NA's :6 NA's :6 NA's :6
## iteration_count      dataset      imba.rate
## Min. :1 abalone : 9 Min. :0.03
## 1st Qu.:1 adult : 9 1st Qu.:0.03
## Median :2 annealing : 9 Median :0.03
## Mean :2 arrhythmia : 9 Mean :0.03
## 3rd Qu.:3 balance-scale: 9 3rd Qu.:0.03
## Max. :3 bank : 9 Max. :0.03
## NA's :6 (Other) :540
```

Computando as médias das iteracoes

```
ds = group_by(ds, learner , weight_space , measure , sampling , underbagging , dataset , imba.rate)
ds = summarise(ds, tuning_measure = mean(tuning_measure), holdout_measure = mean(holdout_measure),
               holdout_measure_residual = mean(holdout_measure_residual))

ds = as.data.frame(ds)
```

Criando dataframe

```
# Dividindo o ds em n, um para cada técnica
splited_df = ds %>% group_by_at(.vars = params$columns) %>% do(vals = as.data.frame(.)) %>% select(vals)

# Juntando cada uma das partes horizontalmente em um data set
df_tec_wide = do.call("cbind", splited_df)

# Renomeando duplicacao de nomes
colnames(df_tec_wide) = make.unique(colnames(df_tec_wide))

# Selecionando apenas as medidas da performance escolhida
df_tec_wide_residual = select(df_tec_wide, matches(paste("^", params$performance, "$|", params$performance)))

# Renomeando colunas
new_names = NULL
for(i in (1:length(splited_df))){
  id = toString(sapply(splited_df[[i]][1, params$columns], as.character))
  new_names = c(new_names, id)
}
colnames(df_tec_wide_residual) = new_names

# Verificando a dimensao do df
dim(df_tec_wide_residual)
```

```
## [1] 66 3
```

```
# Renomeando a variavel
df = df_tec_wide_residual

head(df)
```

```
##   classif.ksvm classif.randomForest classif.xgboost
## 1    0.3311463          0.3154729      0.3156552
## 2    0.4176651              NA      0.5584004
## 3    0.7074543          0.8284107      0.7862166
## 4    0.9807692          0.9775641      0.9807692
## 5    0.2819795          0.2987862      0.2577031
## 6    0.6610215          0.6618280      0.6610215
```

```
summary(df)
```

```
##   classif.ksvm   classif.randomForest classif.xgboost
## Min.   :0.03709   Min.   :0.07857      Min.   :0.06025
## 1st Qu.:0.30583   1st Qu.:0.33062      1st Qu.:0.36436
## Median :0.47920   Median :0.64180      Median :0.65692
## Mean   :0.58807   Mean   :0.62558      Mean   :0.64564
## 3rd Qu.:0.94689   3rd Qu.:0.94887      3rd Qu.:0.96092
## Max.   :0.99992   Max.   :1.00000      Max.   :0.99992
##                NA's   :2
```


Verificando a média de cada coluna selecionada

```
for(i in (1:dim(df)[2])){
  print(paste("Media da coluna ", colnames(df)[i], " = ", mean(df[,i], na.rm = TRUE), sep=""))
}
```

```
## [1] "Media da coluna classif.ksvm = 0.588071491527805"
## [1] "Media da coluna classif.randomForest = 0.625576726604515"
## [1] "Media da coluna classif.xgboost = 0.64563518661074"
```

Fazendo teste de normalidade

```
plotDensities(data = na.omit(df))
```

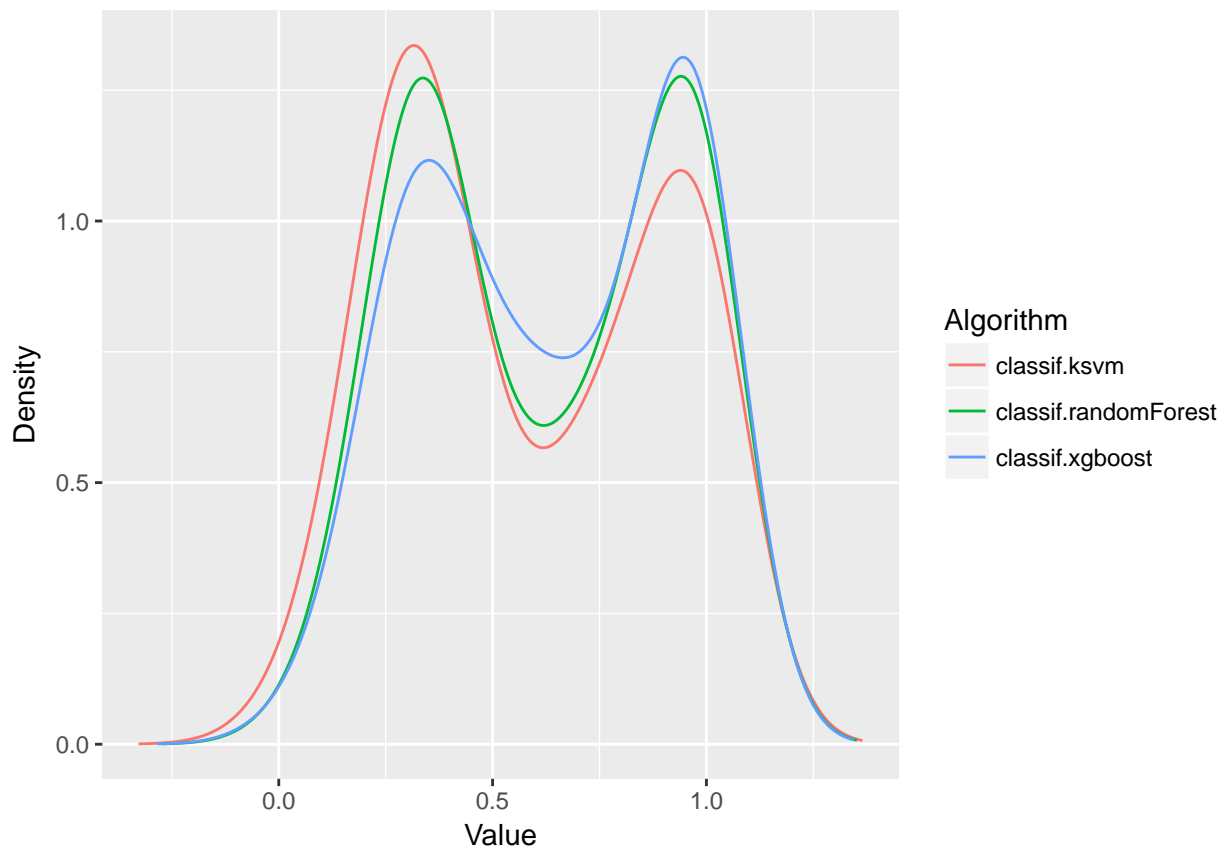

Testando as diferencas

```
friedmanTest(df)
```

```
##
## Friedman's rank sum test
##
## data: df
## Friedman's chi-squared = 10.659, df = 2, p-value = 0.004846
```

Testando as diferenças par a par

```
test <- nemenyiTest(df, alpha=0.05)
abs(test$diff.matrix) > test$statistic
```

```
##      classif.ksvm classif.randomForest classif.xgboost
## [1,]          FALSE                  FALSE             TRUE
## [2,]          FALSE                  FALSE             FALSE
## [3,]          TRUE                   FALSE             FALSE
```

Plotando os ranks

```
print(colMeans(rankMatrix(df)))
```

```
##      classif.ksvm classif.randomForest      classif.xgboost
##      2.287879      1.992424      1.719697
```

Plotando grafico de Critical Difference

```
result = tryCatch({
  plotCD(df, alpha=0.05, cex = 0.35)
}, error = function(e) {})
```

