

# R Notebook

## Parametros:

Measure = G-mean  
Columns = sampling, weight\_space, underbagging, learner  
Performance = holdout\_measure\_residual  
Filter keys = imba.rate  
Filter values = 0.05

```
library("scmamp")  
library(dplyr)
```

## Tratamento dos dados

Carregando data set compilado

```
ds = read.csv("/home/rodrigo/Dropbox/UNICAMP/IC/estudo_cost_learning/SummaryResults/summary_compilation.  
ds = filter(ds, learner != "classif.rusboost")  
summary(ds)
```

```
##           learner      weight_space  
## classif.ksvm      :17100  Mode :logical  
## classif.randomForest:17100 FALSE:41040  
## classif.rusboost   :    0  TRUE :10260  
## classif.xgboost    :17100  NA's :0  
##  
##  
##  
##           measure      sampling      underbagging  
## Accuracy           :10260  ADASYN:10260  Mode :logical  
## Area under the curve :10260  FALSE :30780  FALSE:41040  
## F1 measure           :10260  SMOTE :10260  TRUE :10260  
## G-mean              :10260           NA's :0  
## Matthews correlation coefficient:10260  
##  
##  
## tuning_measure      holdout_measure      holdout_measure_residual  
## Min.      :-0.1277  Min.      :-0.2120  Min.      :-0.4658  
## 1st Qu.: 0.6911  1st Qu.: 0.4001  1st Qu.: 0.1994  
## Median : 0.9700  Median : 0.8571  Median : 0.5581  
## Mean : 0.7903  Mean : 0.6718  Mean : 0.5298  
## 3rd Qu.: 0.9975  3rd Qu.: 0.9900  3rd Qu.: 0.8755  
## Max. : 1.0000  Max. : 1.0000  Max. : 1.0000  
## NA's :1077  NA's :1077  NA's :1077  
## iteration_count      dataset      imba.rate  
## Min.      :1      abalone      : 900  Min.      :0.0010  
## 1st Qu.:1      adult      : 900  1st Qu.:0.0100  
## Median :2      bank      : 900  Median :0.0300  
## Mean :2      car      : 900  Mean :0.0286
```

```
## 3rd Qu.:3      cardiocography-10clases: 900 3rd Qu.:0.0500
## Max. :3      cardiocography-3clases : 900 Max. :0.0500
## NA's :1077 (Other) :45900
```

Filtrando pela metrica

```
ds = filter(ds, measure == params$measure)
```

Filtrando o data set

```
if(params$filter_keys != 'NULL' && !is.null(params$filter_keys)){
  dots = paste0(params$filter_keys, " == '",params$filter_values,"'")
  ds = filter_(ds, .dots = dots)
}
```

```
summary(ds)
```

```
##          learner      weight_space
## classif.ksvm      :1230  Mode :logical
## classif.randomForest:1230 FALSE:2952
## classif.rusboost   :  0  TRUE :738
## classif.xgboost    :1230  NA's :0
##
##
##
##          measure      sampling  underbagging
## Accuracy          :  0  ADASYN: 738  Mode :logical
## Area under the curve :  0  FALSE :2214  FALSE:2952
## F1 measure          :  0  SMOTE : 738  TRUE :738
## G-mean              :3690          NA's :0
## Matthews correlation coefficient:  0
##
##
## tuning_measure  holdout_measure  holdout_measure_residual
## Min. :0.0000  Min. :0.0000  Min. :0.0000
## 1st Qu.:0.6329  1st Qu.:0.3162  1st Qu.:0.2321
## Median :0.9254  Median :0.7412  Median :0.5564
## Mean :0.7606  Mean :0.6130  Mean :0.5202
## 3rd Qu.:0.9872  3rd Qu.:0.9487  3rd Qu.:0.8165
## Max. :1.0000  Max. :1.0000  Max. :1.0000
## NA's :39      NA's :39      NA's :39
## iteration_count      dataset      imba.rate
## Min. :1      abalone : 45  Min. :0.05
## 1st Qu.:1      adult : 45  1st Qu.:0.05
## Median :2      annealing : 45  Median :0.05
## Mean :2      arrhythmia : 45  Mean :0.05
## 3rd Qu.:3      balance-scale: 45  3rd Qu.:0.05
## Max. :3      bank : 45  Max. :0.05
## NA's :39      (Other) :3420
```

Computando as médias das iteracoes

```
ds = group_by(ds, learner , weight_space , measure , sampling , underbagging , dataset , imba.rate)
ds = summarise(ds, tuning_measure = mean(tuning_measure), holdout_measure = mean(holdout_measure),
               holdout_measure_residual = mean(holdout_measure_residual))

ds = as.data.frame(ds)
```

Criando dataframe

```
# Dividindo o ds em n, um para cada técnica
splited_df = ds %>% group_by_at(.vars = params$columns) %>% do(vals = as.data.frame(.)) %>% select(vals)

# Juntando cada uma das partes horizontalmente em um data set
df_tec_wide = do.call("cbind", splited_df)

# Renomeando duplicacao de nomes
colnames(df_tec_wide) = make.unique(colnames(df_tec_wide))

# Selecionando apenas as medidas da performance escolhida
df_tec_wide_residual = select(df_tec_wide, matches(paste("^", params$performance, "$|", params$performance)))

# Renomeando colunas
new_names = NULL
for(i in (1:length(splited_df))){
  id = toString(sapply(splited_df[[i]][1, params$columns], as.character))
  new_names = c(new_names, id)
}
colnames(df_tec_wide_residual) = new_names

# Verificando a dimensao do df
dim(df_tec_wide_residual)
```

```
## [1] 82 15
```

```
# Renomeando a variavel
df = df_tec_wide_residual

summary(df)
```

```
## ADASYN, FALSE, FALSE, classif.ksvm
## Min. :0.00000
## 1st Qu.:0.07978
## Median :0.27601
## Mean :0.33562
## 3rd Qu.:0.54361
## Max. :0.98958
## NA's :1
## ADASYN, FALSE, FALSE, classif.randomForest
## Min. :0.0000
## 1st Qu.:0.3444
## Median :0.6163
## Mean :0.5797
## 3rd Qu.:0.8444
## Max. :0.9999
## NA's :3
## ADASYN, FALSE, FALSE, classif.xgboost FALSE, FALSE, FALSE, classif.ksvm
## Min. :0.0000 Min. :0.0000
## 1st Qu.:0.3473 1st Qu.:0.0000
## Median :0.6219 Median :0.2390
## Mean :0.6101 Mean :0.2878
## 3rd Qu.:0.8630 3rd Qu.:0.4438
## Max. :0.9999 Max. :1.0000
##
```

```

## FALSE, FALSE, FALSE, classif.randomForest
## Min.      :0.0000
## 1st Qu.:0.2255
## Median :0.4749
## Mean    :0.5081
## 3rd Qu.:0.7899
## Max.     :0.9999
## NA's     :1
## FALSE, FALSE, FALSE, classif.xgboost FALSE, FALSE, TRUE, classif.ksvm
## Min.      :0.0000      Min.      :0.02295
## 1st Qu.:0.2368      1st Qu.:0.44758
## Median :0.5645      Median :0.61845
## Mean    :0.5301      Mean    :0.60073
## 3rd Qu.:0.8117      3rd Qu.:0.77313
## Max.     :0.9999      Max.     :0.99115
##
## FALSE, FALSE, TRUE, classif.randomForest
## Min.      :0.1800
## 1st Qu.:0.6256
## Median :0.7864
## Mean    :0.7498
## 3rd Qu.:0.9274
## Max.     :0.9999
## NA's     :3
## FALSE, FALSE, TRUE, classif.xgboost FALSE, TRUE, FALSE, classif.ksvm
## Min.      :0.1744      Min.      :0.0000
## 1st Qu.:0.6174      1st Qu.:0.0000
## Median :0.7769      Median :0.2379
## Mean    :0.7375      Mean    :0.2785
## 3rd Qu.:0.9241      3rd Qu.:0.4203
## Max.     :0.9999      Max.     :1.0000
##
## FALSE, TRUE, FALSE, classif.randomForest
## Min.      :0.0000
## 1st Qu.:0.2335
## Median :0.5441
## Mean    :0.5258
## 3rd Qu.:0.8035
## Max.     :1.0000
## NA's     :1
## FALSE, TRUE, FALSE, classif.xgboost SMOTE, FALSE, FALSE, classif.ksvm
## Min.      :0.0000      Min.      :0.00000
## 1st Qu.:0.2404      1st Qu.:0.09306
## Median :0.5446      Median :0.25092
## Mean    :0.5251      Mean    :0.33190
## 3rd Qu.:0.8135      3rd Qu.:0.51760
## Max.     :1.0000      Max.     :0.97432
##
## SMOTE, FALSE, FALSE, classif.randomForest
## Min.      :0.0000
## 1st Qu.:0.3426
## Median :0.6210
## Mean    :0.5948
## 3rd Qu.:0.8577

```

```
## Max.      :0.9999
## NA's      :4
## SMOTE, FALSE, FALSE, classif.xgboost
## Min.      :0.0000
## 1st Qu.:0.3987
## Median :0.6347
## Mean      :0.6188
## 3rd Qu.:0.8517
## Max.      :0.9999
##
```


## Verificando a média de cada coluna selecionada

```
for(i in (1:dim(df)[2])){
  print(paste("Media da coluna ", colnames(df)[i], " = ", mean(df[,i], na.rm = TRUE), sep=""))
}
```

```
## [1] "Media da coluna ADASYN, FALSE, FALSE, classif.ksvm = 0.335617285973206"
## [1] "Media da coluna ADASYN, FALSE, FALSE, classif.randomForest = 0.579683857721563"
## [1] "Media da coluna ADASYN, FALSE, FALSE, classif.xgboost = 0.610139689852958"
## [1] "Media da coluna FALSE, FALSE, FALSE, classif.ksvm = 0.287789278569379"
## [1] "Media da coluna FALSE, FALSE, FALSE, classif.randomForest = 0.508099322739096"
## [1] "Media da coluna FALSE, FALSE, FALSE, classif.xgboost = 0.530100482332132"
## [1] "Media da coluna FALSE, FALSE, TRUE, classif.ksvm = 0.600727325466884"
## [1] "Media da coluna FALSE, FALSE, TRUE, classif.randomForest = 0.749830081812749"
## [1] "Media da coluna FALSE, FALSE, TRUE, classif.xgboost = 0.737450202566195"
## [1] "Media da coluna FALSE, TRUE, FALSE, classif.ksvm = 0.278469691750086"
## [1] "Media da coluna FALSE, TRUE, FALSE, classif.randomForest = 0.525800241493586"
## [1] "Media da coluna FALSE, TRUE, FALSE, classif.xgboost = 0.525146253916715"
## [1] "Media da coluna SMOTE, FALSE, FALSE, classif.ksvm = 0.331898396128473"
## [1] "Media da coluna SMOTE, FALSE, FALSE, classif.randomForest = 0.594775374330153"
## [1] "Media da coluna SMOTE, FALSE, FALSE, classif.xgboost = 0.618804323312565"
```

## Fazendo teste de normalidade

```
plotDensities(data = na.omit(df))
```

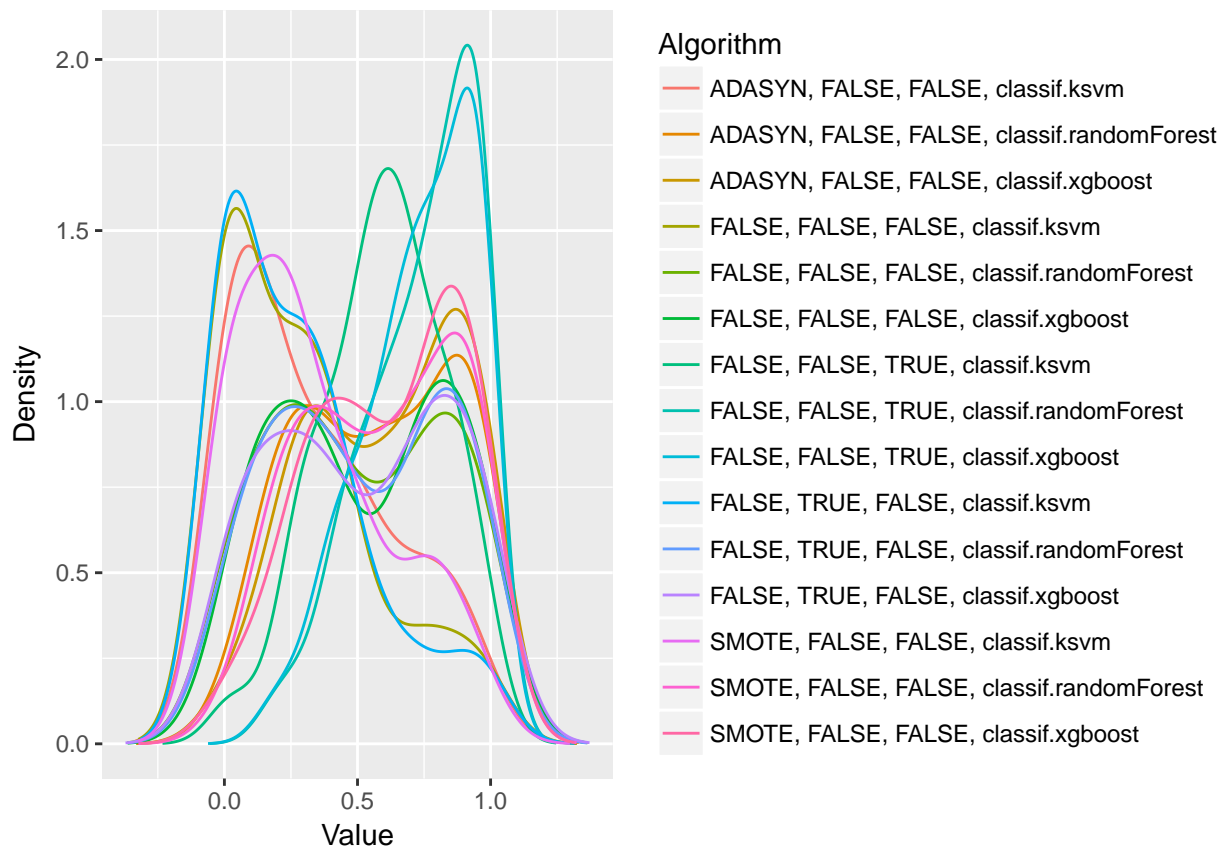

## Testando as diferencas

```
friedmanTest(df)
```

```
##
## Friedman's rank sum test
##
## data: df
## Friedman's chi-squared = 486.98, df = 14, p-value < 2.2e-16
```

## Testando as diferencas par a par

```
test <- nemenyiTest (df, alpha=0.05)
abs(test$diff.matrix) > test$statistic
```

```
##      ADASYN, FALSE, FALSE, classif.ksvm
## [1,]                                FALSE
## [2,]                                TRUE
## [3,]                                TRUE
## [4,]                                FALSE
## [5,]                                FALSE
## [6,]                                TRUE
## [7,]                                TRUE
```

```

## [8,] TRUE
## [9,] TRUE
## [10,] FALSE
## [11,] FALSE
## [12,] TRUE
## [13,] FALSE
## [14,] TRUE
## [15,] TRUE
## ADASYN, FALSE, FALSE, classif.randomForest
## [1,] TRUE
## [2,] FALSE
## [3,] FALSE
## [4,] TRUE
## [5,] FALSE
## [6,] FALSE
## [7,] FALSE
## [8,] TRUE
## [9,] TRUE
## [10,] TRUE
## [11,] FALSE
## [12,] FALSE
## [13,] TRUE
## [14,] FALSE
## [15,] FALSE
## ADASYN, FALSE, FALSE, classif.xgboost
## [1,] TRUE
## [2,] FALSE
## [3,] FALSE
## [4,] TRUE
## [5,] TRUE
## [6,] TRUE
## [7,] FALSE
## [8,] TRUE
## [9,] TRUE
## [10,] TRUE
## [11,] TRUE
## [12,] TRUE
## [13,] TRUE
## [14,] FALSE
## [15,] FALSE
## FALSE, FALSE, FALSE, classif.ksvm
## [1,] FALSE
## [2,] TRUE
## [3,] TRUE
## [4,] FALSE
## [5,] TRUE
## [6,] TRUE
## [7,] TRUE
## [8,] TRUE
## [9,] TRUE
## [10,] FALSE
## [11,] TRUE
## [12,] TRUE
## [13,] FALSE

```

```

## [14,] TRUE
## [15,] TRUE
## FALSE, FALSE, FALSE, classif.randomForest
## [1,] FALSE
## [2,] FALSE
## [3,] TRUE
## [4,] TRUE
## [5,] FALSE
## [6,] FALSE
## [7,] TRUE
## [8,] TRUE
## [9,] TRUE
## [10,] TRUE
## [11,] FALSE
## [12,] FALSE
## [13,] FALSE
## [14,] FALSE
## [15,] TRUE
## FALSE, FALSE, FALSE, classif.xgboost
## [1,] TRUE
## [2,] FALSE
## [3,] TRUE
## [4,] TRUE
## [5,] FALSE
## [6,] FALSE
## [7,] FALSE
## [8,] TRUE
## [9,] TRUE
## [10,] TRUE
## [11,] FALSE
## [12,] FALSE
## [13,] TRUE
## [14,] FALSE
## [15,] TRUE
## FALSE, FALSE, TRUE, classif.ksvm
## [1,] TRUE
## [2,] FALSE
## [3,] FALSE
## [4,] TRUE
## [5,] TRUE
## [6,] FALSE
## [7,] FALSE
## [8,] TRUE
## [9,] TRUE
## [10,] TRUE
## [11,] TRUE
## [12,] TRUE
## [13,] TRUE
## [14,] FALSE
## [15,] FALSE
## FALSE, FALSE, TRUE, classif.randomForest
## [1,] TRUE
## [2,] TRUE
## [3,] TRUE

```



```

## [4,] TRUE
## [5,] TRUE
## [6,] TRUE
## [7,] TRUE
## [8,] FALSE
## [9,] FALSE
## [10,] TRUE
## [11,] TRUE
## [12,] TRUE
## [13,] TRUE
## [14,] TRUE
## [15,] FALSE
## FALSE, FALSE, TRUE, classif.xgboost FALSE, TRUE, FALSE, classif.ksvm
## [1,] TRUE FALSE
## [2,] TRUE TRUE
## [3,] TRUE TRUE
## [4,] TRUE FALSE
## [5,] TRUE TRUE
## [6,] TRUE TRUE
## [7,] TRUE TRUE
## [8,] FALSE TRUE
## [9,] FALSE TRUE
## [10,] TRUE FALSE
## [11,] TRUE TRUE
## [12,] TRUE TRUE
## [13,] TRUE FALSE
## [14,] TRUE TRUE
## [15,] TRUE TRUE
## FALSE, TRUE, FALSE, classif.randomForest
## [1,] FALSE
## [2,] FALSE
## [3,] TRUE
## [4,] TRUE
## [5,] FALSE
## [6,] FALSE
## [7,] TRUE
## [8,] TRUE
## [9,] TRUE
## [10,] TRUE
## [11,] FALSE
## [12,] FALSE
## [13,] FALSE
## [14,] FALSE
## [15,] TRUE
## FALSE, TRUE, FALSE, classif.xgboost
## [1,] TRUE
## [2,] FALSE
## [3,] TRUE
## [4,] TRUE
## [5,] FALSE
## [6,] FALSE
## [7,] TRUE
## [8,] TRUE
## [9,] TRUE

```

```

## [10,] TRUE
## [11,] FALSE
## [12,] FALSE
## [13,] TRUE
## [14,] FALSE
## [15,] TRUE
## SMOTE, FALSE, FALSE, classif.ksvm
## [1,] FALSE
## [2,] TRUE
## [3,] TRUE
## [4,] FALSE
## [5,] FALSE
## [6,] TRUE
## [7,] TRUE
## [8,] TRUE
## [9,] TRUE
## [10,] FALSE
## [11,] FALSE
## [12,] TRUE
## [13,] FALSE
## [14,] TRUE
## [15,] TRUE
## SMOTE, FALSE, FALSE, classif.randomForest
## [1,] TRUE
## [2,] FALSE
## [3,] FALSE
## [4,] TRUE
## [5,] FALSE
## [6,] FALSE
## [7,] FALSE
## [8,] TRUE
## [9,] TRUE
## [10,] TRUE
## [11,] FALSE
## [12,] FALSE
## [13,] TRUE
## [14,] FALSE
## [15,] FALSE
## SMOTE, FALSE, FALSE, classif.xgboost
## [1,] TRUE
## [2,] FALSE
## [3,] FALSE
## [4,] TRUE
## [5,] TRUE
## [6,] TRUE
## [7,] FALSE
## [8,] FALSE
## [9,] TRUE
## [10,] TRUE
## [11,] TRUE
## [12,] TRUE
## [13,] TRUE
## [14,] FALSE
## [15,] FALSE

```

## Plotando grafico de Critical Difference

```
result = tryCatch({  
  plotCD(df, alpha=0.05, cex = 0.35)  
}, error = function(e) {})
```

