Axes adjustements

API

plt.**subplot_adjust**(...)



Extent & origin

API

ax.**imshow**(extent=..., origin=...)



Text alignments

API

ax.**text**(..., ha=... , va=..., ...)



Text parameters

API

ax.**text**(..., family=... , size=..., weight = ...)
ax.**text**(..., fontproperties = ...)

The quick brown fox — xx-large (1.73)
The quick brown fox — x-large (1.44)
The quick brown fox — large (1.20)
The quick brown fox — medium (1.00)
The quick brown fox — small (0.83)
The quick brown fox — x-small (0.69)
The quick brown fox — xx-small (0.58)

The quick brown fox jumps over the lazy dog — black (900)
The quick brown fox jumps over the lazy dog — bold (700)
The quick brown fox jumps over the lazy dog — semibold (600)
The quick brown fox jumps over the lazy dog — normal (400)
The quick brown fox jumps over the lazy dog — ultralight (100)

The quick brown fox jumps over the lazy dog — monospace
The quick brown fox jumps over the lazy dog — serif
The quick brown fox jumps over the lazy dog — sans
The quick brown fox jumps over the lazy dog — cursive

The quick brown fox jumps over the lazy dog — italic
The quick brown fox jumps over the lazy dog — normal

THE QUICK BROWN FOX JUMPS OVER THE LAZY DOG — small-caps
The quick brown fox jumps over the lazy dog — normal

Uniform colormaps



Sequential colormaps



Diverging colormaps



Qualitative colormaps



Miscellaneous colormaps



Color names

API

Image interpolation

API

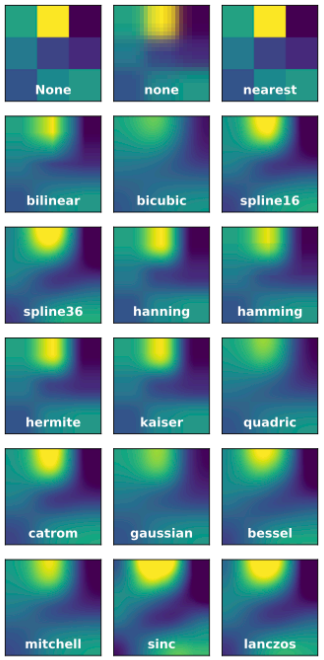

Legend placement



ax.**legend**(loc="string", bbox_to_anchor=(x,y))

1: lower left — 2: lower center — 3: lower right
4: left — 5: center — 6: right
7: upper left — 8: upper center — 9: upper right

A: upper right / (-.1,.9) — B: right / (-.1,.5)
C: lower right / (-.1,.1) — D: upper left / (-.1,-.1)
E: upper center / (.5,-.1) — F: upper right / (.9,-.1)
G: lower left / (1.1,.1) — H: left / (1.1,.5)
I: upper left / (1.1,.9) — J: lower right / (.9,1.1)
K: lower center / (.5,1.1) — L: lower left / (.1,1.1)

Annotation connection styles

API



Annotation arrow styles

API



How do I ...

... resize a figure?
→ fig.set_size_inches(w,h)
... save a figure?
→ fig.savefig("figure.pdf")
... save a transparent figure?
→ fig.savefig("figure.pdf", transparent=True)
... clear a figure?
→ ax.clear()
... close all figures?
→ plt.close("all")
... remove ticks?
→ ax.set_xticks([])
... remove tick labels ?
→ ax.set_[xy]ticklabels([])
... rotate tick labels ?
→ ax.set_[xy]ticks(rotation=90)
... hide top spine?
→ ax.spines['top'].set_visible(False)
... hide legend border?
→ ax.legend(frameon=False)
... show error as shaded region?
→ ax.fill_between(X, Y+error, Y-error)
... draw a rectangle?
→ ax.add_patch(plt.Rectangle((0, 0),1,1)
... draw a vertical line?
→ ax.axvline(x=0.5)
... draw outside frame?
→ ax.plot(..., clip_on=False)
... use transparency?
→ ax.plot(..., alpha=0.25)
... convert an RGB image into a gray image?
→ gray = 0.2989*R+0.5870*G+0.1140*B
... set figure background color?
→ fig.patch.set_facecolor("grey")
... get a reversed colormap?
→ plt.get_cmap("viridis_r")
... get a discrete colormap?
→ plt.get_cmap("viridis", 10)
... show a figure for one second?
→ fig.show(block=False), time.sleep(1)

Performance tips

```
scatter(X, Y)                          slow
plot(X, Y, marker="o", ls="")          fast

for i in range(n): plot(X[i])          slow
plot(sum([x+[None] for x in X],[]))    fast

cla(), imshow(…), canvas.draw()        slow
im.set_data(…), canvas.draw()          fast
```

Beyond Matplotlib

Seaborn: Statistical Data Visualization
Cartopy: Geospatial Data Processing
yt: Volumetric data Visualization
mpld3: Bringing Matplotlib to the browser
Datashader: Large data processing pipeline
plotnine: A Grammar of Graphics for Python

Matplotlib Cheatsheets (c) 2020 Nicolas P. Rougier
Released under a CC-BY 4.0 International License

NUMFOCUS
OPEN CODE = BETTER SCIENCE