

Last Modified: Monday 19 August 2024

MRP TECHNICAL MANUAL

MODIFYING MRP

Considerations

Modifying the software can result in unexpected events if the procedure is not properly controlled, some suggested processes for modifying the software are:

- ⑩ Review the modification – is there *really* a need for it? Can user training avoid the issue?
- ⑩ Document the proposal
- ⑩ Make a backup copy of the current client and make sure the folder name is **dated**
- ⑩ Modify the client software on a computer that *isn't* a server
- ⑩ Make sure the development computer *only* has Microsoft Access and Office on it

Software Requirements

The standard client on the current system requires Access 2000 Runtime.


The development computer needs:

- ⑩ Microsoft Office Developers Edition
- ⑩ Access 2000
- ⑩ Office 2000

Be sure to have the *same* service pack version of Office/Access 2000 as the current client computers.

NETWORK ARCHITECTURE

The Network layout is as follows:

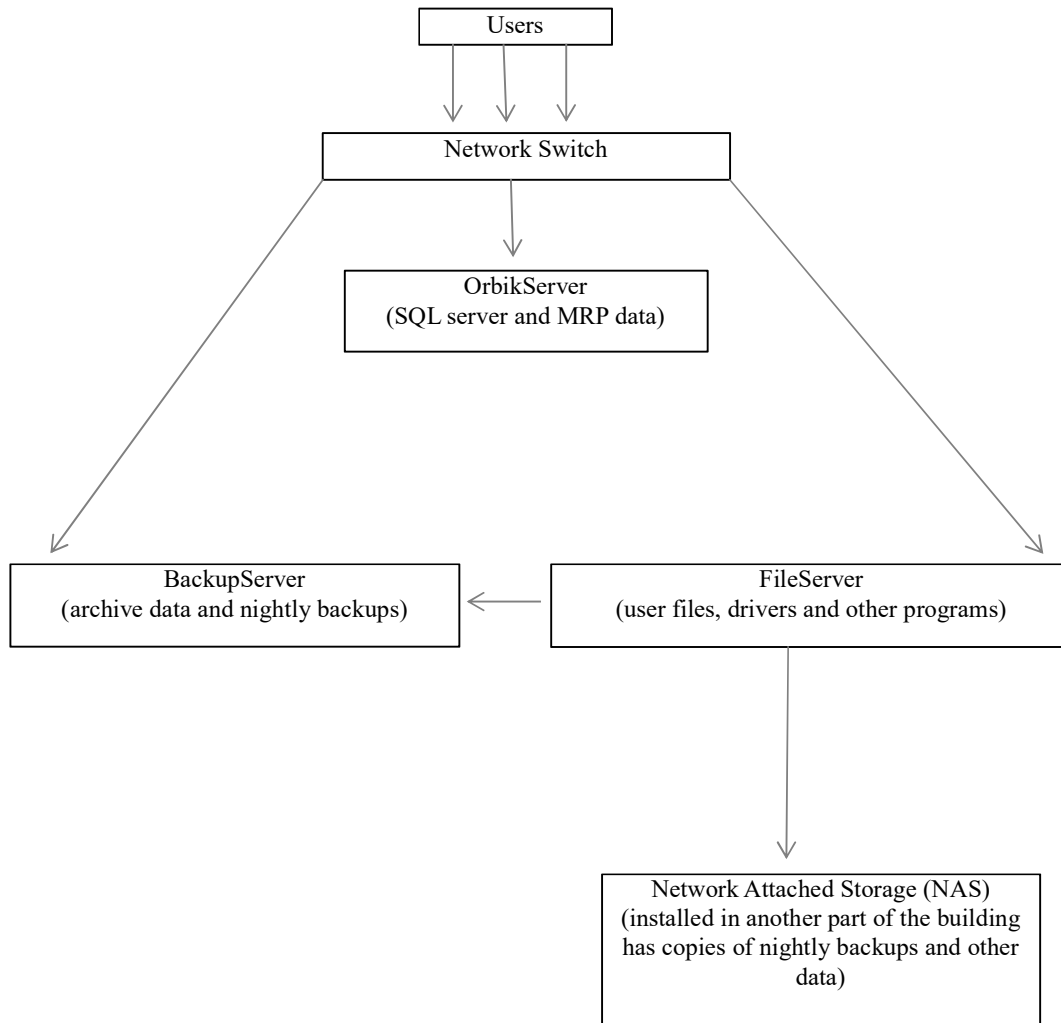

CLIENT ARCHITECTURE

The Client is made up of a series of library databases these contain the forms and reports for each of the “cycles”:

Library Database	Cycle
Ladmin.mdb	Admin
Lbuy.mdb	Buy
LGL.mdb	General Ledger
Linv.mdb	Inventory
LlocLot.mdb	Loc and Lot
Lmake.mdb	Make
Lplan.mdb	Plan
Lsell.mdb	Sell
LSFC.mdb	Shop Floor Control

There are also other databases which hold other forms and reports:

Library Database	Contents
Lcustom.mdb	Custom forms and reports embedded into the system
Lfind.mdb	The “find” form for searching for data
Llogin.mdb	The login database used for development only
Lorbikcode.mdb	Contains “About” form, error handler and other internal system functions
Lrelinktables.mdb	Called by login database to relink client tables in necessary before system starts
Lrma.mdb	Once was RMA library now container for more custom forms and reports
Orbikmrp.mdb	Main menu database called when login screen starts system proper password authentication.

There are also a series of read only databases called MDEs:

Library Database	Contents
ArchiveDataReader.mde	Allows reporting on data from archive server
CriteriaBasedMessaging.mde	QA requested messaging system
dbExternalreportsnForms.mde	Custom reports and forms
login.mde	Login screen each user sees
NCP.mde	QA “debit note” system based on QA rejects to supplier
TAS.mde	Old TAS system data can be viewed/reported on

Also each library that contains forms/reports used in the system contains a special table that lists all the object in that library. These along with all the server tables and all DAO temporary tables from

all the libraries are linked directly into the OrbikMRP database which allowed the main menu to open forms and reports from the correct library.

This linking of all temporary DAO and ODBC tables is also mirrored in the Lorbikcode database. Here a list of the tables with the forms/reports lists per cycle:

Table Name	Library
USysFormsReports_admin	Ladmin
USysFormsReports_buy	Lbuy
USysFormsReports_custom	Lcustom
USysFormsReports_gl	LGL
USysFormsReports_inv	Linv
USysFormsReports_loclot	Lloclot
USysFormsReports_make	Lmake
USysFormsReports_plan	Lplan
USysFormsReports_rma	Lrma
USysFormsReports_sell	Lsell
USysFormsReports_sfc	Lsfc

Server names are currently: OrbikServer (main), Backupserver (archive data and backup), FileServer (drivers, programs and user files)

HOW THE LOGIN FORM WORKS

When the user types in their name the function DoesUserExist is called this simply sees if that user name exists in the loginname field in the EMP table.

When the user enters their password ValidatePasssword is called. This runs the SQL Server stored procedure SP_Password and passes the password entered by the user as parameter one and two parameter three is the user name (EMP loginname).

When the “Login” button is clicked the same name/password checks are made then CheckForNewVersion is called. This reads the USS_Type field for value 'Version' in the UsysSystem table in the lorbikcode.mdb *on the server*. If the value does not match the same field value on the client a new version is copied from the server.

Otherwise CompactClient is called this checks the registry on the client using the VBA command GetSetting for sub key Orbik value CompactDate. If the returned value is greater than one month older than today the current date plus one month is stored as the CompactDate and the client is compacted.

If from the Options sub screen Compact Client is chosen then the client is compacted regardless.

Then CheckRelink is called this calls GetSystemOptions and passed a value to it of 1 then tells it to read the table SysOptions in SQL Server and returns the value of the field SYS_ReLinkTables. If the value is 1 opens the database Lrelinktables.mdb which relinks all tables in the system libraries.

CreateUserLoginRecord is run this creates a login record in the SQL Server table LoginCurrent.

Finally the Lorbikmrp.mdb database is run and passed the value of the field EMP_EmployeeID from the EMP table where the loginname field equals the users login name.

The login form now closes.

Rest of the login process

The AutoExec macro in Lorbikmpr.mdb starts and first runs AutoExecCode. This checks if a command line (user ID) has been passed if not it closes the application.

If the command line is “Compile” it exits the function otherwise it runs the function StartUp, this first shows the splash screen then sets system variables like logged on user ID, ODBC connection string and various LEN_ variables for length of fields checking during key entry in various screens.

Then it runs MenuOn_ORB which shows the title bar menu, then runs Startup_ORB in the lorbikcode.mdb this function checks the Usystable to see if any caption maintenance has been set by the login form and if so performs it. This is usually done if new items are added to the main menu or new entries e.g. new system messages placed into the MSG table etc.

Then the main menu form is run which populates the main menu based on user permissions in MainMenu_Permissions and the contents of the local MainMenu table.

HOW THE MAIN MENU WORKS

The main menu structure comprises of three main tables:

MainMenu_English – menus names

MainMenuPermissions – group premissions per object

MainMenuSettings – where objects appear in the cycles and where they are actually ran from

The main menu form reads the cycle and open from cycle details from MainMenuSettings and gets the menu name captions from the local table MainMenu in lorvikcode.mdb

This local table is updated either by setting an option in the login screen or after modifying security permissions for objects in frmMenuSecurityMaintenance (admin).

There is a function in lorvikcode.mdb called RefreshMainMenu which refreshes the MainMenu table from the three primary tables.

In each library there is a table: UsysFormsReports_<cycle name>

This contains all the objects that can be opened from that form and used by the main menu for to decide where open objects from if the MainMenuSettings table has a open from cycle value that differs from the UsysFormsReports_<cycle name> record the object is opened from the UsysFormsReports_<cycle name> cycle instead.

When the RefreshMainMenu function is run it rebuilds the local MainMenu table after first updating the MainMenuSettings table MMS_OpenFromCycle field with any object names from the UsysFormsReports_<cycle name> tables where the open from cycles differ.

That is if MainMenuSettings has a record for an object and it has the MMS_OpenFromCycle set to “Sell” and in the UsysFormsReports_Sell table that object does not appear *but* it does appear in UsysFormsReports_Custom then MainMenuSettings gets update to MMS_OpenFromCycle = Custom.

Having the MainMenuSettings table makes for a quick and easy way of getting menu objects and open from cycles.


The refresh main menu at login is done by the login form settings the value UpdateCaptions = true in the table UsysSystem in the lorvikcode.mdb. The Startup_ORB function in this library is called by the procedure in lorvikMRP AutoExec macro (AutoExecCode) checks the Usystable to see if any maintenance options have been set by the login form.

ADDING ITEMS TO THE MAIN MENU


First add the name of the item to the “USysFormsReports_<cycle>” in the library database if this was linv.mdb then you would add the name of the object too: USysFormsReports_inv.

Next open Lorbikmrp.mdb. Note: hold down the left shift key when opening to stop the system from trying to automatically start which of course it won't as your not accessing it from the login screen so it will just close.


Now show the Orbik MRP main menu by right clicking thus:

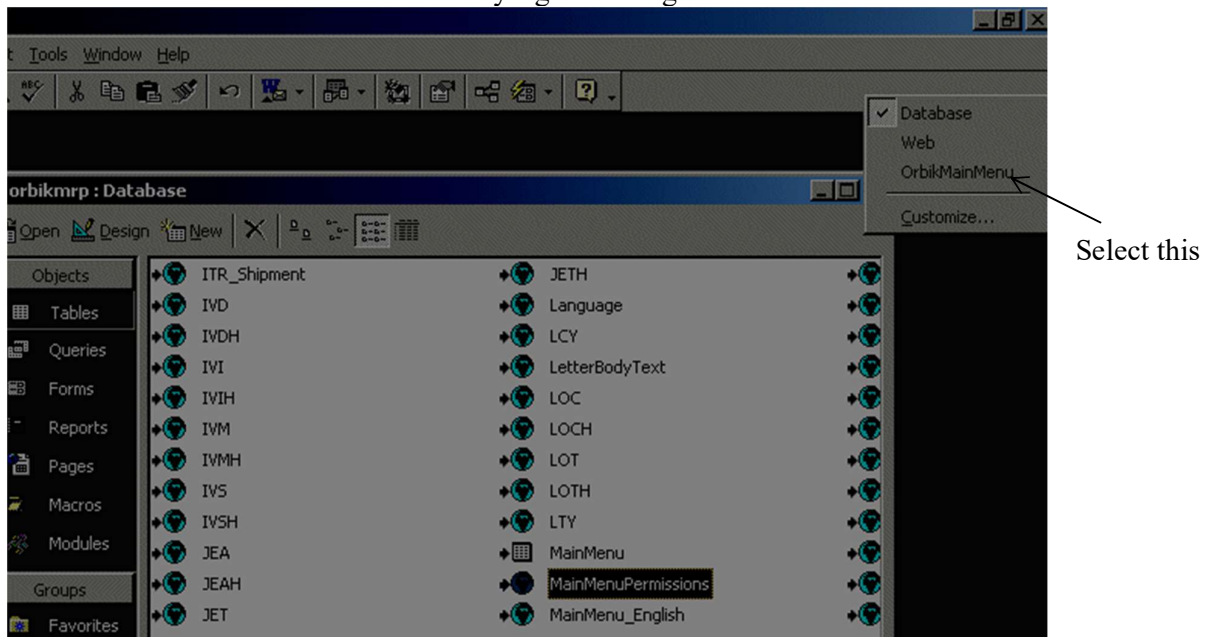


This now shows:

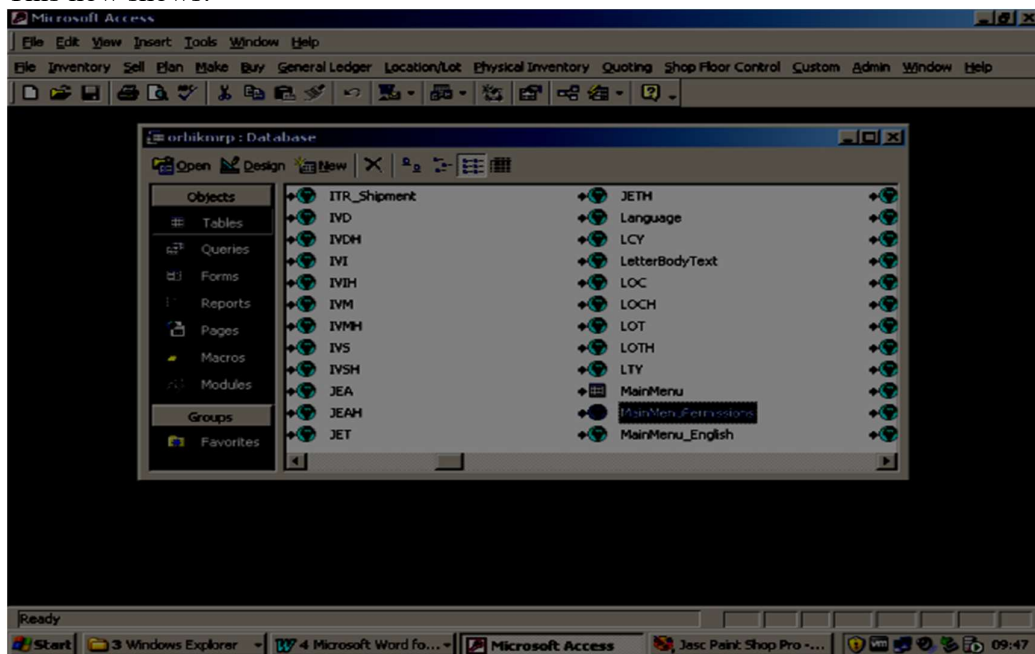

Now right click and select “Customize”:

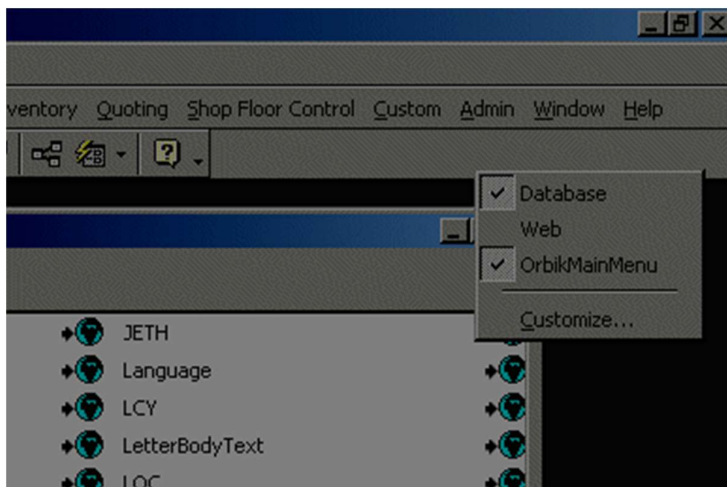


You are now in menu edit mode and this screen pops up:

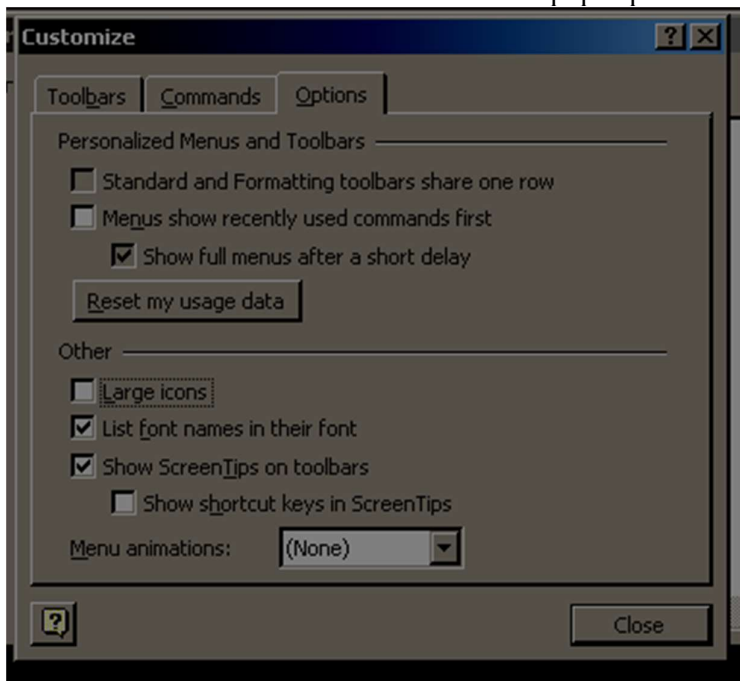


First thing to do is find the sub menu where you want to add your new item then *copy* an existing menu item to use as a template. To do this hold down the control key then left click on the item to

copy and drag it to where you want the new menu item to be and release.

In this example I have copied the “procedures” menu item and *copied* below the “About Orbik MRP” menu item.

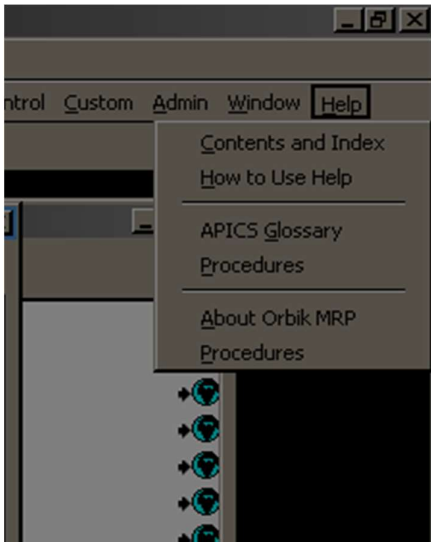


Now select the new menu item and right click it:

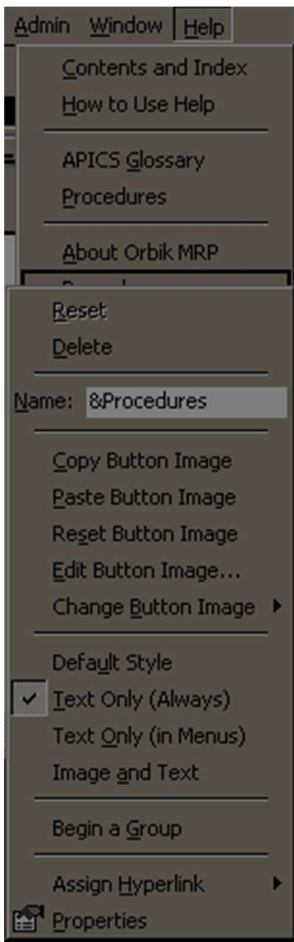


← This sub menu now appears where you can edit the menu item attributes

Change the name note this is the name for the menu item:

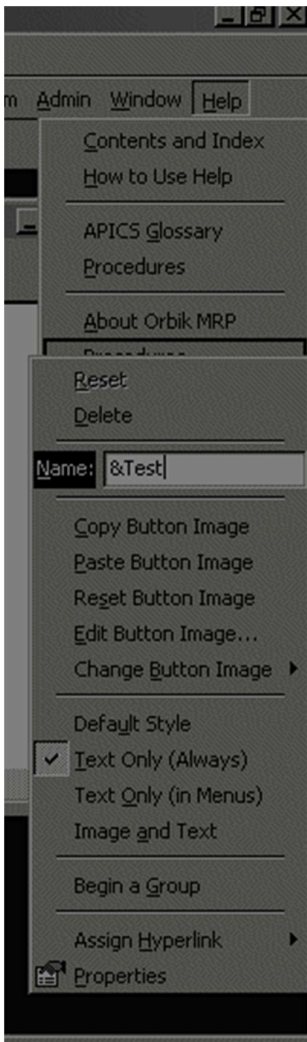

Now click “Properties”:

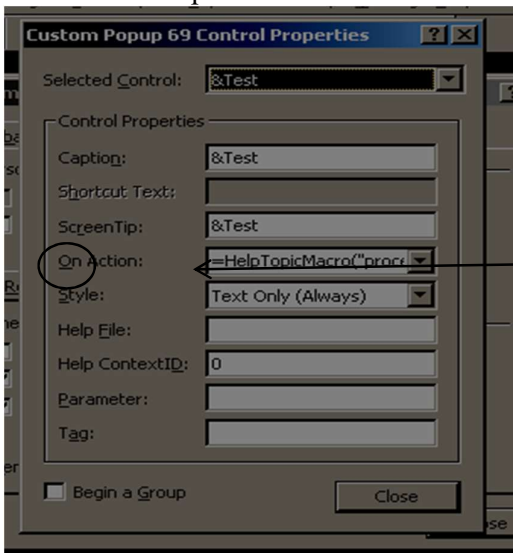

We need to replace the “On Action” with the command to open the object to open an object in the system is:

OpenMenuItem

If we wanted to open the Location Maintenance form from our new menu item the “On Action” would contain:

=OpenMenuItem_ORB("frmLocMaint","LocLot")



Note: the system has two different cycle names for each menu item the first is where it is *displayed* the second is where it is actually run *from*. For “OpenMenuItem” we specify where it is *displayed*.

Now we need to add a record into the “MainMenu” table for the new item so open the table and enter what the object is called e.g. frmLocMaint, the cycle where it is *displayed* then the cycle it is run *from* then the description of the menu item e.g. Location Maintenance. Then which of the three tabs it can appear in: Form, Report or Operation.

Then the data type e.g. Static, Dynamic (use the entries already in the table for more options NOTE you can only use the listed type not user defined ones) then “parent” menu e.g. LocLot_Forms then set the MMP_Flags to 11.

Now repeat the same procedure for the MainMenuSettings table and add an entry for the object and description into MainMenu_English.

Open/create a database and link the table MainMenuPermissions to it via ODBC.

Now create a query with this SQL and save it:

```
SELECT MainMenuPermissions.MMP_GroupName
FROM MainMenuPermissions
GROUP BY MainMenuPermissions.MMP_GroupName
HAVING (((MainMenuPermissions.MMP_GroupName) Not Like "frm*" And
(MainMenuPermissions.MMP_GroupName) Not Like "fsl*" And
(MainMenuPermissions.MMP_GroupName) Not Like "fpop*" And
(MainMenuPermissions.MMP_GroupName) Not Like "rpt*" And
(MainMenuPermissions.MMP_GroupName) Not Like "help*" And
(MainMenuPermissions.MMP_GroupName) Not Like "menu*" And
(MainMenuPermissions.MMP_GroupName) Not Like "edi*"))
ORDER BY MainMenuPermissions.MMP_GroupName;
```

Now create another query with this SQL and save it:

```
INSERT INTO MainMenuPermissions ( MMP_GroupName, MMP_ObjectName, MMP_Flags )
SELECT Query1.MMP_GroupName, "frmQuickStockView" AS Expr1, 9 AS Expr2
FROM Query1
ORDER BY Query1.MMP_GroupName;
```

Replace “frmQuickStockView” with the name of your object.

This will create records for each security group for the new menu item with limited security access. Now start the Orbik MRP system login as the administrator go into Admin->Menu Security Maintenance.

From the “View By” selection on the left pick “Menu Items”.

From the filtered list select the menu item you have just added, in the “Filter By” selection select “All”.


Now all you need to do is close the system down open the Login.mdb database and run forms:

frmCompact
frmCompile
frmCompact


CLIENT ODBC SETUP

Each client has two ODBC settings configured from Data Sources (ODBC).



Open the Data Sources ODBC and select the tab “System DSN” and click “Add” and select “SQL Server”:

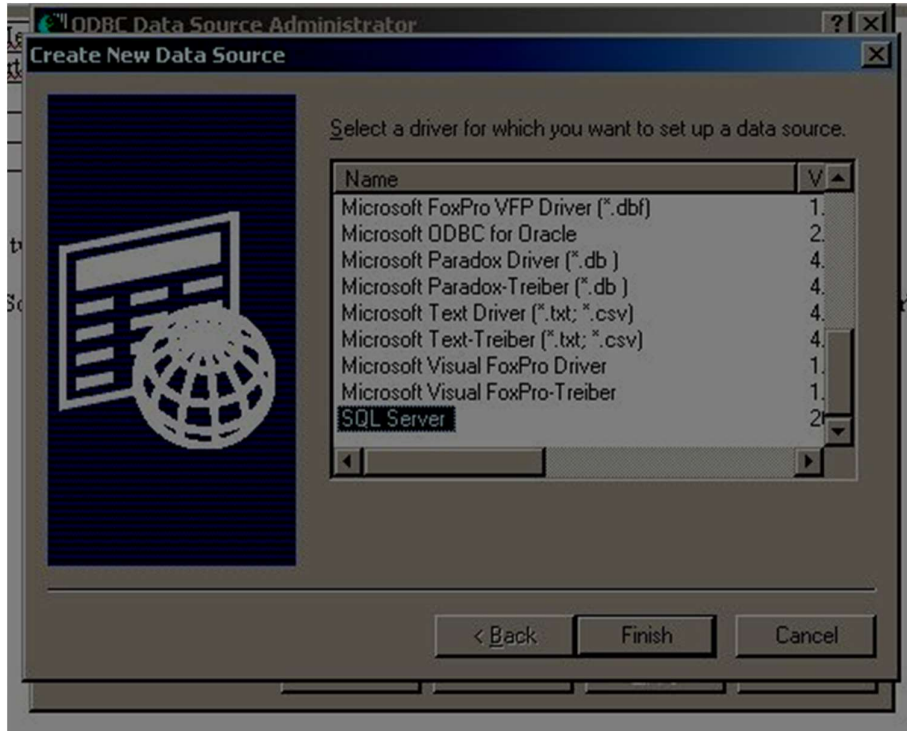


Now we can start adding the main ODBC connection for the MRP system:

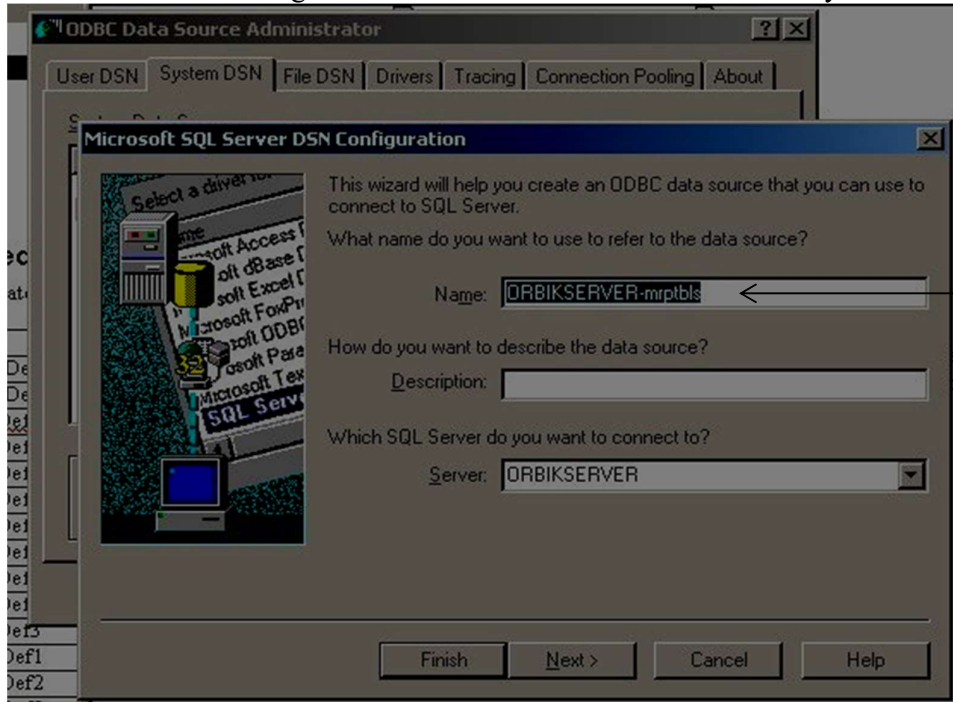



Name used in the system for linked OD

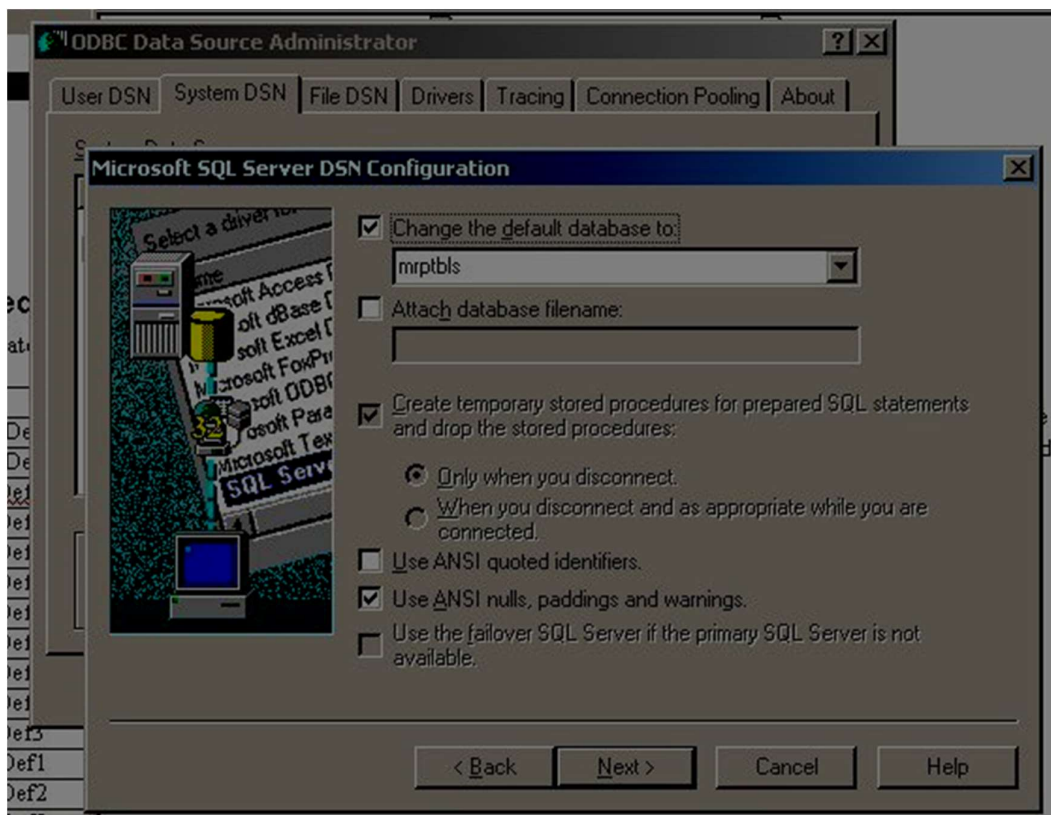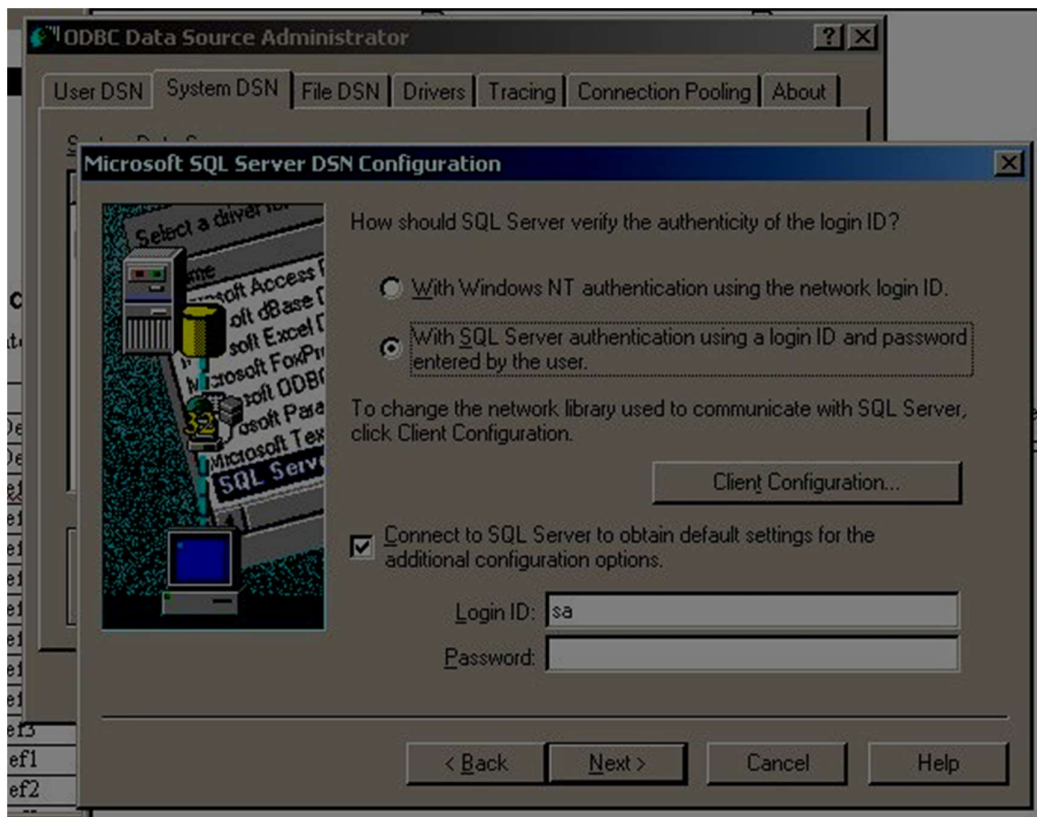

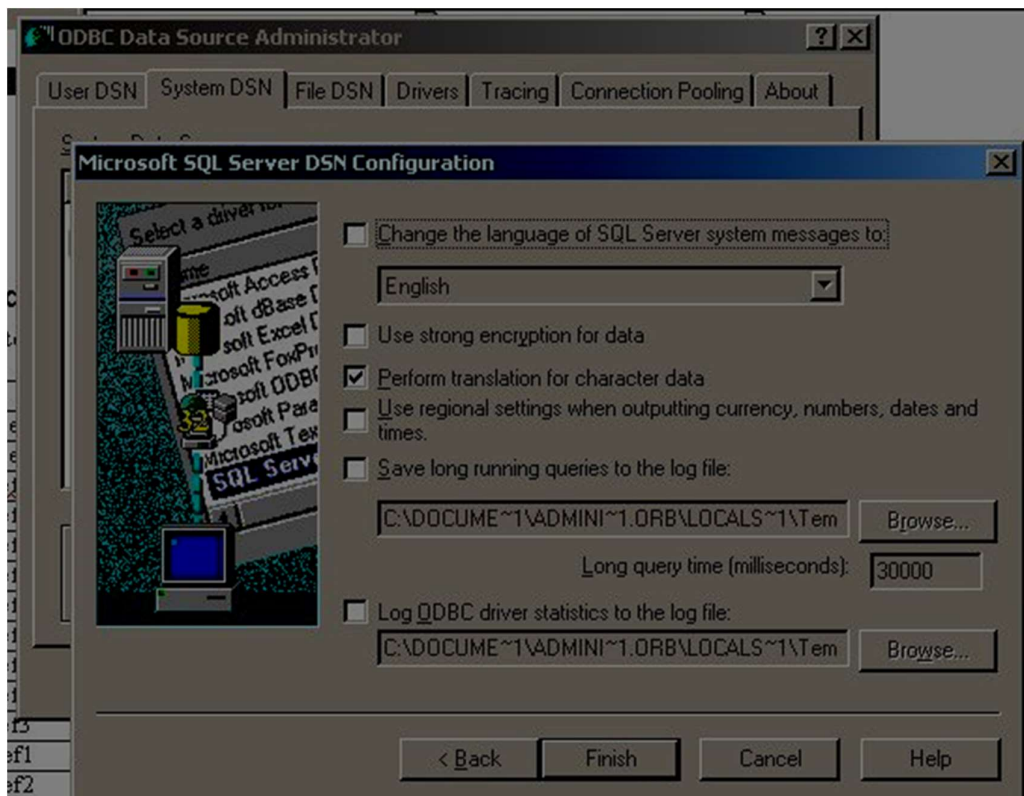




That's the MRP ODBC setup now lets create the ODBC link to the archive server using the same procedure. Click "Add" and select "SQL Server":

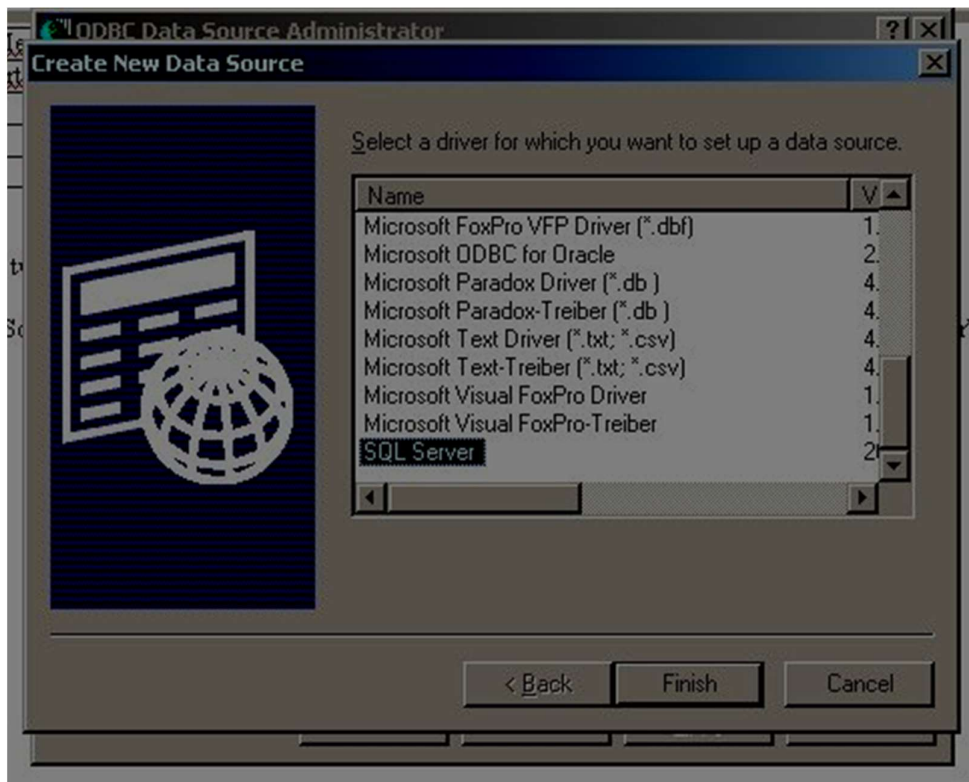

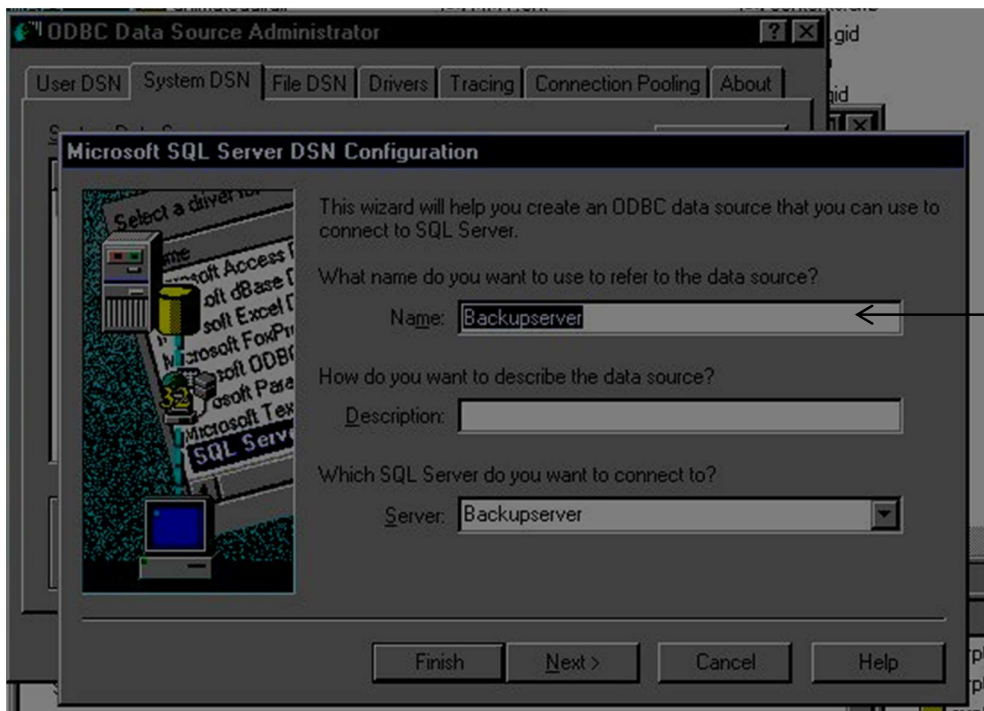

Archive servers ODBC connection

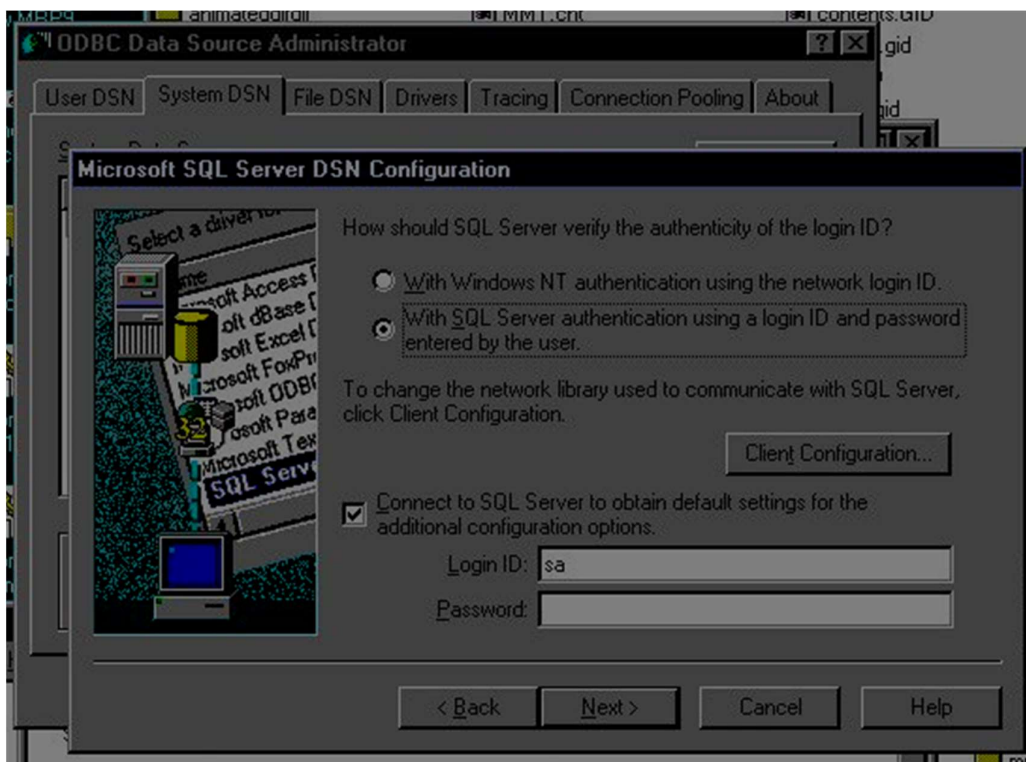

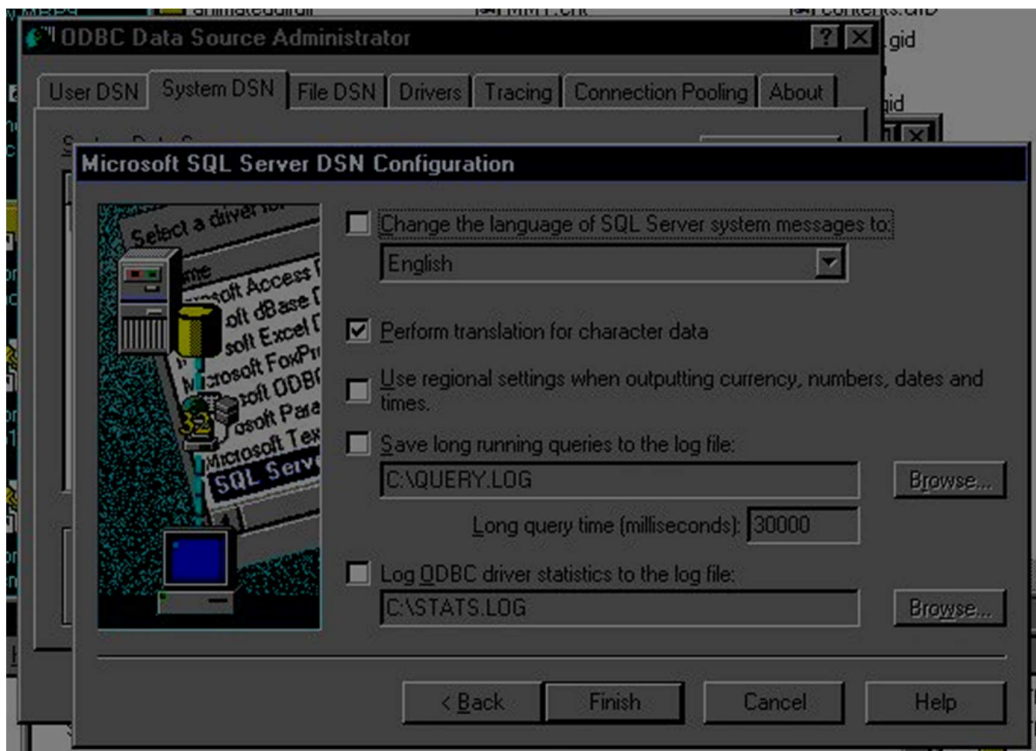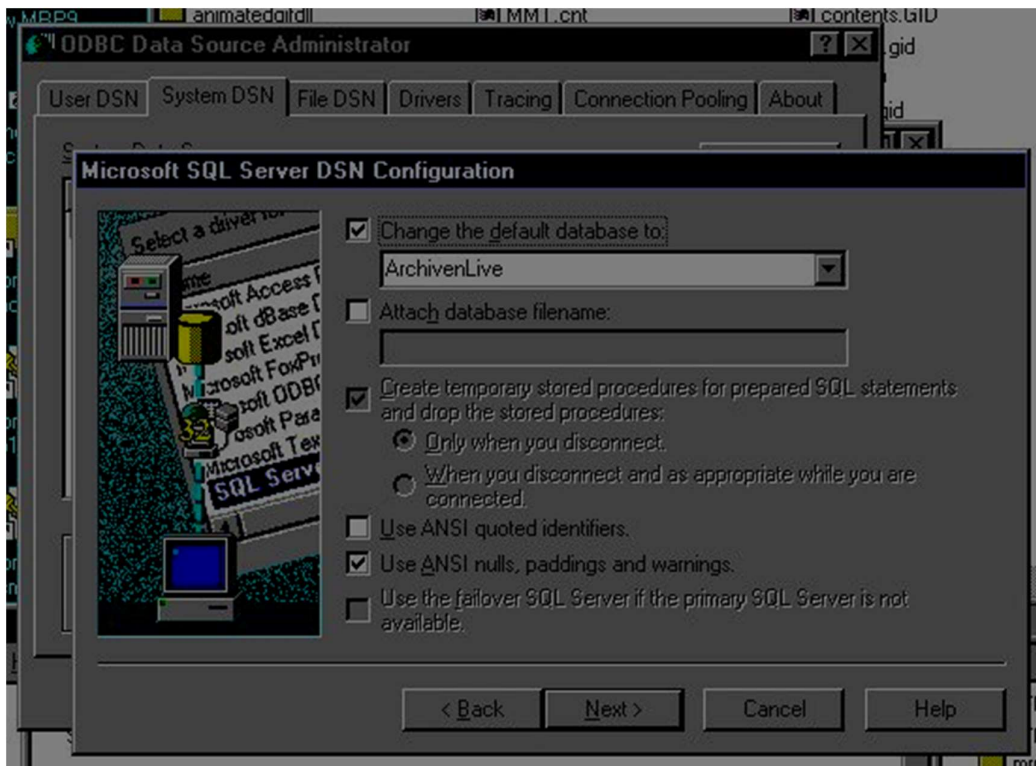

That is the ODBC configured.

USING EMPTY LIBRARY DB TO STORE EXTRA FORMS

Situation

You can find as you add more things to the system the standard libraries start becoming corrupted. When this happens it is best to move the object to a new empty library and redirect the main menu tables to point to that new location.

- Copy all the objects you want into the empty library (and their dependants)
- Make sure UsysTableList has the correct tables to link
- Edit the entry in MainMenuSettings so the source points to the library
- Edit the entry in LOrbikCode MainMenu as above
- Remove edtry from old UsysFormsReports_<cycle name> and insert into new libraries UsysFormsReports_<cycle name>
- Compile the client
- Check the LOrbikCode MainMenu has the correct library source for your objects
- Reattach the tables and push to server

Current list of unused libraries:

LECO

LEDI

LEIS

LPHYSINV

Note: This gives you around 400MB's of extra objects, there is no reason with some mild editing why you could not all you own libraries e.g. LQA.MDB.

FORMS THAT WRITE GLT RECORDS

Cycle

SELL

Cash application invoices
Shipment
Invoice reversal
Invoicing
Misc A/R Invoice
Credit Memo

BUY

A/P Invoice Entry
A/P Handwrite
PO Inspection
PO Receipts
Void Check
Process Check

MAKE

Close work order
First issue
Issue
Rework
WIP Inspect
WIP Receipt

SFC

Shop data maintenance

INV

Adjust Quantity
Issue GL
Item Card
Bottom Up Cost

SQL SERVER REFERENTIAL INTEGRITY

What It Is

Each time table data is edited checks and updates are performed on other tables here is a complete list of populated tables their references and checks.

APD	APM																
APG	API																
API	APM																
APM	RCP	CHI	CHK	APP	API	APD	APG										
APP	APM																
ARC	ARM																
ARM	ARC	ARP															
ARP	ARPI	ARM															
ARPI	ARP																
CHI	CHK																
CHK	CHI																
COA	GLD	COP															
COM	GLD	GLDH	JETH	COP													
COP	GLD	COM															
CSA		CUS															
CSO	CUS																
CUS	ARM	SOM	CSO	CSA	IVM												
EMP	EMI																
IMA	IPF	IPM	IPP	IPR	IPS	IPU	IPW	PST	RTG	IMV	MEV	IMC	IMS	IMS	IMO		
IMC	IMCH	IMA															
IMD	IMDH	IMA															
IMS	IMA																
IMV	IMVH	IMA															
ITC	ITC_Issue	ITC_IssueH	ITL	ITR	ITCH												
ITL	ITL_Issue	ITL_IssueH	ITR														
ITR	ITC	ITR_Issue	ITR_IssueH														
IVD	IVS	IVI															
IVI	IVD	IVM															
IVM	IVI																
IVS	IVD																
JEA	JET																
JET	JEA																
LOC	LOT																
LOT	LOC																
MEV	IMA																
MMA	MCT_Branches																
MMB	MCT_Branches																
MMC	MMX																
MMD	MCT_Branches																
MME	MCT_Branches																
MMN	MCT_Branches																
MMP	MCT_Branches																
MMR	MCT_Branches																
MMS	MCT_Branches																
MMT_Territories	MCT_Branches																
MMTS	MCT_Branches																
MMTS_UM	MCT_Branches																
ORBIK_MessageRTM	ORBIK_MessageRTMH																
PLD	PLDH	PLT															

PLT	PLTH	PLD															
POD	POR	IPP	POI	POQ	RCP												
POI	POD	POM															
POM	POR	POI															
POQ	POR																
POR	POQ	POD	RCP														
PRM	PRQ																
PRQ	PRM																
PSD	PSDH	PST	PSDC														
PSS	PST																
PST	PSTH	PSD	PSS	IMA	PSTC												
QUOTATIONSHEADER	QUOTATIONSHEADERH																
QUOTATIONSLINE	QUOTATIONSLINEH																
RCP	RCPH	RCQ															
RCP_API	RCP_APIH																
RCQ	RCP																
RCR	RCW																
RCW	RCR																
RJA	RJE																
RJC	RJE																
RJE	RJA	RJC															
RTC	RTG																
RTG	RTC																
SGRP	GRP																
SHD	SHI																
SHI	SHD	SHP															
SHP	SHI																
SOD	SOS	SOI															
SOI	SOD	SOM															
SOM	SOS	SHP	SOI	IPS	SOMC	SOIC	SODC										
SOS	SON	SOD															
VBA	VEN																
VBM	VBQ																
VBQ	VBM																
VEN	APM	POM	VBA														
WCC	WCL	WCT															
WCL	WCLH	WCC															
WCT	WCC																
WKC	WKO																
WKE	WKO																
WKI	WKO																
WKO	PLD	POI	RCW	WOO	WKC	WKI	WKE	WKV	RAC	PLT	WOO	WCL	IPR	IPW			
WKV	WKO																
WOM	WOO																
WOO	WOM																

TABLES DESCRIPTIONS 11/06/14

Cycle	Table	Description	Used?
Buy	APD	Accounts Payable Debit – This contains multiple account numbers for each debit memo. One APD is created for each credit account number entered	
Buy	APDH	Accounts Payable History – Purged APD records only created if “AP History” is checked in Master Controls Explorer	
Buy	APG	Accounts Payable GL – Contains miscellaneous invoice lines. Multiple APG records exist for each invoice line	
Buy	APGH	Accounts Payable GL History – Purged APG records	
Buy	API	Accounts Payable Invoice – Contains data for invoice line numbers. One API record exists per invoice line	
Buy	APIH	Accounts Payable Invoice History – Purged API records. Only created if “AP History” is checked in Master Controls Explorer	
Buy	APM	Accounts Payable Master – Contains accounts payable records. One APM record is created for each invoice ID. The invoice lines are detailed in the APG and API tables	
Buy	APMH	Accounts Payable Master History – Purged APM records. Only created if “AP History” is checked in the Master Controls Explorer	
Buy	APP	Accounts Payable Payments – Contains records of payments made against each invoice. One APP record is created for each payment made against an invoice	
Buy	APPH	Accounts Payable Payment History – Purged APP record only created if “AP History” is checked in the Master Controls Explorer	
Sell	ARC	Accounts Receivable Credit – Contains multiple account numbers for each credit memo entered. One ARC is created for each debit account number entered	
Sell	ARCH	Accounts Receivable Credit History – Purged ARC records	
Sell	ARM	Accounts Receivable Master – Contains accounts receivable records. One ARM record is created for each invoice. Invoice lines are detailed through	

Cycle	Table	Description	Used?
		IVM, IVI, IVD	
Sell	ARMH	Accounts Receivable Master History – Purged ARM records only created if “AR History” is checked in the Master Controls Explorer	
Sell	ARP	Accounts Receivable Payments – Contains records of payments received against each invoice. One ARP record is created for each payment applied against an invoice	
Sell	ARPH	Accounts Receivable Payment History – Purged ARP records only created if “AR History” is checked in the Master Controls Explorer	
Sell	ARPI	Case Receipts Commissions – Created for each commissionable invoice when accrued at Cash Receipt.	
Sell	ARPIH	Case Receipts Commissions History – Purged ARPI records	
Sell	ARTerms	Small list of Accounts Receivable Terms	
Admin	AutoNumber	Automatic Numbers – Contains the next number for automatically generated fields such as Purchase Order numbers	
Sell	BCT	Batch Table – Contains A/P batch identifiers	
	BEC_EEC_Codes		
	BEC_Intrastats		
	BEC_Intrastats_tmp		
	BEC_IntrastatsControl		
	BEC_IntrastatsManual		
	BEC_MMT_Cntry_Dest		
	BEC_MMT_Cntry_Origin		
	BEC_MMT_Commodity		
	BEC_MMT_Delivery		
	BEC_MMT_Mode_Transport		
	BEC_tmpVAT		
	BEC_VAT		
	BEC_VAT_History		
	BEC_VAT_Manual		
	BEC_VAT_Periods		
	BID	Unknown	

Cycle	Table	Description	Used?
Sell	BKS	Bookings – Contains data on each booking. BKS records are written for each sales order delivery entered as delivery records are modified or deleted the old BKS record is backed out by the writing of a new negative BKS record, and a new BKS record for the modified amount	
Sell	BKSH	Bookings History – Purged BKS records only created if “Booked Sales History” is checked in the Master Controls Explorer	
Sell	BOL	Bill of Lading – Contains data for internal bills of lading. only created if “Internal Bill of Lading” is checked in the Master Controls Explorer	
GL	BUD	Budgets – Contains budget information including period, account number and amount for each budget in the system. An unlimited number of budgets may be created	
Admin	Captions_English	Language specific captions for fields	
Sell	CBC	Customer Bill of Lading Defaults – Contains default header and footer data for use on internal bills of lading	
Sell	CFI	Configurator – Contains the possible items available with each configuration ID	
Sell	CFM	Configurator Master – Contains configuration data for the possible configurations that may be used during the configurator process. One CFM record exists for each configurator ID	
Sell	CFP	Configurator Price Multiplier – Contains all the available price matrix data that may be used for each item in a configurator record. Each CFI record has a price multiplier from this table	
	Changes	Unknown	
Buy	CHI	Check Invoice Detail – Contains detail of each invoice that was paid against a check. One CHI record is written for each invoice against which a payment is made. The sum of the CHI records equals the total check amount	
Buy	CHIH	Check Invoice Detail History – Contains purged CHI records only created if “AP History” is checked in the Master Controls Explorer	
Buy	CHK	Check Records – Contains a record of each A/P check. One CHK record is created for each check and are detailed to the invoice paid level in the CHI table	

Cycle	Table	Description	Used?
Buy	CHKH	Check Records History – Contains purged CHK records	
GL	COA	Chart of Accounts – Contains all general ledger account numbers. One COA record is created for each account number	
GL	COM	Company Master – Contains company name and fiscal year end data for each year	
GL	COP	Company Periods – Contains GL period definitions	
Sell	Creditcontroldatabase	Credit Control – Contains records of sales returns (RMA) awaiting credit. One CreditControlDatabase record exists per RMA	
Sell	CSA	Custom Ship to Address – Contains ship to addresses of customers in CUS table. Customers can have an unlimited number of CSA records and one CSA record is automatically created using the bill to master address when the customer is first created	
Sell	CSAH	Customer Ship to Address History – Contains purged CSA records	
Sell	CSO		
Server	CURRENCY_TYPE	Currency Type – Contains a list of all currencies supported in the system. One record exists per currency and can be modified via the Master Controls Explorer “Currency”	
Sell	CUS	Customer Master – Contains one record per customer of master data such as head office address and delivery terms	
Sell	CUSH	Customer Master History – Contains purged CUS records only created if “Customer History” is checked in the Master Controls Explorer	
Sell	CustomerExtraInfo	Customer Extra Info – Contains extra information about the customer per company division e.g. Orbik/Spel. One record exists for each customer	
GL	CustomerStopList	Customer Stop List – Contains a list of customer currently on account hold	
Sell	CustomerTypes	Customer Types – Contains a list of customer types	
Sell	DefaultTerms	Default Terms – Contains a list of records for the available terms for use in Spel quotes	
ECO	EAT	Employee Attendance – Contains clock in/out data	

Cycle	Table	Description	Used?
ECO	EATH	Employee Attendance History – Contains purged EAT records	
ECO	ECA	Action Notices of ECN record – Contains engineering change note data	
ECO	ECD	Department Records of ECO – Contains engineering change note data	
ECO	ECI	Item Records of ECO – Contains engineering change note data	
ECO	ECN	Notice of Record of ECO – Contains engineering change note data	
ECO	ECO	Engineering Change Order Master – Contains primary ECO information	
ECO	ECP	Modified PO of ECO record – Contains engineering change note data	
ECO	ECR	Engineering Change Record Master – Contains engineering change note data	
ECO	ECW	Modified WO fo ECO record – Contains engineering change note data	
EDI	EDI_Customer	Settings for EDI	
EDI	EDI_SchedParms	Settings for EDI	
EDI	EDI_SchedParmsDflt	Settings for EDI	
EDI	EDI_Schedule	Settings for EDI	
EDI	EDI_Transactions	Settings for EDI	
EDI	EDIE	Settings for EDI	
EDI	EDIQ	Settings for EDI	
EDI	EDIWH	Settings for EDI	
EDI	EMI	Settings for EDI	
Admin	EMP	Employee Master – Contains master data including earning rates and user ID. One EMP record exists for each employee	
Sell	Employees	List of Employees who can use Spel quote system with electronic signatures	
Admin	EMT	Employee Training Records – Contains records of employee training	
	Errors	Errors – List of errors generated by users	
Server	EURO	Euro – Contains conversion rates for currencies	
Quoting	ExportDefaultTerms	Export Default Terms – Contains a list of records for the available terms for use in Orbik export	

Cycle	Table	Description	Used?
		quotes	
Quoting	ExportLetterBodyText	Export Letter Body Text – Contains a record of the letter template used when creating Orbik export quotes	
Quoting	ExportQuotationsHeader	Export Quotations Header – Contains a master record of information such as quote ID and customer ID for Orbik export quotes	
Quoting	ExportQuotationsHeaderH	Export Quotations Header History – Contains purged ExportQuotationsHeader records	
Quoting	ExportQuotationsLines	Export Quotations Lines – Contains the line information for Orbik Export quotes	
Quoting	ExportQuotationsLinesH	Export Quotations Lines History – Contains purged Export Quotations Lines records	
Sell	FRT	Freight – Contains freight information such as country and currency	
GL	GLD	General Ledger Detail – Contains beginning balance, total debit, total credit and ending balance for each account number in a period	
GL	GLDH	General Ledger Detail History – Contains purged GLD records	
GL	GLT	General Ledger Transaction – Contains details of transactions in the system that affect the trial balance position. This record contains debit/credit amounts and account numbers and tracking data	
	GLT_Org	Copy of GLT data	
GL	GLTH	General Ledger Transaction History – Contains purged GLT records	
Sell	Groups	Groups – Spel customer pricing groups	
Sell	GroupsItemsnPrices	Groups Items and Prices – Contains Spel customer items and prices	
GL	GRP	Group – Contains all of the user defined groups within each type (Asset, Revenue, Liability etc)	
Sell	IBC	Item Bill of Lading – Contains default header and footer data to be included on all bills of lading for a specific item	
Inv	IMA	Item Master – Contains a master record for each inventory item.	
Inv	IMA_RevTrack	Item Master Revision Tracking – Contains tracking data for revision level changes	
Inv	IMAH	Item Master History – Purged IMA records only created if “Inventory History” is checked in the	

Cycle	Table	Description	Used?
		Master Controls Explorer	
Inv	IMC	Item Master Cost – Contains one IMC records per IMA. This record contains data about the item cost including things like material/labour	
Inv	IMCH	Item Master Cost History – Contains purged IMC records only created if “Inventory History” is checked in the Master Controls Explorer	
Inv	IMD	Item Master Drawing – Contains one record for each drawing for each item. An unlimited number of IMD records can exist per IMA	
Inv	IMDH	Item Master Drawing History – Contains purged IMD records only created if “Inventory History” is checked in the Master Controls Explorer	
Inv	IMO	Contains sales tax descriptions per item	
Inv	IMQ	Contains vendor prices per item	
Inv	IMQD	Contains vendor discounts per item	
Inv	IMS	Item Master Show – Contains the item long description	
Inv	IMSH	Item Master Show History – Contains purged IMS records	
Inv	IMV	Item Master Vendor – Contains one record for each vendor/manufacturer for each item including their name for the item and cost	
Inv	IMVH	Item Master Vendor History – Contains purged IMV records only created if “Inventory History” is checked in the Master Controls Explorer	
Phys	IMY	Item Master Physical – Contains cutover records from the IMA for storing costs and quantity information for each item	
Phys	IMYH	Item Master Physical History – Contains purged IMY records	
Server	INTLFORMAT	International Format – Contains the display information for forgien currencies	
Sell	INV	Invoiced – Contains billings data for all invoices lines created through invoicing	
Sell	INVH	Invoiced History – Contains purged INV records only created if “Sales History” is checked in the Master Controls Explorer	
Plan	IPF	Item Planning Sales Forecast – Contains one IPF record for each sales forecast requirement	
Plan	IPFC	Item Planning Sales Forecast – Contains one IPF	

Cycle	Table	Description	Used?
		record for each sales forecast with a group code	
Plan	IPL	Item Planning Planned Work Order – Contains a stripped down version of each planned work order record	
Plan	IPM	Item Planning Master Schedule – One IPM record is created for each master schedule requirement	
Plan	IPP	Item Planning Purchase Order – Contains a stripped down version of each purchase order record	
Plan	IPR	Item Planning Requirement – Contains a stripped down version of each requirement against a work order	
Plan	IPS	Item Planning Sales Order – Contains a stripped down version of each sales order record	
Plan	IPU	Item Planning Planned Purchase Order – Contains a stripped down version of each planned purchase order	
Plan	IPW	Item Planned Work Order – Contains a stripped down version of each planned work order record	
Loc/Lot	ITC	Inventory Transaction Location – Contains records if location tracking is turned on for an item. When an ITR record is created so is an ITC record for each location that was affected during the inventory transaction	
Loc/Lot	ITC_Issue	Inventory Transaction Location Issue – Contains records of issue transactions if location tracking is on for an item	
Loc/Lot	ITC_IssueH	Inventory Transaction Issue History – Contains purged ITC records	
Loc/Lot	ITC_Shipment	Inventory Transaction Shipment – Contains records of shipment transactions if location tracking is on for an item	
Loc/Lot	ITCH	Inventory Transaction History – Contains purged ITC records only created if “Inventory History” is checked in the Master Controls Explorer	
Sell	Itemreturndetail	Item Returned Detail – Contains RMA details about Spel customer returns there can be multiple records per CreditControlDatabase record	
Loc/Lot	ITL	Inventory Transaction Lot – Contains records if lot tracking is switched on for an item. When an ITR record is created so is an ITL for each lot that was affected during the inventory transaction	

Cycle	Table	Description	Used?
Loc/Lot	ITL_Issue	Inventory Transaction Lot Issue – Contains ITL records for issue transactions	
Loc/Lot	ITL_IssueH	Inventory Transaction Lot Issue History – Contains purged ITL_Issue records	
Loc/Lot	ITL_Shipment	Inventory Transaction Shipment – Contains ITL records for shipment transactions	
Loc/Lot	ITLH	Inventory Transaction Lot History – Contains purged ITL records only created if “Inventory History” is checked in the Master Controls Explorer	
Loc/Lot	ITR	Inventory Transaction – Contains a detail of the inventory transaction that have occurred for each item. Each time the inventory position of an item affected an ITR record is written containing that data e.g. shipment/issue etc	
	ITR_120511		
Loc/Lot	ITR_Issue	Inventory Transaction Issue – Contains ITR records for issue transactions	
Loc/Lot	ITR_IssueH	Inventory Transaction Issue History – Contains purged ITR_Issue records	
Loc/Lot	ITR_Shipment	Inventory Shipment – Contains ITR records for shipment transactions	
Loc/Lot	ITRH	Inventory Transaction History – Contains purged ITR records only created if “Inventory History” is checked in the Master Controls Explorer	
Sell	IVD	Invoice Delivery – Contains the invoice data related to the sales order delivery that was shipped (quantity, unit price, discount). The sum of all IVD records for an invoice line is equal to the invoice line amount	
Sell	IVDH	Invoice Delivery History – Contains purged IVD records	
Sell	IVI	Invoice Item – Contains invoice data related to the sales order line item that was shipped (item ID, sales tax). One IVI records exists per invoice line	
Sell	IVIH	Invoice Item History – Contains purged IVI records	
Sell	IVM	Invoice Master – Contains the header data related to the sales order that was shipped. One IVM record exists per invoice	
	IVM_Org	Copy of IVM data	
Sell	IVMH	Invoice Master History – Contains purged IVM	

Cycle	Table	Description	Used?
		records	
Sell	IVS	Invoice Serial Number – Contains the serial numbers shipped on this invoice	
Sell	IVSH	Invoice Serial Number History – Contains purged IVS records	
GL	JEA	Journal Entry Accounts – Contains the detail behind each journal entry record (JET). One JEA record is created for each account number (debit and credit) that are entered	
GL	JEAH	Journal Entry Accounts History – Contains purged JEA records	
GL	JET	Journal Entries – Contains one record for each journal entry	
GL	JETH	Journal Entry History – Contains purged JET records	
Server	Language	Language Master – Contains list of available languages	
Phys	LCY	Location Master Physical – Contains cut over records from the LOC for storing costs and quantity information for each item that is location tracked. One LYC record is created for each LOC record that exists (one record for each location)	
Phys	LCYH	Location Master Physical History – Contains purged LCY records	
Sell	LetterBodyText	Letter Body Text - Contains a record of the letter template used when creating Spel quotes	
Loc/Lot	LOC	Location – Contains the location of each item stored. For items that are location tracked one LOC record exists for each location that item is in	
Loc/Lot	LOCH	Location History – Contains Purged LOC records	
Admin	LogicalLocks	Logical Locks – Contains list of records of a specific type currently locked by users e.g. sales orders	
Server	LoginCurrent	Login Current – Contains list of currently logged on users	
Loc/Lot	LOT	Lot – Contains lot data for each item with lot tracking. One LOT record exists per lot number	
Loc/Lot	LOTH	Lot History – Contains purged LOT records	
Phys	LOTY	Location Master Physical – Contains cut over records from the LOT for storing costs and quantity information for each lot tracked item.	

Cycle	Table	Description	Used?
		One LTY records exists for each LOT record	
Phys	LTYH	Lot Master Physical History – Contains purged LTY records	
Server	MainMenu	Main Menu – Contains the items in the Spel system	
Server	MainMenu_English	Main Menu – Contains the cycles, names and object names of items shown in the main menu	
Server	MainMenuFlags	Main Menu Flags – Contains the values used to decided what can/cannot be run or seen on the main menu e.g. 1, 2, 4	
Admin	MainMenuPermissions	Main Menu Permissions - Contains the security values used to decided what can/cannot be run or seen on the main menu per user group	
Server	MainMenuSettings	Main Menu Settings – Contains the characteristics of each menu item such as cycle it is run from and cycle to be displayed in	
Admin	MCT_Branches	Master Controls Branches – Contains records about where each MCT that contains a list e.g. AP terms is stored	
Admin	MCT_ControlFormats	Master Controls Formats – Contains the details for how values are displayed in the Master Controls Explorer such as caption names and field types	
Admin	MCT_Union	Master Control Union – Contains records containing data taken from other “MCT” tables	
Admin	MCTS	Master Control System – Contains settings for many system options that are not lists e.g default sales order header/footer	
Admin	MCTS_User	Master Control Profiles – Contains control profiles for language and windows colour scheme data for each user in the system	
Admin	MEV	Month End Value – Contains month end value records for each IMA item	
Admin	MMA	Multiple Master Control Credit – Contains unique records of credit card details	
Admin	MMB	Multiple Master Control Bank – Contains multiple bank account information used in A/P and A/R. The data for each bank includes a cash account number and a next check number	
Admin	MMC	Multiple Master Control Currency – Contains currency data for A/P transactions in foreign currencies	
Admin	MMD	Multiple Master Control A/R extra charges –	

Cycle	Table	Description	Used?
		Contains all the extra charges types used in sales order devliery lines	
Admin	MME	Multiple Master Control A/P extra charges – Contains all the extra charges and account numbers charged	
Admin	MMF	Multiple Master Adjustment – Contains adjustment reasons and related GL account numbers	
Admin	MMG	Multiple Master Account Package – Contains records about external accounts package including debit/credit account names and transaction type	
Admin	MMN	Multiple Master Control Representatives – Contains all external reps that may be used in the sales order card. Each rep is associated with a calculation code (sales order, invoice or cash application) and a default commission percentage. Each rep must exist as a vendor	
Admin	MMO	Multiple Master Sales Tax – Contains details about alternative sales tax including discount percent and GL account numbers	
Admin	MMP	Multiple Master Control A/P – Contains A/P terms used throughout the system e.g. in A/P invoice and Payment Select	
Admin	MMQ	Unknown	
Admin	MMR	Multiple Master Control A/R = Contains all A/R terms used in the system	
Admin	MMS	Multiple Master Control Sales Tax – Contains all sales tax information used in the system	
Admin	MMT_Territories	Multiple Master Control Territories – Contains basic sales area types (EU, UK, Non EU), GL codes and percentage	
Admin	MMTS	Multiple Master Control System Settings – Contains lists on entries used in the Master Controls Explorer e.g. debit account numbers, inventory adjustment reasons	
Admin	MMTS_UM	Multiple Master Control Units of Measure – Contains all units of measure used in the system	
Admin	MMU	Unknown	
Admin	MMV	Unknown	
Admin	MMX	Multiple Master Control Table – Contains multiple currency exchange rates	
Admin	MSG_English	Language specific message text	

Cycle	Table	Description	Used?
Plan	MTK	Manufacturing Tickler – Contains order or reschedule action for manufactured parts	
Buy	NCP	Non Conformance Master – Contains NCP header data for vendor returns	
Buy	NCP_Lines	Non Conformance Lines – Contains NCP line data for vendor returns	
Sell	NSH	Non Ship – Contains data on sales order lines due to ship but failed to get on the shiplist due to stock shortage or credit limit breach	
GL	NUM	Number – Contains a counter for journal entry numbers. This table is filled for each period when created through Period Maintenance	
SFC	OLE	Object Linking and Embedding – Contains OLE objects	
Inv	OnHandQtyFlagH	On Hand Quantity History – Contains records of changes to the on hand quantity by sales order shipments	
	ORBErrorLog	Orbik Error Log – Contains Spel system error logs	
Sell	ORBIK_AllocToSales	Orbik Allocated to Sales – Contains data about sales order, item and quantity to allocate	
Sell	ORBIK_AllocToSalesH	Orbik Allocated to Sales History – Contains purged ORBIK_AllocToSales records	
Sell	ORBIK_Debit	Orbik Debit – Contains debit note details raised against a customer	
Sell	ORBIK_DebitH	Orbik Debit History – Contains purged ORBIK_Debit records	
Server	ORBIK_IDLEDATA	Orbik Idle Data – Contains data regarding amount of time user leaves a screen unattended	
Sell	ORBIK_InactiveCustomer	Orbik Inactive Customer – Contains a list of inactive customers	
Custom	ORBIK_MessageExpired	Orbik Message Expired – Contains records of CBM (Criteria Based Messaging) messages that have expired	
Custom	ORBIK_MessageForms	Orbik Message Forms – Contains a list of forms that can be involved with CBM operations	
Custom	ORBIK_MessageMain	Orbik Message Main – Contains CBM messages	
Cutsom	ORBIK_MessageMainH	Orbik Message Main History – Contains purged ORBIK_MessageMain records	
Custom	ORBIK_MessageRTM	Orbik Real Time Message – Contains records of user to user messages	

Cycle	Table	Description	Used?
Custom	ORBIK_MessageRTMH	Orbik Real Time Message History – Contains purged ORBIK_MessageRTM records	
Custom	ORBIK_MessageRTMSave	Orbik Real Time Message Saved – Contains RTM messages user has chosen to save	
Custom	ORBIK_MessageTypes	Orbik Message Types – Contains types of message the CBM message can be linked too	
Server	ORBIK_ModifiedObjects	Orbik Modified Objects – Contains a list of administrator modified objects	
Plan	ORBIK_PhaseOut	Orbik Phase Out – Contains records about components to phased out at a particular date	
Server	Orbik_UserObjects	Orbik User Objects – Contains list of screens opened by users and date/time	
Inv	ORBIKBatteries	Orbik Batteries – Contains list of all inventory battery items the number of cells and battery type	
Sell	ORBIKCancelledShipLists	Orbik Cancelled Shiplists – Contains list of user cancelled shiplists by sales order and date/time	
Sell	ORBIKCreditRange	Orbik Credit Range – Contains date range used by sales RMA to determine maximum credit value allowed per month	
Sell	ORBIKCustDisc	Orbik Customer Discount – Contains customer discount records	
Sell	OrbikItemPrices	Orbik Item Prices – Contains Orbik custom prices e.g. trade, less 20% etc	
Inv	ORBIKItemStatusChange	Orbik Item Status Change – Contains records of times/user who change inventory status e.g. from active to inactive	
Inv	ORBIKItemsToArchive	Orbik Items to Archive – Contains records of manufactured items to move into the archive	
	ORBIKPurchWOMsg	Unknown	
Sell	OrbikSHILog	Orbik Shipment Lines Log – Contains log of shiplist lines	
Sell	OrbikSHPLog	Orbik Shipment Log – Contains log of header information for shiplists	
Server	OrbikSpelMods	Orbik Spel Mods – Contains a list of Orbik and Spel custom modifications	
Inv	PackedItemsLocations	Packed Items Locations – Contains list of items/locations/weights of selected stock items	
Buy	PCT	Purchase Order Commitment – Contains temporary data for outstanding POs	
Sell	PFM	Product Family Master – Contains account numbers and other data that are utilised for every	

Cycle	Table	Description	Used?
		item that falls within this product family.	
Make	PLD	Picklist Issues – Contains material issue data	
Make	PLDH	Picklist Issues History – Contains purged PLD records	
Plan	PLI	Planned Work Order Item – Contains requirements generated from planned work orders. One PLI record is created for each component item in the bill of materials of the parent item	
Plan	PLM	Planned Work Order Master – Contains planned work orders as created through planned order maintenance or the MRP run	
Plan	PLP	Planned Purchase Order Master – Contains planned purchase order data	
Make	PLT	Picklist – Contains picklist requirements one PLT record exists for each component of a work order	
Make	PLTH	Picklist History – Contains purged PLT records	
Plan	PLV	Planned Order Value – Contains temporary data about current planned orders and their values in time buckets	
Phys	PLY	Picklist Physical – Contains cut over records from the PLD for storing the component issue status for each work order.	
Phys	PLYH	Picklist Physical History – Contains purged PLY records	
Buy	POD	Purchase Order Delivery – Contains delivery schedule data for each purchase order line number. One POD exists for each data against each scheduled delivery	
Buy	PODC	Purchase Order Detail Change – Contains revision record information for modified POD records	
Buy	PODCH	Purchase Order Detail Change History – Contains purged PODC records only created if “PO History” is checked in Master Controls Explorer	
Buy	PODH	Purchase Order Delivery History – Contains purged PODC records only created if “PO History” is checked in Master Controls Explorer	
Buy	POI	Purchase Order Item – Contains item data for purchase order lines (item, GL and work order lines). One POI exists for each item on the purchase order	
Buy	POIC	Purchase Order Line Change – Contains revision	

Cycle	Table	Description	Used?
		information for POI changes	
Buy	POICH	Purchase Order Line Change History – Contains purged POIC records only created if “PO History “ is check in Master Controls Explorer	
Buy	POIH	Purchase Order Item History – Contains purged POI records only created if “PO History “ is check in Master Controls Explorer	
Buy	POM	Purchase Order Master – Contains header data for purchase orders such as ship to address and special instructions	
Buy	POMC	Purchase Order Master Change – Contains revision data for modified POM records	
Buy	POMCH	Purchase Order Master Change History – Contains purged POMC records only created if “PO History “ is check in Master Controls Explorer	
Buy	POMH	Purchase Order Master History – Contains purged POM records only created if “PO History “ is check in Master Controls Explorer	
Buy	POQ	Purchase Order QC – Contains data on each receipt that requires inspection	
Buy	POQH	Purchase Order QC History – Contains purged POQ records only created if “PO History “ is check in Master Controls Explorer	
Buy	POR	Purchase Order Receipts – Contains receipt data for each purchase order. One POR record is created for each delivery	
Buy	PORH	Purchase Order Receipts History – Contains purged POR records only created if “PO History “ is check in Master Controls Explorer	
Sell	PRM	Price Matrix – Contains price matrix header data	
Sell	PRO	Standard Process – Contains data on operation steps used multiple times in multiple routings	
Admin	PROD	Work Instruction Detail	
Admin	PROH	Work Instruction Headers	
Sell	PRQ	Price Matrix Quantity – Contains the price breaks entered for each price matrix	
Plan	PSD	Reference Designators – Contains reference designators entered on each bills of material	
Plan	PSD_BOMMassReplace	Reference Designators Mass Replace – Contains records of PSD data that was change on mass	

Cycle	Table	Description	Used?
Plan	PSDC	Reference Designators Change – Contains revision data for modifications to PSD records	
Plan	PSDH	Reference Designators History – Contains purged PSD records	
Plan	PSS	Product Structure Substitute Items – Contains substitute items entered for a bill of materials relationship this data is used for reference	
Plan	PST	Product Structure – Contains bills of material for manufactured items. Data includes planning codes, quantity per assembly and lead time offset	
Plan	PST_BOMMassReplace	Product Structure Mass Replace – Contains records of PST data that was modified on mass	
Plan	PST_BOMMassReplaceHistory	Product Structure Mass Replace History – Contains purged PST_BOMMassReplace records	
Plan	PSTC	Product Structure Change – Contains revision data for modifications made to PST records	
Plan	PSTH	Product Structure History – Contains purged PST records	
Plan	PTK	Purchasing Ticker – Contains order or reschedule action notices for purchased parts	
Quoting	QCUS	Quoting Customer Table – Contains information about new customers entered at quote time	
Quoting	QSO	Quote Sales Order – Contains quote sales order data	
Quoting	QTB	Quoting Bill of Material – Contains BOM data for each line on a quote. If the item already exists the BOM information is retrieved and put into the quote card	
Quoting	QTD	Quoting Detail – Contains the detail level of the quote similar to the SOD	
Quoting	QTI	Quoting Lines – Contains line information about each quote line can be BOM data, routing data, comments etc	
Quoting	QTM	Quoting Master – Contains the master record of r the quote created	
Quoting	QTQ	Quote OLE – Contains OLE objects	
Quoting	QTP	Quote Purchasing – Contains mark up data for quote lines	
Quoting	QTQ	Quote Quantity – Contains the quantity data for a line. For each QTI record there may be multiple	

Cycle	Table	Description	Used?
		QTQ records.	
Quoting	QTR	Quote Routing – Contains routing information for a new item. If the item exists the routing data is not stored in the QTR but read from the routing table (RTG)	
Quoting	QTT	Quote Price Template – Contains quote price template details	
Quoting	QuotationsHeader	Quotations Header – Contains header information for Spel quotes	
Quoting	QuotationsHeaderH	Quotations Header History – Contains purged QuotationsHeader records	
Quoting	QuotationsLines	Quotations Lines – Contains line data for Spel quotes such as item ID, quantity, price, discount	
Quoting	QuotationsLinesH	Quotation Linse History – Contains purged QuotationsLines records	
Plan	RAC	Run Activity – An RAC records is created for each item whenever status data is changed (quantity, status etc)	
Buy	RAP	Recurring Accounts Payable – Contains vendor and remittance data to recurring vendor payments	
Buy	RCP	Receiver PO – Contains receiver data for each receipt made against a purchase order for each POR record there is one RCP	
Buy	RCP_API	Receiver and Accounts Payable Invoice – Contains data recorded when invoice lines are matched to a purchase order. Multiple RCP_API records may be written for each RCP	
Buy	RCP_APIH	Receiver and Accounts Payable Invoice History – Contains purched RCP_API records	
Buy	RCPH	Receiver PO History – Contains purged RCP records	
Buy	RCQ	Receiver QC – Contains inspection information against a receiver containing data on accept, scrap and reject quantities and other data used for the matching of invoices. There is one RCQ record for each POQ	
Make	RCR	Receiver Inspection – Contains inspection data for receivers. One RCR record is created for each WIP inspection transaction	
Make	RCW	Receiver Work Order – Contains records of receipts against work orders. One RCW record is created for each receipt made through WIP	

Cycle	Table	Description	Used?
		receipts, there may be multiple RCW records for each work order	
Make	RCWH	Receiver Work Order History – Contains purged RCW records	
Server	Results	Results – Contains A/P matching records for purchase orders unmatched	
Plan	RFC	Routing Forecast Costs – Contains route forecast costs	
GL	RJA	Recurring Journey Entry Accounts – Contains the detail behind each recurring journal entry (RJE). One RJA record is created for each account number (debit and credit)	
GL	RJC	Recurring Journal Convert – Contains a counter for recurring journal entry conversion. This track when each recurring journal entry is converted each period to prevent multiple conversions in one period	
GL	RJE	Recurring Journal Entries – Contains one record for each recurring journal entry. Each RJE can have multiple RJA records which contain the account number detail behind each RJE record	
RMA	RMA	RMA Master – Contains master data for each RMA issued	
RMA	RMAH	RMA Master History – Contains purged RMA records	
RMA	RMD	RMA Delivery – Contains quantity data against sales order deliveries. Each standard RMA needs to be against an SOD in order to get the correct pricing information	
RMA	RMDH	RMA Delivery History – Contains purged RMA records	
RMA	RMI	RMA Inspection – Contains inspection data for each received RMA quantity	
RMA	RMIH	RMA Inspection History – Contains purged RMI records	
RMA	RML	Return Material Lots – Contains the lot number and quantity for each RMA issued, there may be multiple RML records	
RMA	RMLH	Return Material Lot History – Contains purged RML records	
RMA	RMR	Return Material Receipt Table – Contains RMA receipt listings. One RMR record is created for	

Cycle	Table	Description	Used?
		each receipt against an RMA each RMA may have multiple records	
RMA	RMRH	Return Material Receipt History – Contains purged RMR records	
Server	routing_view	Routing View – Created and maintained by a SQL Server stored procedure	
	RQD	Unknown	
	RQI	Unknown	
	RQM	Unknown	
	RQQ	Unknown	
RMA	RRD	RMA Receipt Delivery – Contains receipt data against delivery dates. One RRD record is created for each quantity entered on each line	
RMA	RRDH	RMA Receipt Delivery History – Contains purged RRD records	
SFC	RTC	Routing Cost – Contains cost data for each routing. Each routing has one routing (RTG) record and a corresponding RTC record	
SFC	RTCH	Routing Cost History – Contains purged RTC records	
SFC	RTG	Routing – Contains information on shop floor routings. Each step (operation sequence) for each manufactured part has an RTG record	
SFC	RTGH	Routing History – Contains purged RTG records	
Plan	SCL	Shop Calendar – Contains a list of each calendar day coded as working/non working day	
	SDT	Unknown	
GL	SGRP	Subgroup – Contains all the user defined subgroups within each group	
Sell	SHD	Shiplist Delivery – Contains data regarding sales order line item deliveries that are to be shipped. There may be multiple SHD records for each shiplist line (SHI) record and SHD records are temporary and purged after shiplist has been shipped and invoiced	
	SHD2	Unknown	
Sell	SHI	Shiplist Item – Contains data regarding sales order line items that are to be shipped. A SHI record is written for each sales order line item that has at least one delivery record and meets shiplist requirements e.g. credit check, stock check. There	

Cycle	Table	Description	Used?
		may be multiple SHI records for each shiplist header (SHP) record. SHI records are temporary and purged after shiplist has been shipped and invoiced	
	SHI2	Unknown	
Sell	SHP	Shiplist – Contains header data regarding sales order to be shipped. A SHP record is written for each sales order line item that has one delivery line that meets the SHI requirements. SHP records are temporary and purged after shiplist has been shipped and invoiced	
Sell	SHP_History	Shiplist History – Contains shiplist history	
	SHP2	Unknown	
SFC	SND	Sound Clips – Contains the sound clip files and the link to routings	
Sell	SOB	Sales Order Backlog – Contains temporary data built when backlog is recalculated by the Backlog report. It contains a record for each outstanding delivery	
Sell	SOD	Sales Order Delivery – Contains sales order delivery data for each required date on each line item. There is one SOD record for each required date and holds information such as quantity, unit price, discount etc	
Sell	SODC	Sales Order Delivery Change – Contains SOD revision data.	
Sell	SODCH	Sales Order Delivery Change History – Contains purged SODC records only created if “Sales Order History” is checked in the Master Controls Explorer	
Sell	SODH	Sales Order Delivery History – Contains purged SOD records only created if “Sales Order History” is checked in the Master Controls Explorer	
Sell	SOI	Sales Order Item – Contains sales order line data for each line on a sales order. There is one SOI record for each line item	
Sell	SOIC	Sales Order Item Change – Contains SOI revision data	
Sell	SOICH	Sales Order Item Change History – Contains purged SOIC records only created if “Sales Order History” is checked in the Master Controls Explorer	

Cycle	Table	Description	Used?
Sell	SOIH	Sales Order Item History – Contains purged SOI records only created if “Sales Order History” is checked in the Master Controls Explorer	
Sell	SOM	Sales Order Master – Contains sales order header information. There is one SOM for each sales order and contains data such as ship to address, special instructions etc	
Sell	SOMC	Sales Order Master Change – Contains SOM revision history	
Sell	SOMCH	Sales Order Master Change History – Contains purged SOMC records only created if “Sales Order History” is checked in the Master Controls Explorer	
Sell	SOMH	Sales Order Master History – Contains purged SOM records only created if “Sales Order History” is checked in the Master Controls Explorer	
Sell	SON	Serial Numbers – Contains the end item serial numbers.	
Sell	SONH	Serial Numbers History – Contains purged SON records only created if “Sales Order History” is checked in the Master Controls Explorer	
Sell	SOS	Sales Order Shipment – Contains shipment data on sales orders shipped. Each shipment is made against a SOD record and there can be an unlimited number of shipment records against each SOD	
	SOS_Org	Unknown	
Sell	SOSH	Sales Order Shipment History – Contains purged SOS records only created if “Sales Order History” is checked in the Master Controls Explorer	
Sell	SOU	Sals Order Due – Contains temporary data built when Backlog is run contains a record for each outstanding delivery	
	SPELFindFieldInfo	Spel Find Field Info – Contains Spel search engine field data	
	SPELFindNamesAndSQL	Spel Find Name and SQL – Contains the search name and its SQL statement	
Sell	SPELItemPrices	Spel Item Prices – Contains Spel custom prices	
Sell	SPELItemPrices_Notes	Spel Item Prices Notes – Contains Spel special notes against items	
Sell	SPELItems	Spel Items – Contains a list of items sold by Spel	

Cycle	Table	Description	Used?
Sell	SpELPriceMatrix	Spel Price Matrix – Contains Spel item price matrix	
Sell	SpelReturnsForm	Spel Returns Form – Contains header data for Spel returns form	
Sell	SpelReturnsItems	Spel Returns Items – Contains line data for Spel returns items	
Phys	TAG	Inventory Tag – Contains physical inventory tag data for each tag created	
Phys	TAGH	Inventory Tag History – Contains purged TAG records	
Server	TBLCNST_English	Language Specific constants data such as cycle codes and custom names	
ECO	TDA	TDA Master – Contains header data for temporary deviations	
ECO	TDD	TDA Departments – Contains departments used for temporary deviations	
ECO	TDI	TDA Items – Contains items affected by temporary deviations	
ECO	TDP	TDA PO – Contains a record of each purchase order affected by a temporary deviation	
ECO	TDW	TDA WO – Contains a record of each work order affected by a temporary deviation	
Sell	tmpAllocSalesQty	Allocated to Sales Quantity – Contains temporary data when allocating sales quantities	
Buy	tmpAPInvEntry	AP Invoice Entry – Contains temporary data used during A/P Invoice Entry	
Inv	tmpArchive_Err	Archive Error – Contains items unable to be moved to archive data due a reason such as existing stock	
Inv	tmpArchiveSelectedItems	Archive Selected Items – Contains items to be archived	
Inv	tmpBUC_ItemLowLevelCode	Contains temporary data used in Bottom Up Cost	
Inv	tmpBUC_PSTRecord	Contains temporary data used in Bottom Up Cost	
Sell	tmpIMAAllocSalesQty	IMA Allocated to Sales Quantity – Contains item and quantity data	
Buy	tmpORBIK_POLotLabels	Orbik PO Lot Labels – Contains temporary data used to print lot labels	
	tmpORBIKFindCriteria	Orbik Find Criteria – Contains search information for custom Orbik search engine	
Ext	tmpORBIKItemHistoryGraph	Orbik Item History Graph – Contains temporary	

Cycle	Table	Description	Used?
		ITR information about usage	
Custom	tmpORBIKMessageShow	Orbik Message Show – Contains CBM message information used when displaying to user	
Buy	tmpRCP_API	RCP_API – Contains temporary RCP_API data	
Buy	tmpRCQ	RCQ – Contains temporary inspection records	
SFC	tmpRTGItemPopUp	RTG Item – Contains list of items with routing sequence	
Plan	tmpWIPValue	WIP Value – Contains temporary data about WIP value	
Plan	tmpWIPVALUE_Vars	WIP Value Variables – Contains grand totals from the tmpWIPValue table	
Server	UsersGroups	User Groups – Contains the list of system users and the groups they belong to e.g sales	
Server	USysEventLog	Event Log – Contains list of errors generated by users	
Admin	usysLogicalLocks	Logical Locks – Contains a list of logical (software) locks generated by only a few forms e.g. Sales Order Card	
Sell	VAT	VAT Master – Contains information for each type of VAT territory and percentage	
Buy	VBA	Vendor Billing Address – Contains remittance addresses for vendors. There can be multiple records per vendor	
Buy	VBAH	Vendor Billing Address History – Contains purged VBA records	
Buy	VBM	Vendor Billing Matrix Master – Contains bid matrix header records.	
Buy	VBQ	Vendor Bid Matrix Quantity – Contains quantity break information for each VBM record.	
SFC	VDO	Video Clips – Contains OLE objects for video files	
Buy	VEN	Vendor Master – Contains one vendor record per vendor	
Buy	VENH	Vendor Master History – Contains purged VEN records	
Server	VIEW_ITR	View ITR – Contains a SQL Server view to retrieve ITR data quicker than standard query	
Server	VIEW_ITRIssue	View ITR Issue - Contains a SQL Server view to retrieve ITR_Issue data quicker than standard query	

Cycle	Table	Description	Used?
Server	VIEW_LocLotActivity	View Loc Lot Activity - Contains a SQL Server view to retrieve location/lot activity data quicker than standard query	
Server	VIEW_LocLotActivity_Issue	View Loc Lot Activity Issue - Contains a SQL Server view to retrieve location/lot activity for issue transactions quicker than standard query	
Server	VIEWCustomerStopList	View Customer Stop List - Contains a SQL Server view to retrieve CUS data quicker than standard query	
	VTD	Unknown	
	VTT	Unknown	
SFC	WCC	Work Centre Capacity – Contains the capacity hours for each work centre. One WCC records exists for each day for each work centre.	
SFC	WCL	Work Centre Load – Contains the loaded hours for each work centre. One WCL record exists for each date/work centre/work order loaded	
SFC	WCLH	Work Centre Load History – Contains purged WCL records	
SFC	WCT	Work centre – Contains data on each work centre such as efficiency rates, description etc. One WCT record exists for each work centre	
Make	WKC	Work Order Close – Contains actual cost data for work orders (total unit costs not the per unit costs).	
Make	WKCH	Work Order Close History – Contains Purged WKC records only created if “Work Order History” is checked in the Master Controls Explorer	
Make	WKE	Work Order Employee – Contains labour reporting data against work orders. Actual labour costs are calculated from this table	
Make	WKEH	Work Order Employee History – Contains purged WKE records only created if “Work Order History” is checked in the Master Controls Explorer	
Make	WKI	Work Order Invoice – Contains outplant operation invoice data. When an invoice is entered and matched a WKI record is created actual outplant costs are calculated from this table	
Make	WKIH	Work Order Invoice History – Contains purged WKI records only created if “Work Order History” is checked in the Master Controls	

Cycle	Table	Description	Used?
		Explorer	
Make	WKO	Work Order Master – Contains one record for each work order raised. WKO contains such data as start and complete date, quantities etc	
Make	WKO_Status	Work Order Status – Contains tracking data for changes made to a work orders status	
Make	WKOH	Work Order Master History – Contains purged WKO records only created if “Work Order History” is checked in the Master Controls Explorer	
Make	WKS	Work Order Closed Summary – Contains actual per unit cost data for work orders. This data is calculated as the work order is closed	
Make	WKV	Work Order Vendor – Contains outplant operation receiver data. When a receipt is made for an outplant operation a WKV record is created. WKV contains receiver data and multiple WKV records may exist to each workoder	
Make	WKVH	Work Order Vendor History – Contains purged WVK records only created if “Work Order History” is checked in the Master Controls Explorer	
SFC	WOM	Work Order Material – Contains material movement records per operation. One WOM record is created each time materials are moved through the shop floor	
SFC	WOMH	Work Order Material History – Contains purged WOM records only created if “Work Order History” is checked in the Master Controls Explorer	
SFC	WOO	Work Order Operations – Contains operations records which are created based on RTG records when work orders are loaded. WOO records are updated with material movement and with load data through the Shop Floor Move and Shop Data Maintenance forms.	
SFC	WOOH	Work Order Operations History – Contains purged WOO records only created if “Work Order History” is checked in the Master Controls Explorer	

