

Pana acum nu am mai facut malware analysis, deci o sa incerc sa vad cum e.


Sa ii aflam hashul, rulam comanda simpla `sha256sum agent`

`2d7b1b2178f76c26893b2a56cbf9b36700235259e76b893d53817d5b66b634a5 agent`

Am rulat intai un strings sa vad ce gasesc la prima vedere.

```
io_uring_queue_init
192.168.56.1
socket
io_uring_wait_event: %s
```

Un ip hardcodat, dar nici un port. Deci deschidem binarul in ghidra si cautam ipul.

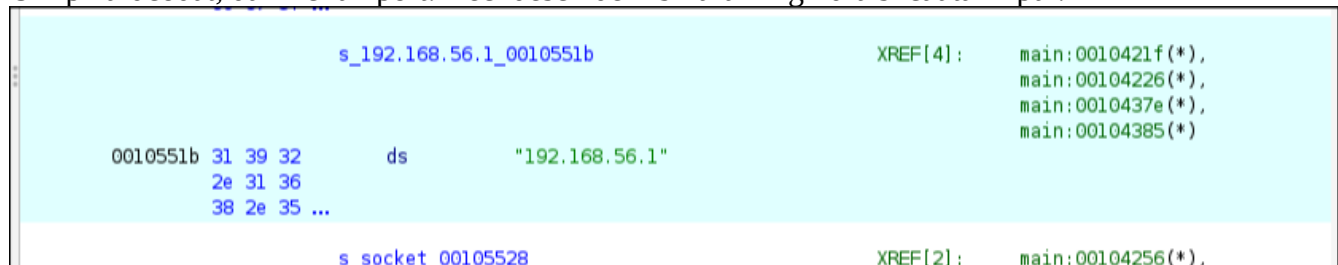

```
printf("[+] Connected to %s:%d\n", "192.168.56.1", 0x115d);  
do {
```

Perfect, portul scris in hexa.

From:	115d	hexadecimal
To:	4445	base-10

Ala vine portul 4445.

O sa vedem ca o sa isi dea self destruct cu compararea cu acest string:

```
}  
else {  
    iVar1 = strcmp(param_3, "sdestruct");  
    if (iVar1 == 0) {  
        cmd_selfdestruct(param_1, param_2);  
    }  
}
```

Asa analizeaza ce aparare exista:

```
/proc/%s/maps  
anon_inode:bpf-map  
[+] Killed PID using BPF: %d  
[-] Failed to kill PID %d: %s  
[*] No processes with BPF map found
```

O sa vedem ca foloseste io_uring sa treaca de monitorizari.
De asenea, asteapta 120 de secunde intre incercari.

```
close(fd2),  
*(undefined8 *) (puVar5 + -0x1128) = 0x10434c;  
sleep(0x78);  
}
```