



भारतीय मानक ब्यूरो
BUREAU OF INDIAN STANDARDS

MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG, NEW DELHI 110002

व्यापक परिचालन मसौदा

हमारा संदर्भ — सीईडी 09/टी – 78

20 अगस्त 2026

तकनीकी समिति — टिम्बर एवं टिम्बर स्टोर्स विषय समिति, सीईडी 09

प्राप्तकर्ता :

- 1 सिविल इंजीनियरिंग विभाग परिषद, सीईडीसी के सभी सदस्य
- 2 टिम्बर एवं टिम्बर स्टोर्स विषय समिति, सीईडी 09 के सभी सदस्य
- 3 सीईडी 09 के अंतर्गत पैनल एवं वर्किंग ग्रुप के सभी सदस्य
- 4 रूचि रखने वाले अन्य निकाय।

प्रिय महोदय/महोदया,

कृपया निम्नलिखित मसौदा संलग्न देखें:

प्रलेख संख्या	शीर्षक
सीईडी 09 (35176) WC	लकड़ी के निहाई ब्लॉक — विशिष्टि का भारतीय मानक मसौदा (पहला पुनरीक्षण) (ICS: 79.040)

कृपया इस मसौदे का अवलोकन करें और अपनी सम्मतियाँ यह बताते हुए भेजे कि यह मसौदा प्रकाशित हो तो इस पर अमल करने में, आपको व्यवसाय अथवा कारोबार में क्या कठिनाइयाँ आ सकती हैं।

सम्मतियाँ भेजने की अंतिम तिथि — 04 अक्टूबर 2026

सम्मति यदि कोई हो तो कृपया अधोहस्ताक्षरी को उपरिलिखित पते पर संलग्न फॉर्मेट में भेजें या ced9@bis.gov.in; nishikant.singh@bis.gov.in पर ईमेल कर दें या सम्मतियाँ बीआईएस ई-गवर्नेंस पोर्टल, www.manakonline.in के माध्यम से ऑनलाइन भी भेजी जा सकती हैं।

यदि कोई सम्मति प्राप्त नहीं होती है अथवा सम्मति में केवल भाषा संबंधी त्रुटि हुई तो उपरोक्त प्रलेख को यथावत अंतिम रूप दे दिया जाएगा। यदि सम्मति तकनीकी प्रकृति की हुई तो विषय समिति के अध्यक्ष के परामर्श से अथवा उनकी इच्छा पर आगे की कार्यवाही के लिए विषय समिति को भेजे जाने के बाद प्रलेख को अंतिम रूप दे दिया जाएगा।

यह प्रलेख भारतीय मानक ब्यूरो की वेबसाइट www.bis.gov.in पर भी उपलब्ध हैं।

धन्यवाद।

भवदीय
ह-/
द्वैपायन भद्र
वै. 'एफ' / वरिष्ठ निदेशक और प्रमुख (सिविल इंजीनियरिंग विभाग)

संलग्न: उपरिलिखित



भारतीय मानक ब्यूरो
BUREAU OF INDIAN STANDARDS

MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG, NEW DELHI 110002

WIDE CIRCULATION DRAFT

Reference — CED 09/T-78

Dated — 20 August 2026

TECHNICAL COMMITTEE — TIMBER AND TIMBER STORES SECTIONAL COMMITTEE, CED 09

ADDRESSED TO:

- 1 All Members of Civil Engineering Division Council, CEDC
- 2 All Members of Timber and Timber Stores Sectional Committee, CED 09
- 3 All Members of Panels and Working Groups under CED 09
- 4 All other interested

Dear Madam/Sir,

Doc. No.	Title
CED 09 (35176) WC	Draft Indian Standard Wooden Anvil Blocks — Specification (First Revision) (ICS: 79.040)

Kindly examine the draft and forward your views stating any difficulties which you are likely to experience in your business or profession, if this is finally adopted as National Standard.

Last Date for comments — 04 October 2026

Comments if any, may please be made in the attached format and mailed to the undersigned at the above address or preferably through e-mail to ced9@bis.gov.in; nishikant.singh@bis.gov.in. The comments may preferably be shared in the prescribed template through the Manak Online portal at www.manakonline.in. Alternatively, the comments may be sent through the attached format for consideration by the BIS' Sectional Committee for necessary action.

In case no comments are received or comments received are of editorial nature, you will kindly permit us to presume your approval for the above document as finalized. However, in case comments, technical in nature are received, then it may be finalized either in consultation with the Chairman, Sectional Committee or referred to the Sectional Committee for further necessary action if so desired by the Chairman, Sectional Committee.

The document is also hosted on BIS website www.bis.gov.in.

Thanking You

YOURS FAITHFULLY
Sd/-
Dwaipayan Bhadra
Sc. 'F' / Senior Director and Head (Civil Engineering Department)

ENCLOSED— As Above

FORMAT FOR SENDING COMMENTS ON BIS DOCUMENTS

(Please use A4 size sheet of paper only and type within fields indicated. Comments on each clause/subclause/table/fig etc. be started on a fresh box. Information in column 5 should include reasons for the comments, and those in column 4 should include suggestions for modified wording of the clauses when the existing text is found not acceptable. Adherence to this format facilitates Secretariat's work) {Please e-mail your comments to ced9@bis.gov.in, nishikant.singh@bis.gov.in

Doc. No.	Doc: CED 09 (35176) WC
Title	Draft Indian Wooden Anvil Blocks — Specification (<i>First Revision</i>) (ICS: 79.040)
Last Date for Comments	04 October 2026
Name of the Commentator /Organization	

[illegible]

BUREAU OF INDIAN STANDARDS

DRAFT FOR COMMENTS ONLY

(Not to be reproduced without the permission of BIS or used as a Standard)

DRAFT INDIAN STANDARD

WOODEN ANVIL BLOCKS — SPECIFICATION

(First Revision)

Timber and Timber Stores
Sectional Committee, CED 09

Last Date for Comments:
04 October 2026

FOREWORD

(Formal clause to be added later)

The blacksmith's anvils covered by IS 510 are used mostly in smithy shops and the anvils without spikes are supported on wooden blocks for which no standard exists. Since these wooden blocks are being manufactured and used in various designs and sizes, this standard attempts to simplify the large number of existing designs and sizes of the wooden blocks in use with the anvils.

This standard was first published in 1968. This standard has been taken up for revision with a view to bring its provisions in line with current practices. In this revision, the following modifications have been incorporated:

- a) Amendments have been incorporated;
- b) BIS certification marking clause has been updated;
- c) References to various Indian Standards have been updated; and
- d) The standard has been aligned with the latest style and format of Indian Standards, with editorial and structural changes to improve clarity and ease of use.

For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test or analysis, shall be rounded off in accordance with IS 2 : 2022 'Rules for rounding off numerical values (second revision)'. The number of significant places retained in the rounded-off value should be the same as that of the specified value in this standard.

BUREAU OF INDIAN STANDARDS**DRAFT FOR COMMENTS ONLY**

(Not to be reproduced without the permission of BIS or used as a Standard)

*DRAFT INDIAN STANDARD***WOODEN ANVIL BLOCKS — SPECIFICATION***(First Revision)*Timber and Timber Stores
Sectional Committee, CED 09Last Date for Comments:
04 October 2026**1 SCOPE**

This standard covers the requirements for wooden anvil blocks for use with cast steel blacksmith's anvils without spikes conforming to Fig. 3 and Table 1 of IS 510.

2 REFERENCES

The standards given below contain provisions, which through reference in this text, constitute provisions of this standard. At the time of publication the editions indicated are valid. All standards are subject to revision, and parties to agreement based on this standard are encouraged to investigate the possibility of applying the most recent editions of these standards:

<i>IS No.</i>	<i>Title</i>
IS 218 : 1983	Specification for Creosote Oil for Use as Wood Preservatives (<i>second revision</i>)
IS 510 : 1986	Specification for Blacksmith's Anvils (<i>third revision</i>)
IS 707 : 2011	Timber Technology and Utilization of Wood, Bamboo and cane — Glossary of Terms (<i>third revision</i>)
IS 1363 (Part 1) : 2023 / ISO 4016 : 2022	Hexagon Head Bolts, Screws and Nuts of Product Grade 'C': Part 1 Hexagon Head Bolts (Size Range M5 to M64) (<i>sixth revision</i>)
IS 1363 (Part 3) : 2018 / ISO 4034 : 2012	Hexagon Head Bolts, Screws and Nuts of Product Grade 'C': Part 3 (Style 1) Hexagon Nuts (Size Range M5 to M64) (<i>fifth revision</i>)
IS 1593 : 2026	Fuel Oils — Specification (<i>fourth revision</i>)
IS 2062 (Part 1) : 2025	Structural Steel Part 1 Hot Rolled Medium and High Tensile Steel (<i>eight revision</i>)
IS 6760 : 1972	Specification for Slotted Countersunk Head Wood Screws

3 TERMINOLOGY

For the purpose of this standard, the following definitions shall apply and for definitions other than those given below, reference may be made to IS 707.

3.1 Anvil — A block of iron with or without spike on which a blacksmith works (hammers) to shape articles.

3.2 Anvil Block — A wooden block for supporting an anvil.

4 MATERIALS

The anvil blocks shall be manufactured from the materials specified in **4.1** to **4.4**.

4.1 Timber

4.1.1 Any of the species of timber listed in Annex A shall be used.

4.1.2 The timber shall be seasoned to a moisture-content not exceeding 18 percent within a depth of 10 mm from the surface and the inclination of the grain shall not exceed 1 in 12. The timber shall be free from centre heart (pith), live insect attack, any kind of decay (rot), dead knots, splits, shakes, warp.

4.1.3 Sound sapwood shall be permissible up to 20 percent of any cross section of any plank or block.

4.2 Bands

4.2.1 The bands shall be made of mild steel flat 5 mm thick conforming to IS 2062 (Part 1).

4.3 Screws — Wood Screw No. 14 and 55 mm length conforming to IS 6760.


4.4 Bolts — Black hexagonal bolts 13 mm dia and 50 mm long with 2 washers and hexagonal nuts conforming to IS 1363 (Part 1) and IS 1363 (Part 3) respectively.

4.5 Stapples Securing. Anvil — Stapples shall be made of forged steel flat 6 mm thick.

5 MANUFACTURE


5.1 The anvil blocks shall be manufactured generally to the shape and design as shown in Fig. 1 to 4. The grain of timber shall run parallel to the longest dimension of the block.

5.2 As far as possible, only one species of timber shall be used in the manufacture of anyone block. However, if necessary, mixed timbers of approximately the same weight class may be used.

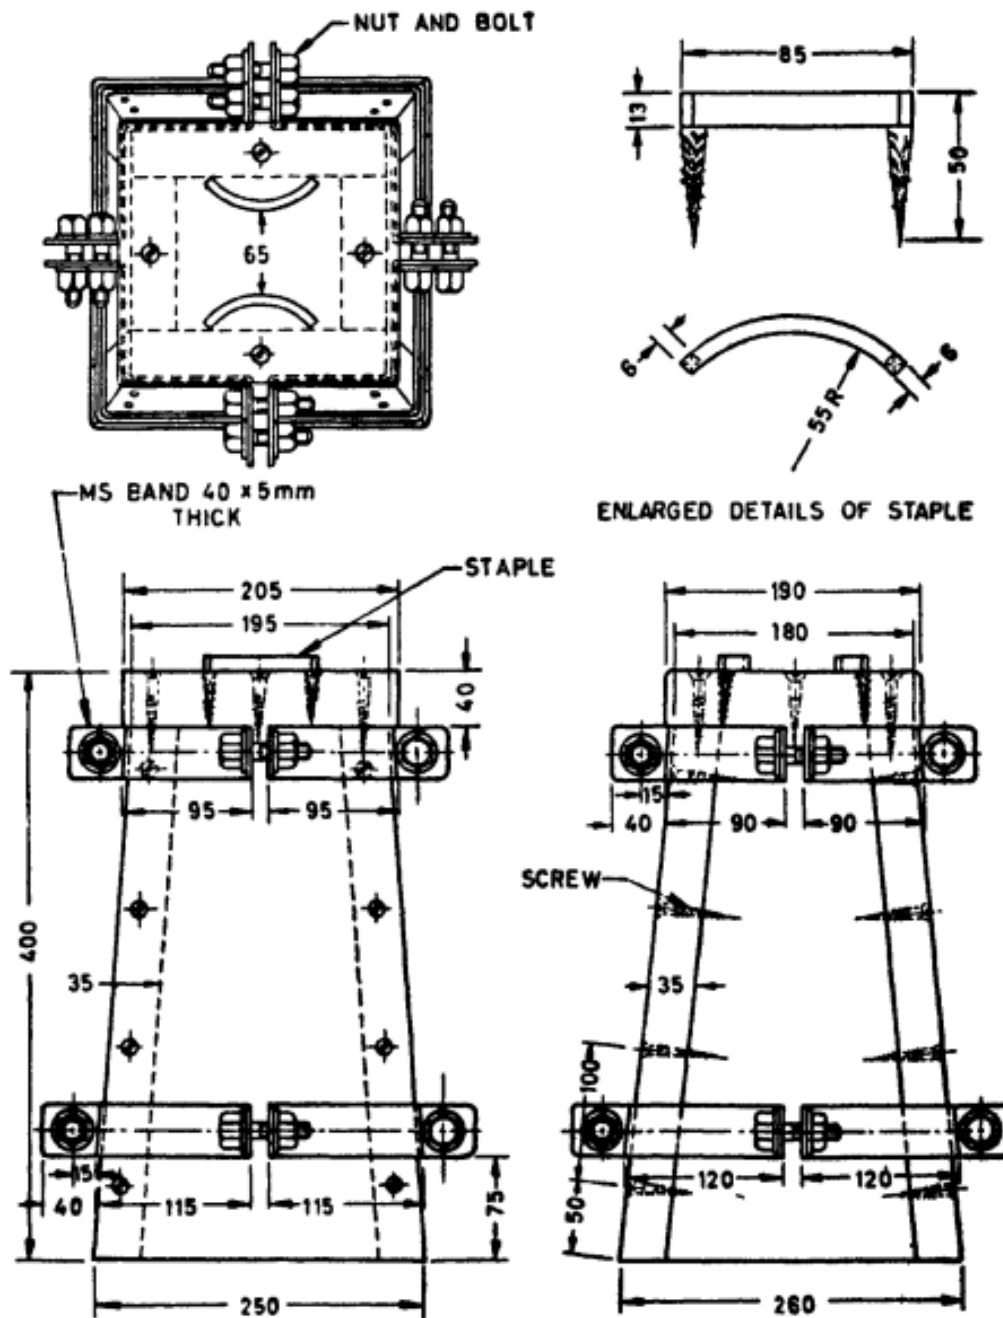


All dimensions in millimetres.

Fig. 1 Anvil Block No.1 (For 12 kg Anvil)

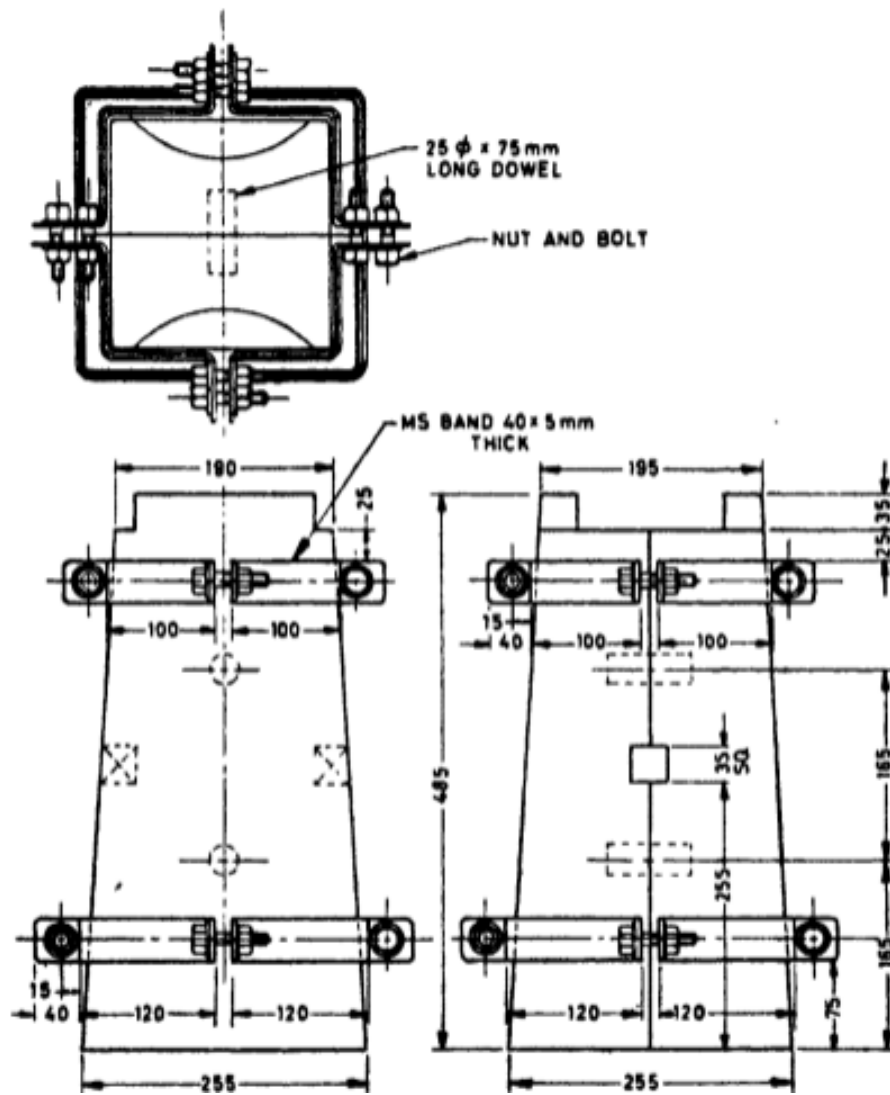

All dimensions in millimetres.

Fig. 2 Anvil Block No. 2 (For 25 kg Anvil)

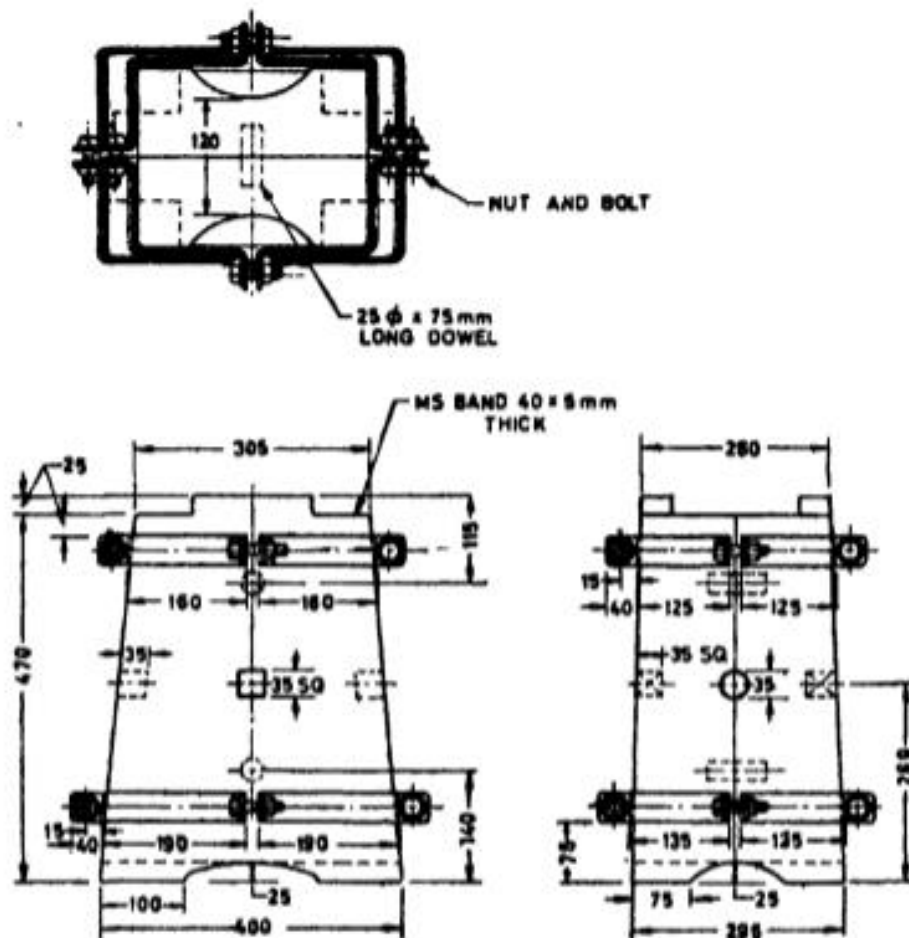

All dimensions in millimetres.


Fig. 3 Anvil Block No. 3 (For 50, 63 and 75 kg Anvil)

5.3 The anvil blocks, except size No.1, shall be manufactured either in 1-piece or in 2-piece construction. If in 2-piece construction, the two pieces of timber shall be firmly pinned together heart-face to heart-face by two 75 mm long $\times$ 25 mm diameter cylindrical dowels firmly glued in position as shown in Fig. 2 to 4.

5.3.1 Anvil block size No. 1 shall be made up of 5 wooden planks firmly secured to each other by screws (see Fig. 1).

5.3.2 Two stapples of the dimensions and shape shown in Fig 1 shall be supplied with the anvil block size No. 1 (for 12 kg anvil) for local fitting of anvils

5.4 The blocks shall be provided with two metal bands which shall be positioned and fixed near the top and bottom of the block, as shown in Fig. 1 to 4. The ends of the two bands, when drawn tight, shall be at least 15 mm apart.

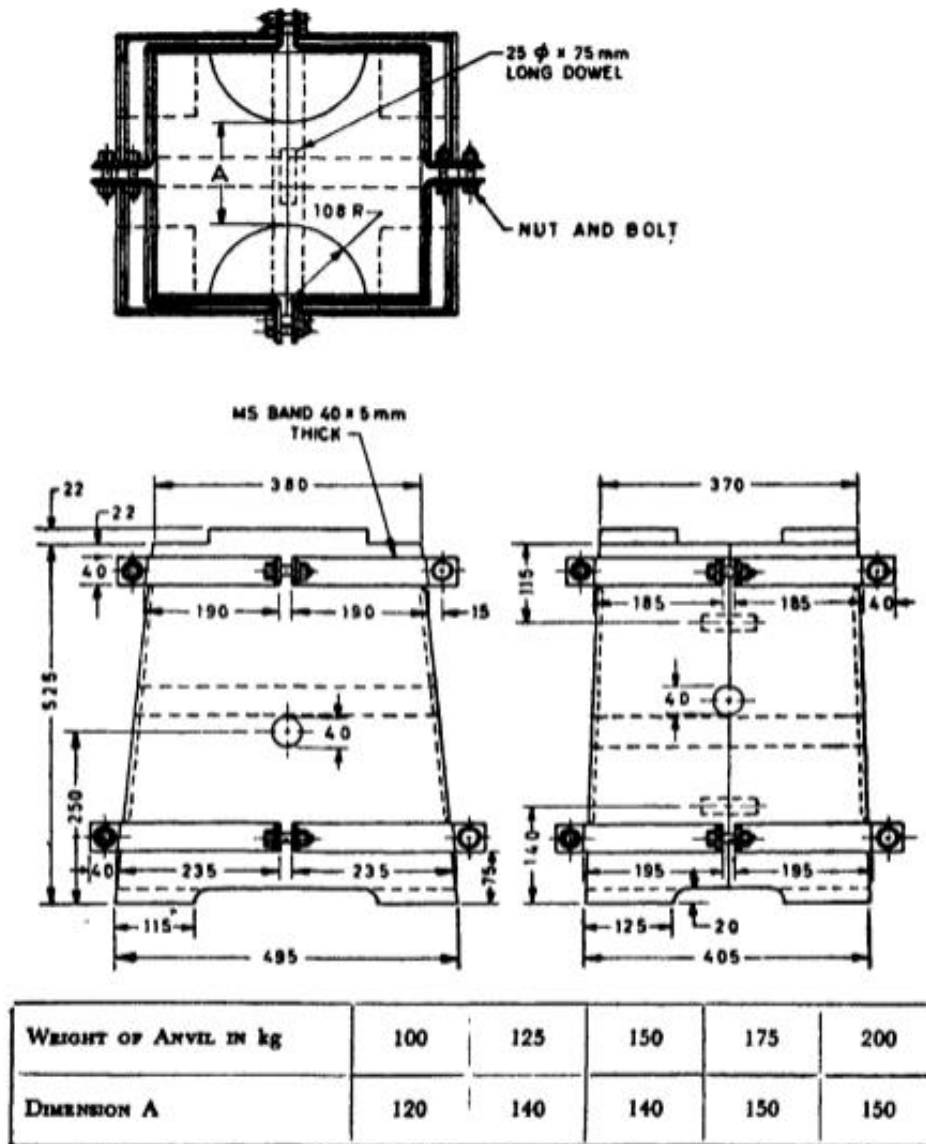

All dimensions in millimetres.

Fig. 4 Anvil Block No.4 (For 100, 125, 150, 175 and 200 kg Anvils)

5.5 Before assembly, the metal components shall be oil blackened.

6 WORKMANSHIP AND FINISH

6.1 All corners shall be rounded off and the edges slightly chamfered. The blocks shall be finished smooth all over.

6.2 The metal components shall be free from rust and sharp edges.

7 DIMENSIONS

7.1 The blocks shall generally conform to the dimensions as shown in Fig. 1 to 4.

8 SIZES

8.1 The sizes of anvil blocks shall be as follows:

<i>Size (No.) of Anvil Blocks</i>	<i>Weight of Anvil, Kg</i>
1	12
2	25
3	50, 63, and 75
4	100, 125, 150, 175 and 200

9 PRESERVATION

9.1 After inspection, the anvil blocks shall be liberally swabbed with a hot mixture of creosote and fuel oil (Grade IV) 50: 50 v/v conforming to IS 218 and IS 1593 respectively and this shall be repeated again after 24 hours or before despatch whichever is earlier.

10 MARKING

10.1 Each anvil block shall be legibly and indelibly marked with the manufacturer's name or initials or recognised trade-mark, the year of manufacture and the size of the block as shown in Fig. 1 to 4.

10.2 BIS Certification Marking

The product(s) may be marked with Standard Mark as per the conformity assessment schemes governed by the provisions of the *Bureau of Indian Standards Act*, 2016 and the Rules and Regulations made there under. The details of conditions for the license may be obtained from the Bureau of Indian Standards.

ANNEX A

(Clause 4.1.1)

SPECIES OF TIMBER SUITABLE FOR ANVIL BLOCKS

Botanical Name	Trade Name
<i>Acacia arabica</i>	Babul
<i>Acacia catechu</i>	Safed Khair
<i>Amoora</i> sp.	Amari
<i>Anogeissus acuminata</i>	Yon
<i>Anogeissus latifolia</i>	Axlewood (Bakli)
<i>Chukrasia tabularis</i>	Chickrassy
<i>Dalbergia sissoo</i>	Sissoo
<i>Diospyros</i> sp.	Dhula
<i>Dipterocarpus</i> spp.	Gurjan
<i>Eucalyptus</i> sp.	Eucalyptus
<i>Grewia</i> spp.	Dhamsan
<i>Hardwickia binata</i>	Anjan
<i>Heritiera</i> spp.	Sundri
<i>Hopea</i> spp.	Hopea
<i>Mesua ferrea</i>	Mesua
<i>Mimusops</i> spp.	Bulletwood
<i>Ougeinia oojeinensis</i>	Sandan
<i>Pterocarpus marsupium</i>	Bijasal
<i>Quercus</i> spp.	Indian oak
<i>Schleichera oleosa</i>	Kusum
<i>Shorea robusta</i>	Sal
<i>Syzygium</i> sp.	Jaman
<i>Terminalia arjuna</i>	Arjun
<i>Terminalia tomentosa</i>	Laurel
<i>Xylia xylocarpa</i>	Irul