



1. Install VirtualBox or VMware Workstation on your computer and take a screenshot of the installation screen showing the software is installed.

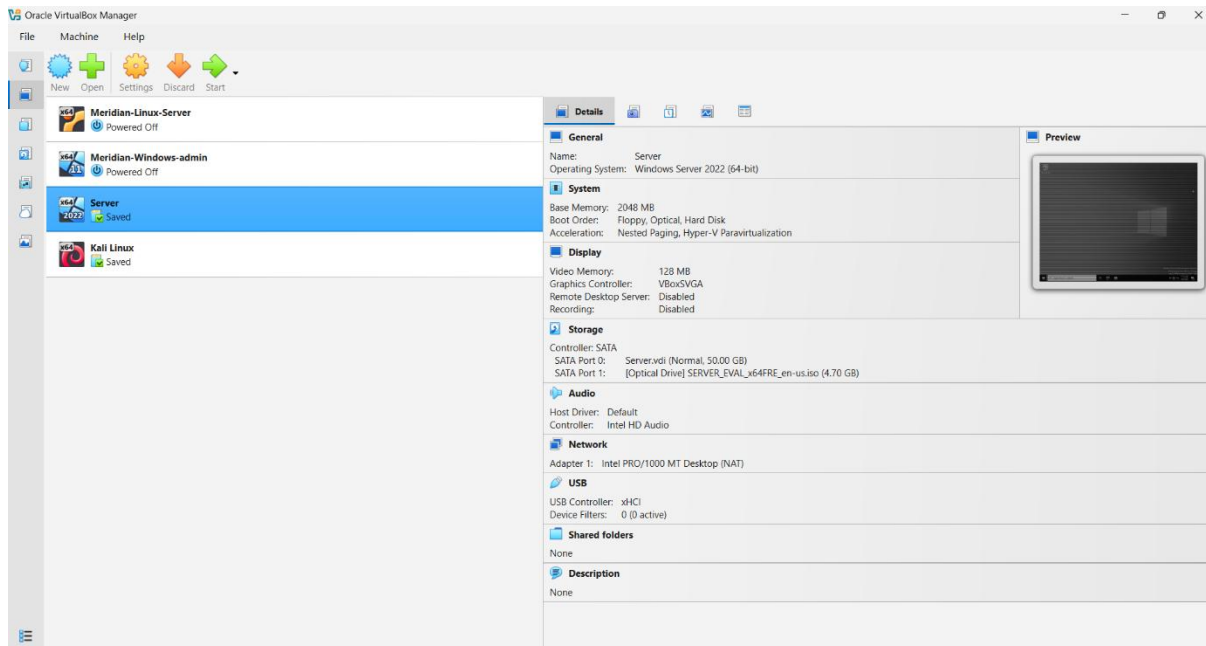

2. Create a new virtual machine in VirtualBox or VMware Workstation and configure it to run Ubuntu Linux as the guest OS with at least 2GB RAM and 20GB storage.

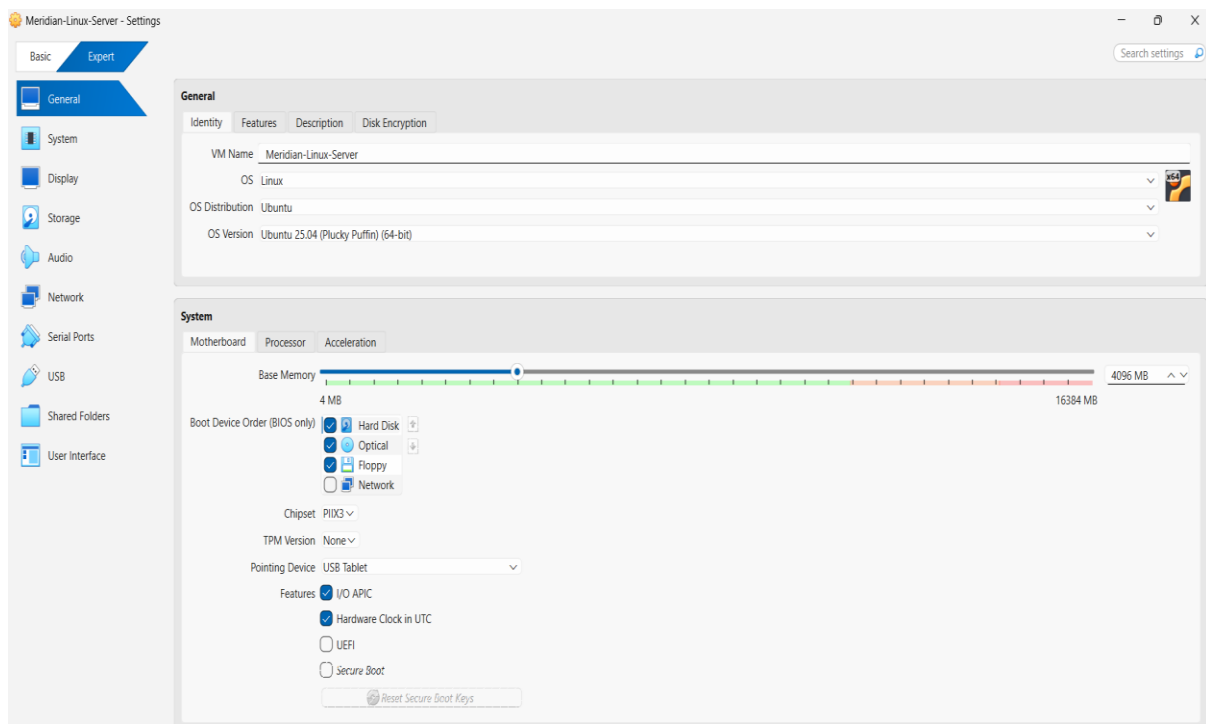

3. Start your Ubuntu virtual machine and take a screenshot of the Ubuntu desktop running inside the VM window.

```
Ubuntu 26.04.1 LTS Meridian-Linux-Server tty1
Meridian-Linux-Server login: vboxuser
Password:
Welcome to Ubuntu 26.04.1 LTS (GNU/Linux 7.0.0-30-generic x86_64)

 * Documentation:  https://docs.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:        https://ubuntu.com/pro

System information as of Tue Sep  8 07:17:50 AM UTC 2026

System load:          0.64
Usage of /:            7.0% of 49.42GB
Memory usage:         12%
Swap usage:           0%
Processes:            159
Users logged in:      0
IPv4 address for enp0s8: 192.168.1.4
IPv6 address for enp0s8: 2401:4900:8fc4:ff11:a00:27ff:feeb:5372

 * Canonical Workshop gives developers fast, composable, reproducible, and
   secure developer environments that are perfect for agentic workflows.
   https://ubuntu.com/workshop

Expanded Security Maintenance for Applications is not enabled.

28 updates can be applied immediately.
14 of these updates are standard security updates.
To see these additional updates run: apt list --upgradable

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

vboxuser@Meridian-Linux-Server:~$
```

4. List 3 differences between Type 1 (bare-metal) and Type 2 (hosted) hypervisors, and name one real-world example of each.

Feature	Type 1 (bare-metal)	Type 2 (hosted)
1 Installation	Runs directly on the physical hardware without a host OS.	Runs on top of a host operating system such as Windows or Linux.
2. Performance	Generally faster and more efficient because there is no host OS layer.	Generally, has more overhead because it depends on the host OS.
3. Common User	Mainly used in servers, data centers and enterprise environments.	Mainly used for desktop virtualization, testing and learning.

Real-world Examples

- **Type 1 – VMware ESXi**
- **Type2 – Oracle VirtualBox**