

**Vishwakarma Institute of Information Technology, Pune Practical Implementation Sheet**

Department: CS-AI    Semester: 5    Academic Year: 2026-27

Division: E    Batch: 2    Practical No:1    Roll no: 07    PRN No: 12410236

**Subject Name: Deep Learning**

**Name of Student: Rohan Devidas Patil**

**Problem Statement:** Install and configure TensorFlow/Keras in Google Colab. Perform data preprocessing, normalization, train-test splitting, and data visualization on a sample dataset.

**Algorithm:**

**Step 1:** Import the required libraries such as NumPy, Matplotlib, Seaborn, TensorFlow/Keras, and the necessary modules from scikit-learn.

**Step 2:** Install and configure TensorFlow/Keras in Google Colab and verify the TensorFlow and Keras versions along with GPU availability.

**Step 3:** Load the **MNIST handwritten digit dataset** using Keras and separate it into training and testing images and their corresponding labels.

**Step 4:** Inspect the dataset by checking the dimensions, pixel-value range, unique labels, and displaying sample handwritten digit images.

**Step 5:** Preprocess the image data by converting the pixel values to float32 and **normalize the pixel values from 0–255 to 0–1**.

**Step 6:** Split the original training data into **80% training and 20% validation data** using train\_test\_split, while keeping the test dataset separate for final evaluation.

**Step 7:** Visualize the preprocessed data by displaying normalized images, the distribution of digit classes, and the distribution of normalized pixel intensities.

**Step 8:** Create a **Sequential Neural Network** using TensorFlow/Keras with a Flatten layer, Dense hidden layer using **ReLU**, Dropout layer, and an output Dense layer using **Softmax** activation.

**Step 9:** Compile and train the neural network using the **Adam optimizer**, sparse categorical cross-entropy loss, and accuracy as the evaluation metric.

**Step 10:** Evaluate the trained model using the test dataset and visualize the training and validation accuracy curves to analyze the performance of the model.

### **Code:**

# Step 1: Install and Import Required Libraries

```
!pip -q install -U tensorflow keras matplotlib seaborn scikit-learn
```

```
import tensorflow as tf
```

```
from tensorflow import keras
```

```
import numpy as np
```

```
import matplotlib.pyplot as plt
```

```
import seaborn as sns
```

# Display TensorFlow and Keras information

```
print("TensorFlow version:", tf.__version__)
```

```
print("Keras version:", keras.__version__)
```

```
print("GPU available:", tf.config.list_physical_devices('GPU'))
```

# Step 2: Load the MNIST Dataset

```
(x_train, y_train), (x_test, y_test) = keras.datasets.mnist.load_data()
```

```
print("\nOriginal training data shape:", x_train.shape)
```

```
print("Original training labels shape:", y_train.shape)
```

```
print("Original test data shape:", x_test.shape)
```

```
print("Original test labels shape:", y_test.shape)
```

# Step 3: Inspect the Dataset

```
print("\nPixel value range:", x_train.min(), "to", x_train.max())

print("Unique labels:", np.unique(y_train))

# Display 10 sample images

plt.figure(figsize=(10, 5))

for i in range(10):

    plt.subplot(2, 5, i + 1)

    plt.imshow(x_train[i], cmap="gray")

    plt.title(f"Label: {y_train[i]}")

    plt.axis("off")

plt.tight_layout()

plt.show()

# Step 4: Data Preprocessing and Normalization

# Convert pixel values to float32

x_train = x_train.astype("float32")

x_test = x_test.astype("float32")

# Normalize pixel values from [0, 255] to [0, 1]

x_train = x_train / 255.0

x_test = x_test / 255.0

print("\nAfter normalization:")

print("Training pixel range:", x_train.min(), "to", x_train.max())

print("Test pixel range:", x_test.min(), "to", x_test.max())

# Step 5: Train-Test / Training-Validation Split

from sklearn.model_selection import train_test_split
```

```
# Split training data into 80% training and 20% validation
x_train_split, x_val, y_train_split, y_val = train_test_split(
    x_train,
    y_train,
    test_size=0.20,
    random_state=42,
    stratify=y_train
)
print("\nTraining set:", x_train_split.shape, y_train_split.shape)
print("Validation set:", x_val.shape, y_val.shape)
print("Test set:", x_test.shape, y_test.shape)
# Step 6: Visualize Normalized Images
plt.figure(figsize=(10, 5))
for i in range(10):
    plt.subplot(2, 5, i + 1)
    plt.imshow(
        x_train_split[i],
        cmap="gray",
        vmin=0,
        vmax=1
    )
    plt.title(f"Digit: {y_train_split[i]}")
    plt.axis("off")
```

```
plt.suptitle("Normalized MNIST Images")
plt.tight_layout()
plt.show()

# Step 7: Visualize Class Distribution
unique, counts = np.unique(y_train, return_counts=True)

plt.figure(figsize=(9, 5))

sns.barplot(
    x=unique,
    y=counts
)

plt.title("Distribution of Digit Classes in MNIST Training Data")
plt.xlabel("Digit")
plt.ylabel("Number of Images")
plt.show()

print("\nClass counts:")

for digit, count in zip(unique, counts):
    print(f"Digit {digit}: {count}")

# Step 8: Visualize Pixel Intensity Distribution

plt.figure(figsize=(9, 5))

plt.hist(
    x_train.flatten(),
    bins=50
)
```

```
plt.title("Distribution of Normalized Pixel Intensities")
plt.xlabel("Normalized Pixel Value")
plt.ylabel("Frequency")
plt.show()

# Step 9: Display One Image and Its Pixel Matrix
sample_index = 0

plt.figure(figsize=(6, 5))

plt.imshow(
    x_train_split[sample_index],
    cmap="gray",
    vmin=0,
    vmax=1
)

plt.colorbar(
    label="Normalized Pixel Value"
)

plt.title(
    f"Sample Image - Label: {y_train_split[sample_index]}"
)

plt.show()

print("\nImage shape:", x_train_split[sample_index].shape)
print("\nFirst 5 rows of normalized pixel values:")
print(x_train_split[sample_index][:5])
```

# Step 10: Create Sequential Neural Network

```
model = keras.Sequential([
    keras.layers.Input(shape=(28, 28)),
    # Convert 28x28 image into a 1D vector
    keras.layers.Flatten(),
    # Hidden layer
    keras.layers.Dense(
        128,
        activation="relu"
    ),
    # Dropout for regularization
    keras.layers.Dropout(0.2),

    # Output layer for 10 digit classes
    keras.layers.Dense(
        10,
        activation="softmax"
    )
])

# Compile the Model
model.compile(
    optimizer="adam",
    loss="sparse_categorical_crossentropy",
```

```
    metrics=["accuracy"]
)
print("\nModel Summary:")
model.summary()
# Step 11: Train the Model
history = model.fit(
    x_train_split,
    y_train_split,
    validation_data=(x_val, y_val),
    epochs=3,
    batch_size=128,
    verbose=1
)

# Step 12: Visualize Training and Validation Accuracy
plt.figure(figsize=(9, 5))
plt.plot(
    history.history["accuracy"],
    marker="o",
    label="Training Accuracy"
)
plt.plot(
    history.history["val_accuracy"],
```






```
        marker="o",
        label="Validation Accuracy"
    )
plt.title("Training and Validation Accuracy")
plt.xlabel("Epoch")
plt.ylabel("Accuracy")
plt.legend()
plt.grid(True)
plt.show()


# Step 13: Evaluate Model on Test Dataset
test_loss, test_accuracy = model.evaluate(
    x_test,
    y_test,
    verbose=0
)

print("\nFinal Model Evaluation")
print("-----")
print(f"Test Loss: {test_loss:.4f}")
print(f"Test Accuracy: {test_accuracy:.4f}")
print(f"Test Accuracy: {test_accuracy * 100:.2f}%")
```

**Output:**

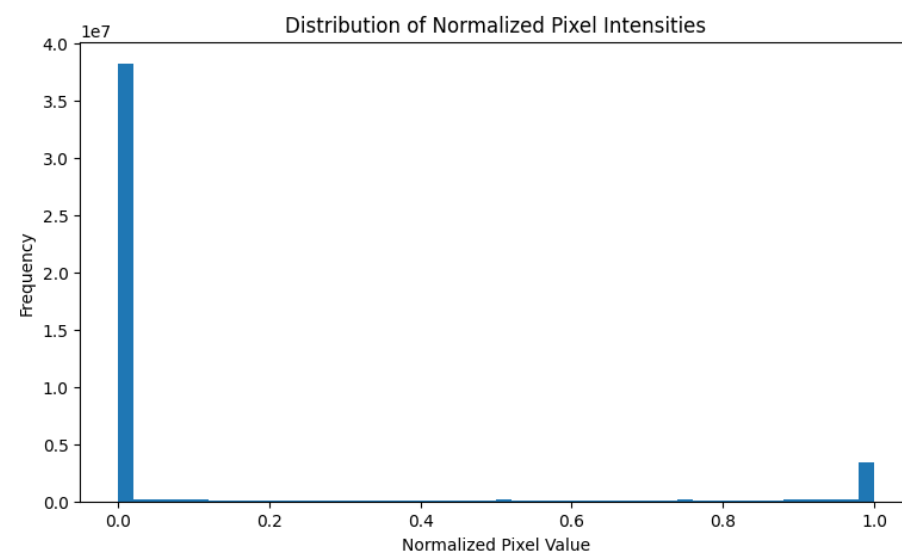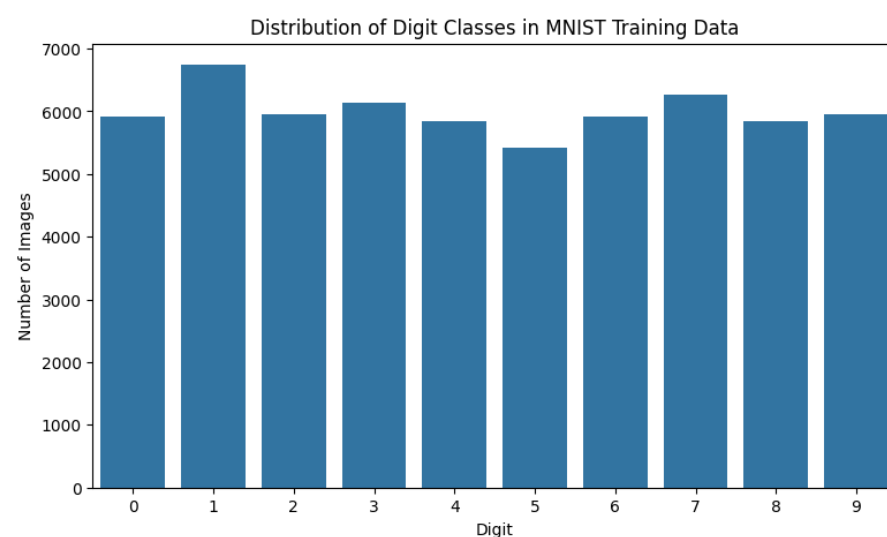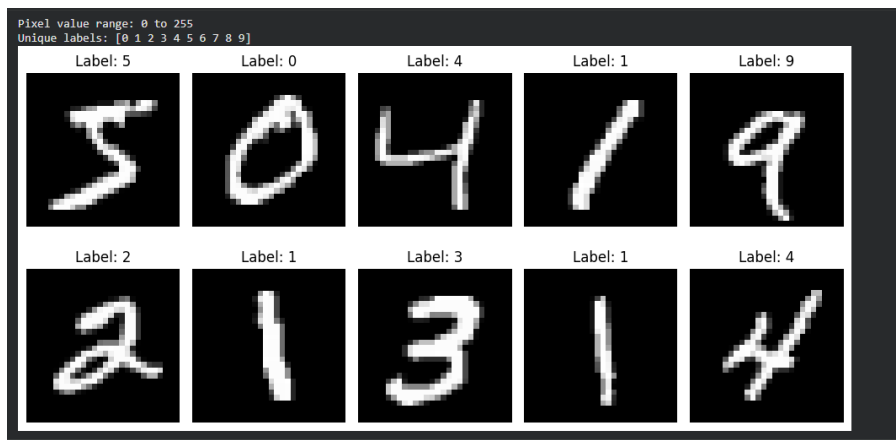



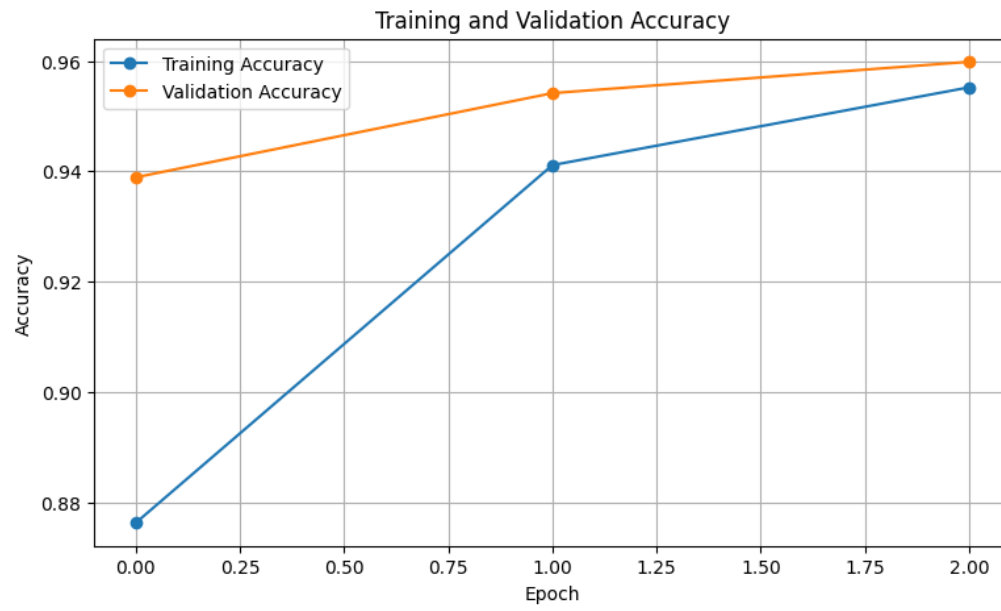

Test Loss: 0.1238  
Test Accuracy: 0.9639  
Test Accuracy: 96.39%