

experiment Name: Introduction to IBM computing

Name: Palak Kothari

Section: A4

Batch: B1


Roll no: 18

Date of performance:18-03-25

API Token Key:

3a7fd3a95d78c91fdf566494f40fe9329d43f8723ed7f32997f11e4d38c3f077c934b1a79168f911a6a268c612aed1a3b20e6b8ef5b26a02ed475dcd03f13e0b

Circuit:

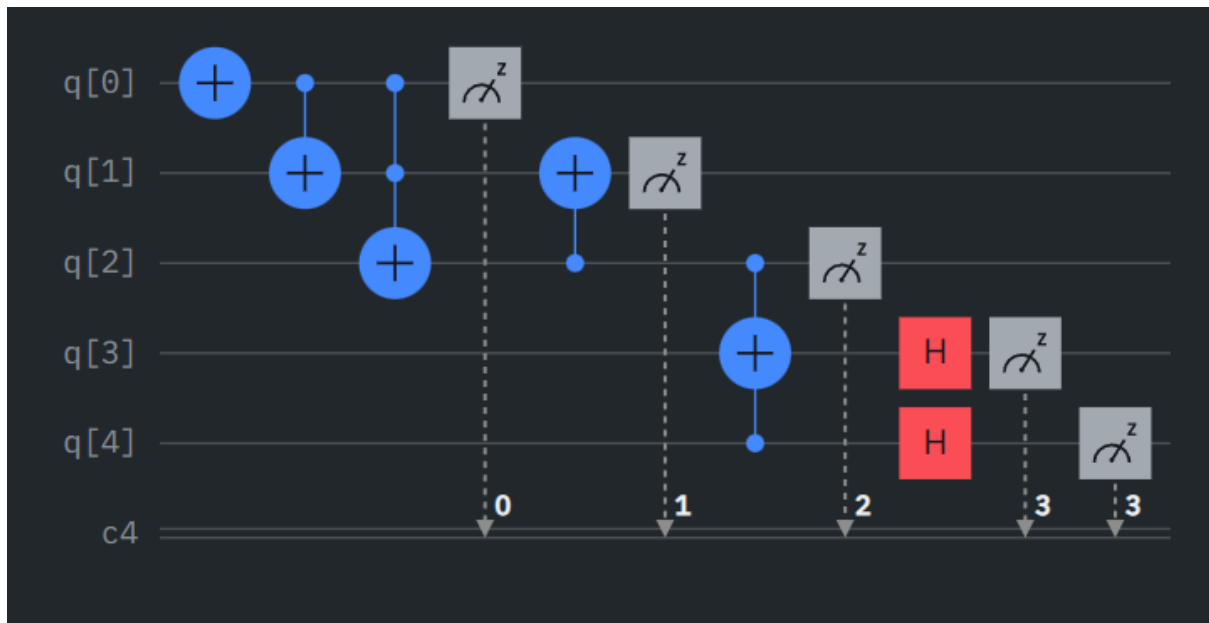


```

1 OPENQASM 2.0;
2 include "qelib1.inc";
3
4 qreg q[5];
5 creg c[4];
6 x q[0];
7 cx q[0], q[1];
8 ccx q[0], q[1], q[2];
9 measure q[0] -> c[0];
10 cx q[2], q[1];
11 ccx q[2], q[4], q[3];
12 measure q[1] -> c[1];
13 measure q[2] -> c[2];
14 h q[4];
15 h q[3];
16 measure q[3] -> c[3];
17 measure q[4] -> c[3];
18

```

Probabilities ▾

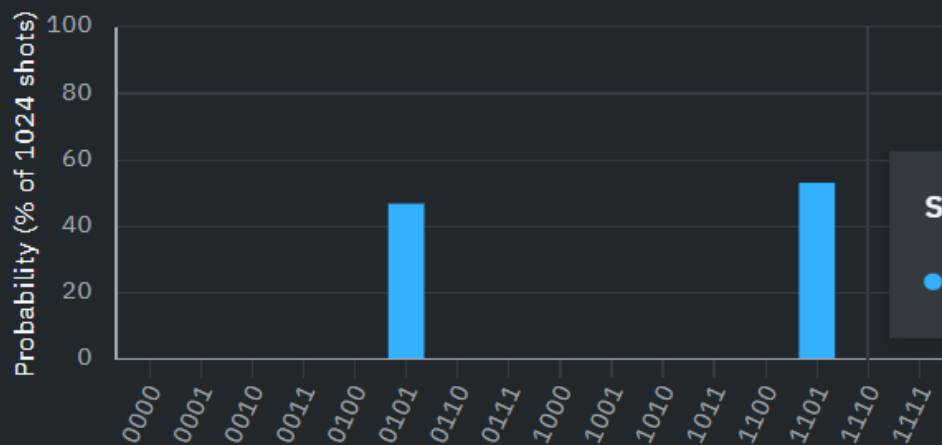

State 1110

● Probability: 0%

Q-sphere ▾



|01101>



State



Phase angle

Statevector ▾



00000
00001
00010
00011
00100
00101
00110
00111
01000
01001
01010
01011
01100
01101
01110
01111
10000
10001
10010
10011
10100
10101
10110
10111
11000
11001
11010
11011
11100
11101
11110
11111

Computational basis states



Output state



[0+0j, 0+0j, 0+0j, 0+0j, 0+0j, 0+0j ...

Show more ▾