Create a Wallet using MetaMask for Crypto Transactions

Network: Ethereum Sepolia (test network) | Wallet: MetaMask Account 1 | Address: 0x28459...01Be4

Step 1: MetaMask installed

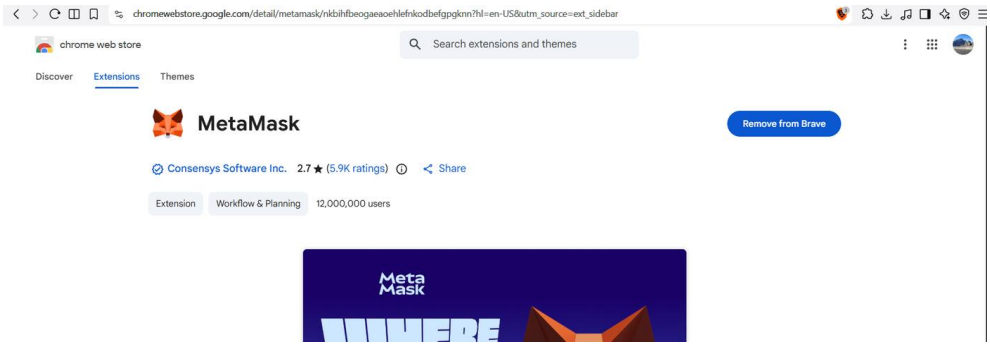


Fig 1: MetaMask extension installed from the Chrome Web Store

Step 2: Wallet created, test ETH requested

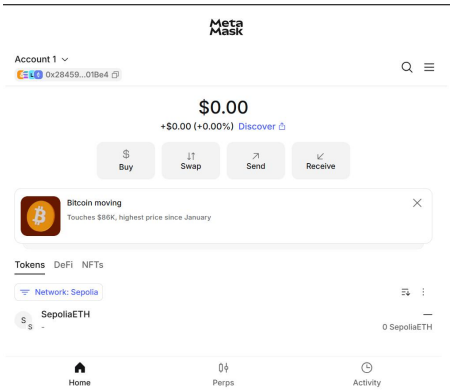


Fig 2: New wallet (Account 1) on Sepolia, balance 0 SepoliaETH

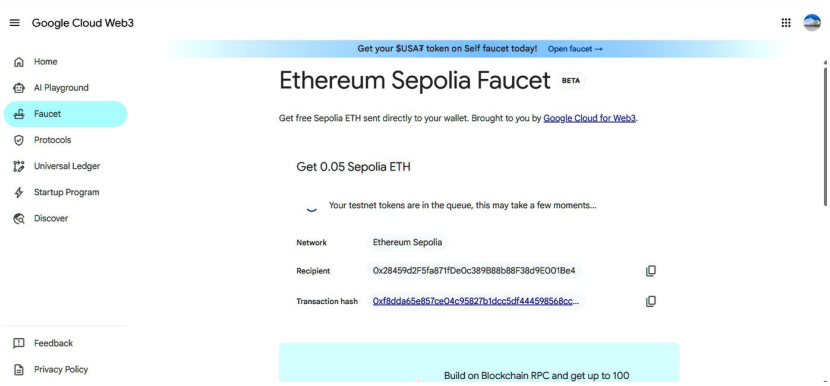


Fig 3: Faucet sending 0.05 Sepolia ETH to the wallet address

Step 3: Wallet funded

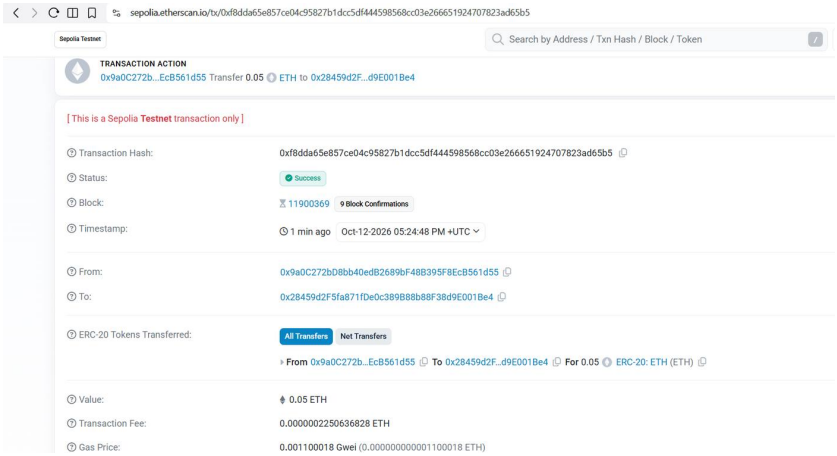


Fig 4: Etherscan confirms the incoming 0.05 ETH, Status Success

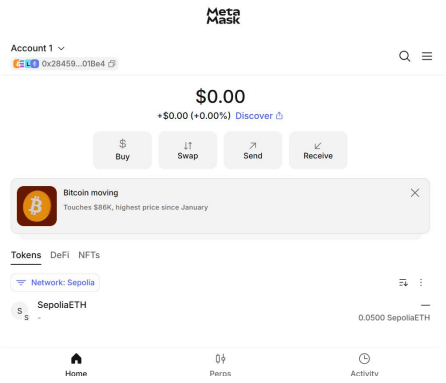


Fig 5: Wallet balance 0.0500 SepoliaETH

Step 4: Crypto transaction sent from the wallet

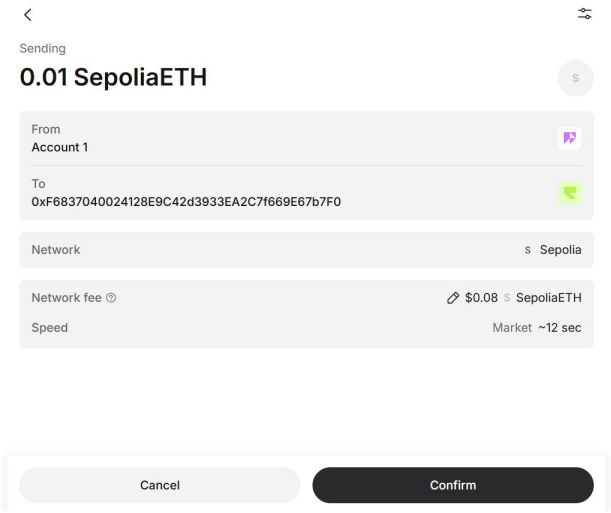


Fig 6: Sending 0.01 SepoliaETH to 0xF6837...7b7F0, fee and speed shown

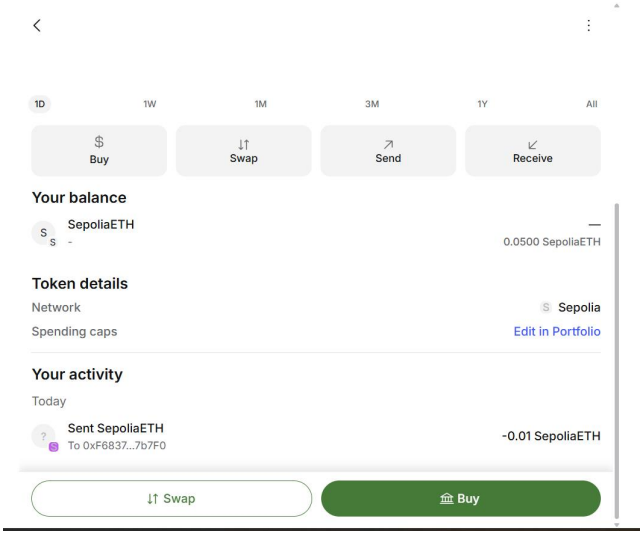


Fig 7: Activity: Sent SepoliaETH, -0.01

Step 5: Transaction confirmed on Sepolia Etherscan

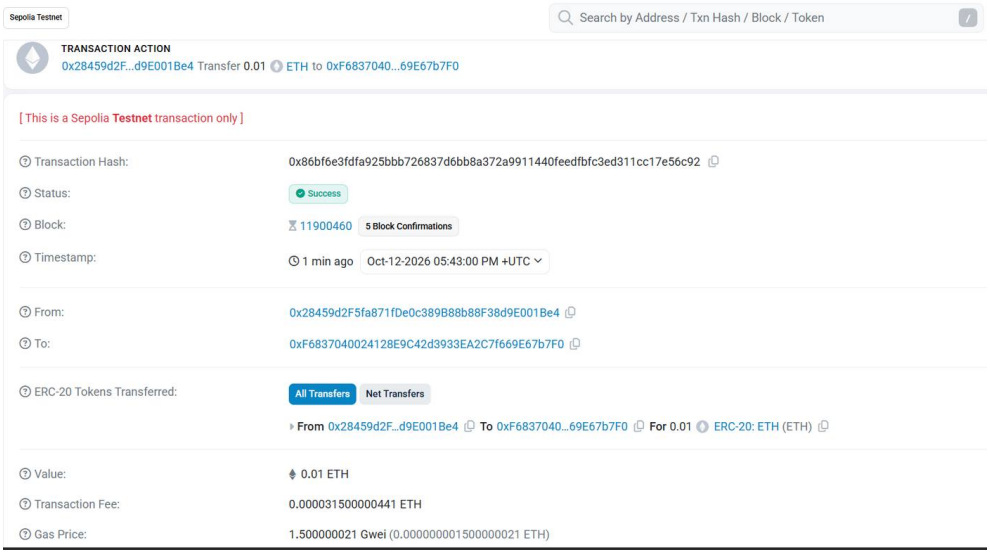


Fig 8: Status Success, block 11900460, value 0.01 ETH, fee 0.000031500000441 ETH

Transaction details (from Etherscan)

Item	Value
Transaction hash	0x86bf6e3fdfa925bbb726837d6bb8a372a9911440feedfbfc3ed311cc17e56c92
Status / Block	Success / 11900460
From (my wallet)	0x28459d2F5fa871fDe0c389B88b88F38d9E001Be4
To	0xF6837040024128E9C42d3933EA2C7f669E67b7F0
Value sent	0.01 ETH
Transaction fee	0.000031500000441 ETH
Gas price	1.500000021 Gwei
Gas used	21,000 (fee / gas price; standard for a simple ETH transfer)
Total spent	0.01 + 0.0000315 = about 0.0100315 ETH (test ETH, no real value)

Conclusion: A MetaMask wallet was created, funded from a faucet and used on the Sepolia test network to send 0.01 ETH. The sender pays the amount plus a network fee (gas used x gas price).