
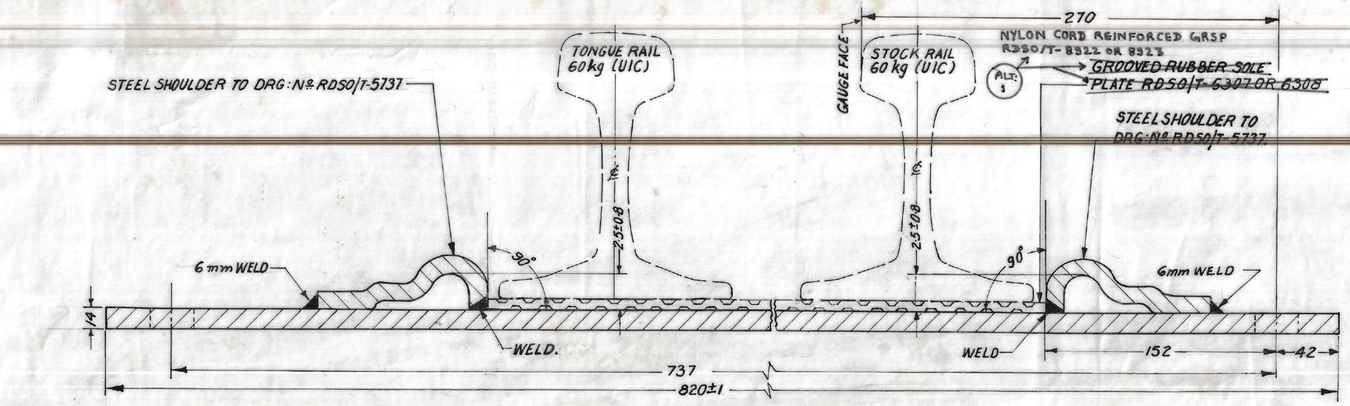


SECTIONAL ELEVATION ON A.B.

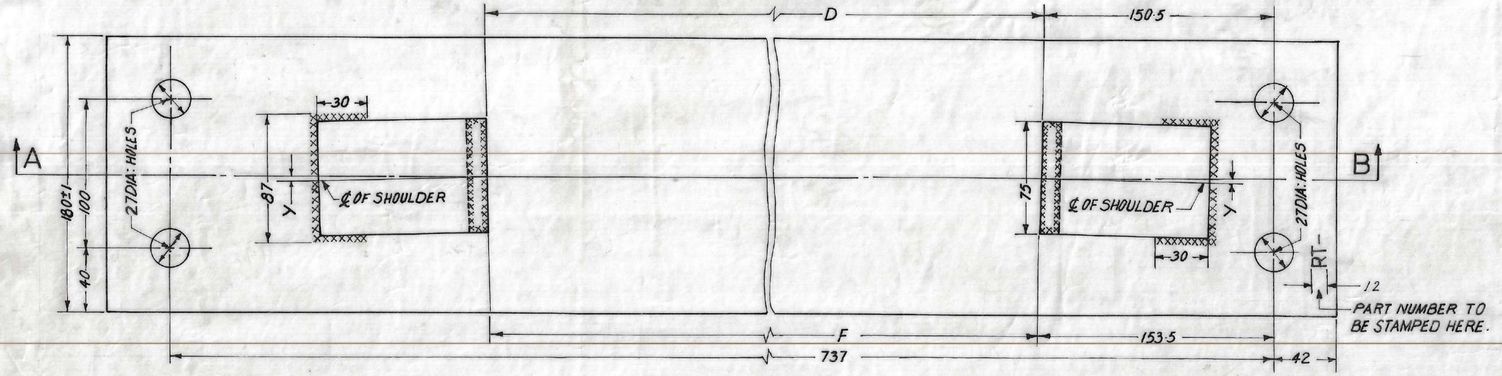

PLAN

TABLE OF DIMENSIONS

SLEEPER No.	PART No.	DIMENSIONS (mm) Y	D	F	G.R.P.S. RDSO/T-
15	RDSO/T-6292	2·5	390	382	~~6307~~ 8322 ALT: 1
16	RDSO/T-6294	2·63	418	409·5	~~6308~~ 8323 ALT: 1

1 EACH — 6400mm CURVED SWITCH WITH ZU-1-60 THICK-WEB TONGUE RAILS FOR 1 IN 8½ TURNOUT B.G. (1673mm) FOR 60 kg (UIC) ON P.S.C. SLEEPERS. RDSO/T-6280

No. OFF	DESCRIPTION	No.
	FOR DRAWING	

THIS DRAWING IS THE PROPERTY OF RESEARCH DESIGNS AND STANDARDS ORGANISATION (MINISTRY OF RAILWAYS) LUCKNOW - 226011, INDIA AND SHALL NOT BE USED, COPIED OR REPRODUCED IN PART OR WHOLE, WITHOUT PRIOR CONSENT IN WRITING

R. D. S. O.

SPECIAL FLAT BEARING PLATES FOR 6400mm CURVED SWITCH WITH ZU-1-60 THICK-WEB TONGUE RAILS B.G. (1673mm) FOR 60 kg (UIC) ON P.S.C. SLEEPERS.

STAN'D — CANC'LD — REV'R — ADVANCE 24.02.04 (T)

RDSO/T-6292 & RDSO/T-6294

NOTE

5. MIG PROCESS OF WELDING TO BE ADOPTED.
4. DIMENSIONS GIVEN SHOW WHERE THE CENTRE AND CROSS-LINES MEET THE EDGES OF THE BEARING PLATE
3. A TOLERANCE OF 0·8 mm EACH WAY IS PERMITTED IN THE POSITION OF HOLES.
2. LATEST ALTERATION NUMBER SHALL BE CHECKED BEFORE PLACING ORDER.
1. ALL DIMENSIONS ARE IN MILLIMETRES.

SPECIFICATION

3. IRS. T 10.
2. IS : 2062-1999. Gr.-B.
1. IRS. WELDED BRIDGE CODE FOR WELDING.

SCALE

MILLIMETRES.

20 0 20 40 60 80

ALT:	DESCRIPTION	DATE
1.	(i) TABLE OF DIMENSIONS MODIFIED (ii) GROOVED RUBBER SOLE PLATES REPLACED WITH NYLON CORD REINFORCED GRSP	20.09.21

FILE: CTP/RDSO/ DESIGN/ PAGE 191021 — C.F.M. TONGUE RAILS 60 kg (UIC) PLATES 3870-43 — CAL: BY: — CAL: CH: (PLINGHANAGE) — DRG: (SR. SAXENA) CH: (MANUFACTURE) — TRC: BY: — TRC: CH: (S.K.SINHA) — Approved (R.L. WADHWA) — DDS/T — DRG: BY — Approved (PUSHPA PANDAY)