

R_Code_1.Rmd

Rohit Dhankar

20 July 2017

This is the 2nd in series of R Code Files.

Refer the GitHub Repository , for all Code files —> <https://github.com/RohitDhankar/R-Beginners-Online-Virtual-Learning-S>

Its a good practise from time to time to keep a track of our current Working Directory and list out all the Objects in our R ENVIRONMENT - specially so when we are committing changes to a Git Remote.

```
getwd()
```

```
## [1] "/home/dhankar/Desktop/R_Own/Proj_1"
```

```
#
```

```
ls()
```

```
## character(0)
```

We could remove any object with command - rm("Object Name")

We can also use print() , to view any objects stored value.

```
# Code Section -1
```

```
#print(a1)
```

```
#
```

```
#print(char_vector)
```

```
#
```

Going further with VECTORS .

We combine two or more vectors to get another vector .

```
# Code Section -2
```

```
num_vector <- c(22,22,33,33,44)
```

```
print(num_vector)
```

```
## [1] 22 22 33 33 44
```

```
num_vector1 <- c(11,12,13,14,15)
```

```
#
```

```
num_vector3 <- c(num_vector,num_vector1)
```

```
print(num_vector3)
```

```
## [1] 22 22 33 33 44 11 12 13 14 15
```

Some basic Maths and Stats with VECTORS.

```
# Code Section -3
```

```
num_vector3 + 5
```

```
## [1] 27 27 38 38 49 16 17 18 19 20
```

```
# Adds NUMERIC VALUE = 5 to all ELEMENTS of the Num Vector.
```

```
# Code Section -4
```

```
num_vector1 * num_vector3
```

```
## [1] 242 264 429 462 660 121 144 169 196 225
```

```
# First 5 elements of - num_vector3 multiplied by the Five Elements of num_vector1 and again the Next 5
```

Check out the LENGTH of a VECTOR with length()

```
# Code Section -5
```

```
length(num_vector1 * num_vector3)
```

```
## [1] 10
```

```
# Code Section -6
```

```
#num_vector1 %*% num_vector3 # Error in num_vector1 %*% num_vector3 : non-conformable arguments
```

```
# Vectors are not of same Length above - below they are of same length
```

```
nv <- c(1,2,3,4,5)
```

```
nv1 <- c(6,7,8,9,10)
```

```
nv %*% nv1 # Inner Product of same Length Vectors
```

```
## [1]
```

```
## [1,] 130
```

```
# Algebraic Dot Product as defined by WikiPedia - "https://en.wikipedia.org/wiki/Dot_product"
```

Operate upon a ELEMENT of the Vector.

```
# Code Section -7
```

```
log(num_vector3[2]) # Log Base 2 of 22
```

```
## [1] 3.091042
```

```
#
```

```
log(22)
```

```
## [1] 3.091042
```

```
#
```

Converting a CHAR Vector into a NUMERIC Vector .

```
# Code Section -8
```

```
ch_v <- c("11","12","13","14","15")
```

```
#
```

```
class(ch_v)
```

```
## [1] "character"
```

```
#ch_v + 2 # Error in ch_v + 2 : non-numeric argument to binary operator
```

```
# Cant do a Math operation on CHAR Vector - lets Convert into NUM Vector
```

```
#
```

```
nm_v <- as.numeric(ch_v)
```

```
#
```

```
class(nm_v)
```

```
## [1] "numeric"
```

```

nm_v + 2

## [1] 13 14 15 16 17
#
print("Summary of the Num Vector as below :- ")

## [1] "Summary of the Num Vector as below :- "
summary(nm_v+2)

##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##       13      14      15      15      16      17
#
summary(nm_v+5)

##      Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
##       16      17      18      18      19      20
#
sum(nm_v+5)

## [1] 90
#
sd(nm_v+5)

## [1] 1.581139
#
max(nm_v+5)


## [1] 20
#
min(nm_v+5)

## [1] 16
#
mean(nm_v+5)

## [1] 18
#
median(nm_v+5)

## [1] 18
#
# Code Section -9
plot(nm_v + 5)

```

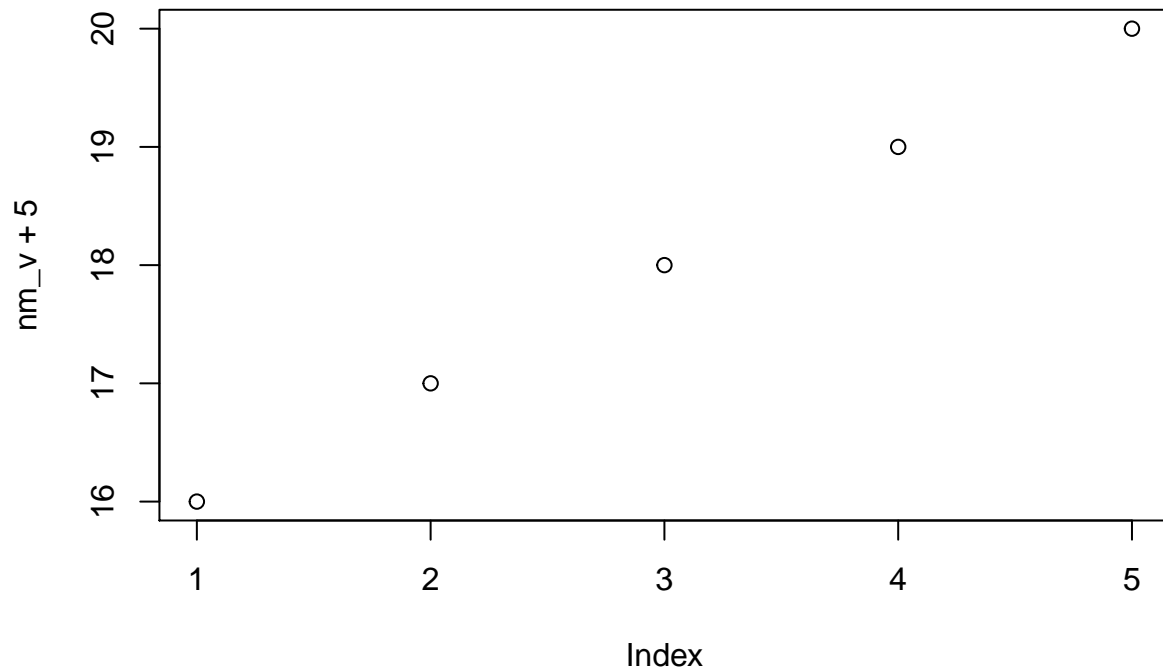

```
# Code Section -10
```

```
# Code Section -11
```

```
# Code Section -12
```

```
# Code Section -13
```

```
# Code Section -14
```

```
# Code Section -15
```

```
# Code Section -16
```

```
# Code Section -17
```

```
sessionInfo()
```

```
R version 3.3.2 (2016-10-31) Platform: x86_64-pc-linux-gnu (64-bit) Running under: Ubuntu 16.04.1 LTS
```

```
locale: [1] LC_CTYPE=en_IN.UTF-8 LC_NUMERIC=C LC_TIME=en_IN.UTF-8 LC_COLLATE=en_IN.UTF-8
```

```
[5] LC_MONETARY=en_IN.UTF-8 LC_MESSAGES=en_IN.UTF-8 LC_PAPER=en_IN.UTF-8 LC_NAME=C
```

```
[9] LC_ADDRESS=C LC_TELEPHONE=C LC_MEASUREMENT=en_IN.UTF-8 LC_IDENTIFICATION=C
```

```
attached base packages: [1] stats graphics grDevices utils datasets methods base
```

```
loaded via a namespace (and not attached): [1] backports_1.0.4 magrittr_1.5 rprojroot_1.1 htmltools_0.3.5 tools_3.3.2 base64enc_0.1-3 yaml_2.1.14
```

```
[8] Rcpp_0.12.8 stringi_1.1.2 rmarkdown_1.3 knitr_1.15.1 jsonlite_1.1 stringr_1.1.0 digest_0.6.10
```

```
[15] evaluate_0.10
```

```
EOF - R_Code_1.Rmd
```