

Real-time Order Status WebSocket Guide

Version: 1.0

Table of Contents

Overview.....	3
Process.....	3
Data Flow Diagram	3
Step 1: Register to get WebSocket token.....	4
CREATE WEBSOCKET TOKEN API	4
Request.....	4
Response	4
Step 2: Connect to WebSocket.....	5
Message Types	5
1. Websocket Connection Establishment.....	5
1.1 Request Message Format:	5
Connection Response:.....	5
1.2 Connection Establishment.....	5
1.3 WebSocket Live Stream.....	6
Live Order status feed:	6
2. Pass Heartbeat Messages.....	7
Heartbeat Message	7
Key Rules	7
Connection Invalidation	8
Connection Re-establishment	8
Error Handling	8
Key Configuration	8


Overview

This guide explains how to integrate the WebSocket order status feed to receive real-time order updates in your Web and Mobile Application. The integration requires two steps: obtaining a WebSocket token via REST API, then establishing a WebSocket connection for live updates.

Process

1. User logs into the base application and gets a session token
2. Frontend calls the Registration API with the session token to get a WebSocket token
3. Frontend connects to WebSocket using the WebSocket token
4. Backend validates and confirms the connection
5. Order status updates stream continuously to the frontend
6. Heartbeat messages (every 50 seconds) keep the connection alive
7. Connection closes when app is closed or after 5 minutes of inactivity
8. Frontend re-establishes the connection

Data Flow Diagram

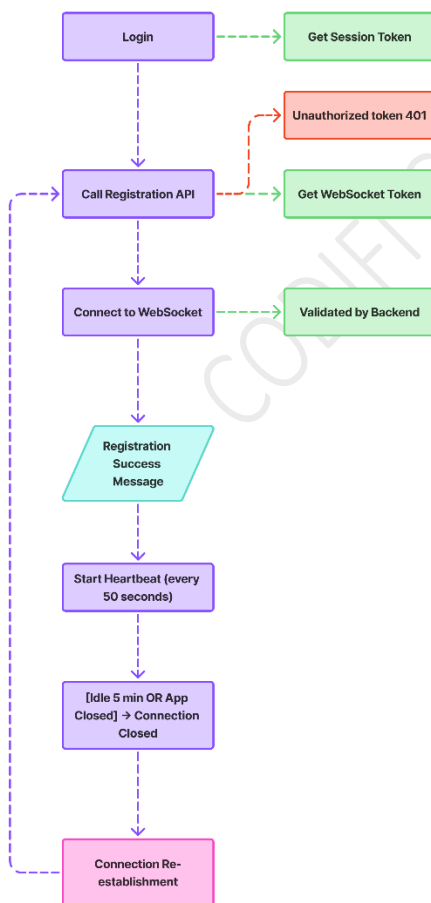

Step 1: Register to get WebSocket token

Purpose: Exchange user session for WebSocket access token.

Action: API call

CREATE WEBSOCKET TOKEN API

Method	GET
Base URL	https://livemiddleware.indiratrade.com
Endpoint	/order-notify/ws/createWsToken
Authorization (<i>Mandatory</i>)	Bearer <user_session_token>
Content-Type	application/json

Note: When using SSO user sessions, include the SSO field in the headers and set its value to true.

Sample:

- **Key:** sso (lowercase)
- **Value:** True

Request

User Session token

Response

Success (200):

```
{
  "status": "Ok",
  "message": "200",
  "result": [
    {
      "orderToken":
      "8d36a6d34113425a813ca2a3dcff03d104eb01e6082503875cefc59b32372b3e"
    }
  ]
}
```

Error (401 - Unauthorized) – If bearer token is not given

```
{
  "status": "NOT_OK",
  "message": "FAILED"
}
```

Step 2: Connect to WebSocket

Action: Pass the WebSocket token as plain text In JSON Format when connecting.

Purpose: Establish real-time order status feed connection.

WebSocket URL: `wss://livemiddleware.indiratrade.com/order-notify/websocket`

Message Types

The WebSocket sends two types of messages:

1. WebSocket Connection Establishment

After successful registration and receiving the order token, establish the WebSocket connection by passing the token and user ID in the specified request format.

1.1 Request Message Format:

Message format Data type: Text

```
{
  "userId":"DM12",
  "orderToken":"8d36a6d34113425a813ca2a3dcff03d104eb01e6082503875cefc59b32372b3e"
}
```

Once the WebSocket connects, the following response will be received:

Connection Response:

Connected to `wss://livemiddleware.indiratrade.com/order-notify/websocket`

1.2 Connection Establishment

Send the request message as **plain text** to the WebSocket.

Successful Connection establishment message:

```
{
  "status":"Ok"
}
```

1.3 WebSocket Live Stream

Now, Live order status feed begins streaming continuously after successful connection.

Live Order status feed:

ORDER STATUS
<pre>{ "OrderSequenceNumber": 133729304, "ExpiryDate": "", "PartCode": "", "InitiatedByUserId": "DM12", "Buy_Sell": "1", "Product": "AMO DELIVERY", "OrderNumber": "0", "ModifiedBy": "APIMOBILE", "DQ": 0, "OrderType": "STOP LOSS LIMIT", "Remarks": "DM12 NOO", "DecimalLocator": "100", "RegularLot": 1, "ModifiedByUserId": "DM12", "SpreadFlag": 0, "MessageType": "ORD_NRML", "OrderPrice": "11.30", "Misc": "AMO", "GTDOrderStatus": 0, "OrderEntryTime": "13-Feb-2026 19.49.31", "DQRemaining": 0, "ProCli": "1", "TradedQTY": "0", "MessageSequenceNumber": "334518", "Exchange": "1", "TradedPrice": "0.00", "PendingQty": 1, "Option_Type": "", "AMOrderID": "NYOYX00006=2", "LegIndicator": "0", "Symbol": "IDEA", "TriggerPrice": 0, "Reason": "", "LastModifiedTimeStamp": "13-Feb-2026 19:49:32", "OrderOriginalQty": 1,</pre>

ORDER STATUS
<pre> "OrderStatus": "AMO SUBMITTED", "InstrumentName": "", "ExchangeAlgoID": "", "UserID": "0", "Days": "0", "CliOrderNumber": 6, "ManagerID": "43", "MarketType": 1, "UniqueCode": "NYOYX00006=2", "SpreadPrice": 0, "StrikePrice": 0, "InitiatedBy": "APIMOBILE", "Series": "EQ", "UserRemarks": "", "UCC": "DM12", "ExchangeAccountCode": "4100014698=2", "ScripCode": "14366", "OrderValidity": "1", "LastModifiedTime": "13-Feb-2026 19.49.31", "CP_ID": "", "OrderTimeStamp": "13-Feb-2026 19:49:32" } </pre>

2. Pass Heartbeat Messages

To keep the connection alive, send a heartbeat message every 50 seconds from the Frontend Application.

Heartbeat Message

Data type: text

```
{"userId":"DM12","heartbeat":"h"}
```

Key Rules

- Send heartbeat every 50 seconds
- If no heartbeat for 5 minutes, user connection will be closed automatically
- If no order activity for 5 minutes, web socket connection will be closed automatically
- When app is closed, close the WebSocket connection explicitly

Connection Invalidation

When connection is invalidated: The below message will be displayed.

Disconnected from <wss://livemiddleware.indiratrade.com/order-notify/websocket>

Connection Re-establishment

Once the user session and WebSocket connection are invalidated after 5 minutes, the frontend must re-establish the user session and repeat the above validation process.

Error Handling

Error	Solution
Invalid Token	Re-authenticate and get new token

Key Configuration

Parameter	Value
Heartbeat Interval	50 seconds
Inactivity Timeout	5 minutes
Connection Protocol	wss:// (secure)