

Indigo Appium Automation Report

20-Dec-2022, 1:10:41 PM

Start : Dec 20, 1:10:29.445 PM

End : Dec 20, 1:10:40.218 PM

Duration : 10.773 s

Features







PASSED - 0
FAILED - 18
SKIPPED - 0

Scenarios

PASSED - 0
FAILED - 83
SKIPPED - 0

Steps

PASSED - 0
FAILED - 83
SKIPPED - 1097

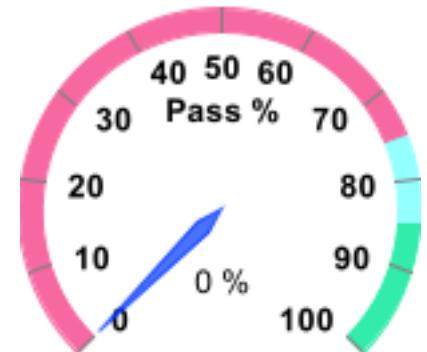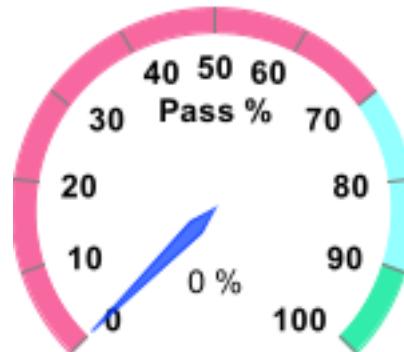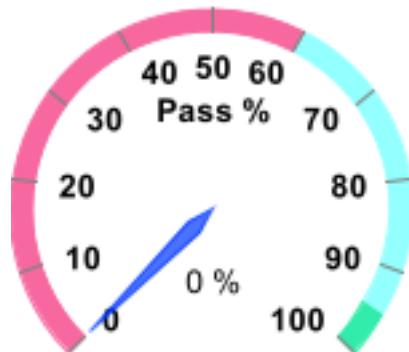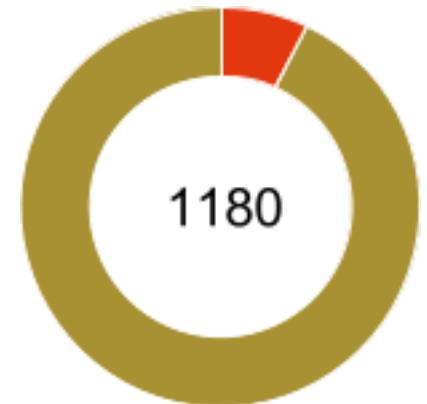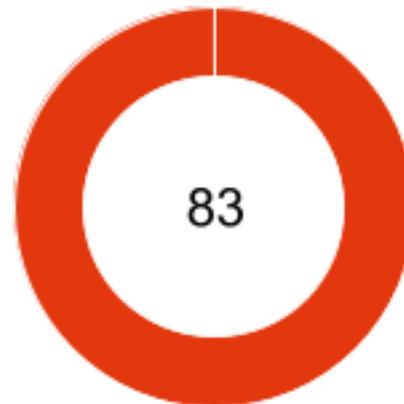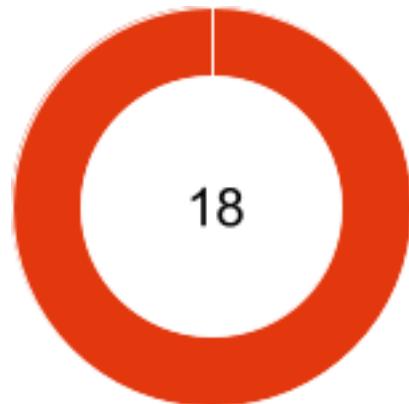


Feature		Duration	Scenario				Step			
			T	P	F	S	T	P	F	S
Name										
<u>Application Login</u>		3.680 s	7	0	7	0	27	0	7	20
<u>Booking Modification Functionality</u>		0.546 s	4	0	4	0	37	0	4	33
<u>Logout Functionality</u>		0.025 s	1	0	1	0	6	0	1	5
<u>Indigo Payment Option</u>		0.864 s	7	0	7	0	124	0	7	117
<u>BoardingPass Functionality</u>		0.136 s	3	0	3	0	33	0	3	30
<u>Update Profile Details</u>		0.207 s	5	0	5	0	30	0	5	25
<u>Cancel Flight</u>		0.071 s	2	0	2	0	30	0	2	28
<u>Check-in Functionality</u>		0.210 s	4	0	4	0	39	0	4	35
<u>Indigo Booking Flow</u>		2.487 s	18	0	18	0	261	0	18	243
<u>Roundtrip Functionality</u>		0.415 s	6	0	6	0	155	0	6	149
<u>MultiCityTrip Functionality</u>		0.540 s	5	0	5	0	100	0	5	95
<u>UndoCheckin Functionality</u>		0.014 s	1	0	1	0	6	0	1	5
<u>Add-on Functionality</u>		0.937 s	12	0	12	0	276	0	12	264
<u>Flight Status Functionality</u>		0.091 s	2	0	2	0	17	0	2	15
<u>My Booking Tab</u>		0.013 s	1	0	1	0	4	0	1	3
<u>Update Contact Details</u>		0.202 s	3	0	3	0	18	0	3	15
<u>Cancel Flight Booking</u>		0.015 s	1	0	1	0	9	0	1	8


Feature				Scenario				Step			
Name		Duration		T	P	F	S	T	P	F	S
<u>Forgot Password</u>		0.021 s		1	0	1	0	8	0	1	7

Tag	Name	Scenario				Feature			
		T	P	F	S	T	P	F	S
@Login		7	0	7	0	1	0	1	0
@BookingModification		3	0	3	0	1	0	1	0
@Bookingmodification		4	0	4	0	1	0	1	0
@demoscenario		8	0	8	0	6	0	6	0
@Demotest2		31	0	31	0	8	0	8	0
@Logout		1	0	1	0	1	0	1	0
@Demotest		26	0	26	0	6	0	6	0
@Payments		7	0	7	0	1	0	1	0
@BoardingPass		3	0	3	0	1	0	1	0
@Profile		5	0	5	0	1	0	1	0
@CancelChangeFlight		2	0	2	0	1	0	1	0
@CancelFlight		1	0	1	0	1	0	1	0
@ChangeFlight		1	0	1	0	1	0	1	0
@new1		1	0	1	0	1	0	1	0
@Booking		18	0	18	0	1	0	1	0
@negativeValidation		3	0	3	0	1	0	1	0
@negativeValidation2		1	0	1	0	1	0	1	0


Tag	Name	Scenario				Feature			
		T	P	F	S	T	P	F	S
	@MultiCityTrip	6	0	6	0	2	0	2	0
	@Roundtrip	6	0	6	0	1	0	1	0
	@undoCheckin	1	0	1	0	1	0	1	0
	@Addons	12	0	12	0	1	0	1	0
	@FlightStatus	2	0	2	0	1	0	1	0
	@MyBookingTab	1	0	1	0	1	0	1	0
	@update	3	0	3	0	1	0	1	0
	@CancelBooking	1	0	1	0	1	0	1	0
	@ForgotPassword	1	0	1	0	1	0	1	0

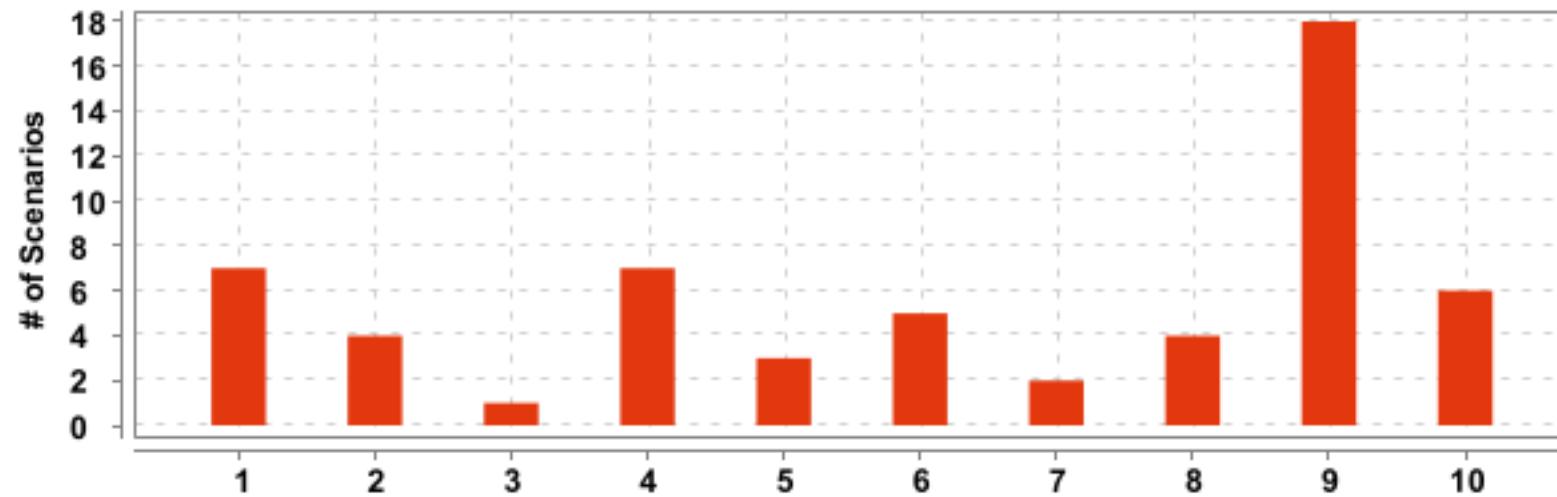


#	Feature Name	T	P	F	S	Duration
1	<u>Application Login</u>	7	0	7	0	3.680 s
2	<u>Booking Modification Functionality</u>	4	0	4	0	0.546 s
3	<u>Logout Functionality</u>	1	0	1	0	0.025 s
4	<u>Indigo Payment Option</u>	7	0	7	0	0.864 s
5	<u>BoardingPass Functionality</u>	3	0	3	0	0.136 s
6	<u>Update Profile Details</u>	5	0	5	0	0.207 s
7	<u>Cancel Flight</u>	2	0	2	0	0.071 s
8	<u>Check-in Functionality</u>	4	0	4	0	0.210 s
9	<u>Indigo Booking Flow</u>	18	0	18	0	2.487 s
10	<u>Roundtrip Functionality</u>	6	0	6	0	0.415 s

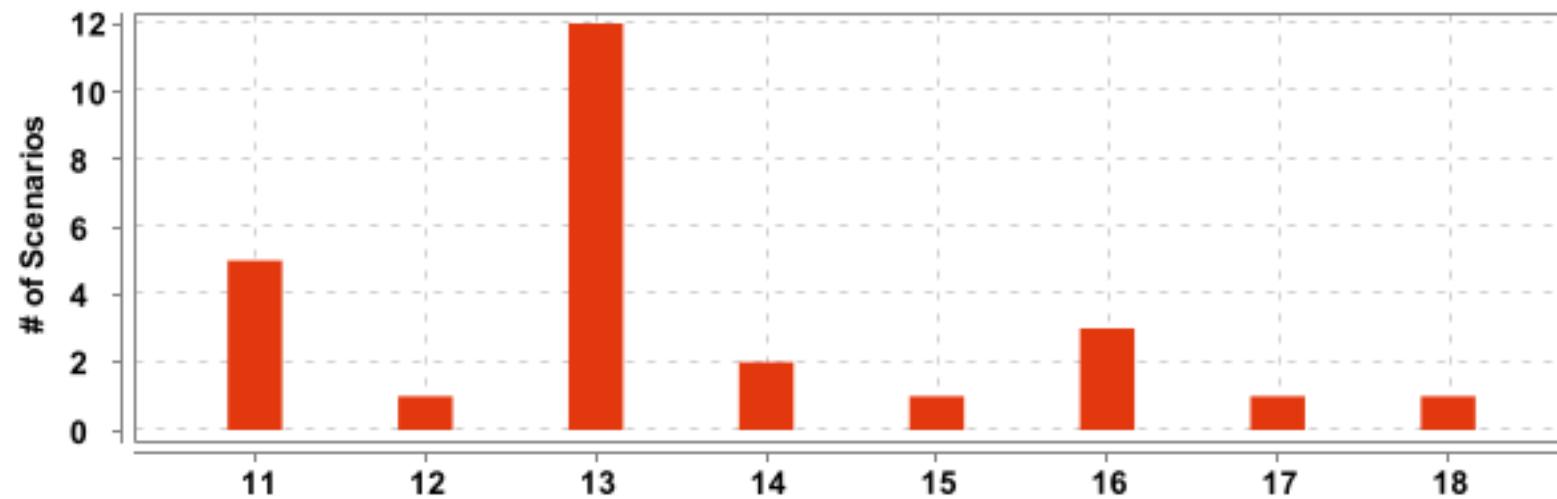


#	Feature Name	T	P	F	S	Duration
11	<u>MultiCityTrip Functionality</u>	5	0	5	0	0.540 s
12	<u>UndoCheckin Functionality</u>	1	0	1	0	0.014 s
13	<u>Add-on Functionality</u>	12	0	12	0	0.937 s
14	<u>Flight Status Functionality</u>	2	0	2	0	0.091 s
15	<u>My Booking Tab</u>	1	0	1	0	0.013 s
16	<u>Update Contact Details</u>	3	0	3	0	0.202 s
17	<u>Cancel Flight Booking</u>	1	0	1	0	0.015 s
18	<u>Forgot Password</u>	1	0	1	0	0.021 s

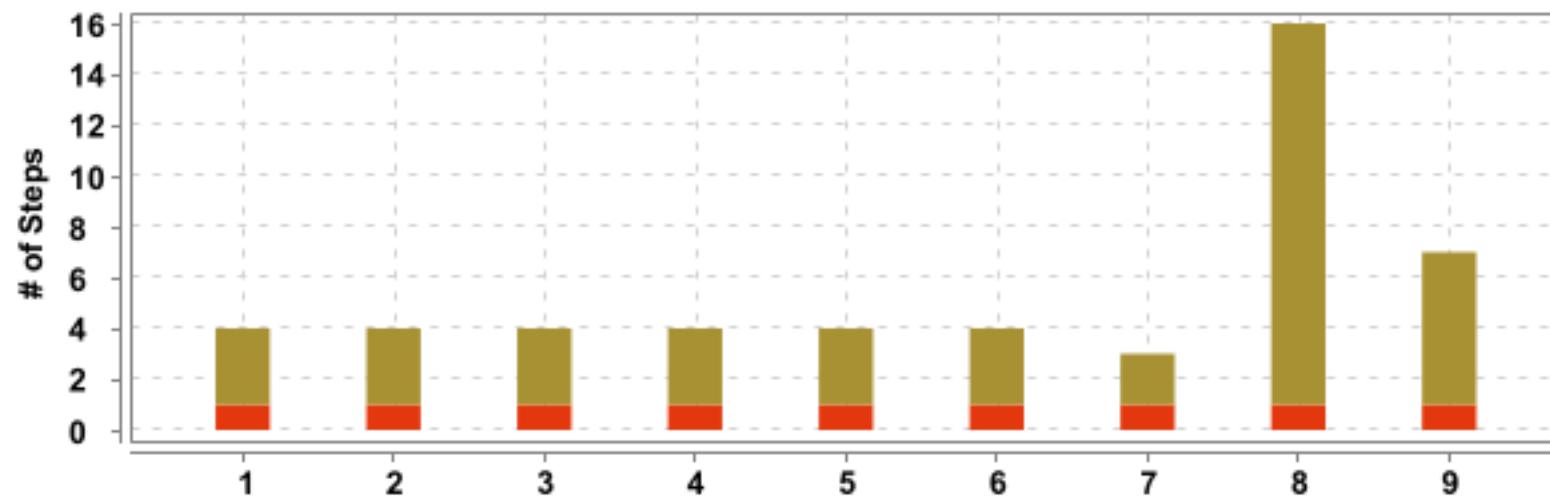


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Application Login</u>	<u>Indigo Customer login with Mobile number</u>	4	0	1	3	2.501 s
2	<u>Application Login</u>	<u>Indigo Customer login with incorrect Mobile number</u>	4	0	1	3	0.091 s
3	<u>Application Login</u>	<u>Indigo Customer login Mobile number char validation</u>	4	0	1	3	0.088 s
4	<u>Application Login</u>	<u>Indigo Customer login with incorrect Password</u>	4	0	1	3	0.052 s
5	<u>Application Login</u>	<u>Indigo Customer login with incorrect OTP</u>	4	0	1	3	0.037 s
6	<u>Application Login</u>	<u>Indigo Customer login with correct OTP</u>	4	0	1	3	0.035 s
7	<u>Application Login</u>	<u>Guest Login</u>	3	0	1	2	0.047 s
8	<u>Booking Modification Functionality</u>	<u>To Booking Modifaction for Addons.</u>	16	0	1	15	0.078 s
9	<u>Booking Modification Functionality</u>	<u>To Booking Modifaction for Update contact deatails.</u>	7	0	1	6	0.040 s

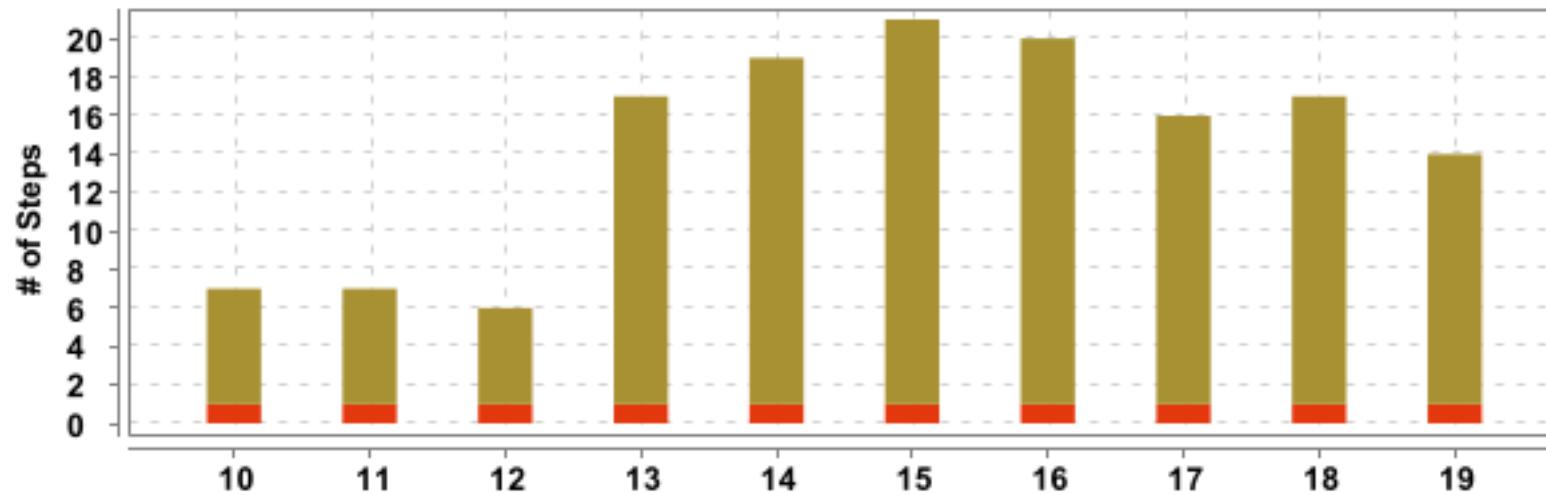


#	Feature Name	Scenario Name	T	P	F	S	Duration
10	<u>Booking Modification Functionality</u>	<u>To Booking Modification for incorrect Update contact details.</u>	7	0	1	6	0.030 s
11	<u>Booking Modification Functionality</u>	<u>To Booking Modification for Change seats.</u>	7	0	1	6	0.039 s
12	<u>Logout Functionality</u>	<u>To test logout functionality</u>	6	0	1	5	0.025 s
13	<u>Indigo Payment Option</u>	<u>Make a Payment Using UPI</u>	17	0	1	16	0.096 s
14	<u>Indigo Payment Option</u>	<u>Make a Payment Using Credit Card</u>	19	0	1	18	0.080 s
15	<u>Indigo Payment Option</u>	<u>Make a Payment Using Debit Card</u>	21	0	1	20	0.057 s
16	<u>Indigo Payment Option</u>	<u>Make a Payment Using 6E Rewards</u>	20	0	1	19	0.037 s
17	<u>Indigo Payment Option</u>	<u>Make a Payment Using Net Banking</u>	16	0	1	15	0.061 s
18	<u>Indigo Payment Option</u>	<u>Make a Payment Using Wallet</u>	17	0	1	16	0.041 s
19	<u>Indigo Payment Option</u>	<u>Make a Payment Using hold and pay option</u>	14	0	1	13	0.019 s

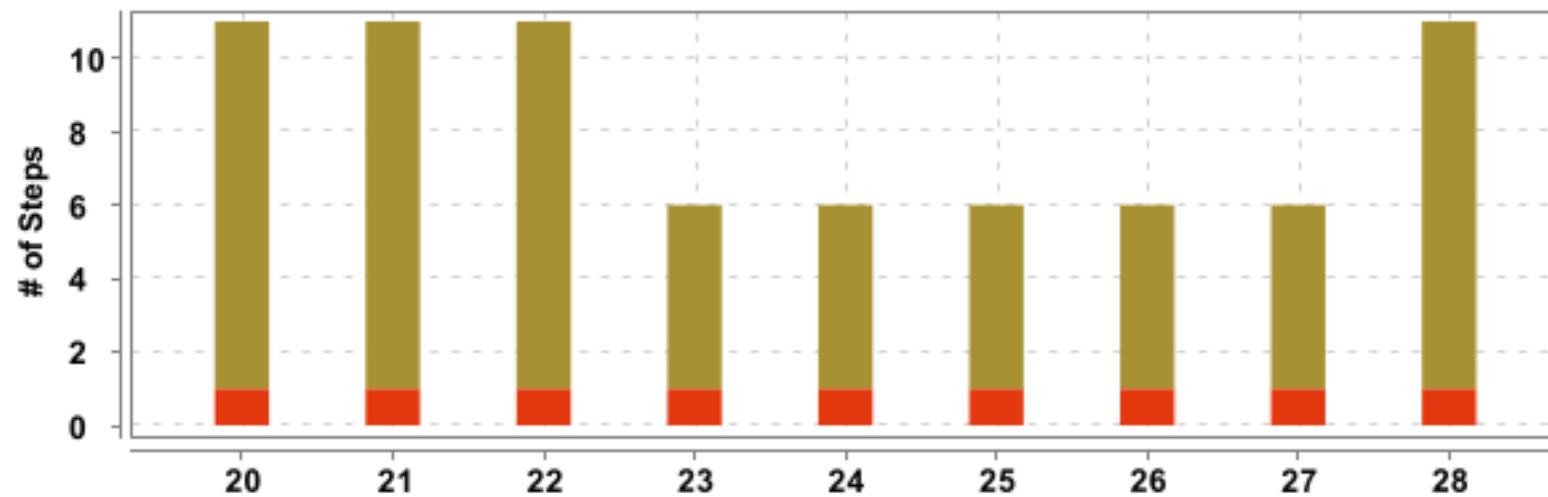


#	Feature Name	Scenario Name	T	P	F	S	Duration
20	<u>BoardingPass Functionality</u>	<u>To verify the process for Boarding pass with valid Credentials</u>	11	0	1	10	0.023 s
21	<u>BoardingPass Functionality</u>	<u>To Verify the process for Boarding Pass with invalid credentials</u>	11	0	1	10	0.021 s
22	<u>BoardingPass Functionality</u>	<u>To verify the process for complete the HealthFrom</u>	11	0	1	10	0.025 s
23	<u>Update Profile Details</u>	<u>To verify user can update First Name</u>	6	0	1	5	0.014 s
24	<u>Update Profile Details</u>	<u>To verify user can update Last Name</u>	6	0	1	5	0.017 s
25	<u>Update Profile Details</u>	<u>To verify user can update Email id</u>	6	0	1	5	0.016 s
26	<u>Update Profile Details</u>	<u>To verify user can update Contact</u>	6	0	1	5	0.015 s
27	<u>Update Profile Details</u>	<u>To verify user can update Profile Details</u>	6	0	1	5	0.022 s
28	<u>Cancel Flight</u>	<u>To Verify User can cancel the booked flight</u>	11	0	1	10	0.019 s

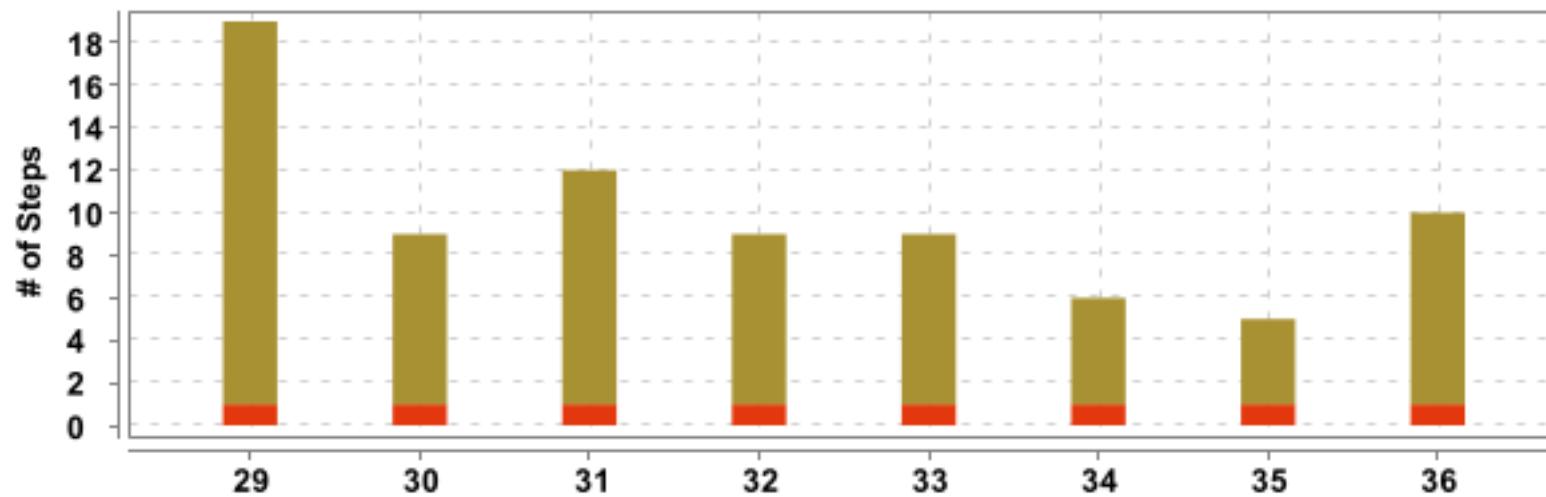


#	Feature Name	Scenario Name	T	P	F	S	Duration
29	<u>Cancel Flight</u>	<u>To Verify User can change the booked flight</u>	19	0	1	18	0.021 s
30	<u>Check-in Functionality</u>	<u>To verify that registered user can check-in</u>	9	0	1	8	0.033 s
31	<u>Check-in Functionality</u>	<u>To verify that Guest user can check-in</u>	12	0	1	11	0.017 s
32	<u>Check-in Functionality</u>	<u>To verify Checkin Through Invalid Mobile Number</u>	9	0	1	8	0.016 s
33	<u>Check-in Functionality</u>	<u>To verify Checkin Through Invalid Email-id</u>	9	0	1	8	0.028 s
34	<u>Indigo Booking Flow</u>	<u>To Verify the maximum Infants allowed 4</u>	6	0	1	5	0.012 s
35	<u>Indigo Booking Flow</u>	<u>To Verify the maximum Children allowed 4</u>	5	0	1	4	0.028 s
36	<u>Indigo Booking Flow</u>	<u>To Verify the Pax count cannot be more than 9</u>	10	0	1	9	0.013 s

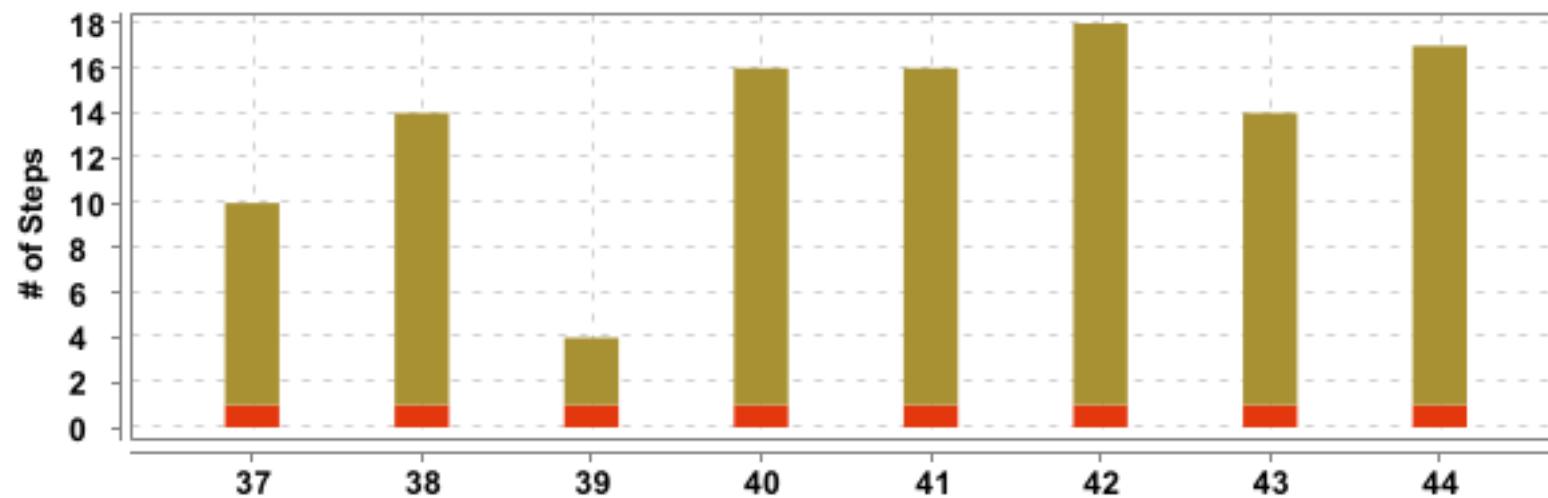


#	Feature Name	Scenario Name	T	P	F	S	Duration
37	<u>Indigo Booking Flow</u>	<u>To Verify that user can search a flight</u>	10	0	1	9	0.022 s
38	<u>Indigo Booking Flow</u>	<u>To Verify that user can modify flight search</u>	14	0	1	13	0.031 s
39	<u>Indigo Booking Flow</u>	<u>To Verify that To and From cannot be same</u>	4	0	1	3	0.012 s
40	<u>Indigo Booking Flow</u>	<u>Make a booking with saver fare option</u>	16	0	1	15	0.019 s
41	<u>Indigo Booking Flow</u>	<u>Make a booking with special fares Armed Forces</u>	16	0	1	15	0.023 s
42	<u>Indigo Booking Flow</u>	<u>Make a booking with special fares Armed Forces Super6E fare option</u>	18	0	1	17	0.021 s
43	<u>Indigo Booking Flow</u>	<u>Make a booking with special fares Students</u>	14	0	1	13	0.021 s
44	<u>Indigo Booking Flow</u>	<u>Make a booking with special fares Students and Super6E fare option</u>	17	0	1	16	0.030 s

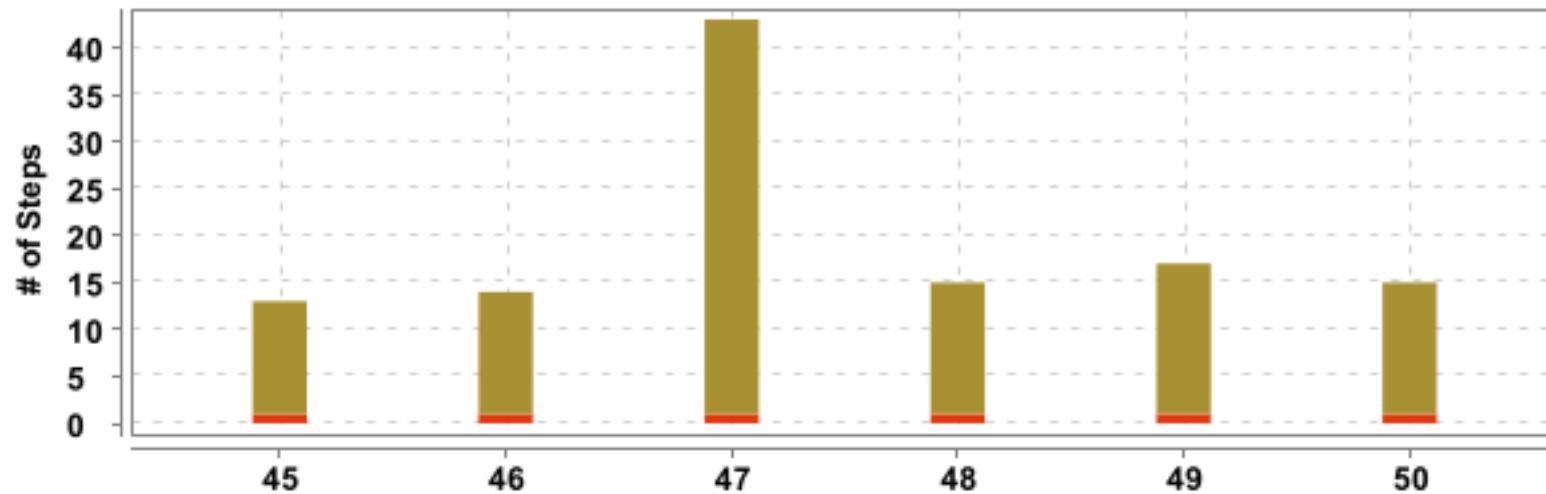


#	Feature Name	Scenario Name	T	P	F	S	Duration
45	<u>Indigo Booking Flow</u>	<u>Make a booking with special fares Family & Friends</u>	13	0	1	12	0.024 s
46	<u>Indigo Booking Flow</u>	<u>Make a booking with special fares Family & Friends and Flexi Plus fare option</u>	14	0	1	13	0.021 s
47	<u>Indigo Booking Flow</u>	<u>Make a booking with special fares Family & Friends and Flexi Plus fare option</u>	43	0	1	42	0.037 s
48	<u>Indigo Booking Flow</u>	<u>Make a booking with special fares Unaccompanied Minor</u>	15	0	1	14	0.027 s
49	<u>Indigo Booking Flow</u>	<u>Make a booking with special fares Unaccompanied Minor and Super6E fare option</u>	17	0	1	16	0.030 s
50	<u>Indigo Booking Flow</u>	<u>Make a booking with FLEXI PLUS</u>	15	0	1	14	0.021 s

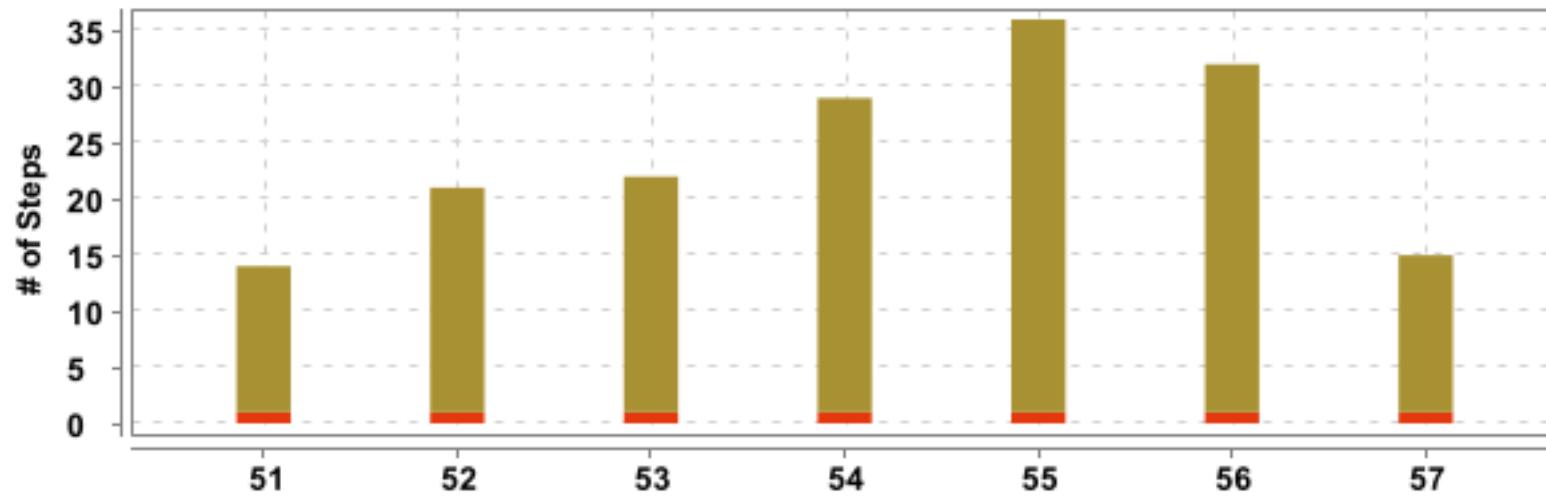


#	Feature Name	Scenario Name	T	P	F	S	Duration
51	<u>Indigo Booking Flow</u>	<u>Make a booking with SUPER 6E CAPITAL</u>	14	0	1	13	0.022 s
52	<u>Roundtrip Functionality</u>	<u>To Verify that user can search a flight for RoundTrip</u>	21	0	1	20	0.043 s
53	<u>Roundtrip Functionality</u>	<u>Make a RoundTrip booking with special fares Armed Forces</u>	22	0	1	21	0.027 s
54	<u>Roundtrip Functionality</u>	<u>To Verify a RoundTrip booking with special fares Family & Friends</u>	29	0	1	28	0.042 s
55	<u>Roundtrip Functionality</u>	<u>Make a RoundTrip booking with special fares Armed Forces and super 6E</u>	36	0	1	35	0.023 s
56	<u>Roundtrip Functionality</u>	<u>To Verify a RoundTrip booking with Flexi plus</u>	32	0	1	31	0.026 s
57	<u>Roundtrip Functionality</u>	<u>To verify that Round trip cannot club two different fares.</u>	15	0	1	14	0.020 s

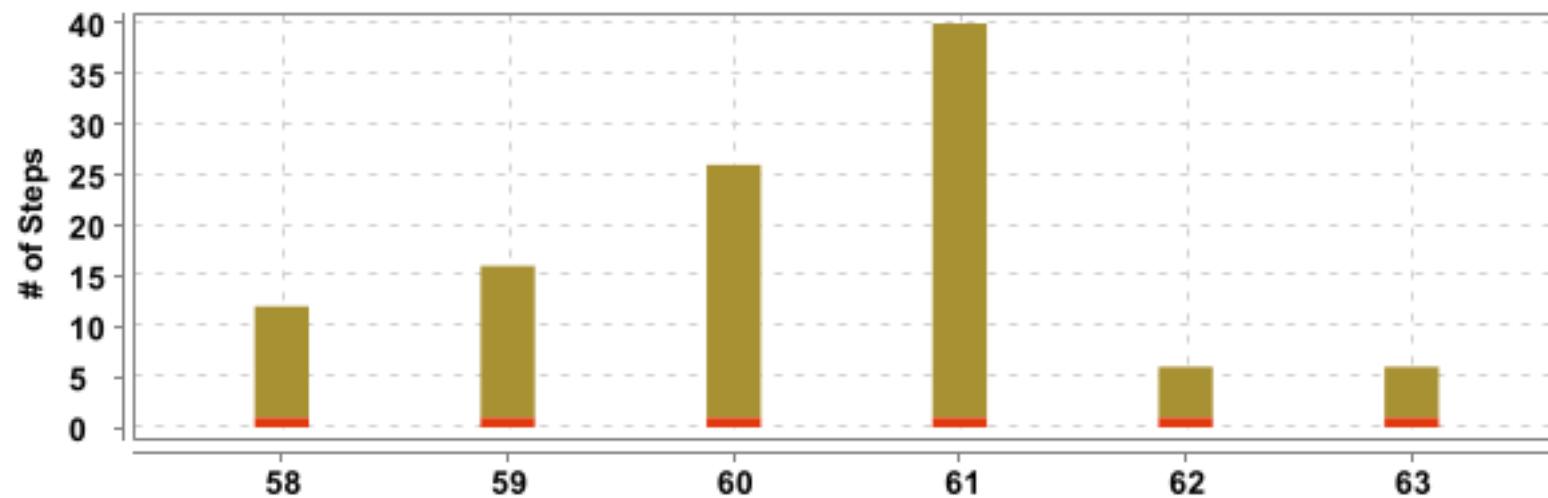


#	Feature Name	Scenario Name	T	P	F	S	Duration
58	<u>MultiCityTrip Functionality</u>	<u>To Verify that user can search a flight for Multicity</u>	12	0	1	11	0.039 s
59	<u>MultiCityTrip Functionality</u>	<u>To Verify that user can modify the MultiCity flight</u>	16	0	1	15	0.023 s
60	<u>MultiCityTrip Functionality</u>	<u>To Verify that user can Make a MultiCity booking with special fares Armed Forces</u>	26	0	1	25	0.033 s
61	<u>MultiCityTrip Functionality</u>	<u>To Verify that Make a Multicity booking with Armed Force and SUPER 6E CAPITAL</u>	40	0	1	39	0.038 s
62	<u>MultiCityTrip Functionality</u>	<u>In multi city we not choose back date for travel</u>	6	0	1	5	0.012 s
63	<u>UndoCheckin Functionality</u>	<u>To Verify User can Check the Undo Check In</u>	6	0	1	5	0.014 s

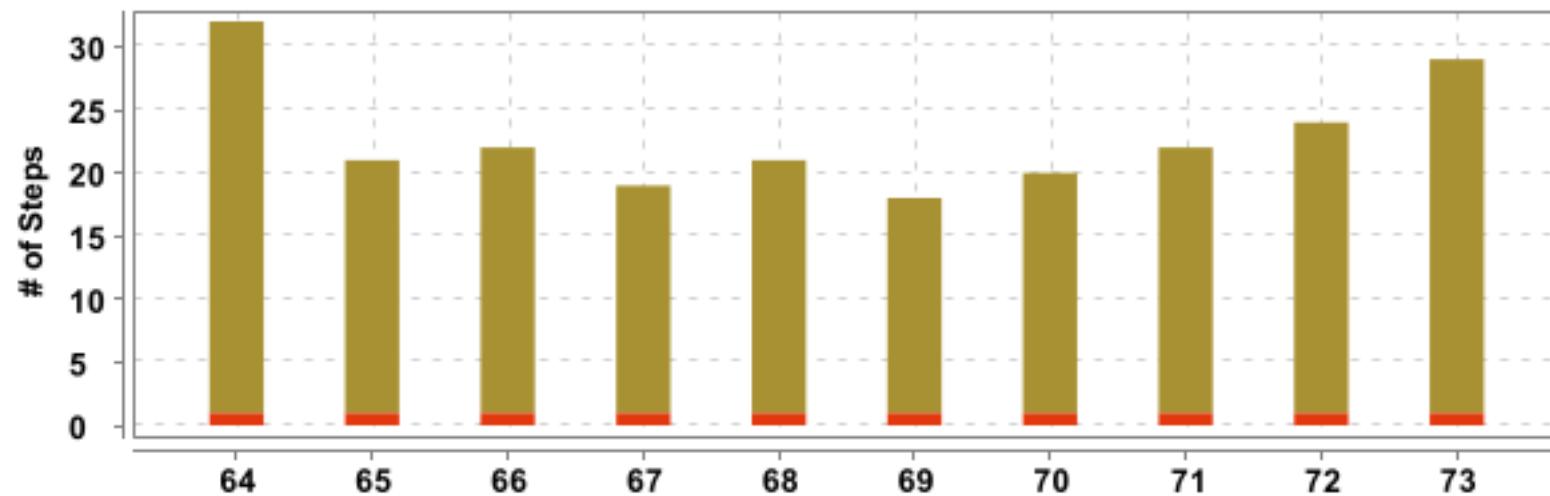

#	Feature Name	Scenario Name	T	P	F	S	Duration
64	<u>Add-on Functionality</u>	<u>To select Six E Prime Add-on for Adult passangers</u>	32	0	1	31	0.061 s
65	<u>Add-on Functionality</u>	<u>To select Fast Forward Add-on for Child</u>	21	0	1	20	0.027 s
66	<u>Add-on Functionality</u>	<u>To select Excess Baggage Add-on</u>	22	0	1	21	0.027 s
67	<u>Add-on Functionality</u>	<u>To select Sports Equipment Add-on</u>	19	0	1	18	0.019 s
68	<u>Add-on Functionality</u>	<u>To select Delayed and Lost Baggage addon</u>	21	0	1	20	0.025 s
69	<u>Add-on Functionality</u>	<u>To select 6E QickBoard Add-on</u>	18	0	1	17	0.019 s
70	<u>Add-on Functionality</u>	<u>To select Lounge Add-on</u>	20	0	1	19	0.024 s
71	<u>Add-on Functionality</u>	<u>To select Travel Assistance Add-on</u>	22	0	1	21	0.033 s
72	<u>Add-on Functionality</u>	<u>To select Indigo Promise Add-on</u>	24	0	1	23	0.022 s
73	<u>Add-on Functionality</u>	<u>To select SixE Seat and Eat Add-on for Senior Citizen passangers</u>	29	0	1	28	0.022 s

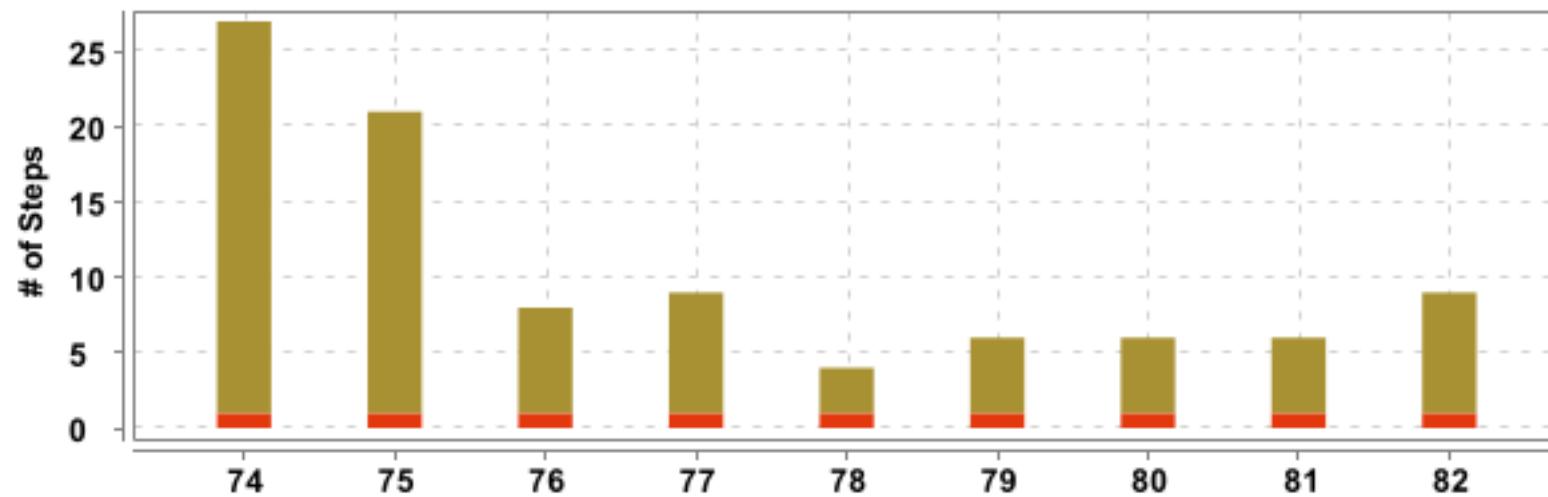

#	Feature Name	Scenario Name	T	P	F	S	Duration
74	<u>Add-on Functionality</u>	<u>Verify For 6e prime fast forward ,meal and Normal seats are free and 50% discount on XL seats</u>	27	0	1	26	0.043 s
75	<u>Add-on Functionality</u>	<u>For flexi plus fare meal is free</u>	21	0	1	20	0.027 s
76	<u>Flight Status Functionality</u>	<u>To verifiy user can check the flight status by using PNR Number</u>	8	0	1	7	0.014 s
77	<u>Flight Status Functionality</u>	<u>To verifiy user can check the flight status By Route</u>	9	0	1	8	0.035 s
78	<u>My Booking Tab</u>	<u>To verify user can check my booking tab</u>	4	0	1	3	0.013 s
79	<u>Update Contact Details</u>	<u>To Verify user can Update Contact</u>	6	0	1	5	0.014 s
80	<u>Update Contact Details</u>	<u>To Verify user can Update Email id</u>	6	0	1	5	0.034 s
81	<u>Update Contact Details</u>	<u>To Verify user can Update Contact and EmailId</u>	6	0	1	5	0.025 s
82	<u>Cancel Flight Booking</u>	<u>To Verify User Can cancel our flight booking</u>	9	0	1	8	0.015 s

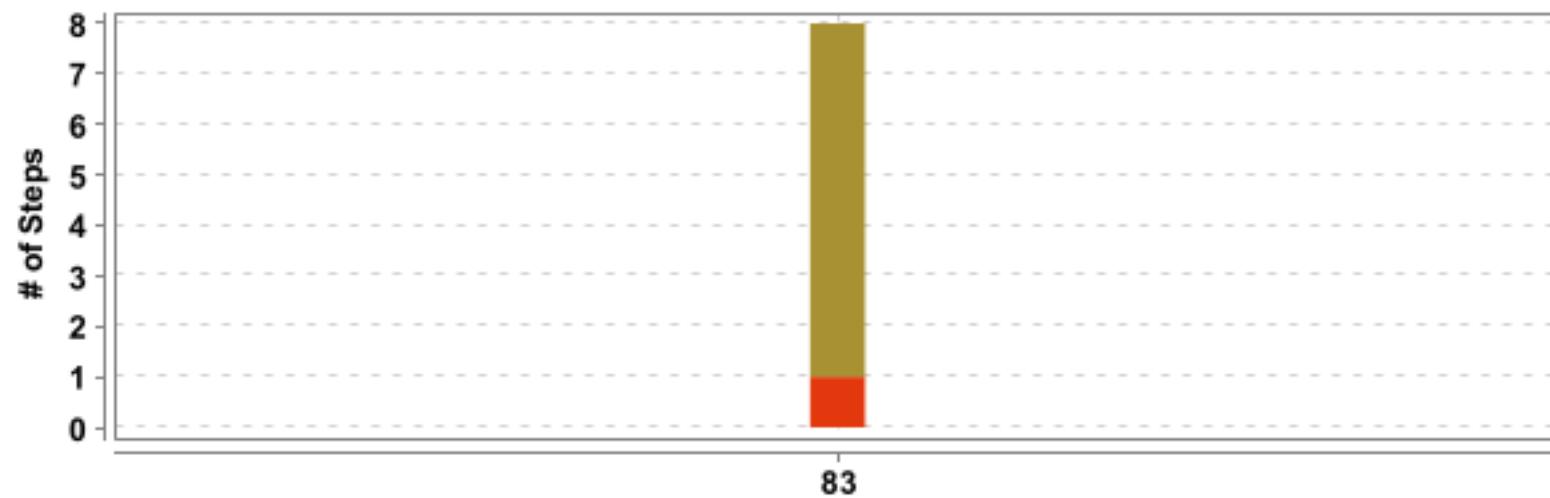


#	Feature Name	Scenario Name	T	P	F	S	Duration
83	<u>Forgot Password</u>	<u>To test forgot password functionality</u>	8	0	1	7	0.021 s

Application Login



Indigo Customer login with Mobile number

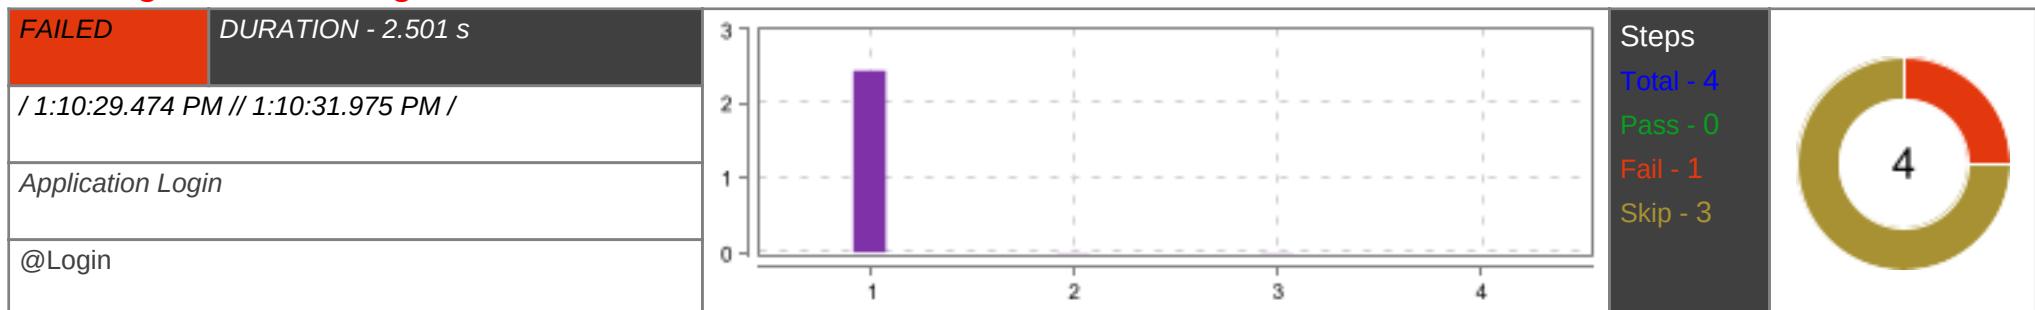


#	Step / Hook Details	Status	Duration
1	<p>Given Launch app and Click on continue with mobile number</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Login1 at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129)</pre>	FAILED	2.441 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Login1.<init>(Login1.java:18) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)</pre>		
2	When User select Password option	SKIPPED	0.004 s
3	And Enters "9766940710" and "Mangeshk@123" and click on submit	SKIPPED	0.003 s
4	Then Verify landing page	SKIPPED	0.002 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.002 s

Indigo Customer login with incorrect Mobile number

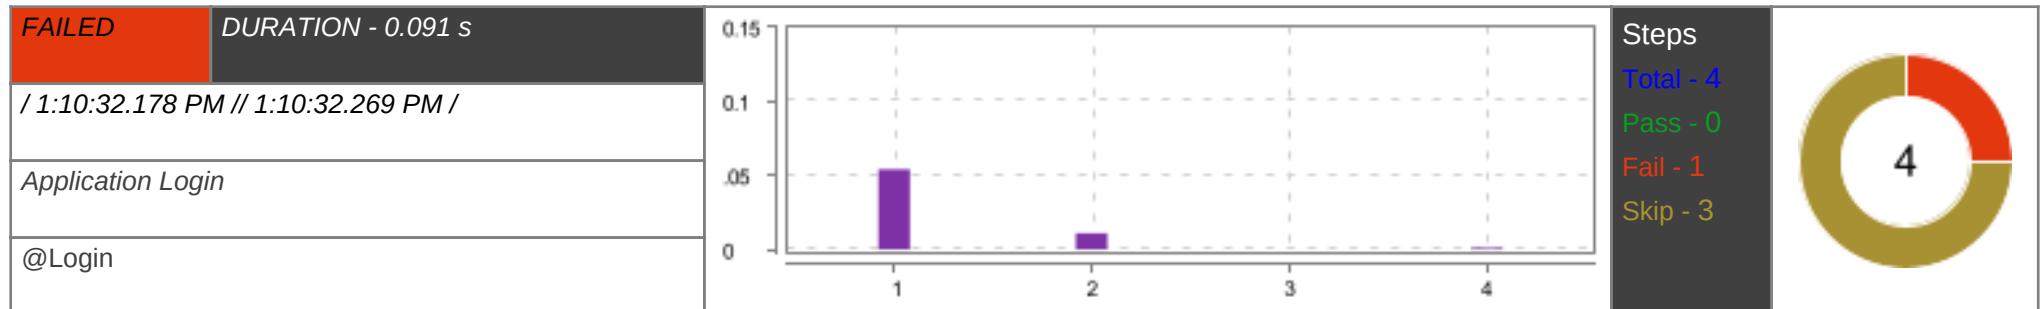


#	Step / Hook Details	Status	Duration
1	<p>Given Launch app and Click on continue with mobile number</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Login1 at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.054 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Login1.<init>(Login1.java:18) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	When User select Password option	SKIPPED	0.011 s
3	And Enters "9625987111" and "Mangeshk@123" and click on submit	SKIPPED	0.000 s
4	Then Verify info message	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.001 s

Indigo Customer login Mobile number char validation

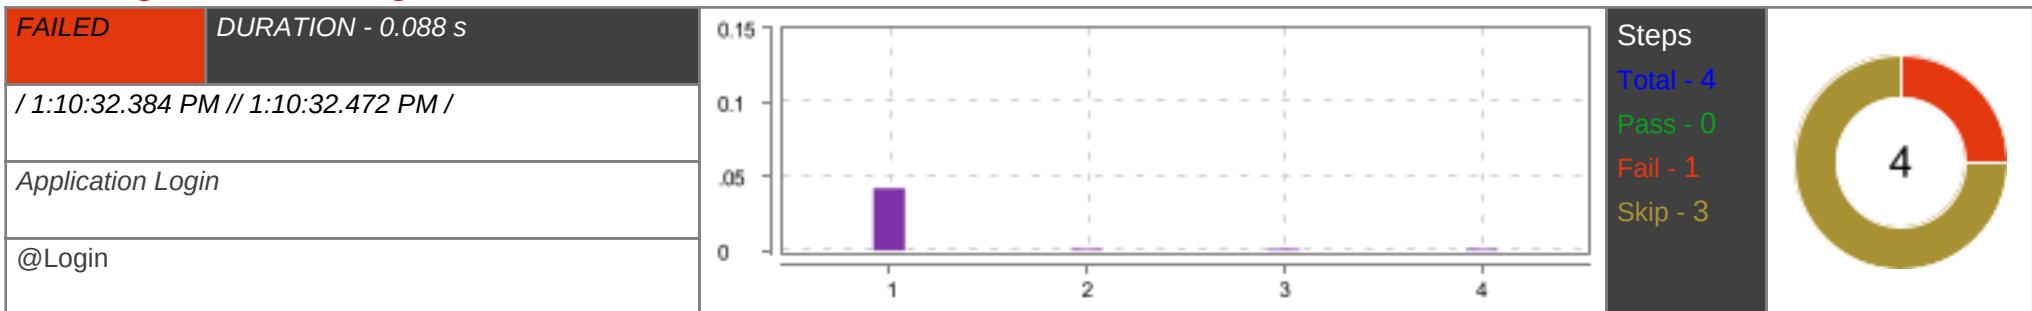


#	Step / Hook Details	Status	Duration
1	Given Launch app and Click on continue with mobile number io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Login1 at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)	FAILED	0.042 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)		

#	Step / Hook Details	Status	Duration
	<p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</p> <p>Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Login1.<init>(Login1.java:18) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)</p>		
2	When User select Password option	SKIPPED	0.001 s
3	And Enters "96259871" and "Mangeshk@123" and click on submit	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
4	Then Verify info message AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	SKIPPED	0.001 s
		FAILED	0.000 s

Indigo Customer login with incorrect Password

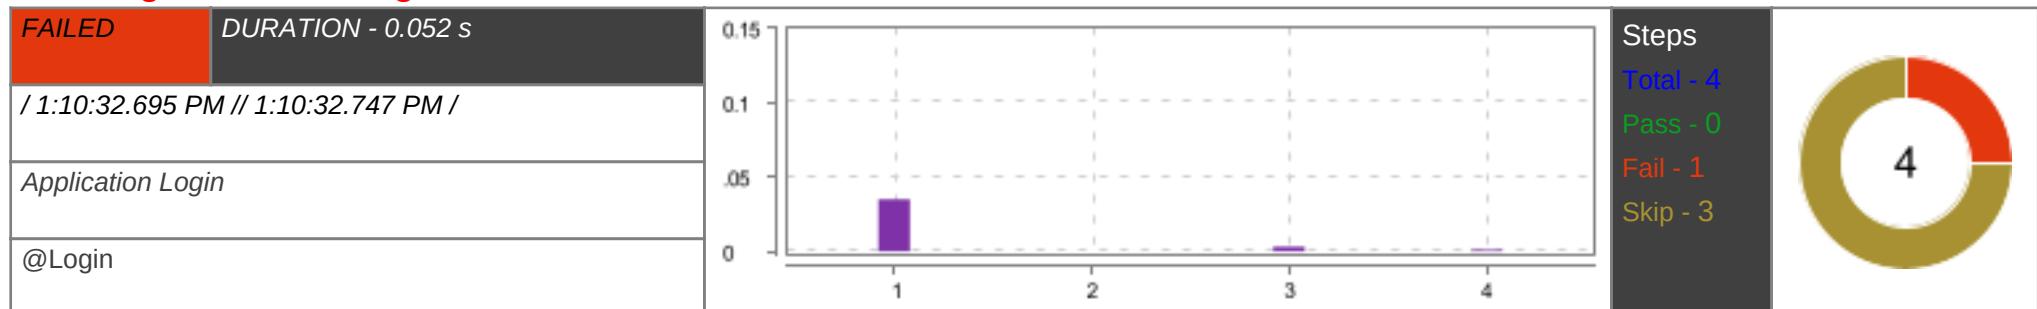


#	Step / Hook Details	Status	Duration
1	Given Launch app and Click on continue with mobile number io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Login1 at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)	FAILED	0.035 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Login1.<init>(Login1.java:18) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) </pre>		
2	When User select Password option	SKIPPED	0.000 s
3	And Enters "9766940710" and "@34#invalid" and click on submit	SKIPPED	0.003 s
4	Then Verify info message	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.001 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Indigo Customer login with incorrect OTP

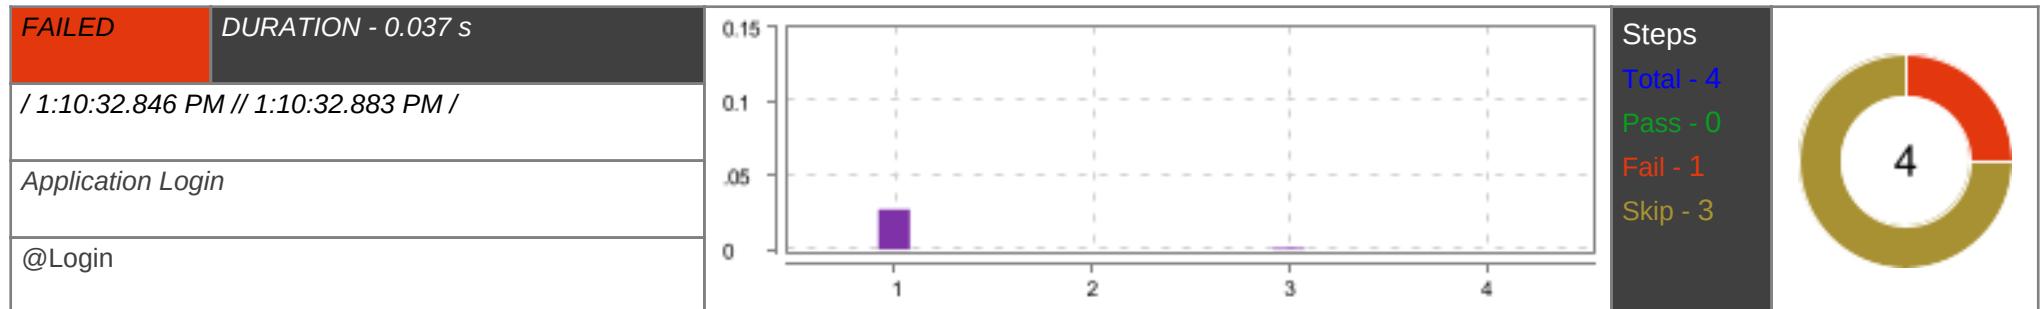


#	Step / Hook Details	Status	Duration
1	Given Launch app and Click on continue with mobile number <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Login1 at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.027 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Login1.<init>(Login1.java:18) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	When User Enters "9766940711" and Click on send OTP	SKIPPED	0.000 s
3	And User Enters "3" and click on confirm	SKIPPED	0.001 s
4	Then Verify incorrect OTP message	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

Indigo Customer login with correct OTP

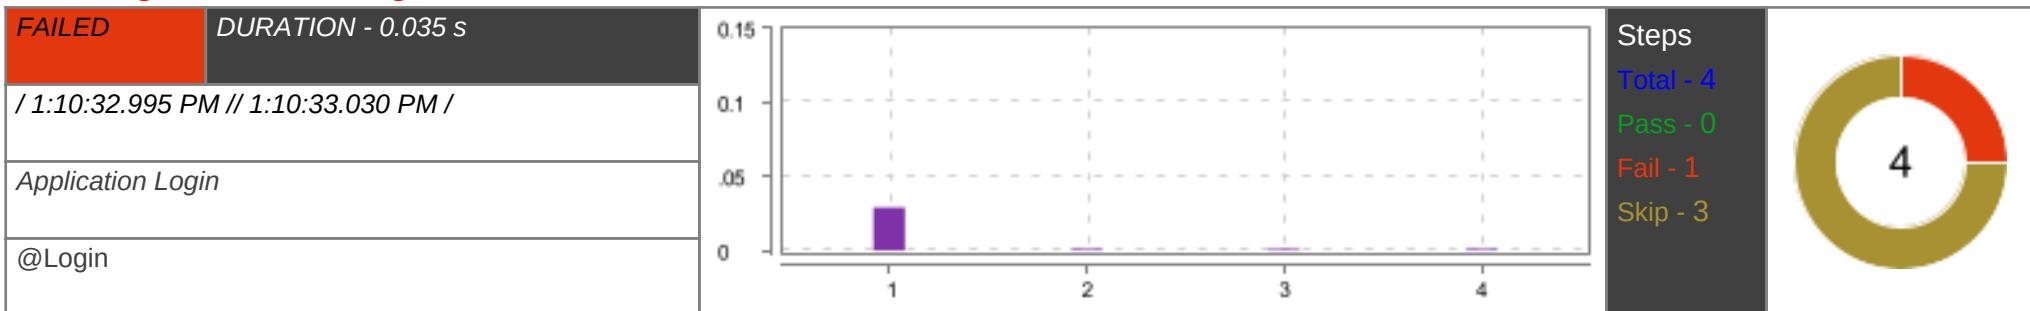


#	Step / Hook Details	Status	Duration
1	Given Launch app and Click on continue with mobile number io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Login1 at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)	FAILED	0.029 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)		

#	Step / Hook Details	Status	Duration
	<p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</p> <p>Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Login1.<init>(Login1.java:18) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)</p>		
2	When User Enters "9766940710" and Click on send OTP	SKIPPED	0.001 s
3	And User clicks on confirm	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
4	Then Verify landing page	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.001 s

Guest Login

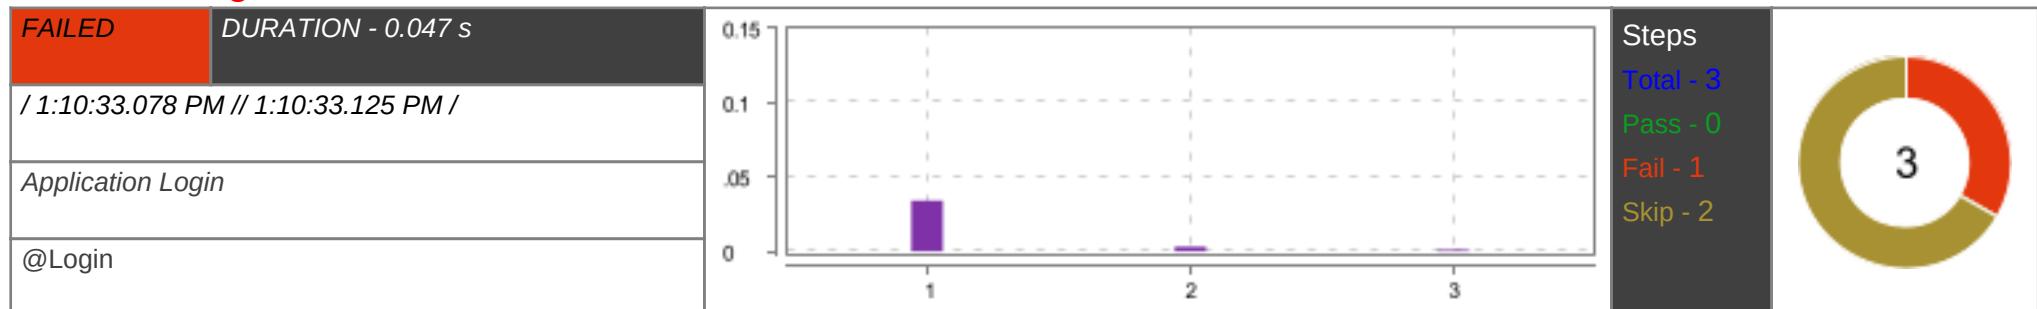

#	Step / Hook Details	Status	Duration
1	Given User Launch the application io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Login1 at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)	FAILED	0.034 s


#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Login1.<init>(Login1.java:18) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) </pre>		
2	When User clicks on continue as guest button	SKIPPED	0.003 s
3	Then User is on homepage	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

Booking Modification Functionality



To Booking Modifaction for Addons.

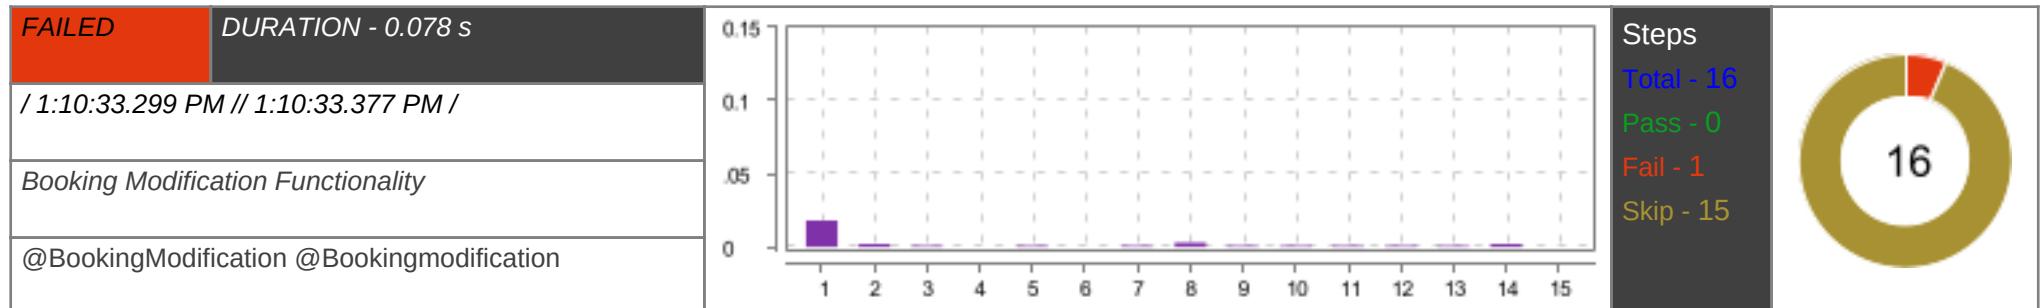


#	Step / Hook Details	Status	Duration
1	<p>Given Launch the Indigo app and login</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Bookingmodifications at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.018 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Bookingmodifications.<init>(Bookingmodifications.java:20) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given user is on home page and click on checkin module	SKIPPED	0.002 s
3	And click on view Itenerary button	SKIPPED	0.001 s
4	And user select additional services option	SKIPPED	0.000 s
5	And verify additional services page	SKIPPED	0.001 s
6	And select excess baggage addon	SKIPPED	0.000 s
7	And select checkbox and confirm it	SKIPPED	0.001 s
8	And click on continue with addon	SKIPPED	0.003 s
9	And skip the travel assistance addons	SKIPPED	0.001 s
10	When user verify payment page	SKIPPED	0.001 s
11	And select Credicard option	SKIPPED	0.001 s
12	And enter valid credentials "4263982640269299" and "02/23" and "837" and "Visa" of credit card	SKIPPED	0.001 s
13	And accept terms and click pay	SKIPPED	0.001 s
14	And Click for confirm Payment	SKIPPED	0.002 s
15	And click on back to merchant page	SKIPPED	0.000 s
16	Then verify modified addon	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.001 s

To Booking Modifaction for Update contact deatials.

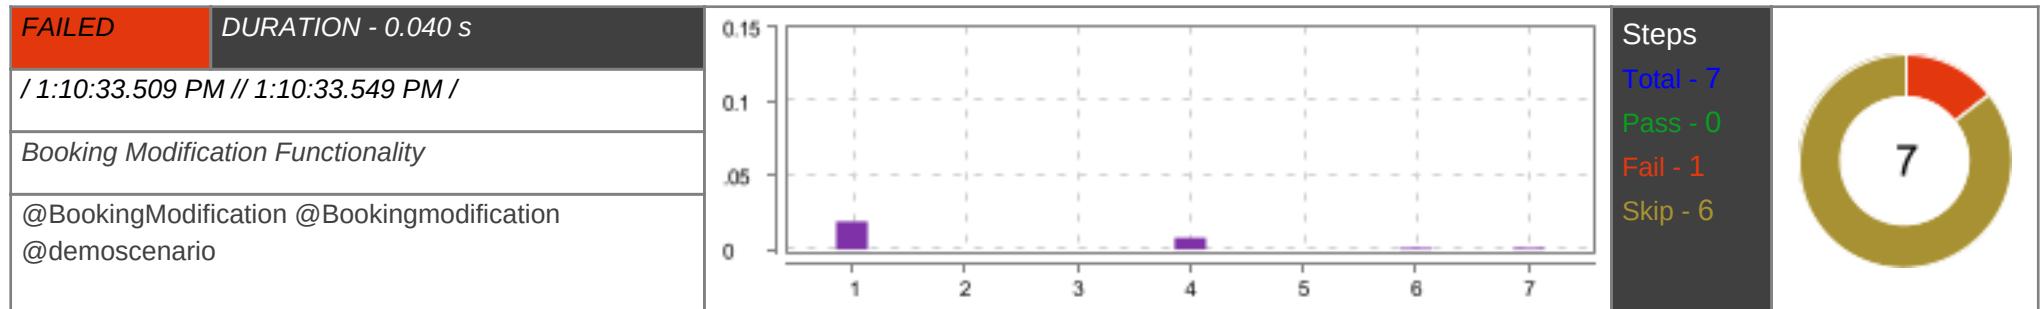


#	Step / Hook Details	Status	Duration
1	<p>Given Launch the Indigo app and login</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Bookingmodifications at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.019 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Bookingmodifications.<init>(Bookingmodifications.java:20) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given user is on home page and click on checkin module	SKIPPED	0.000 s
3	And click on view Itenerary button	SKIPPED	0.000 s
4	And user select update contact details	SKIPPED	0.008 s
5	When user enters "9766940710" and "mk@gmail.com" for update	SKIPPED	0.000 s
6	And click on update details button	SKIPPED	0.001 s
7	Then verify updated contact details	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

To Booking Modifaction for incorrect Update contact deatils.

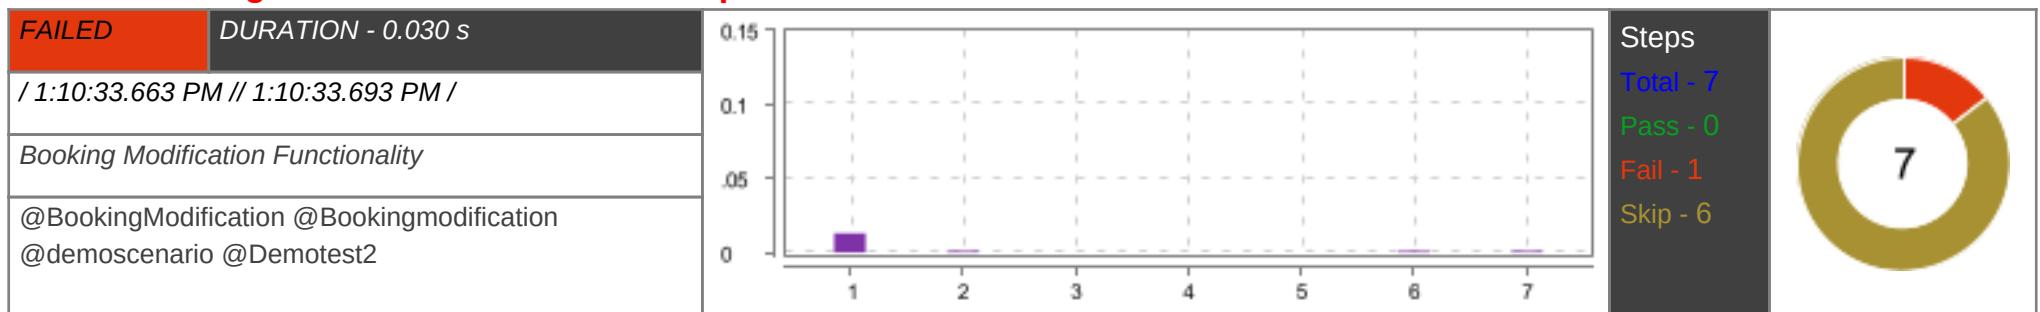


#	Step / Hook Details	Status	Duration
1	Given Launch the Indigo app and login io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Bookingmodifications	FAILED	0.013 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)		

#	Step / Hook Details	Status	Duration
	<pre> at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Bookingmodifications.<init>(Bookingmodifications.java:20) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) </pre>		

#	Step / Hook Details	Status	Duration
2	Given user is on home page and click on checkin module	SKIPPED	0.001 s
3	And click on view Itenerary button	SKIPPED	0.000 s
4	And user select update contact details	SKIPPED	0.000 s
5	When user enters incorrect "762082813" and "mangeshk@gmail.com" for update	SKIPPED	0.000 s
6	And click on update details button	SKIPPED	0.001 s
7	Then verify enter valid contact details message	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.003 s

To Booking Modifaction for Change seats.

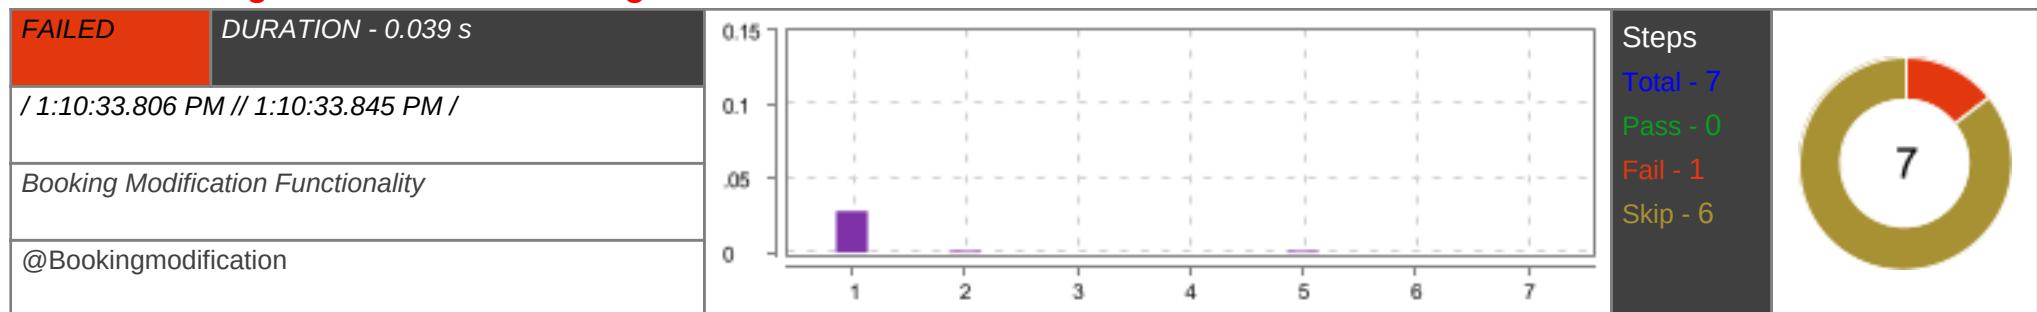

#	Step / Hook Details	Status	Duration
1	Given Launch the Indigo app and login io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Bookingmodifications at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109)	FAILED	0.028 s


#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELGGNLPTP1412', ip: '192.168.29.67' </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Bookingmodifications.<init>(Bookingmodifications.java:20) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) </pre>		
2	Given user is on home page and click on checkin module	SKIPPED	0.001 s
3	And click on view Itenerary button	SKIPPED	0.000 s
4	And user select Change seats	SKIPPED	0.000 s
5	When user select seat	SKIPPED	0.001 s
6	And click on continue for payment	SKIPPED	0.000 s
7	Then verify modified seat change	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Logout Functionality



To test logout functionality

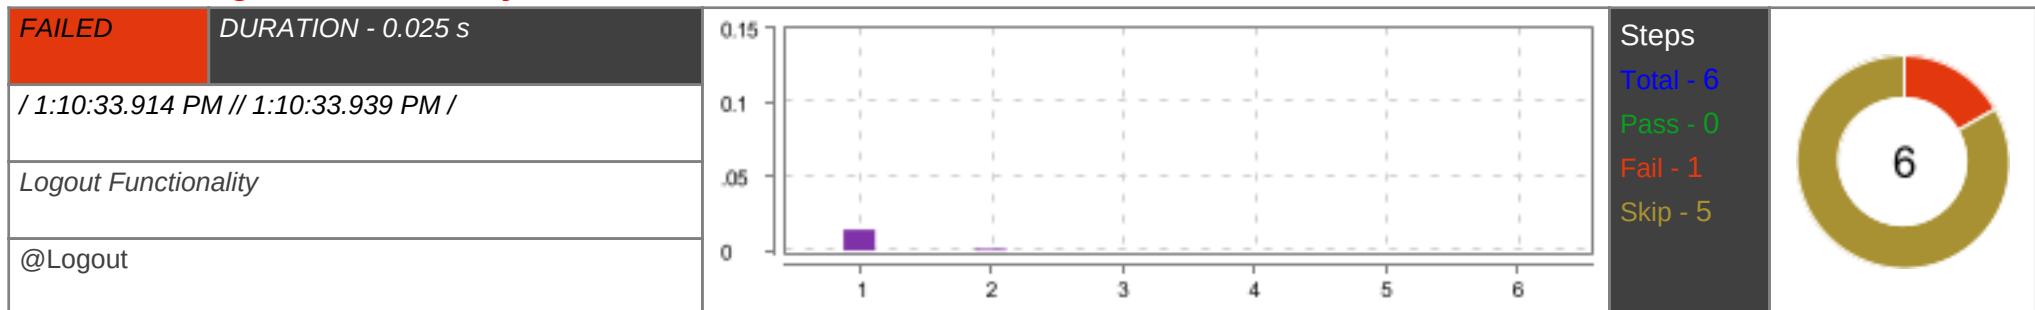


#	Step / Hook Details	Status	Duration
1	<p>Given user is on home page</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Logout at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129)</pre>	FAILED	0.014 s


#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Logout.<init>(Logout.java:19) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)</pre>		
2	And user is click on profile button	SKIPPED	0.001 s
3	And user is scrolled down	SKIPPED	0.000 s
4	And select logout button	SKIPPED	0.000 s
5	And user select yes option	SKIPPED	0.000 s
6	Then user is on the login page	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.002 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Indigo Payment Option

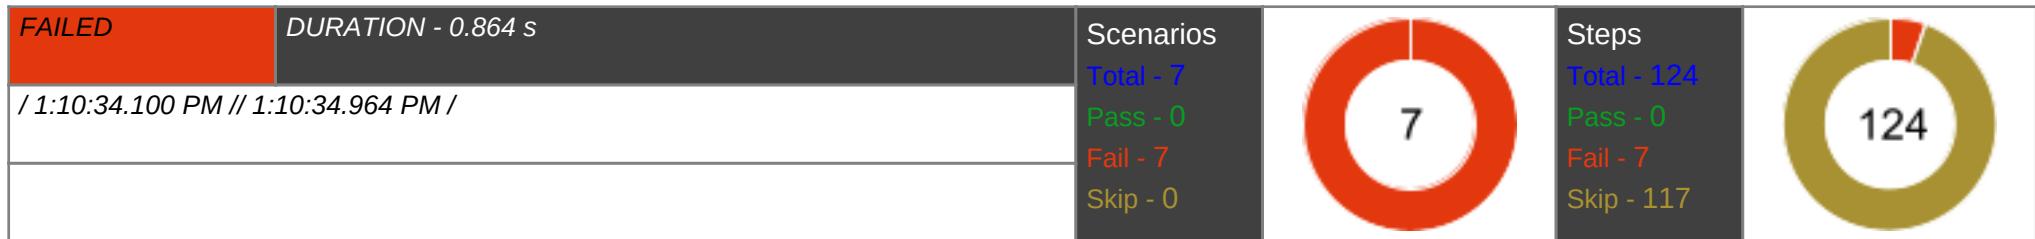

Make a Payment Using UPI

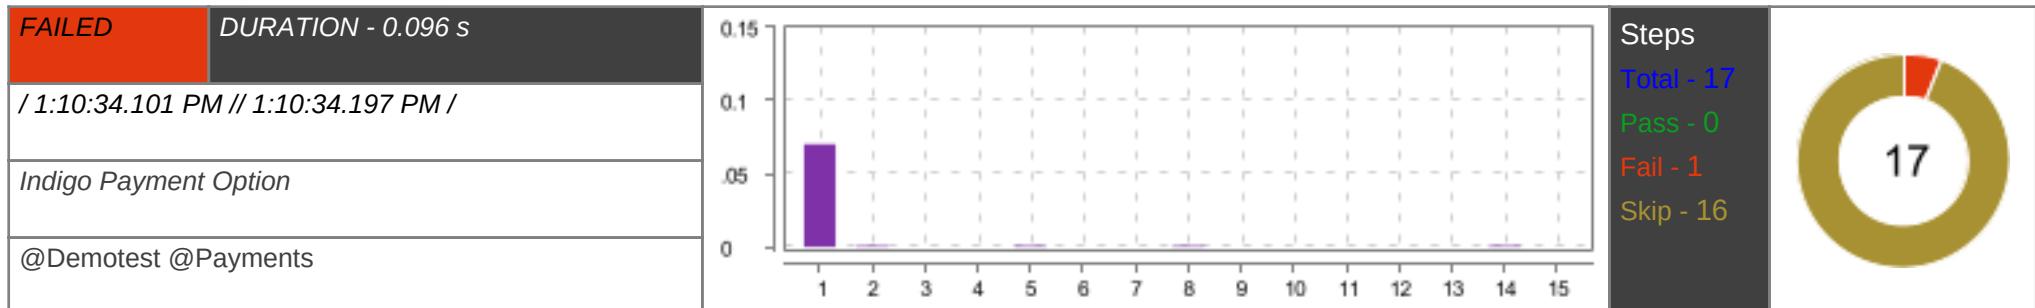


#	Step / Hook Details	Status	Duration
1	<p>Given User logs into the application</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Payments at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</pre>	FAILED	0.070 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Payments.<init>(Payments.java:31) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)</pre>		
2	And User is on Book flight page	SKIPPED	0.001 s
3	When User Select "DEL" and "MUM" cities	SKIPPED	0.000 s
4	And User select a Departure date	SKIPPED	0.000 s
5	And User click on Done button	SKIPPED	0.001 s
6	And User click on search flight	SKIPPED	0.000 s
7	And User click on continue button	SKIPPED	0.000 s
8	And User skips flexi upgrade option	SKIPPED	0.001 s
9	And User enter details for passenger	SKIPPED	0.000 s
10	And User skips addons and insurance	SKIPPED	0.000 s
11	Given User is on Payment Page	SKIPPED	0.000 s
12	And User select payment method UPI	SKIPPED	0.000 s
13	And User enter "john@sbi" Virtual Payment Address	SKIPPED	0.000 s
14	And User agrees to terms and conditions	SKIPPED	0.001 s
15	Then User click on pay button	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
16	And User proceed to complete the payment	SKIPPED	0.000 s
17	And Ticket is confirmed	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.001 s

Make a Payment Using Credit Card

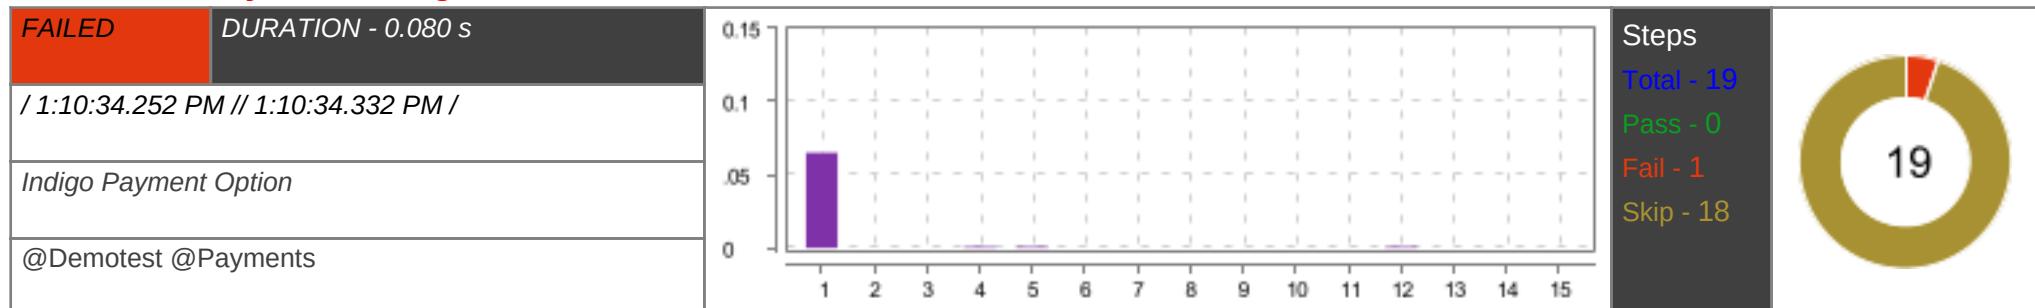


#	Step / Hook Details	Status	Duration
1	Given User logs into the application io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Payments at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)	FAILED	0.065 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Payments.<init>(Payments.java:31) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)</pre>		
2	And User is on Book flight page	SKIPPED	0.000 s
3	When User Select "DEL" and "MUM" cities	SKIPPED	0.000 s
4	And User select a Departure date	SKIPPED	0.001 s
5	And User click on Done button	SKIPPED	0.001 s
6	And User click on search flight	SKIPPED	0.000 s
7	And User click on continue button	SKIPPED	0.000 s
8	And User skips flexi upgrade option	SKIPPED	0.000 s
9	And User enter details for passenger	SKIPPED	0.000 s
10	And User skips addons and insurance	SKIPPED	0.000 s
11	Given User is on Payment Page	SKIPPED	0.000 s
12	And User select payment method Credit Card	SKIPPED	0.001 s
13	And User enters card number "5200000000000007"	SKIPPED	0.000 s
14	And User enters expiry date "0123"	SKIPPED	0.000 s
15	And User enters cvv number "123"	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
16	And User enters fullname "Lee"	SKIPPED	0.001 s
17	And User agrees to terms and conditions	SKIPPED	0.000 s
18	Then User click on pay button	SKIPPED	0.000 s
19	And User proceed to complete the payment	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.001 s

Make a Payment Using Debit Card

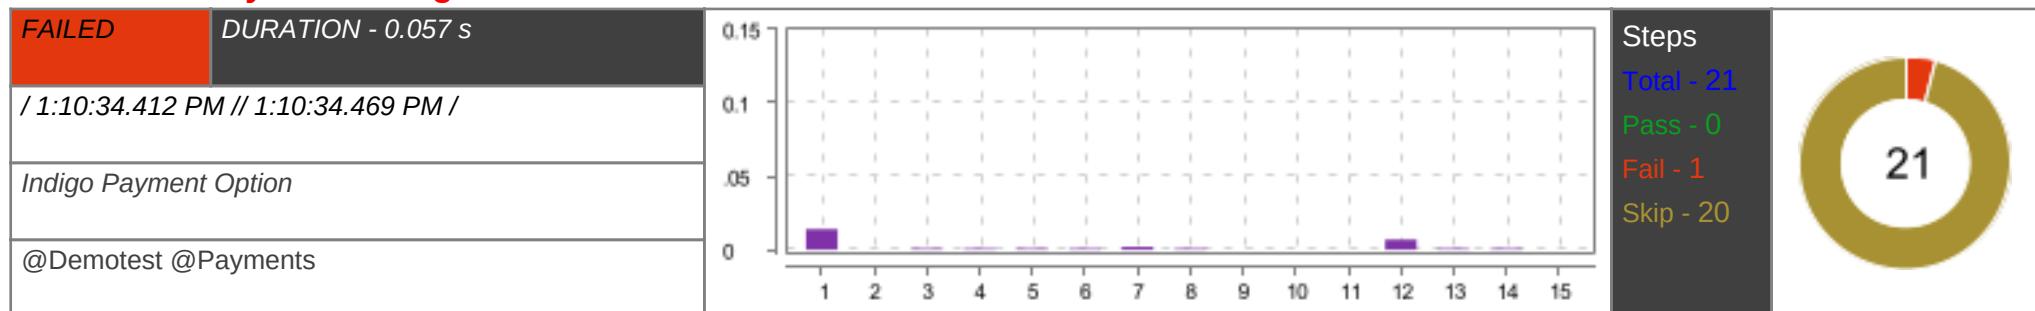


#	Step / Hook Details	Status	Duration
1	Given User logs into the application io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Payments at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129)	FAILED	0.014 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Payments.<init>(Payments.java:31) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)</pre>		
2	And User is on Book flight page	SKIPPED	0.000 s
3	When User Select "DEL" and "MUM" cities	SKIPPED	0.001 s
4	And User select a Departure date	SKIPPED	0.001 s
5	And User click on Done button	SKIPPED	0.001 s
6	And User click on search flight	SKIPPED	0.001 s
7	And User click on continue button	SKIPPED	0.002 s
8	And User skips flexi upgrade option	SKIPPED	0.001 s
9	And User enter details for passenger	SKIPPED	0.000 s
10	And User skips addons and insurance	SKIPPED	0.000 s
11	Given User is on Payment Page	SKIPPED	0.000 s
12	And User select payment method Debit Card	SKIPPED	0.007 s
13	And User select search and select a "State Bank of India"	SKIPPED	0.001 s
14	And User enters debit card number "5200000000000007"	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
15	And User enters debit expiry date "0123"	SKIPPED	0.000 s
16	And User enters debit cvv number "123"	SKIPPED	0.000 s
17	And User enters debit fullname "admin"	SKIPPED	0.000 s
18	And User agrees to terms and conditions	SKIPPED	0.000 s
19	Then User click on pay button	SKIPPED	0.001 s
20	And User proceed to complete the payment	SKIPPED	0.002 s
21	And Ticket is confirmed	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Make a Payment Using 6E Rewards

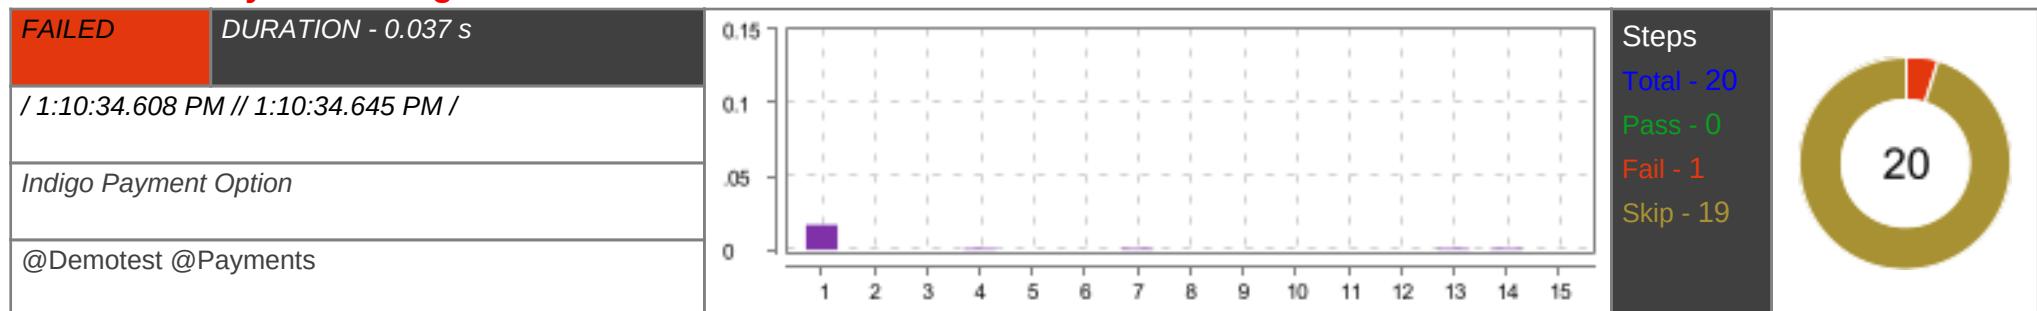


#	Step / Hook Details	Status	Duration
1	Given User logs into the application io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Payments at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)	FAILED	0.017 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid </pre>		

#	Step / Hook Details	Status	Duration
	<p>address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67'</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553)</p> <p>at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156)</p> <p>at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80)</p> <p>at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92)</p> <p>at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117)</p> <p>at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64)</p> <p>at testApp.Payments.<init>(Payments.java:31)</p> <p>... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver</p> <p>at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274)</p> <p>at java.base/java.util.Optional.orElseGet(Optional.java:369)</p> <p>at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535)</p> <p>... 57 more Caused by: java.net.ConnectException: Connection refused: no further information</p> <p>at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method)</p> <p>at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779)</p> <p>at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)</p> <p>at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)</p> <p>at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)</p> <p>at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)</p> <p>at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)</p> <p>at java.base/java.lang.Thread.run(Thread.java:834)</p>		
2	And User is on Book flight page	SKIPPED	0.000 s
3	When User Select "DEL" and "MUM" cities	SKIPPED	0.000 s
4	And User select a Departure date	SKIPPED	0.001 s
5	And User click on Done button	SKIPPED	0.000 s
6	And User click on search flight	SKIPPED	0.000 s
7	And User click on continue button	SKIPPED	0.001 s
8	And User skips flexi upgrade option	SKIPPED	0.000 s
9	And User enter details for passenger	SKIPPED	0.000 s
10	And User skips addons and insurance	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
11	And User navigate to Payment Page	SKIPPED	0.000 s
12	And User select payment method 6E Rewards	SKIPPED	0.000 s
13	And User enters card number "5200000000000007"	SKIPPED	0.001 s
14	And User enters expiry date "0123"	SKIPPED	0.001 s
15	And User enters cvv number "123"	SKIPPED	0.000 s
16	And User enters fullname "admin"	SKIPPED	0.000 s
17	And User agrees to terms and conditions	SKIPPED	0.000 s
18	Then User click on pay button	SKIPPED	0.001 s
19	And User proceed to complete the payment	SKIPPED	0.000 s
20	And Ticket is confirmed	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Make a Payment Using Net Banking

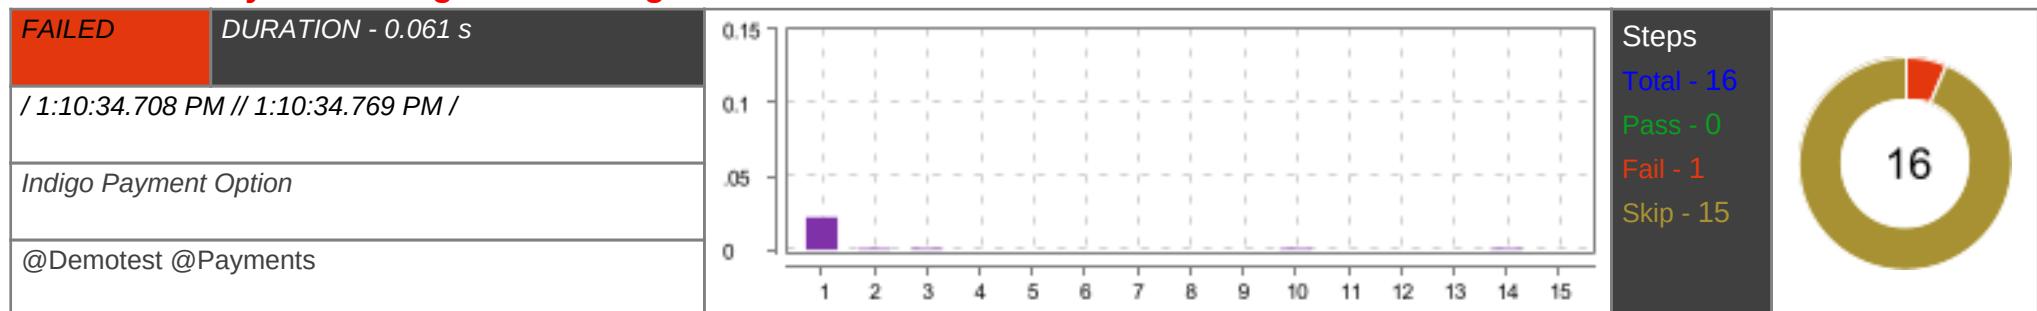


#	Step / Hook Details	Status	Duration
1	<p>Given User logs into the application</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Payments at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85)</pre>	FAILED	0.022 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Payments.<init>(Payments.java:31) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) </pre>		
2	And User is on Book flight page	SKIPPED	0.001 s
3	When User Select "DEL" and "MUM" cities	SKIPPED	0.001 s
4	And User select a Departure date	SKIPPED	0.000 s
5	And User click on Done button	SKIPPED	0.000 s
6	And User click on search flight	SKIPPED	0.000 s
7	And User click on continue button	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
8	And User skips flexi upgrade option	SKIPPED	0.000 s
9	And User enter details for passenger	SKIPPED	0.000 s
10	And User skips addons and insurance	SKIPPED	0.001 s
11	Given User is on Payment Page	SKIPPED	0.000 s
12	And User select payment method Net Banking	SKIPPED	0.000 s
13	And User click on other bank option	SKIPPED	0.000 s
14	And User select test bank for net banking	SKIPPED	0.001 s
15	And User agrees to terms and conditions	SKIPPED	0.000 s
16	Then User click on pay button	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

Make a Payment Using Wallet

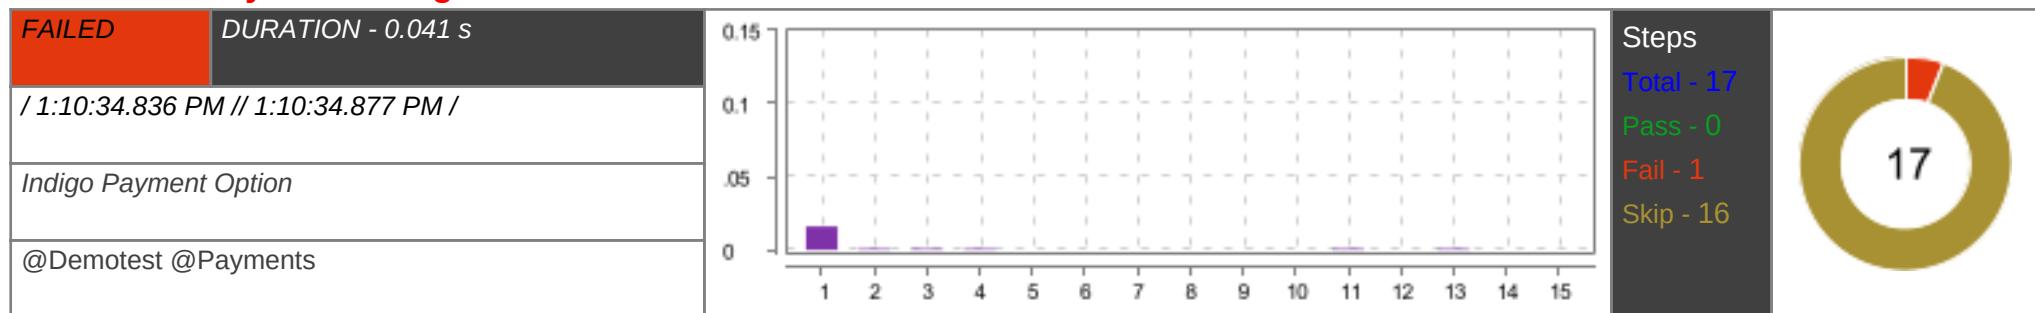


#	Step / Hook Details	Status	Duration
1	Given User logs into the application io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Payments at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57)	FAILED	0.016 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Payments.<init>(Payments.java:31) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)</pre>		
2	And User is on Book flight page	SKIPPED	0.001 s
3	When User Select "DEL" and "MUM" cities	SKIPPED	0.001 s
4	And User select a Departure date	SKIPPED	0.001 s
5	And User click on Done button	SKIPPED	0.000 s
6	And User click on search flight	SKIPPED	0.000 s
7	And User click on continue button	SKIPPED	0.000 s
8	And User skips flexi upgrade option	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
9	And User enter details for passenger	SKIPPED	0.000 s
10	And User skips addons and insurance	SKIPPED	0.000 s
11	Given User is on Payment Page	SKIPPED	0.001 s
12	And User select payment method Wallet	SKIPPED	0.000 s
13	And User select a Wallet "Paytm" from displayed option	SKIPPED	0.001 s
14	And User enters mobile "9999999999"	SKIPPED	0.000 s
15	And User agrees to terms and conditions	SKIPPED	0.000 s
16	Then User click on pay button	SKIPPED	0.000 s
17	And Payment initiated continue	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.008 s

Make a Payment Using hold and pay option

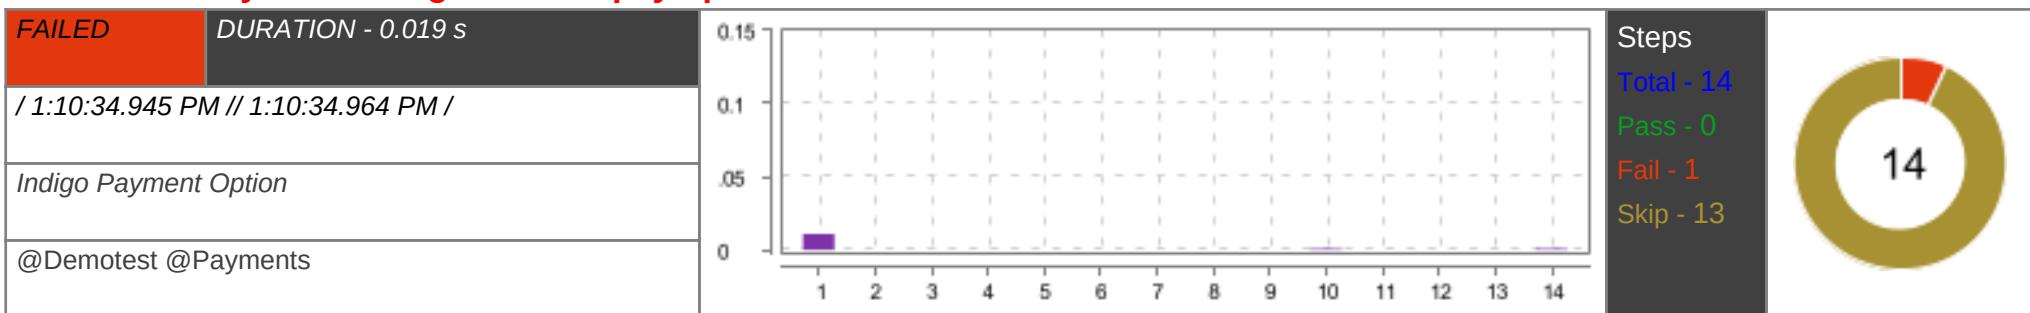

#	Step / Hook Details	Status	Duration
1	Given User logs into the application io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Payments at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57)	FAILED	0.011 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) </pre>		


#	Step / Hook Details	Status	Duration
	<pre> at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Payments.<init>(Payments.java:31) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)</pre>		
2	And User is on Book flight page	SKIPPED	0.000 s
3	When User Select "DEL" and "MUM" cities	SKIPPED	0.000 s
4	And User select a Departure date in future	SKIPPED	0.000 s
5	And User click on Done button	SKIPPED	0.000 s
6	And User click on search flight	SKIPPED	0.000 s
7	And User click on continue button	SKIPPED	0.000 s
8	And User skips flexi upgrade option	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
9	And User enter details for passenger	SKIPPED	0.000 s
10	And User skips addons and insurance	SKIPPED	0.001 s
11	Given User is on Payment Page	SKIPPED	0.000 s
12	And User click on hold and pay option	SKIPPED	0.000 s
13	And User click on Hold button	SKIPPED	0.000 s
14	Then User verify ticket confirmation	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

BoardingPass Functionality



To verify the process for Boarding pass with valid Credentials

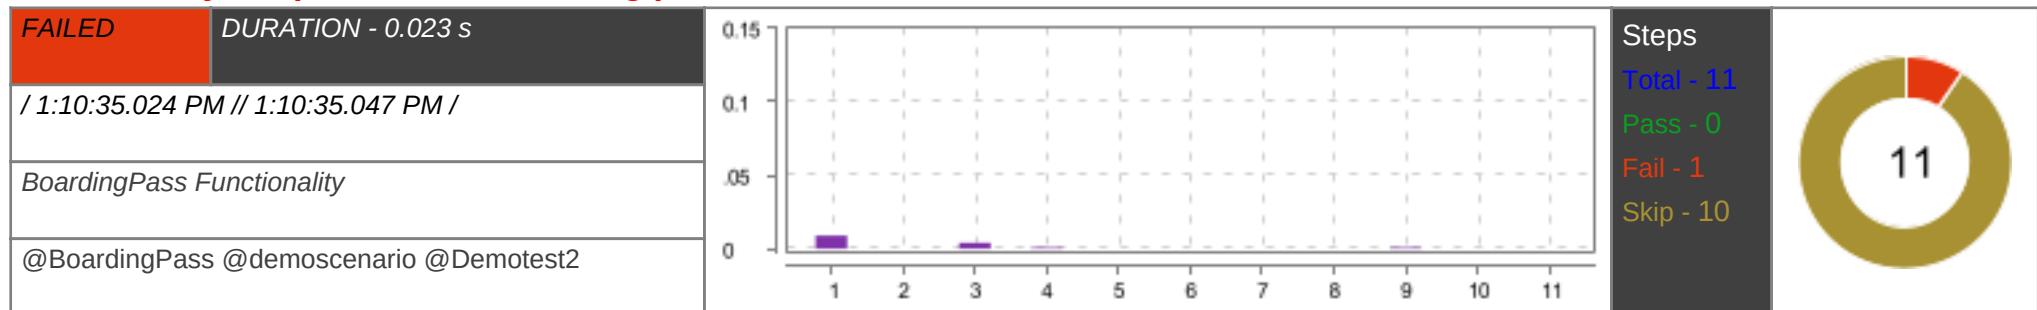


#	Step / Hook Details	Status	Duration
1	Given Launch the Application and Login io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.BoardingPass at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)	FAILED	0.009 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)		

#	Step / Hook Details	Status	Duration
	<p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</p> <p>Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.BoardingPass.<init>(BoardingPass.java:23) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)</p>		
2	Given user is on Home Page and click on Checkin	SKIPPED	0.000 s
3	When user click on find booking	SKIPPED	0.004 s

#	Step / Hook Details	Status	Duration
4	And user Enter PNR and "Kulkarni"	SKIPPED	0.001 s
5	And user click On Submit	SKIPPED	0.000 s
6	And user click On Check IN Now button	SKIPPED	0.000 s
7	When user add the Bag count and Click on Next	SKIPPED	0.000 s
8	And user Skip the addons page and Click on continue	SKIPPED	0.000 s
9	And user select Not interested for Travel Assistance	SKIPPED	0.001 s
10	And user Enter "8668399134" and "yoyo3557@gmail.com" and "latur" and "413512" in Web Check In from	SKIPPED	0.000 s
11	Then verify user complete Boarding Pass Process	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.001 s

To Verify the process for Boarding Pass with invalid credentials

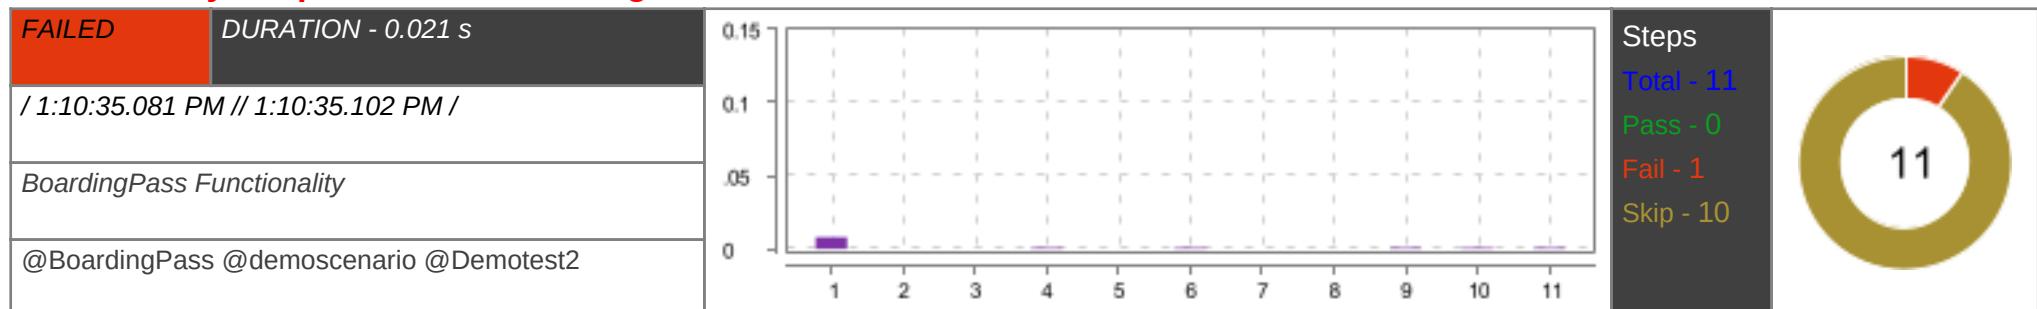


#	Step / Hook Details	Status	Duration
1	Given Launch the Application and Login io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.BoardingPass at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84)	FAILED	0.008 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) </pre>		

#	Step / Hook Details	Status	Duration
	<p>... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.BoardingPass.<init>(BoardingPass.java:23)</p> <p>... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)</p>		
2	Given user is on Home Page and click on Checkin	SKIPPED	0.000 s
3	And user get a pnr and click on find booking	SKIPPED	0.000 s
4	And user Enter PNR and "Kulkarni"	SKIPPED	0.001 s
5	And user click On Submit	SKIPPED	0.000 s
6	And user click On Check IN Now button	SKIPPED	0.001 s
7	When user add the Bag count and Click on Next	SKIPPED	0.000 s
8	And user Skip the addons page and Click on continue	SKIPPED	0.000 s
9	And user select Not intrested for Travel Asistance	SKIPPED	0.001 s
10	And user Enter "567" and "yoyo3557@gmail.com" and "pune" and "413512" in Web Check In from	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
11	Then Verify contact info message AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	SKIPPED	0.001 s
		FAILED	0.001 s

To verify the process for complete the HealthFrom

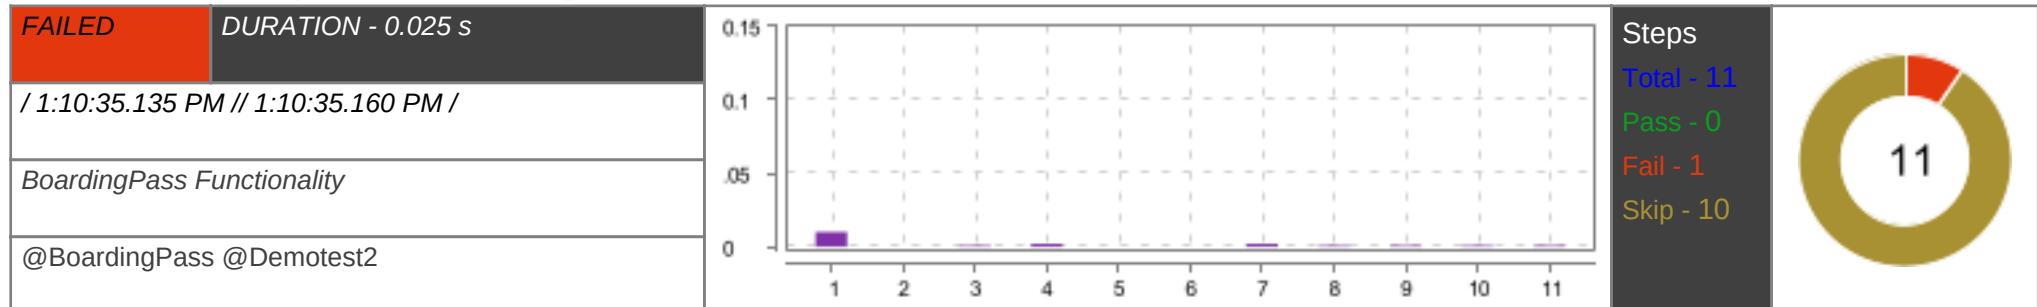

#	Step / Hook Details	Status	Duration
1	Given Launch the Application and Login io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.BoardingPass at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)	FAILED	0.010 s


#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.BoardingPass.<init>(BoardingPass.java:23) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) </pre>		
2	Given user is on Home Page and click on Checkin	SKIPPED	0.000 s
3	When user get new PNR and click on find booking	SKIPPED	0.001 s
4	And user Enter PNR and "Kulkarni"	SKIPPED	0.002 s
5	And user click On Submit	SKIPPED	0.000 s
6	And user click On Check IN Now button	SKIPPED	0.000 s
7	When user add the Bag count and Click on Next	SKIPPED	0.002 s
8	And user Skip the addons page and Click on continue	SKIPPED	0.001 s
9	And user select Not intrested for Travel Asistance	SKIPPED	0.001 s
10	And user Enter "8668345124" and "yoyo3557@gmail.com" and "latur" and "413512" in Web Check In from	SKIPPED	0.001 s
11	Then verify user complete Boarding Pass Process	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Update Profile Details



To verify user can update First Name

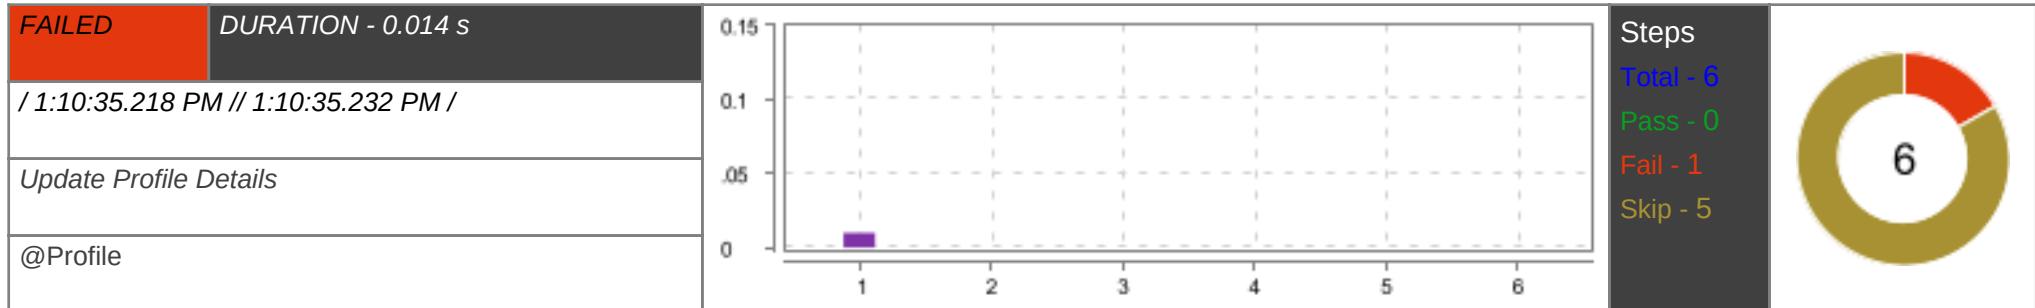


#	Step / Hook Details	Status	Duration
1	<p>Given Launch and login into the application</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Profile at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</pre>	FAILED	0.010 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Profile.<init>(Profile.java:18) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)</pre>		
2	And User is on Profile Page	SKIPPED	0.000 s
3	And User click on Edit Profile button	SKIPPED	0.000 s
4	When User Changes First Name "Mangesh"	SKIPPED	0.000 s
5	And User click on Update Profile button	SKIPPED	0.000 s
6	Then Profile update is successfull	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.001 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

To verify user can update Last Name

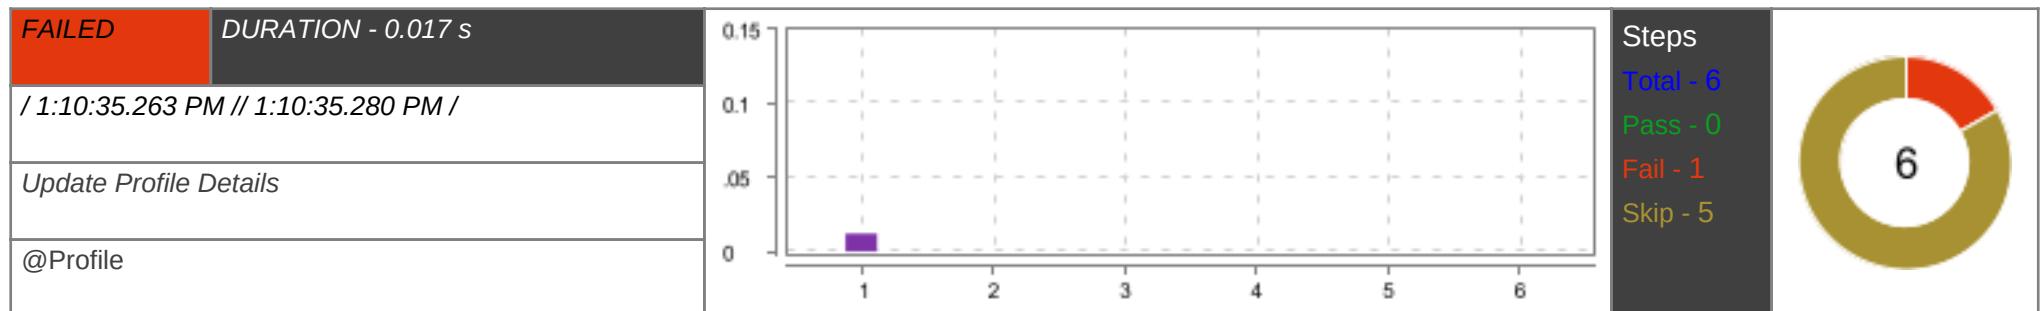


#	Step / Hook Details	Status	Duration
1	<p>Given Launch and login into the application</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Profile at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.012 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Profile.<init>(Profile.java:18) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	And User is on Profile Page	SKIPPED	0.000 s
3	And User click on Edit Profile button	SKIPPED	0.000 s
4	When User Changes Last Name "Kulkarni"	SKIPPED	0.000 s
5	And User click on Update Profile button	SKIPPED	0.000 s
6	Then Profile update is successfull	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

To verify user can update Email id

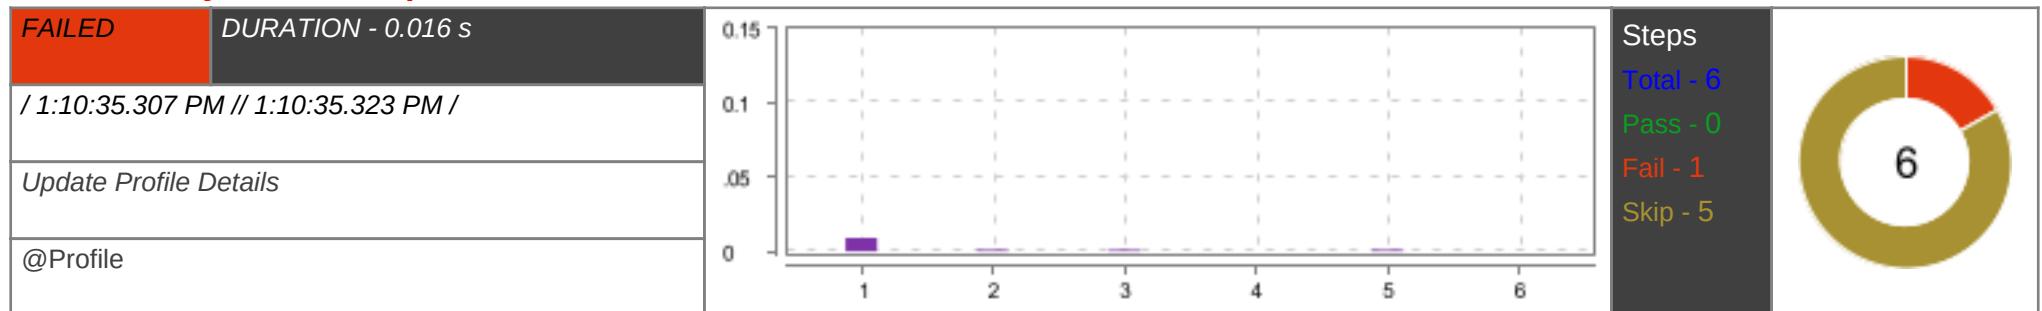


#	Step / Hook Details	Status	Duration
1	Given Launch and login into the application io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Profile at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)	FAILED	0.009 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)		

#	Step / Hook Details	Status	Duration
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Profile.<init>(Profile.java:18) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	And User is on Profile Page	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
3	And User click on Edit Profile button	SKIPPED	0.001 s
4	When User Changes Email ID "mk@gmail.com"	SKIPPED	0.000 s
5	And User click on Update Profile button	SKIPPED	0.001 s
6	Then Profile update is successfull	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

To verify user can update Contact

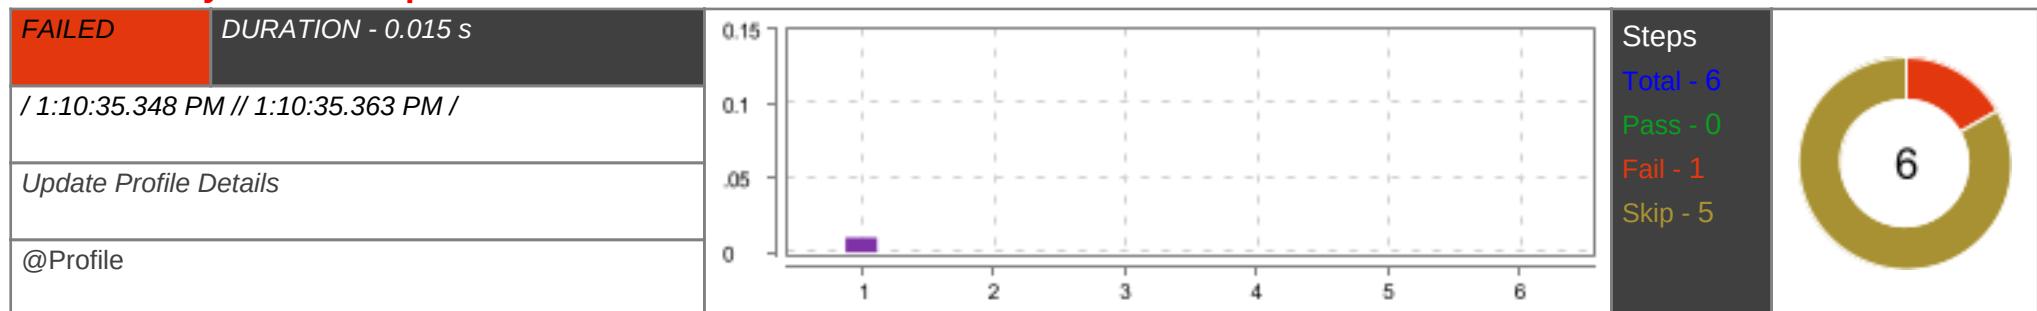


#	Step / Hook Details	Status	Duration
1	<p>Given Launch and login into the application</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Profile at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129)</pre>	FAILED	0.010 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Profile.<init>(Profile.java:18) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)</pre>		
2	And User is on Profile Page	SKIPPED	0.000 s
3	And User click on Edit Profile button	SKIPPED	0.000 s
4	When User Changes contact "9766940710"	SKIPPED	0.000 s
5	And User click on Update Profile button	SKIPPED	0.000 s
6	Then Profile update is successfull	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.001 s

To verify user can update Profile Details

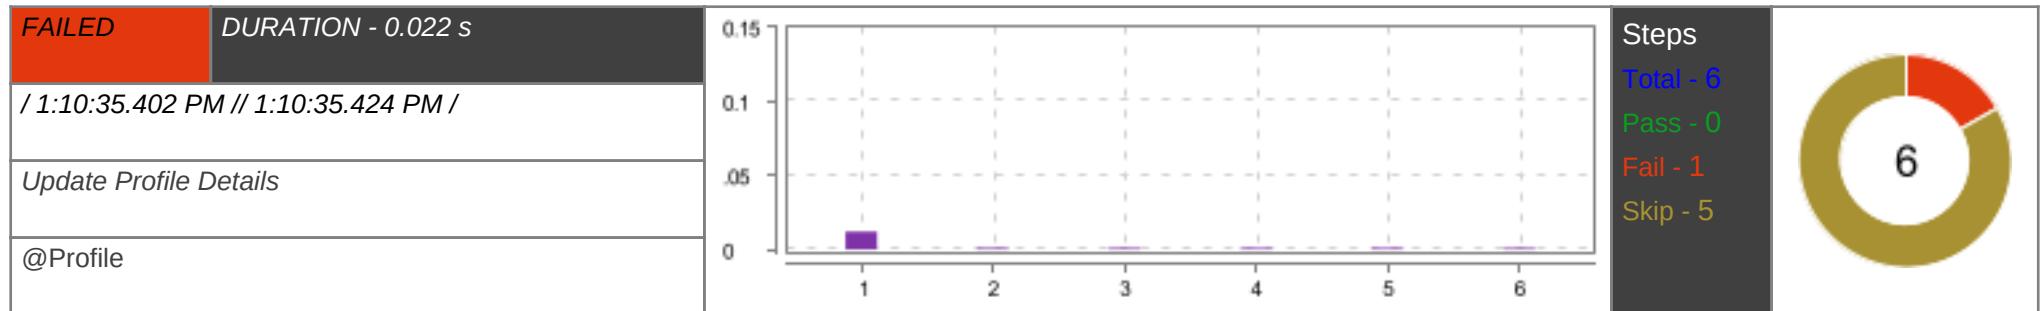

#	Step / Hook Details	Status	Duration
1	<p>Given Launch and login into the application</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Profile at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.012 s


#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Profile.<init>(Profile.java:18) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	And User is on Profile Page	SKIPPED	0.001 s
3	And User click on Edit Profile button	SKIPPED	0.001 s
4	When User Changes "Mangesh" and "Kulkarni" and "mk@gmail.com" and "9766940710"	SKIPPED	0.001 s
5	And User click on Update Profile button	SKIPPED	0.001 s
6	Then Profile update is successfull	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

Cancel Flight



To Verify User can cancel the booked flight

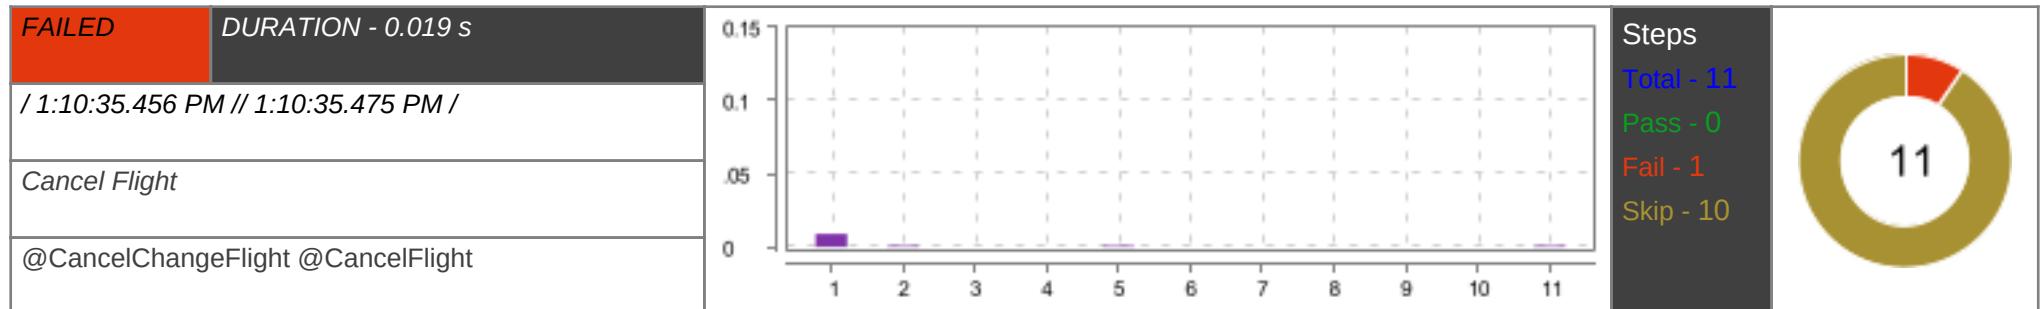


#	Step / Hook Details	Status	Duration
1	<p>Given Launch the application and login</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.CancelChangeFlight at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.009 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.CancelChangeFlight.<init>(CancelChangeFlight.java:21) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given User is on Home page and click on modify	SKIPPED	0.001 s
3	When User click on modify booking	SKIPPED	0.000 s
4	And User click on cancel flight	SKIPPED	0.000 s
5	And User select Bank Account to refund	SKIPPED	0.001 s
6	And User click on Cancel flight tab	SKIPPED	0.000 s
7	And User should select booked flight for cancelling	SKIPPED	0.000 s
8	And User click on continue tab	SKIPPED	0.000 s
9	And User select yes for cancel flight	SKIPPED	0.000 s
10	And User click on finish option	SKIPPED	0.000 s
11	Then User verify Flight Cancel Message	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

To Verify User can change the booked flight

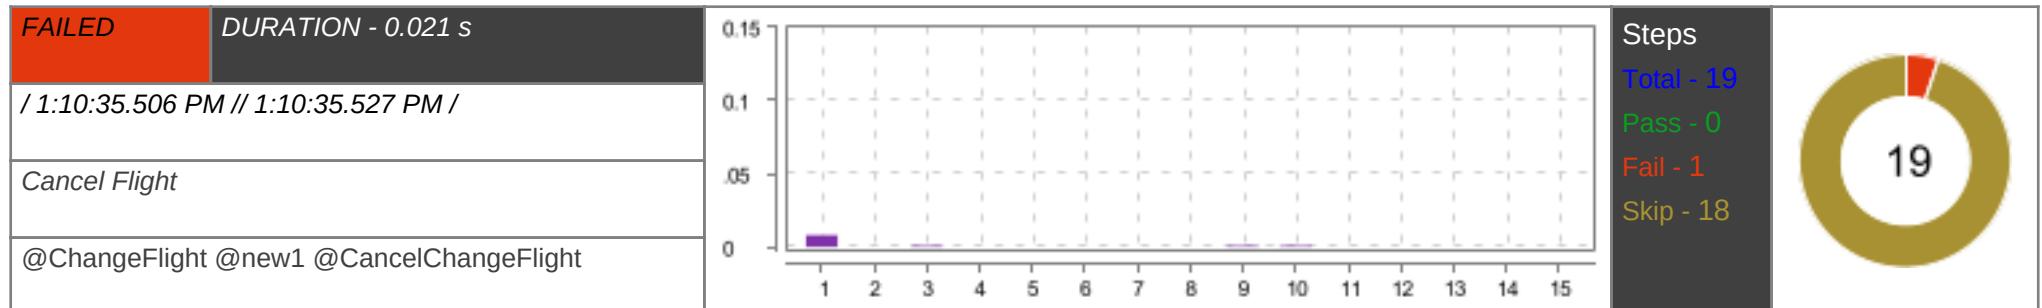

#	Step / Hook Details	Status	Duration
1	<p>Given Launch the application and login</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.CancelChangeFlight at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.008 s


#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.CancelChangeFlight.<init>(CancelChangeFlight.java:21) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given User is on Home Page and click on CheckIn	SKIPPED	0.000 s
3	And User select view Itenerary	SKIPPED	0.001 s
4	When User click on change flight Button	SKIPPED	0.000 s
5	And User click on checkbox	SKIPPED	0.000 s
6	And User select New date	SKIPPED	0.000 s
7	And User click on done button	SKIPPED	0.000 s
8	When User click on select flight button	SKIPPED	0.000 s
9	And User click on new flight booking	SKIPPED	0.001 s
10	And User click on continue Tab	SKIPPED	0.001 s
11	And User skip Addon page click on continue	SKIPPED	0.000 s
12	And User select Not interested for Travel Asistance	SKIPPED	0.000 s
13	And User select NetBanking Payemnt Option	SKIPPED	0.000 s
14	And User select Other	SKIPPED	0.000 s
15	And User click on Avenue Test	SKIPPED	0.000 s
16	And User select CheckBox	SKIPPED	0.001 s
17	And User click on Pay Button	SKIPPED	0.000 s
18	And User click on Continue	SKIPPED	0.000 s
19	Then User verify the Message	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Check-in Functionality



To verify that registered user can check-in

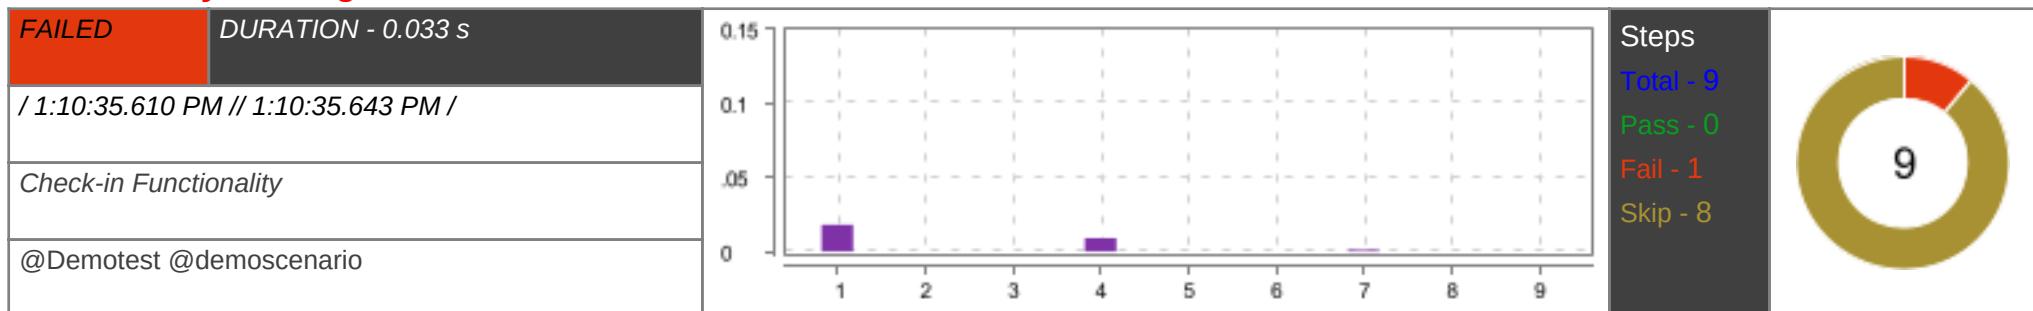


#	Step / Hook Details	Status	Duration
1	<p>Given Launch the app and login</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.CheckIn at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129)</pre>	FAILED	0.018 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.CheckIn.<init>(CheckIn.java:24) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)</pre>		
2	And User can Select Check In now Option to Proceed	SKIPPED	0.000 s
3	And user click on check in now	SKIPPED	0.000 s
4	And user click on Check IN Now button	SKIPPED	0.009 s
5	When user add the Bag count and click on Next	SKIPPED	0.000 s
6	And User skip addons and click on continue	SKIPPED	0.000 s
7	And user select not intrested for Travel Asistance	SKIPPED	0.001 s
8	And user Enter "8668399124" and "yoyo3557@gmail.com" and "latur" and "413512" in Web Check In From	SKIPPED	0.000 s
9	Then User completed checkin process	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

To verify that Guest user can check-in

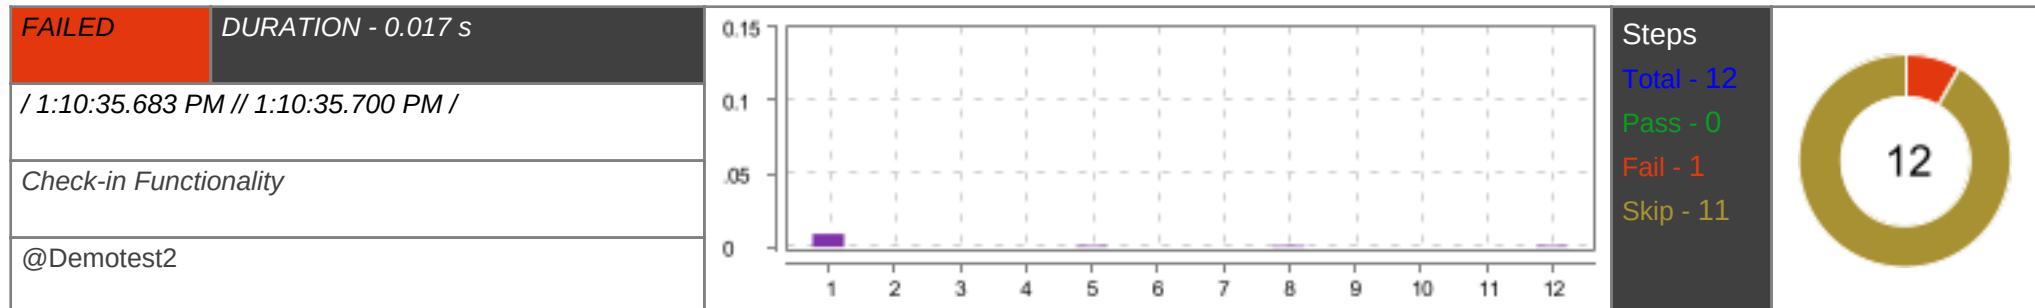


#	Step / Hook Details	Status	Duration
1	<p>Given user launch the Application</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.CheckIn at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.009 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.CheckIn.<init>(CheckIn.java:24) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	When User clicks on continue as guest Button	SKIPPED	0.000 s
3	And User is on HomePage Click On CheckIN	SKIPPED	0.000 s
4	And User Click On Find Booking	SKIPPED	0.000 s
5	When User Enter "OJBZ4Q" and "Kulkarni"	SKIPPED	0.001 s
6	And User Click On Submit	SKIPPED	0.000 s
7	And user click on Check IN Now button	SKIPPED	0.000 s
8	When user add the Bag count and click on Next	SKIPPED	0.001 s
9	And User skip addons and click on continue	SKIPPED	0.000 s
10	And user select not intrested for Travel Asistance	SKIPPED	0.000 s
11	And user Enter "8668399124" and "yojo3557@gmail.com" and "latur" and "413512" in Web Check In From	SKIPPED	0.000 s
12	Then User completed checkin process	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

To verify Checkin Through Invalid Mobile Number

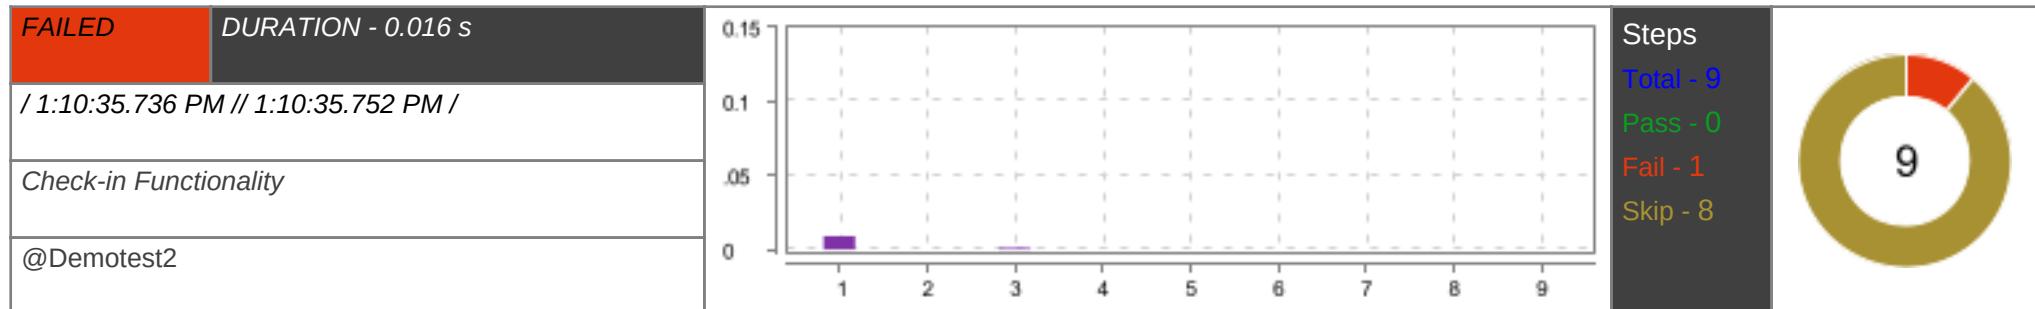


#	Step / Hook Details	Status	Duration
1	<p>Given Launch the app and login</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.CheckIn at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.009 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.CheckIn.<init>(CheckIn.java:24) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	And User can Select Check In now Option to Proceed	SKIPPED	0.000 s
3	And user click on check in now	SKIPPED	0.001 s
4	And user click on Check IN Now button	SKIPPED	0.000 s
5	When user add the Bag count and click on Next	SKIPPED	0.000 s
6	And User skip addons and click on continue	SKIPPED	0.000 s
7	And user select not intrested for Travel Asistance	SKIPPED	0.000 s
8	And user Enter "8634" and "yoyo3557@gmail.com" and "latur" and "413512" in Web Check In From	SKIPPED	0.000 s
9	Then Verify contact information message	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.001 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

To verify Checkin Through Invalid Email-id

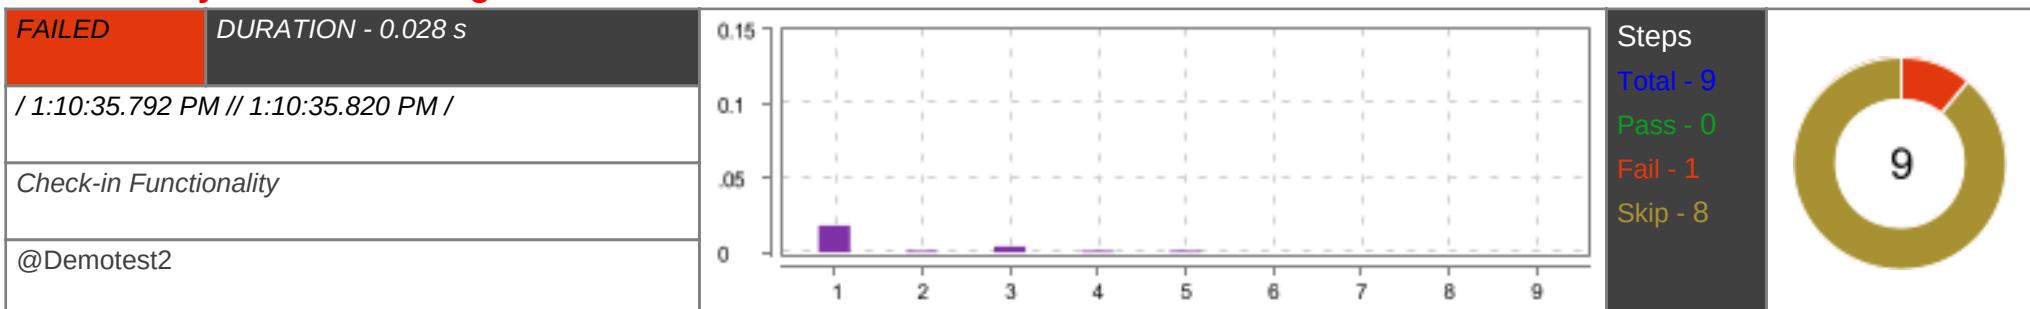

#	Step / Hook Details	Status	Duration
1	<p>Given Launch the app and login</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.CheckIn at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248)</pre>	FAILED	0.018 s


#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.CheckIn.<init>(CheckIn.java:24) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) </pre>		

#	Step / Hook Details	Status	Duration
	at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	And User can Select Check In now Option to Proceed	SKIPPED	0.001 s
3	And user click on check in now	SKIPPED	0.004 s
4	And user click on Check IN Now button	SKIPPED	0.001 s
5	When user add the Bag count and click on Next	SKIPPED	0.001 s
6	And User skip addons and click on continue	SKIPPED	0.000 s
7	And user select not interested for Travel Assistance	SKIPPED	0.000 s
8	And user Enter "8668399124" and "yoyo3557@gmail.com" and "latur" and "413512" in Web Check In From	SKIPPED	0.000 s
9	Then Verify Emailid message	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Indigo Booking Flow



To Verify the maximum Infants allowed 4

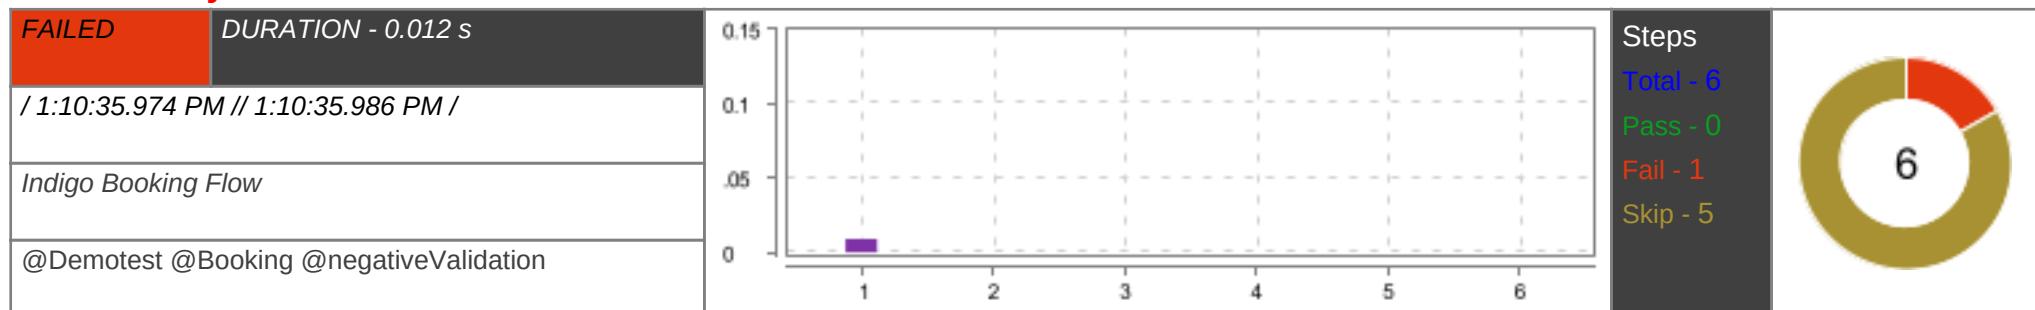


#	Step / Hook Details	Status	Duration
1	<p>Given User is Logged in</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Booking at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248)</pre>	FAILED	0.009 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Booking.<init>(Booking.java:30) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) </pre>		

#	Step / Hook Details	Status	Duration
	at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given User is on Book Flight Page	SKIPPED	0.000 s
3	And User click on passengers	SKIPPED	0.000 s
4	When User add Adults	SKIPPED	0.000 s
5	And User add infants more than four	SKIPPED	0.000 s
6	Then User validate the infants count	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

To Verify the maximum Children allowed 4

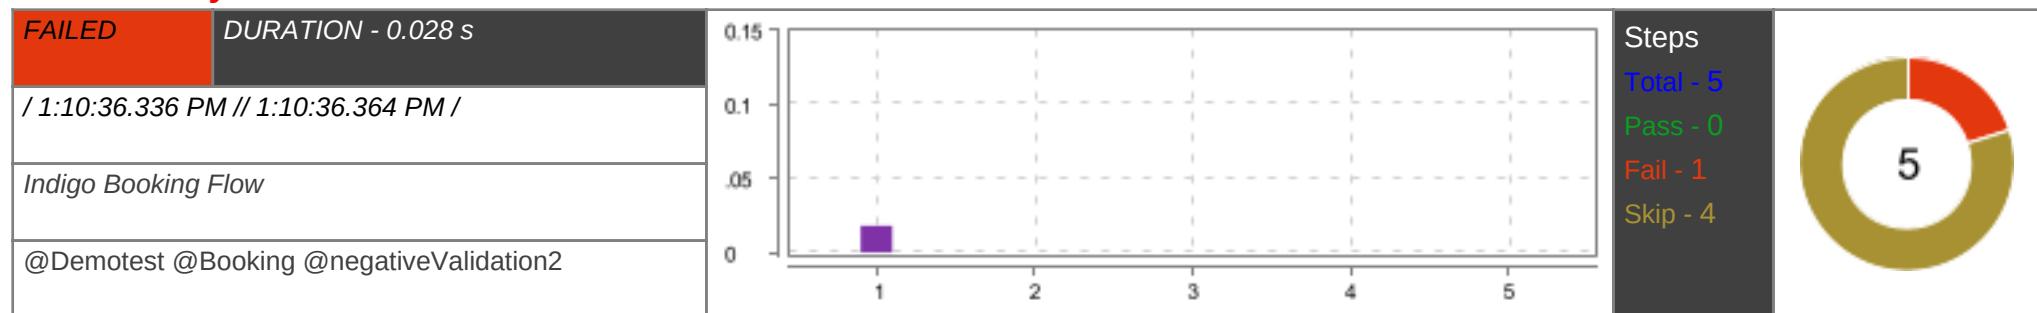


#	Step / Hook Details	Status	Duration
1	Given User is Logged in io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Booking at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84)	FAILED	0.018 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) </pre>		

#	Step / Hook Details	Status	Duration
	<p>... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67'</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553)</p> <p>at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156)</p> <p>at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80)</p> <p>at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92)</p> <p>at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117)</p> <p>at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64)</p> <p>at testApp.Booking.<init>(Booking.java:30)</p> <p>... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver</p> <p>at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274)</p> <p>at java.base/java.util.Optional.orElseGet(Optional.java:369)</p> <p>at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535)</p> <p>... 57 more Caused by: java.net.ConnectException: Connection refused: no further information</p> <p>at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method)</p> <p>at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779)</p> <p>at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)</p> <p>at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)</p> <p>at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)</p> <p>at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)</p> <p>at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)</p> <p>at java.base/java.lang.Thread.run(Thread.java:834)</p>		
2	Given User is on Book Flight Page	SKIPPED	0.000 s
3	And User click on passengers	SKIPPED	0.000 s
4	When User add child more than four	SKIPPED	0.000 s
5	Then User validate the child count	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.001 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

To Verify the Pax count cannot be more than 9

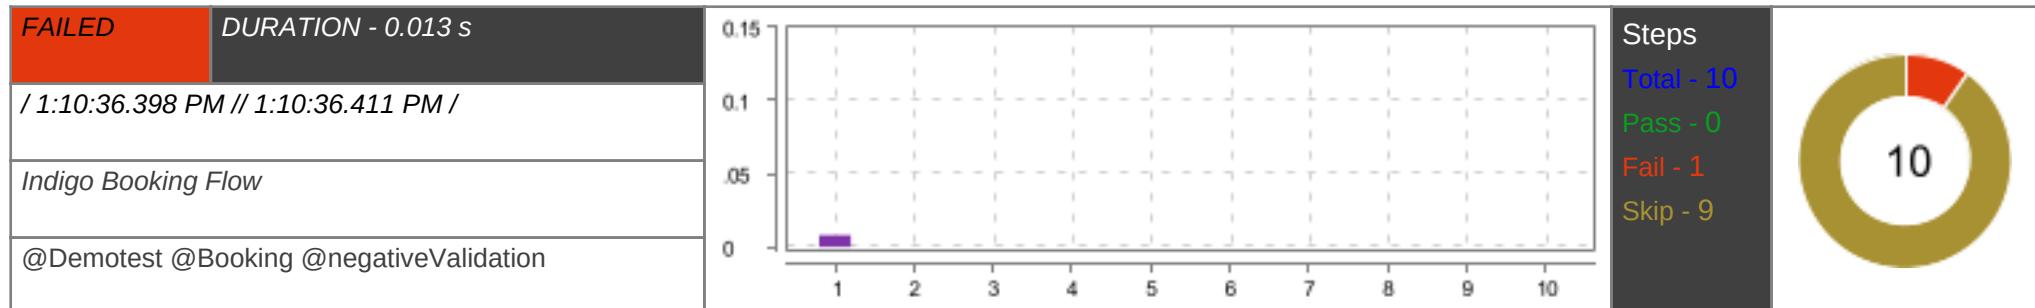


#	Step / Hook Details	Status	Duration
1	<p>Given User is Logged in</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Booking at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.008 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Booking.<init>(Booking.java:30) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given User is on Book Flight Page	SKIPPED	0.000 s
3	When User selects "Mum" and "IXC" cities	SKIPPED	0.000 s
4	And User selects a departure date	SKIPPED	0.000 s
5	And User clicks on Done button	SKIPPED	0.000 s
6	And User Search and select a "Indian Rupee"	SKIPPED	0.000 s
7	And User click on passengers	SKIPPED	0.000 s
8	And User Selects Passengers	SKIPPED	0.000 s
9	Then User Clicks on Search Flight	SKIPPED	0.000 s
10	And Verify pax count	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

To Verify that user can search a flight

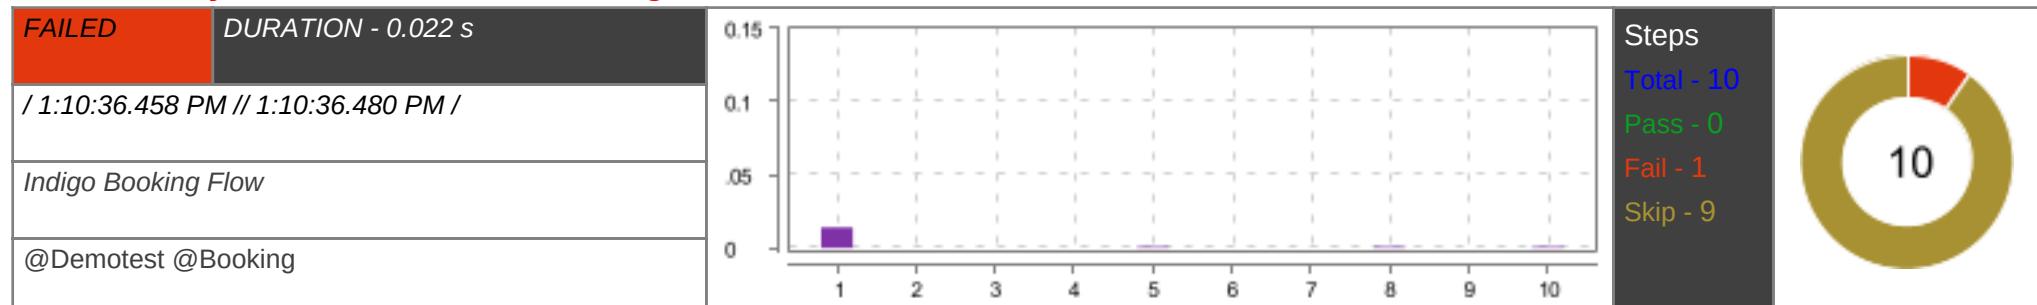


#	Step / Hook Details	Status	Duration
1	<p>Given User is Logged in</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Booking at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248)</pre>	FAILED	0.014 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Booking.<init>(Booking.java:30) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) </pre>		

#	Step / Hook Details	Status	Duration
	at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given User is on Book Flight Page	SKIPPED	0.000 s
3	When User selects "IXC" and "BOM" cities	SKIPPED	0.000 s
4	And User selects a departure date	SKIPPED	0.000 s
5	And User clicks on Done button	SKIPPED	0.001 s
6	And User Search and select a "Indian Rupee"	SKIPPED	0.000 s
7	And User click on passengers	SKIPPED	0.000 s
8	And User Selects Passengers	SKIPPED	0.001 s
9	Then User Clicks on Search Flight	SKIPPED	0.000 s
10	And User can see Search results for "IXC" and "BOM" cities	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

To Verify that user can modify flight search

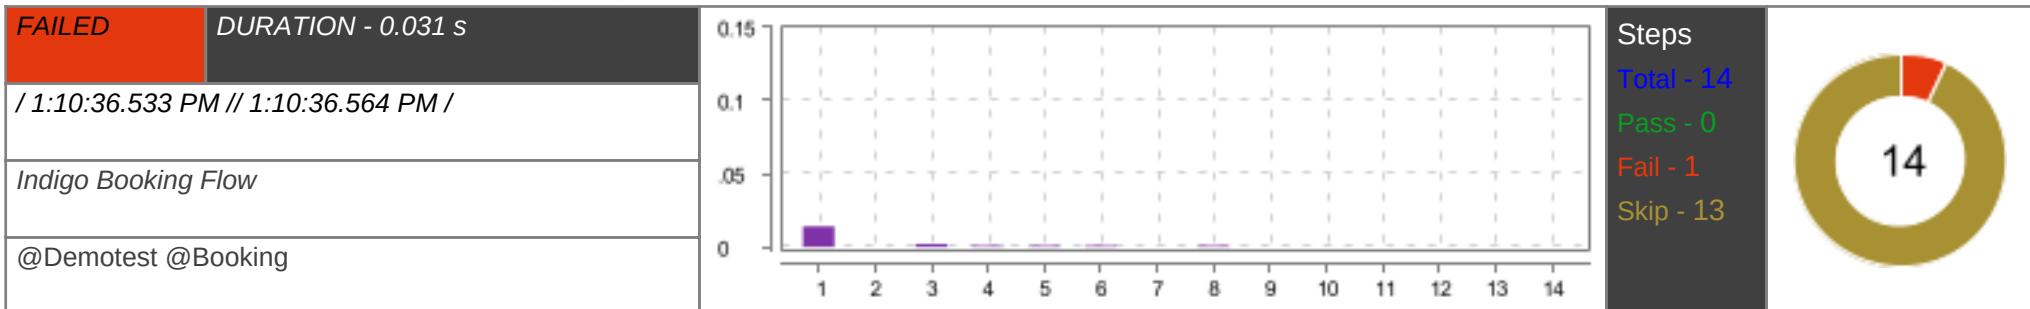


#	Step / Hook Details	Status	Duration
1	Given User is Logged in io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Booking at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)	FAILED	0.014 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException </pre>		

#	Step / Hook Details	Status	Duration
1	<pre> at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Booking.<init>(Booking.java:30) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) </pre>		
2	Given User is on Book Flight Page	SKIPPED	0.000 s
3	When User selects "IXC" and "BOM" cities	SKIPPED	0.002 s
4	And User selects a departure date	SKIPPED	0.001 s
5	And User clicks on Done button	SKIPPED	0.001 s
6	And User click on passengers	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
7	And User Selects Passengers	SKIPPED	0.000 s
8	Then User Clicks on Search Flight	SKIPPED	0.001 s
9	And User can see Search results for "IXC" and "BOM" cities	SKIPPED	0.000 s
10	And User Click on modify Search	SKIPPED	0.000 s
11	And User navigate back to the Book Flight Page	SKIPPED	0.000 s
12	And User click on passengers	SKIPPED	0.000 s
13	And User Selects Passengers	SKIPPED	0.000 s
14	And User Clicks on Search Flight	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.001 s

To Verify that To and From cannot be same

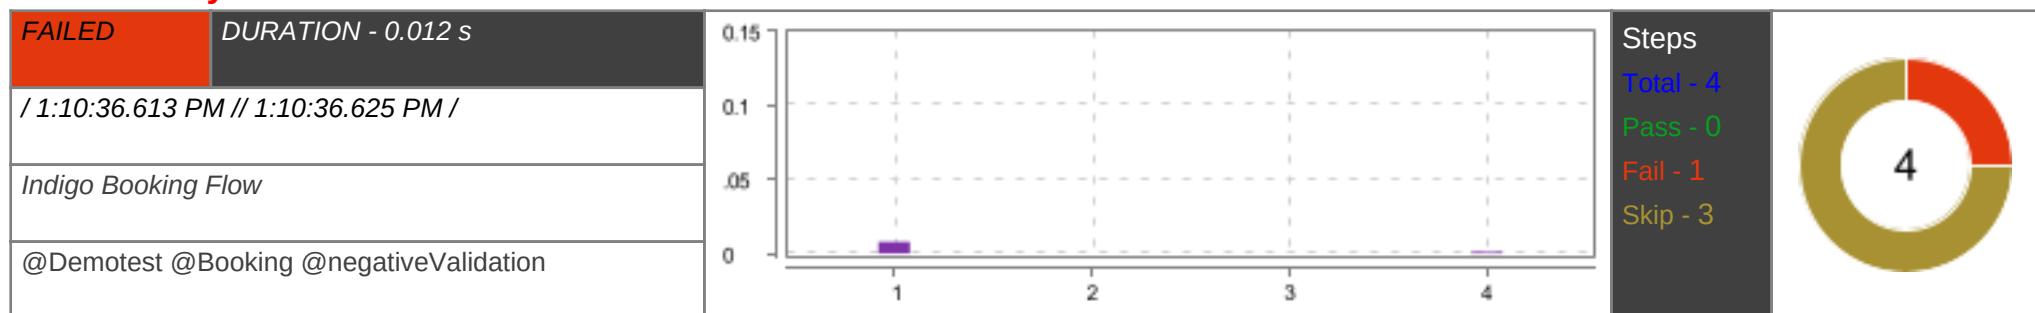


#	Step / Hook Details	Status	Duration
1	Given User is Logged in io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Booking at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84)	FAILED	0.008 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) </pre>		

#	Step / Hook Details	Status	Duration
	<p>... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67'</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553)</p> <p>at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156)</p> <p>at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80)</p> <p>at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92)</p> <p>at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117)</p> <p>at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64)</p> <p>at testApp.Booking.<init>(Booking.java:30)</p> <p>... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver</p> <p>at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274)</p> <p>at java.base/java.util.Optional.orElseGet(Optional.java:369)</p> <p>at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535)</p> <p>... 57 more Caused by: java.net.ConnectException: Connection refused: no further information</p> <p>at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method)</p> <p>at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779)</p> <p>at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337)</p> <p>at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724)</p> <p>at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650)</p> <p>at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562)</p> <p>at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997)</p> <p>at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74)</p> <p>at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30)</p> <p>at java.base/java.lang.Thread.run(Thread.java:834)</p>		
2	Given User is on Book Flight Page	SKIPPED	0.000 s
3	When User selects same cities for "MUM" and "MUM"	SKIPPED	0.000 s
4	Then Destination city not displayed in searched list	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Make a booking with saver fare option

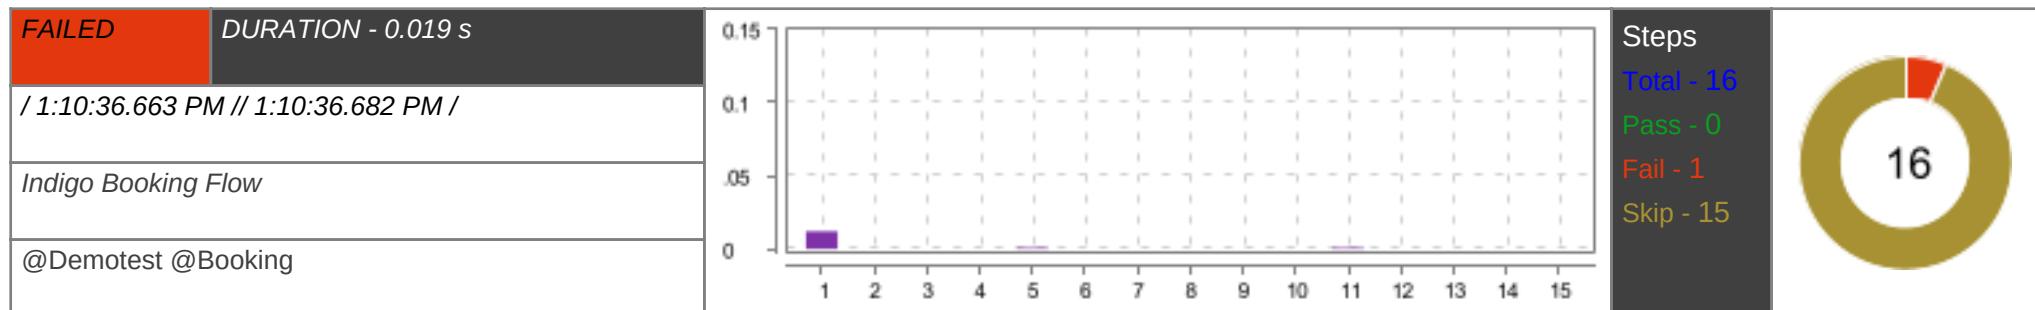


#	Step / Hook Details	Status	Duration
1	<p>Given User is Logged in</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Booking at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.012 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Booking.<init>(Booking.java:30) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given User is on Book Flight Page	SKIPPED	0.000 s
3	When User selects "DEL" and "BOM" cities	SKIPPED	0.000 s
4	And User selects a departure date	SKIPPED	0.000 s
5	And User clicks on Done button	SKIPPED	0.001 s
6	And User Search and select a "Indian Rupee"	SKIPPED	0.000 s
7	And User click on passengers	SKIPPED	0.000 s
8	And User adds 2 adult passengers	SKIPPED	0.000 s
9	And User Clicks on Search Flight	SKIPPED	0.000 s
10	And User selects saver fare option	SKIPPED	0.000 s
11	And click on continue button and skipFlexi	SKIPPED	0.001 s
12	And User provides first adult passengers "Mr" "wicky" and "jones"	SKIPPED	0.000 s
13	And User provides second adult passengers "Mr" "admin" and "adminn"	SKIPPED	0.000 s
14	And User skips Addons and Insurance and seat selection	SKIPPED	0.000 s
15	Then verify user is on payment page	SKIPPED	0.000 s
16	And verify user payment successfull using upi "avi@sbi"	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.001 s

Make a booking with special fares Armed Forces

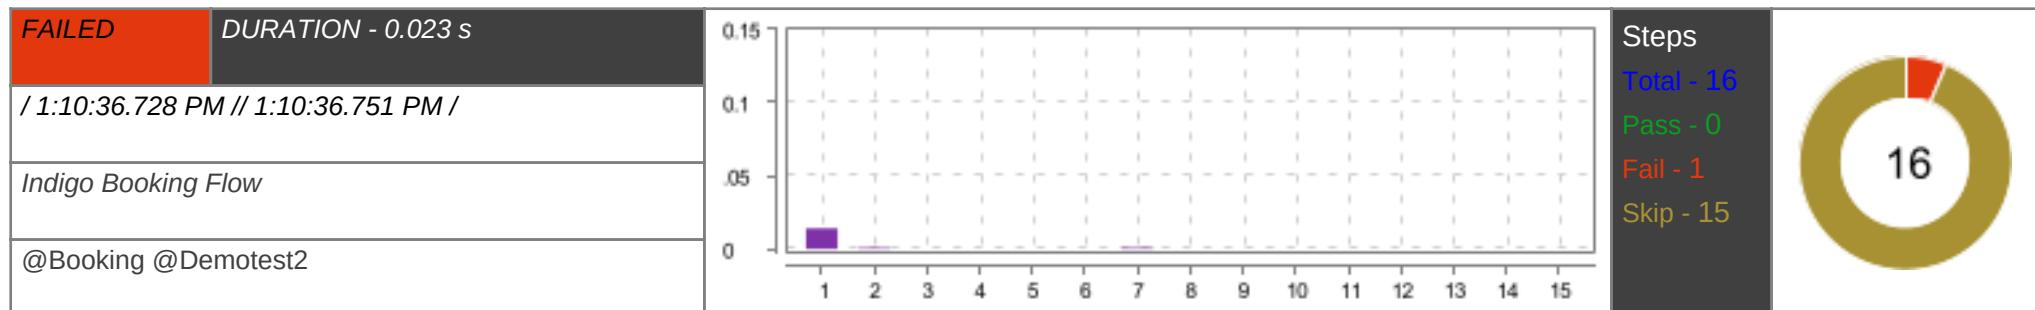


#	Step / Hook Details	Status	Duration
1	<p>Given User is Logged in</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Booking at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.014 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Booking.<init>(Booking.java:30) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given User is on Book Flight Page	SKIPPED	0.001 s
3	When User selects "DEL" and "BOM" cities	SKIPPED	0.000 s
4	And User selects a departure date	SKIPPED	0.000 s
5	And User clicks on Done button	SKIPPED	0.000 s
6	And User Search and select a "Indian Rupee"	SKIPPED	0.000 s
7	And User click on passengers	SKIPPED	0.001 s
8	And User Select a Passenger with infant	SKIPPED	0.000 s
9	And User Selects any "Armed Forces"	SKIPPED	0.000 s
10	And User Clicks on Search Flight	SKIPPED	0.000 s
11	And User clicks on continue button on search flight page	SKIPPED	0.000 s
12	And User provides first adult passengers "Mr" "wicky" and "jones"	SKIPPED	0.000 s
13	And User provides infant passengers "male" "admin" and "adminn"	SKIPPED	0.000 s
14	And User skips Addons and Insurance and seat selection	SKIPPED	0.000 s
15	Then verify user is on payment page	SKIPPED	0.000 s
16	And verify user payment successfull using upi "avi@sbi"	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.001 s

Make a booking with special fares Armed Forces Super6E fare option

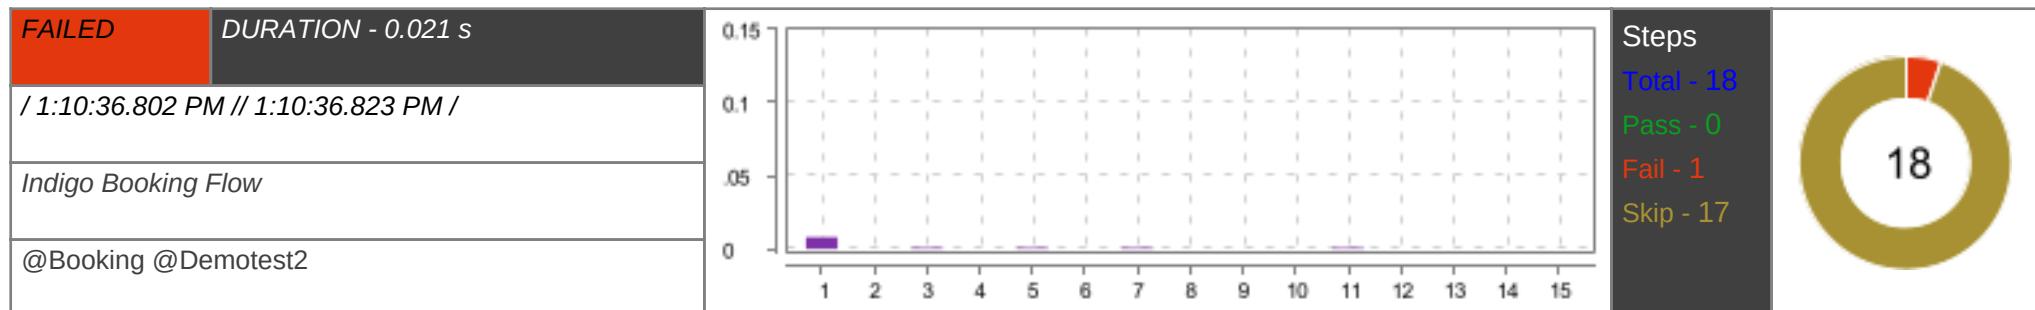


#	Step / Hook Details	Status	Duration
1	<p>Given User is Logged in</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Booking at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.008 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Booking.<init>(Booking.java:30) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given User is on Book Flight Page	SKIPPED	0.000 s
3	When User selects "DEL" and "BOM" cities	SKIPPED	0.001 s
4	And User selects a departure date	SKIPPED	0.000 s
5	And User clicks on Done button	SKIPPED	0.001 s
6	And User Search and select a "Indian Rupee"	SKIPPED	0.000 s
7	And User click on passengers	SKIPPED	0.001 s
8	And User Select a Passenger with infant	SKIPPED	0.000 s
9	And User Selects any "Armed Forces"	SKIPPED	0.000 s
10	And User Clicks on Search Flight	SKIPPED	0.000 s
11	And User selects Super6E fare option	SKIPPED	0.001 s
12	And User clicks on continue button	SKIPPED	0.000 s
13	And User provides first adult passengers "mRs" "Nancy" and "Wick"	SKIPPED	0.000 s
14	And User provides infant passengers "Male" "Admin" and "Admin"	SKIPPED	0.000 s
15	And User Add a snack for Super 6e and continue	SKIPPED	0.000 s
16	And User selects a seat	SKIPPED	0.002 s
17	Then verify user is on payment page	SKIPPED	0.000 s
18	And verify user payment successfull using upi "avi@sbi"	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Make a booking with special fares Students

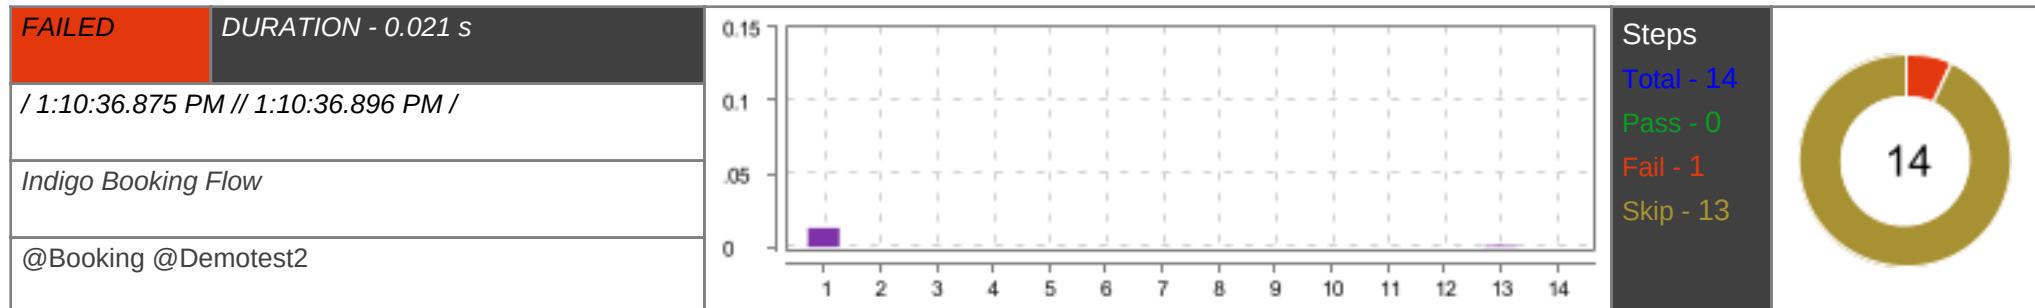


#	Step / Hook Details	Status	Duration
1	<p>Given User is Logged in</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Booking at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.013 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Booking.<init>(Booking.java:30) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given User is on Book Flight Page	SKIPPED	0.000 s
3	When User selects "DEL" and "BOM" cities	SKIPPED	0.000 s
4	And User selects a departure date	SKIPPED	0.000 s
5	And User clicks on Done button	SKIPPED	0.000 s
6	And User Search and select a "Indian Rupee"	SKIPPED	0.000 s
7	And User click on passengers	SKIPPED	0.000 s
8	And User Select a Passenger	SKIPPED	0.000 s
9	And User Selects Students special fare option	SKIPPED	0.000 s
10	And User Clicks on Search Flight	SKIPPED	0.000 s
11	And User clicks on continue button	SKIPPED	0.000 s
12	And User provides passenger details for student "Mr" "wicky" "jones" "1112" "Kellton"	SKIPPED	0.000 s
13	And User skips Addons and Insurance and seat selection	SKIPPED	0.001 s
14	Then verify user is on payment page	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.001 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Make a booking with special fares Students and Super6E fare option

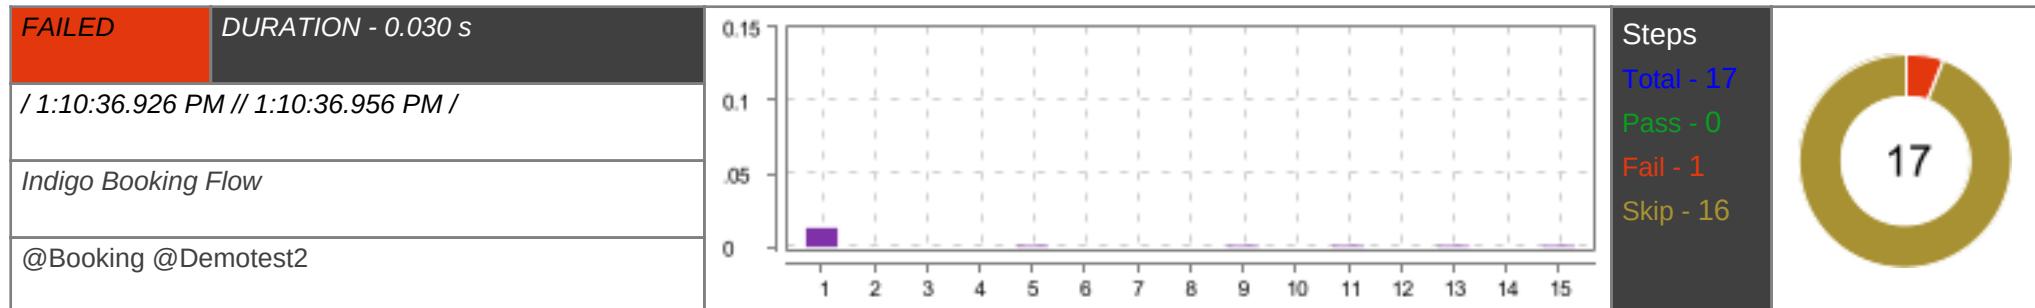


#	Step / Hook Details	Status	Duration
1	<p>Given User is Logged in</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Booking at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.013 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Booking.<init>(Booking.java:30) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given User is on Book Flight Page	SKIPPED	0.000 s
3	When User selects "DEL" and "BOM" cities	SKIPPED	0.000 s
4	And User selects a departure date	SKIPPED	0.000 s
5	And User clicks on Done button	SKIPPED	0.001 s
6	And User Search and select a "Indian Rupee"	SKIPPED	0.000 s
7	And User click on passengers	SKIPPED	0.000 s
8	And User Select a Passenger	SKIPPED	0.000 s
9	And User Selects Students special fare option	SKIPPED	0.001 s
10	And User Clicks on Search Flight	SKIPPED	0.000 s
11	And User select Super6e fare option	SKIPPED	0.001 s
12	And User clicks on continue button	SKIPPED	0.000 s
13	And User provides passenger details for student "Mr" "wicky" "jones" "1112" "Kellton"	SKIPPED	0.001 s
14	And User Add a snack for Super 6e and continue	SKIPPED	0.000 s
15	And User selects a seat	SKIPPED	0.001 s
16	Then verify user is on payment page	SKIPPED	0.001 s
17	And verify user payment successfull using upi "avi@sbi"	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.004 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Make a booking with special fares Family & Friends

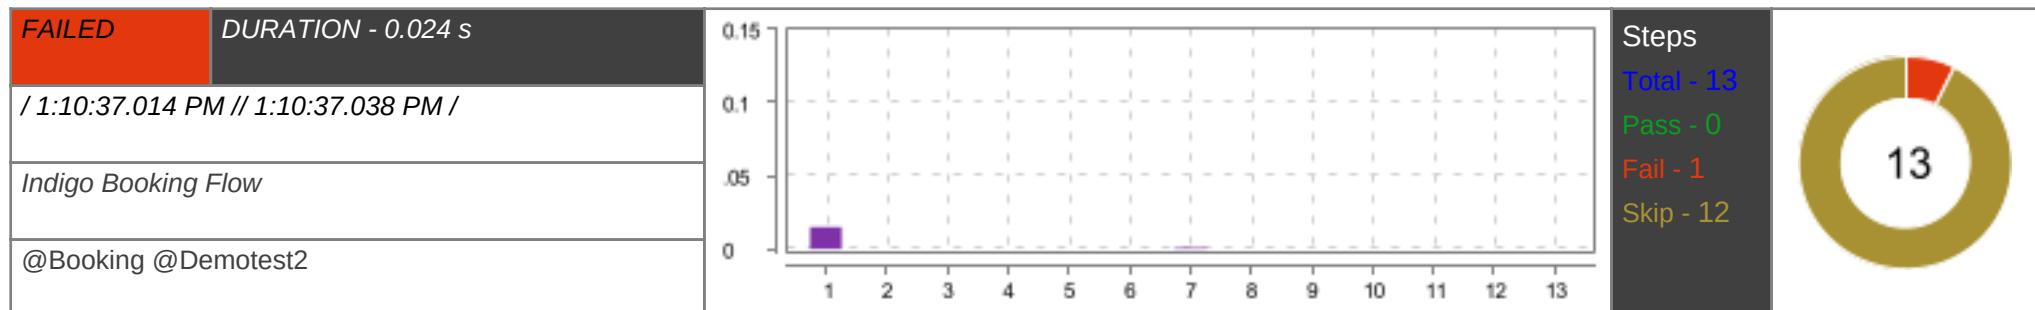


#	Step / Hook Details	Status	Duration
1	<p>Given User is Logged in</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Booking at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.015 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Booking.<init>(Booking.java:30) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given User is on Book Flight Page	SKIPPED	0.000 s
3	When User selects "DEL" and "BOM" cities	SKIPPED	0.000 s
4	And User selects a departure date	SKIPPED	0.000 s
5	And User clicks on Done button	SKIPPED	0.000 s
6	And User Search and select a "Indian Rupee"	SKIPPED	0.000 s
7	And User Selects any "Family & Friends"	SKIPPED	0.001 s
8	And User Clicks on Search Flight	SKIPPED	0.000 s
9	And User clicks on continue button and skipFlexi	SKIPPED	0.000 s
10	And User provides passenger details for Family & Friends	SKIPPED	0.000 s
11	And User skips Addons and Insurance and seat selection	SKIPPED	0.000 s
12	Then verify user is on payment page	SKIPPED	0.000 s
13	And verify user payment successfull using upi "avi@sbi"	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

Make a booking with special fares Family & Friends and Flexi Plus fare option

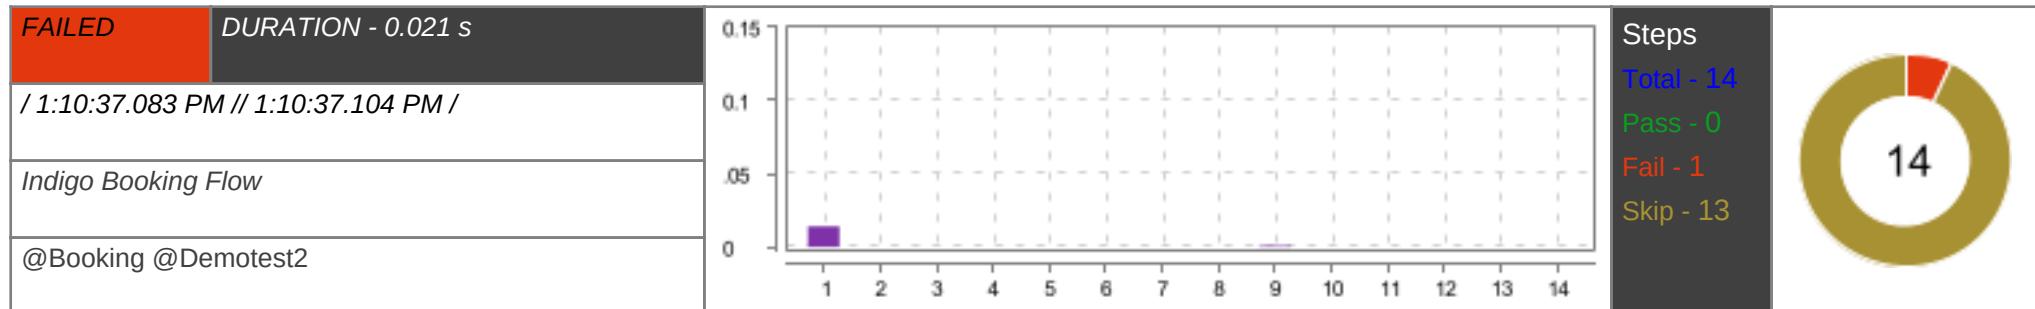


#	Step / Hook Details	Status	Duration
1	<p>Given User is Logged in</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Booking at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.014 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Booking.<init>(Booking.java:30) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given User is on Book Flight Page	SKIPPED	0.000 s
3	When User selects "DEL" and "BOM" cities	SKIPPED	0.000 s
4	And User selects a departure date	SKIPPED	0.000 s
5	And User clicks on Done button	SKIPPED	0.000 s
6	And User Search and select a "Indian Rupee"	SKIPPED	0.000 s
7	And User Selects any "Family & Friends"	SKIPPED	0.000 s
8	And User Clicks on Search Flight	SKIPPED	0.000 s
9	And User selects Flexi Plus fare option	SKIPPED	0.001 s
10	And User clicks on continue button	SKIPPED	0.000 s
11	And User provides passenger details for Family & Friends	SKIPPED	0.000 s
12	And User skips Addons and Insurance and seat selection	SKIPPED	0.000 s
13	Then verify user is on payment page	SKIPPED	0.000 s
14	And verify user payment successfull using upi "avi@sbi"	SKIPPED	0.000 s
AFTER - testApp.Hooks.closeDriver()		FAILED	0.000 s
java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)			

Make a booking with special fares Family & Friends and Flexi Plus fare option

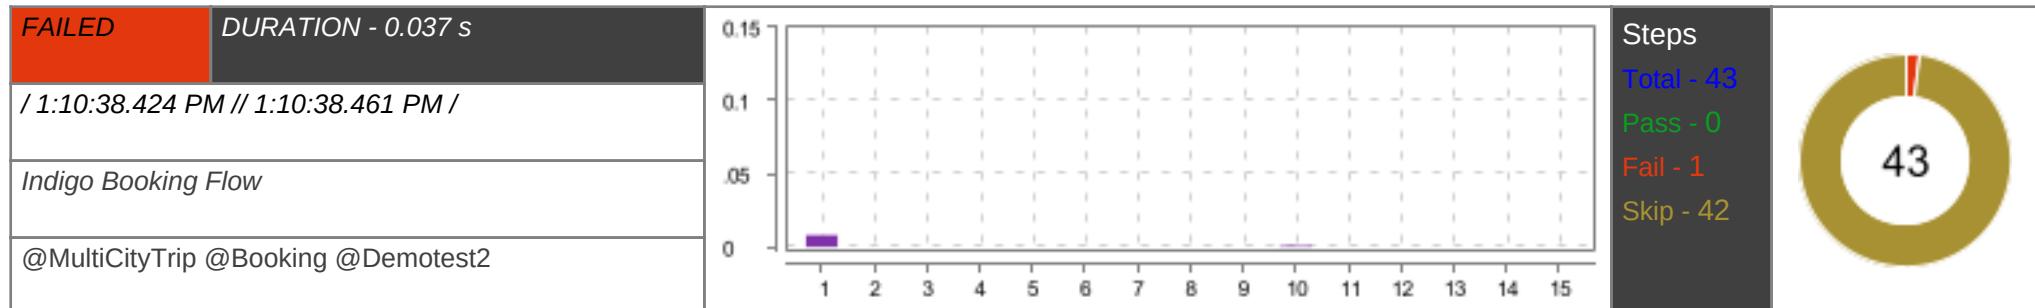


#	Step / Hook Details	Status	Duration
1	<p>Given Launch the App and Login</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.MultiCityTrip at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.008 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.MultiCityTrip.<init>(MultiCityTrip.java:22) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given user click on Bookflight	SKIPPED	0.000 s
3	And user click on MultiCity option	SKIPPED	0.000 s
4	When user click on Popup cross btn	SKIPPED	0.000 s
5	And user select first "MUM" city	SKIPPED	0.000 s
6	And user select Date for first flight	SKIPPED	0.000 s
7	And user select second "COK" city	SKIPPED	0.000 s
8	Then user click on city search cross btn	SKIPPED	0.000 s
9	And user click on second "IXE" city	SKIPPED	0.000 s
10	And user select date for second flight	SKIPPED	0.001 s
11	And user scroll up to special fare	SKIPPED	0.000 s
12	And user select a "Family & Friends" from special fare options	SKIPPED	0.000 s
13	And user search a flight	SKIPPED	0.000 s
14	Then user is on searched result page with Family fare	SKIPPED	0.000 s
15	And user select flexi fare for first flight	SKIPPED	0.000 s
16	And user click on continue button with first flight	SKIPPED	0.000 s
17	And user can see searched results for MultiCity	SKIPPED	0.000 s
18	And user select flexi fare for second city	SKIPPED	0.001 s
19	And user click on continue with second flight	SKIPPED	0.000 s
20	Then user is on step1 add passenger details page	SKIPPED	0.000 s
21	And user fill "admin" and "adminn" the Passenger Details Form	SKIPPED	0.001 s
22	And user fill "sam" and "jones" the Second Passenger Details Form	SKIPPED	0.000 s
23	And user fill "harry" and "kane" the Third Passenger Details Form	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
24	And user fill "martin" and "luther" the Fourth Passenger Details Form	SKIPPED	0.000 s
25	And user click on step1 continue button	SKIPPED	0.000 s
26	Then user is on 6E add-ons page	SKIPPED	0.000 s
27	And user click on 6E tiffin	SKIPPED	0.000 s
28	And user click first passenger arrow button	SKIPPED	0.000 s
29	And user add food combo	SKIPPED	0.001 s
30	And user select this for all passanger	SKIPPED	0.000 s
31	And user click on confirm Button	SKIPPED	0.000 s
32	And user click on continue after confirm	SKIPPED	0.000 s
33	And user selct second flight box	SKIPPED	0.002 s
34	And user add food combo	SKIPPED	0.001 s
35	And user select this for all passanger	SKIPPED	0.000 s
36	And user click on confirm Button	SKIPPED	0.000 s
37	And user click on continue after confirm	SKIPPED	0.000 s
38	And user click on done button after choose food of both flight	SKIPPED	0.000 s
39	And user click on continue with Addon	SKIPPED	0.000 s
40	And user click on Not Intrested button on travel assitance page	SKIPPED	0.000 s
41	And user skip step 3 select seat page	SKIPPED	0.000 s
42	And user click on continue on payment with upi "admin@sbi"	SKIPPED	0.000 s
43	Then user is verified payment completed	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Make a booking with special fares Unaccompanied Minor

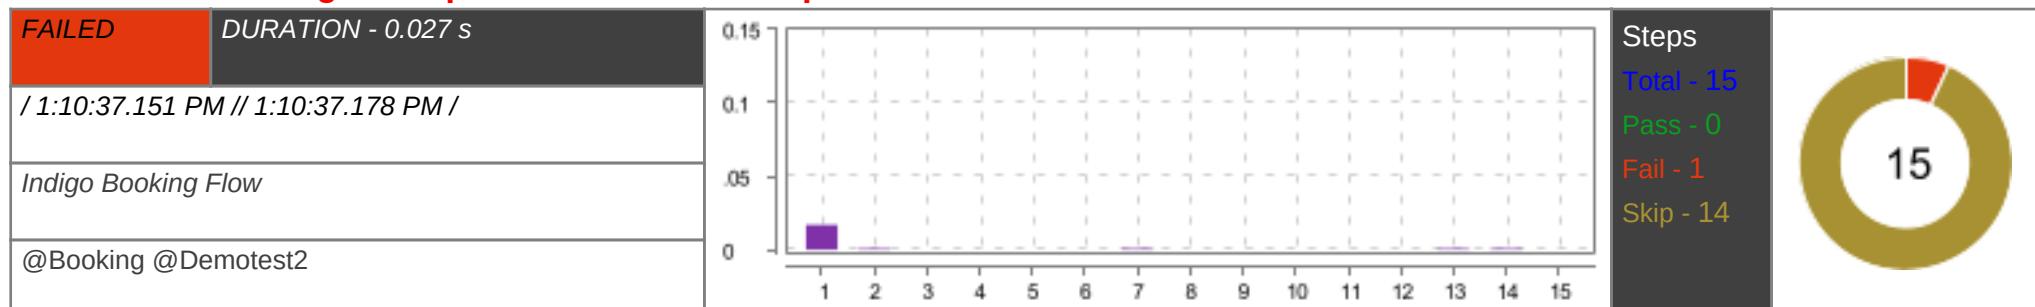


#	Step / Hook Details	Status	Duration
1	<p>Given User is Logged in</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Booking at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248)</pre>	FAILED	0.017 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Booking.<init>(Booking.java:30) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) </pre>		

#	Step / Hook Details	Status	Duration
	at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given User is on Book Flight Page	SKIPPED	0.001 s
3	When User selects "DEL" and "BOM" cities	SKIPPED	0.000 s
4	And User selects a departure date	SKIPPED	0.000 s
5	And User clicks on Done button	SKIPPED	0.000 s
6	And User Search and select a "Indian Rupee"	SKIPPED	0.000 s
7	And User click on passengers	SKIPPED	0.001 s
8	And User Select a Passenger	SKIPPED	0.000 s
9	And User Selects any "Unaccompanied Minor"	SKIPPED	0.000 s
10	And User Clicks on Search Flight	SKIPPED	0.000 s
11	And User clicks on continue button	SKIPPED	0.000 s
12	And User Enter Unaccompanied Minor details "Male" "wicky" "jones"	SKIPPED	0.000 s
13	And User skips Addons and Insurance and seat selection	SKIPPED	0.001 s
14	Then verify user is on payment page	SKIPPED	0.001 s
15	And verify user payment successfull using upi "avi@sbi"	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Make a booking with special fares Unaccompanied Minor and Super6E fare option

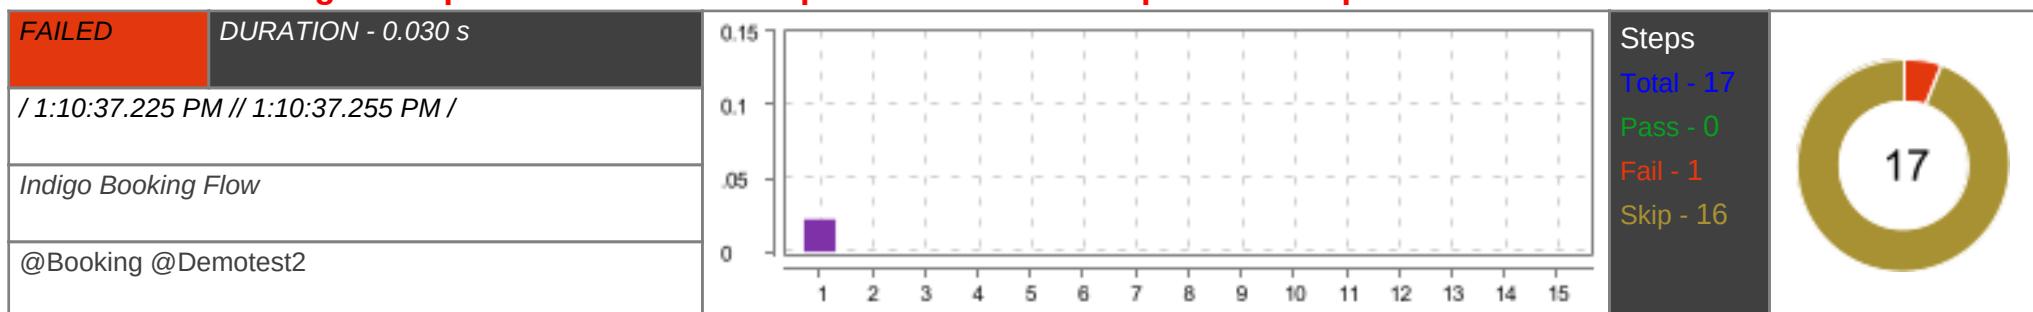


#	Step / Hook Details	Status	Duration
1	Given User is Logged in io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Booking	FAILED	0.022 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)		

#	Step / Hook Details	Status	Duration
	<pre> at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Booking.<init>(Booking.java:30) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) </pre>		

#	Step / Hook Details	Status	Duration
2	Given User is on Book Flight Page	SKIPPED	0.000 s
3	When User selects "DEL" and "BOM" cities	SKIPPED	0.000 s
4	And User selects a departure date	SKIPPED	0.000 s
5	And User clicks on Done button	SKIPPED	0.000 s
6	And User Search and select a "Indian Rupee"	SKIPPED	0.000 s
7	And User click on passengers	SKIPPED	0.000 s
8	And User Select a Passenger	SKIPPED	0.000 s
9	And User Selects any "Unaccompanied Minor"	SKIPPED	0.000 s
10	And User Clicks on Search Flight	SKIPPED	0.000 s
11	And User select Super6e fare option	SKIPPED	0.000 s
12	And User clicks on continue button	SKIPPED	0.000 s
13	And User Enter Unaccompanied Minor details "Male" "wicky" "jones"	SKIPPED	0.000 s
14	And User Add a snack for Super 6e and continue	SKIPPED	0.000 s
15	And User selects a seat	SKIPPED	0.000 s
16	Then verify user is on payment page	SKIPPED	0.001 s
17	And verify user payment successfull using upi "avi@sbi"	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Make a booking with FLEXI PLUS

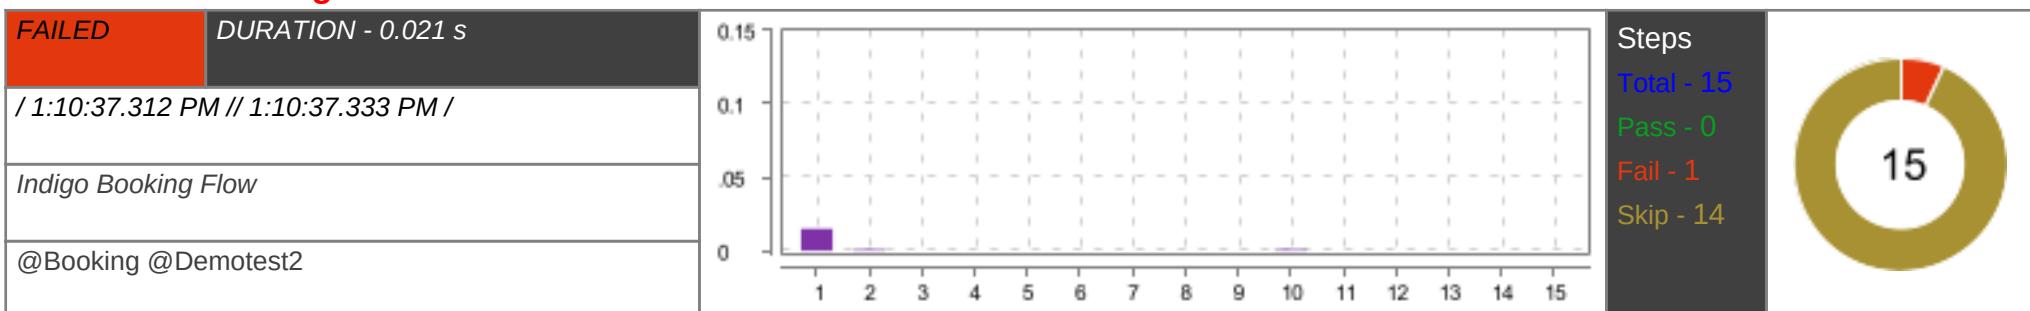


#	Step / Hook Details	Status	Duration
1	Given User is Logged in io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Booking at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)	FAILED	0.015 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)		

#	Step / Hook Details	Status	Duration
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Booking.<init>(Booking.java:30) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given User is on Book Flight Page	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
3	When User selects "DEL" and "BOM" cities	SKIPPED	0.000 s
4	And User selects a departure date	SKIPPED	0.000 s
5	And User clicks on Done button	SKIPPED	0.000 s
6	And User Clicks on Search Flight	SKIPPED	0.000 s
7	And User selects Flexi Plus fare option	SKIPPED	0.000 s
8	And User clicks on continue button	SKIPPED	0.000 s
9	And User fills the passenger details	SKIPPED	0.000 s
10	And User verifies add-ons included in flexi plus fare	SKIPPED	0.001 s
11	And User Add a snack and continue	SKIPPED	0.000 s
12	And User skips Insurance	SKIPPED	0.000 s
13	And User skips seat selection	SKIPPED	0.000 s
14	Then verify user is on payment page	SKIPPED	0.000 s
15	And verify user payment successfull using upi "avi@sbi"	SKIPPED	0.000 s
AFTER - testApp.Hooks.closeDriver()			FAILED 0.001 s
java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)			

Make a booking with SUPER 6E CAPITAL

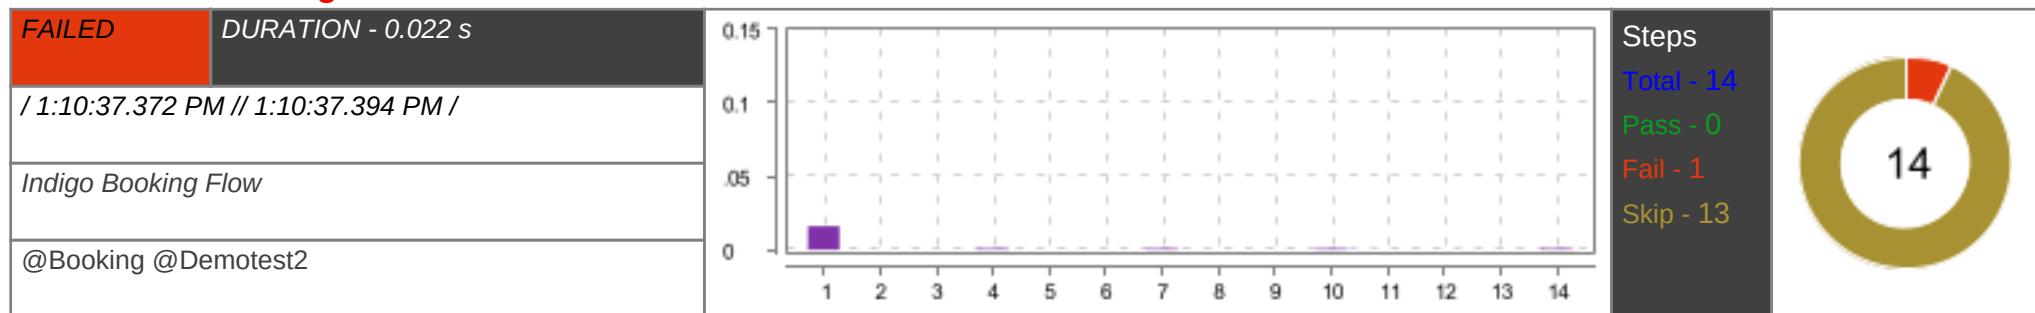

#	Step / Hook Details	Status	Duration
1	Given User is Logged in io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Booking at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)	FAILED	0.016 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)		


#	Step / Hook Details	Status	Duration
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at jdk.internal.reflect.GeneratedConstructorAccessor17.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Booking.<init>(Booking.java:30) ... 49 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 56 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given User is on Book Flight Page	SKIPPED	0.000 s
3	When User selects "DEL" and "BOM" cities	SKIPPED	0.000 s
4	And User selects a departure date	SKIPPED	0.001 s
5	And User clicks on Done button	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
6	And User Clicks on Search Flight	SKIPPED	0.000 s
7	And User select Super6e fare option	SKIPPED	0.001 s
8	And User clicks on continue button	SKIPPED	0.000 s
9	And User fills the passenger details	SKIPPED	0.000 s
10	And User verifies add-ons included in Super 6E fare	SKIPPED	0.001 s
11	And User Add a snack for Super 6e and continue	SKIPPED	0.000 s
12	And User selects a seat	SKIPPED	0.000 s
13	Then verify user is on payment page	SKIPPED	0.000 s
14	And verify user payment successfull using upi "avi@sbi"	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Roundtrip Functionality



To Verify that user can search a flight for RoundTrip

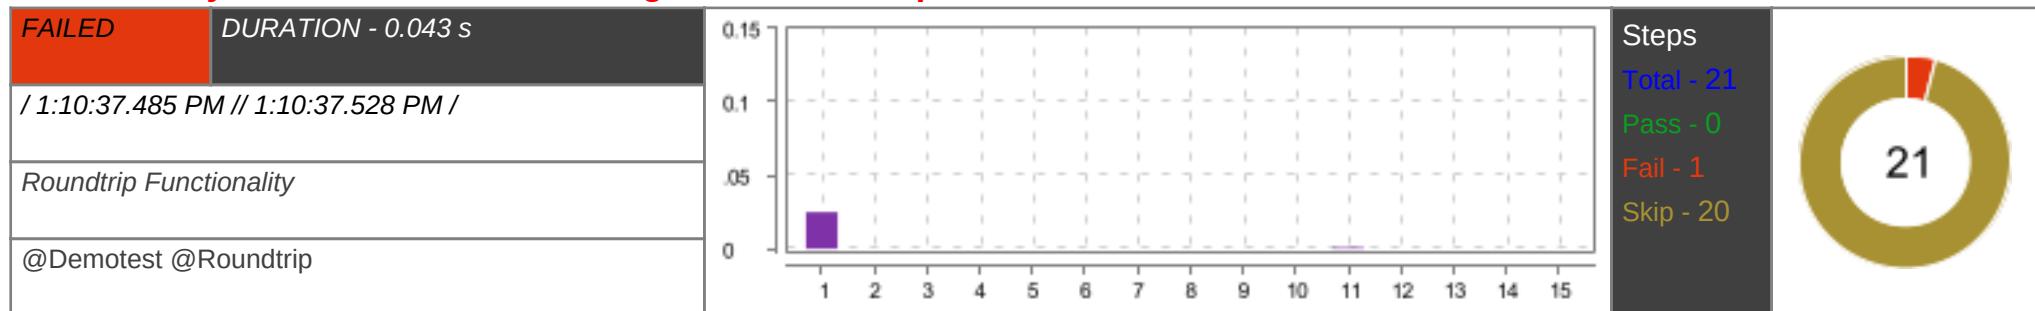


#	Step / Hook Details	Status	Duration
1	Given Launch the app and Login	FAILED	0.025 s

#	Step / Hook Details	Status	Duration
	<pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.RoundTrip at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</pre>		

#	Step / Hook Details	Status	Duration
	<pre> at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.RoundTrip.<init>(RoundTrip.java:19) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) </pre>		

#	Step / Hook Details	Status	Duration
	at java.base/java.lang.Thread.run(Thread.java:834)		
2	Then user is on homepage	SKIPPED	0.000 s
3	Given user click on bookflight	SKIPPED	0.000 s
4	When user select roundtrip option	SKIPPED	0.000 s
5	And user selects "MUM" and "DEI" cities	SKIPPED	0.000 s
6	And user select date for travel	SKIPPED	0.000 s
7	And user select passenger option	SKIPPED	0.000 s
8	And user click on Searchflight	SKIPPED	0.000 s
9	Then user is on flight serached result page	SKIPPED	0.000 s
10	And user click on continue button	SKIPPED	0.000 s
11	And user can see searched results for RoundTrip	SKIPPED	0.001 s
12	And user click on continue with return flight	SKIPPED	0.000 s
13	And user click on skip button	SKIPPED	0.000 s
14	Then user is on add passenger details page	SKIPPED	0.000 s
15	And user fill "wick" and "jones" the Passenger Details Forms	SKIPPED	0.000 s
16	And user click on continue button with step1	SKIPPED	0.000 s
17	And user click on skip button at step 2	SKIPPED	0.001 s
18	And user click on No button on travel assitance page	SKIPPED	0.000 s
19	And user skip the select seat page	SKIPPED	0.000 s
20	Then user make a payment using upi "admin@sbi"	SKIPPED	0.009 s
21	And verify confirm ticket	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.001 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Make a RoundTrip booking with special fares Armed Forces

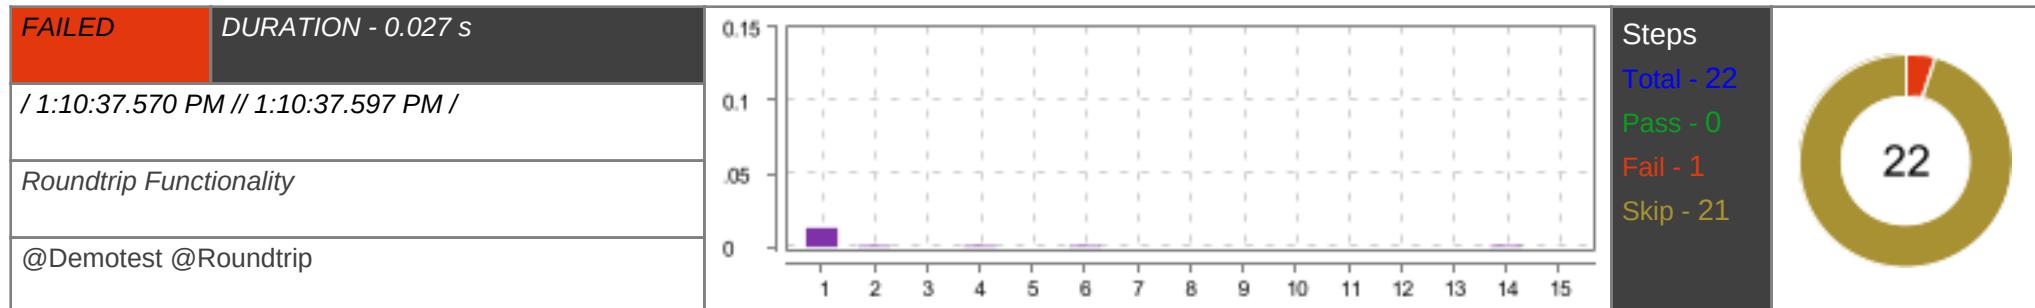


#	Step / Hook Details	Status	Duration
1	<p>Given Launch the app and Login</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.RoundTrip at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.013 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.RoundTrip.<init>(RoundTrip.java:19) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Then user is on homepage	SKIPPED	0.001 s
3	Given user click on bookflight	SKIPPED	0.000 s
4	When user select roundtrip option	SKIPPED	0.001 s
5	And user selects "MUM" and "DEI" cities	SKIPPED	0.000 s
6	And user select date for travel	SKIPPED	0.001 s
7	And user select passenger option	SKIPPED	0.000 s
8	And user click on Armed force	SKIPPED	0.000 s
9	And user click on Searchflight	SKIPPED	0.000 s
10	Then user is on searched Flighthpage with armedforce fare	SKIPPED	0.000 s
11	And user click on continue button	SKIPPED	0.000 s
12	And user can see searched results for RoundTrip	SKIPPED	0.000 s
13	And user click on continue with return flight	SKIPPED	0.000 s
14	Then user is on add passenger details page	SKIPPED	0.001 s
15	And user fill "wick" and "jones" the Passenger Details Forms	SKIPPED	0.000 s
16	And user fills the military Id "123456"	SKIPPED	0.000 s
17	And user click on continue button with step1	SKIPPED	0.000 s
18	And user click on skip button at step 2	SKIPPED	0.000 s
19	And user click on No button on travel assitance page	SKIPPED	0.000 s
20	And user skip the select seat page	SKIPPED	0.000 s
21	Then user make a payment using upi "admin@sbi"	SKIPPED	0.000 s
22	And verify confirm ticket	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

To Verify a RoundTrip booking with special fares Family & Friends

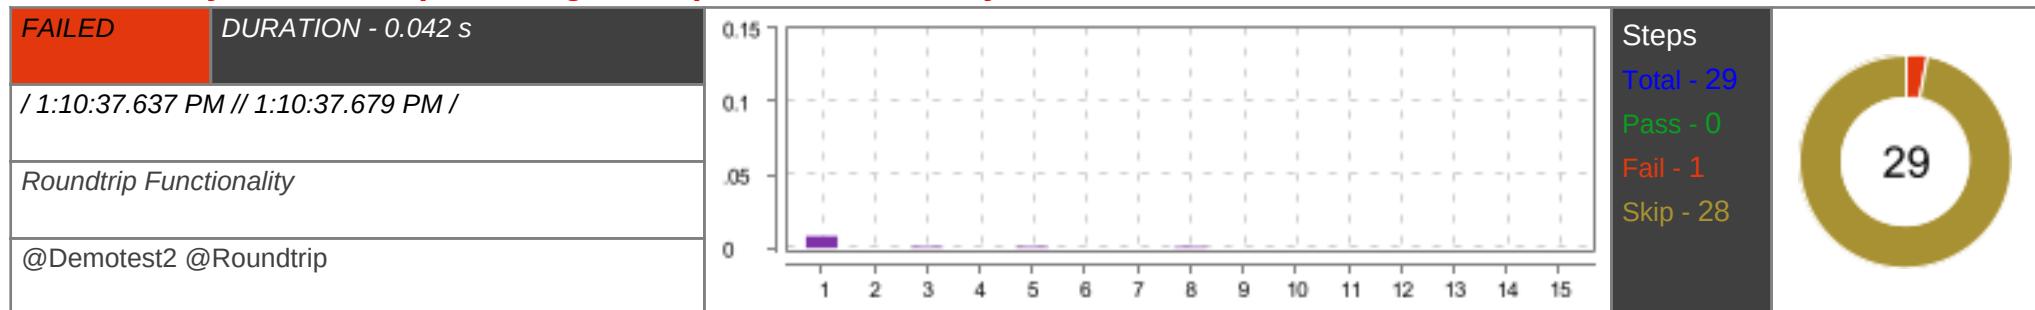


#	Step / Hook Details	Status	Duration
1	<p>Given Launch the app and Login</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.RoundTrip at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)</pre>	FAILED	0.008 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.RoundTrip.<init>(RoundTrip.java:19) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', </pre>		

#	Step / Hook Details	Status	Duration
1	revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Then user is on homepage	SKIPPED	0.000 s
3	Given user click on bookflight	SKIPPED	0.001 s
4	When user select roundtrip option	SKIPPED	0.000 s
5	And user selects "MUM" and "DEL" cities	SKIPPED	0.001 s
6	And user select date for travel	SKIPPED	0.000 s
7	And user click on Family & Friends "Family & Friends"	SKIPPED	0.000 s
8	And user click on Searchflight	SKIPPED	0.001 s
9	Then user is on flight serached result page with Family and friends fare	SKIPPED	0.000 s
10	And user click on continue button	SKIPPED	0.000 s
11	And user can see searched results for RoundTrip	SKIPPED	0.000 s
12	And user click on continue with return flight	SKIPPED	0.000 s
13	And user click on skip button	SKIPPED	0.000 s
14	Then user is on add passenger details page	SKIPPED	0.000 s
15	And user select title of Passanger	SKIPPED	0.000 s
16	And user fill first user details "nancy" and "jones"	SKIPPED	0.000 s
17	And user select title of Passanger	SKIPPED	0.000 s
18	And user fill 2nd user Details "wick" and "jones"	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
19	And user select title of Passanger	SKIPPED	0.001 s
20	And user fill 3rd user details "admin" and "james"	SKIPPED	0.000 s
21	And user select title of Passanger	SKIPPED	0.000 s
22	And user fill 4th user details "harry" and "smith"	SKIPPED	0.000 s
23	And user click on step1 continue button	SKIPPED	0.001 s
24	And user click on skip button at step 2	SKIPPED	0.000 s
25	And user click on No button on travel assitance page	SKIPPED	0.000 s
26	Then user is on seat selection page	SKIPPED	0.001 s
27	And user skip the select seat page	SKIPPED	0.000 s
28	Then user make a payment using upi "admin@sbi"	SKIPPED	0.000 s
29	And verify confirm ticket	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Make a RoundTrip booking with special fares Armed Forces and super 6E

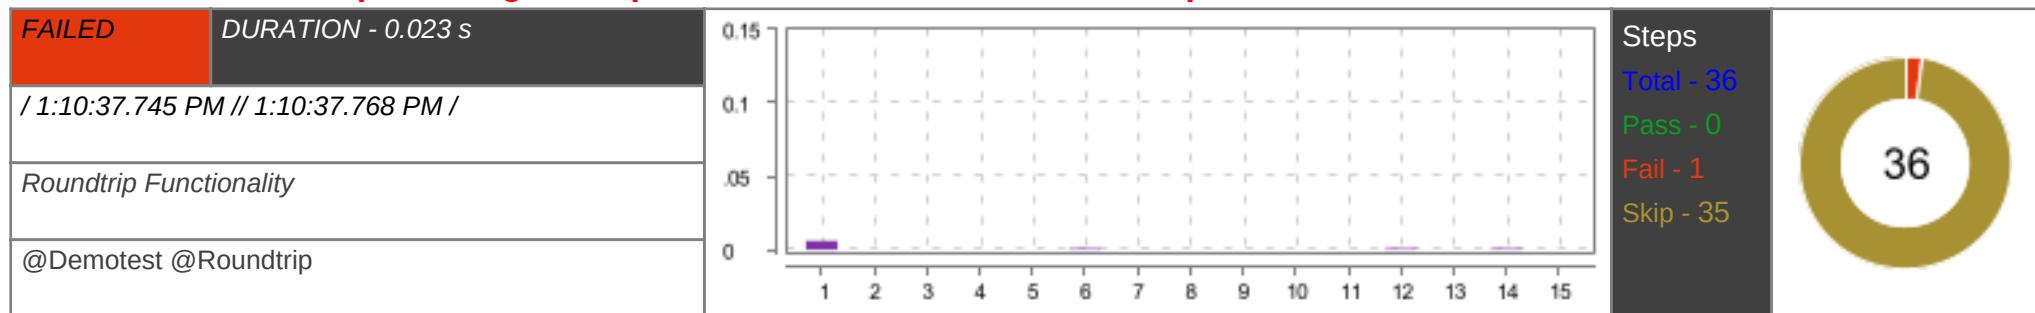


#	Step / Hook Details	Status	Duration
1	Given Launch the app and Login io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.RoundTrip at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)	FAILED	0.006 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.RoundTrip.<init>(RoundTrip.java:19) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) </pre>		
2	Then user is on homepage	SKIPPED	0.000 s
3	Given user click on bookflight	SKIPPED	0.000 s
4	When user select roundtrip option	SKIPPED	0.000 s
5	And user selects "MUM" and "DEL" cities	SKIPPED	0.000 s
6	And user select date for travel	SKIPPED	0.001 s
7	And user click on Armed force	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
8	And user click on Searchflight	SKIPPED	0.000 s
9	And user select Super 6E for first flight	SKIPPED	0.000 s
10	And user continue with first flight	SKIPPED	0.000 s
11	And user select Super 6E for second flight	SKIPPED	0.000 s
12	And user click on continue with return flight	SKIPPED	0.001 s
13	Then user is on add passenger details page	SKIPPED	0.000 s
14	And user fill "wick" and "jones" the Passenger Details Forms	SKIPPED	0.001 s
15	And user fills the military Id "123456"	SKIPPED	0.000 s
16	And user click on continue button with step1	SKIPPED	0.001 s
17	Then user is on 6E addOn page	SKIPPED	0.000 s
18	And user clickon skip Btn at addon page	SKIPPED	0.000 s
19	And User click on Select snack now for first flight	SKIPPED	0.000 s
20	And user click on passenger arrow btn	SKIPPED	0.000 s
21	And user add the food on refreshment page	SKIPPED	0.001 s
22	And user click on continue btn at refreshment page	SKIPPED	0.000 s
23	And user select second Flight Box	SKIPPED	0.000 s
24	And user click on passenger arrow btn	SKIPPED	0.000 s
25	And user add the food on refreshment page	SKIPPED	0.001 s
26	And user click on continue btn at refreshment page	SKIPPED	0.000 s
27	And user click on Done Meal	SKIPPED	0.000 s
28	And user click on continue at step 2 page	SKIPPED	0.000 s
29	Then user is on Travel Assistance Page	SKIPPED	0.000 s
30	And user click on not intrested Btn	SKIPPED	0.000 s
31	Then user is on step3 page	SKIPPED	0.000 s
32	And user select free seat for first flight	SKIPPED	0.000 s
33	And user copy seat to second flight	SKIPPED	0.001 s
34	And user continue to payment page	SKIPPED	0.000 s
35	Then user make a payment using upi "admin@sbi"	SKIPPED	0.000 s
36	And verify confirm ticket	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.001 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

To Verify a RoundTrip booking with Flexi plus

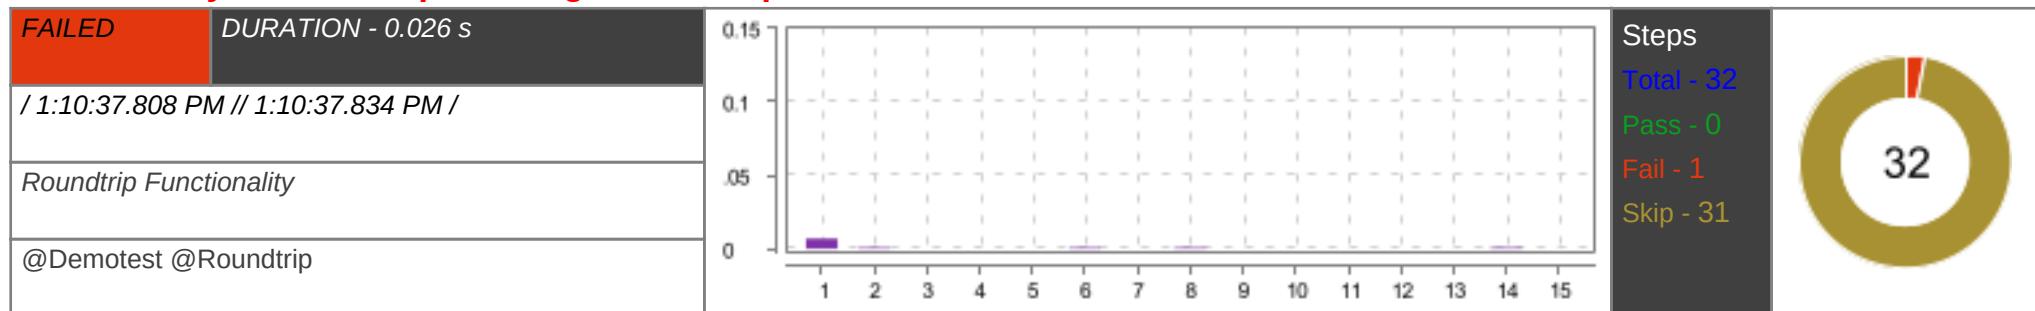


#	Step / Hook Details	Status	Duration
1	<p>Given Launch the app and Login</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.RoundTrip at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</pre>	FAILED	0.007 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.RoundTrip.<init>(RoundTrip.java:19) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) </pre>		

#	Step / Hook Details	Status	Duration
	at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Then user is on homepage	SKIPPED	0.001 s
3	Given user click on bookflight	SKIPPED	0.000 s
4	When user select roundtrip option	SKIPPED	0.000 s
5	And user selects "MUM" and "DEL" cities	SKIPPED	0.000 s
6	And user select date for travel	SKIPPED	0.001 s
7	And user select passenger option	SKIPPED	0.000 s
8	And user click on Searchflight	SKIPPED	0.001 s
9	Then user is on flight serached result page	SKIPPED	0.000 s
10	And user select flexi plus fare for first flight	SKIPPED	0.000 s
11	And user click on continue button	SKIPPED	0.000 s
12	And user can see searched results for RoundTrip	SKIPPED	0.000 s
13	And user select flexi fare for return flight	SKIPPED	0.000 s
14	And user click on continue with return flight	SKIPPED	0.001 s
15	Then user is on add passenger details page	SKIPPED	0.000 s
16	And user fill "shvam" and "jones" the Passenger Details Forms	SKIPPED	0.000 s
17	And user click on continue button with step1	SKIPPED	0.000 s
18	Then user is on 6E addOn page	SKIPPED	0.000 s
19	And user add 6E tiffin	SKIPPED	0.000 s
20	And user click on passenger arrow btn	SKIPPED	0.000 s
21	And user add the food on refreshment page	SKIPPED	0.000 s
22	And user click on continue btn at refreshment page	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
23	And user select second Flight Box	SKIPPED	0.000 s
24	And user click on passenger arrow btn	SKIPPED	0.001 s
25	And user add the food on refreshment page	SKIPPED	0.000 s
26	And user click on continue btn at refreshment page	SKIPPED	0.000 s
27	And user click on done Button at tiffin page	SKIPPED	0.000 s
28	And user click on continue at step 2 page	SKIPPED	0.000 s
29	And user click on No button on travel assistance page	SKIPPED	0.001 s
30	And user skip the select seat page	SKIPPED	0.000 s
31	Then user make a payment using upi "admin@sbi"	SKIPPED	0.000 s
32	And verify confirm ticket	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

To verify that Round trip cannot club two different fares.

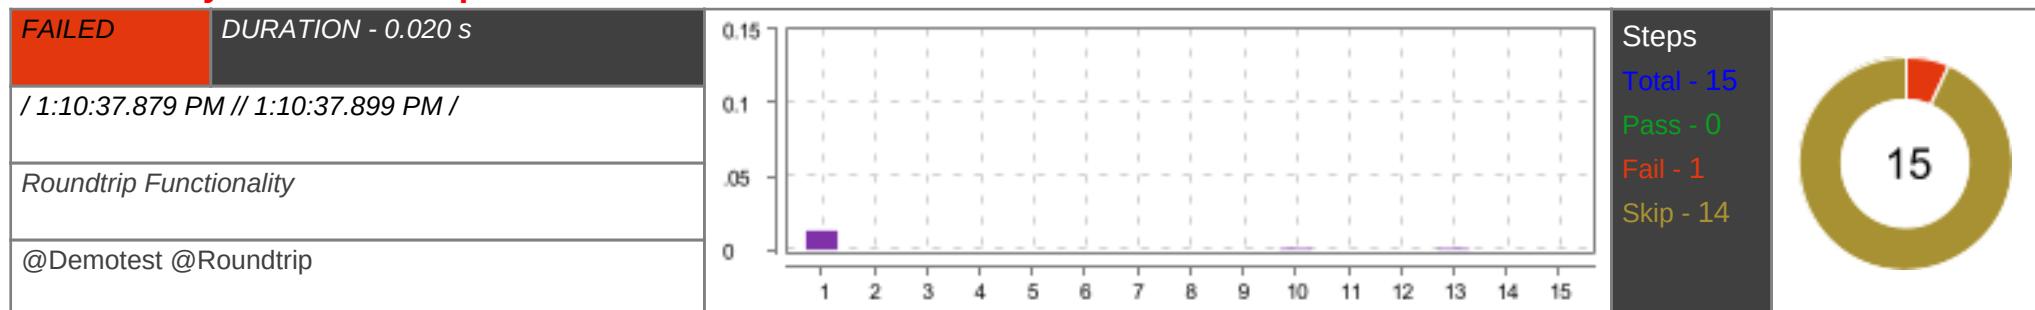

#	Step / Hook Details	Status	Duration
1	<p>Given Launch the app and Login</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.RoundTrip at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85)</pre>	FAILED	0.013 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) </pre>		


#	Step / Hook Details	Status	Duration
	<pre> at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.RoundTrip.<init>(RoundTrip.java:19) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) </pre>		
2	Then user is on homepage	SKIPPED	0.000 s
3	Given user click on bookflight	SKIPPED	0.000 s
4	When user select roundtrip option	SKIPPED	0.000 s
5	And user selects "MUM" and "DEI" cities	SKIPPED	0.000 s
6	And user select date for travel	SKIPPED	0.000 s
7	And user select passenger option	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
8	And user click on Searchflight	SKIPPED	0.000 s
9	Then user is on flight serached result page	SKIPPED	0.000 s
10	And user select flexi plus fare for first flight	SKIPPED	0.001 s
11	And user click on continue button	SKIPPED	0.000 s
12	And user can see searched results for RoundTrip	SKIPPED	0.000 s
13	And user select Super 6E for second flight	SKIPPED	0.001 s
14	And user click on continue with return flight	SKIPPED	0.000 s
15	Then user verify the invalid fare	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.001 s

MultiCityTrip Functionality



To Verify that user can search a flight for Multicity

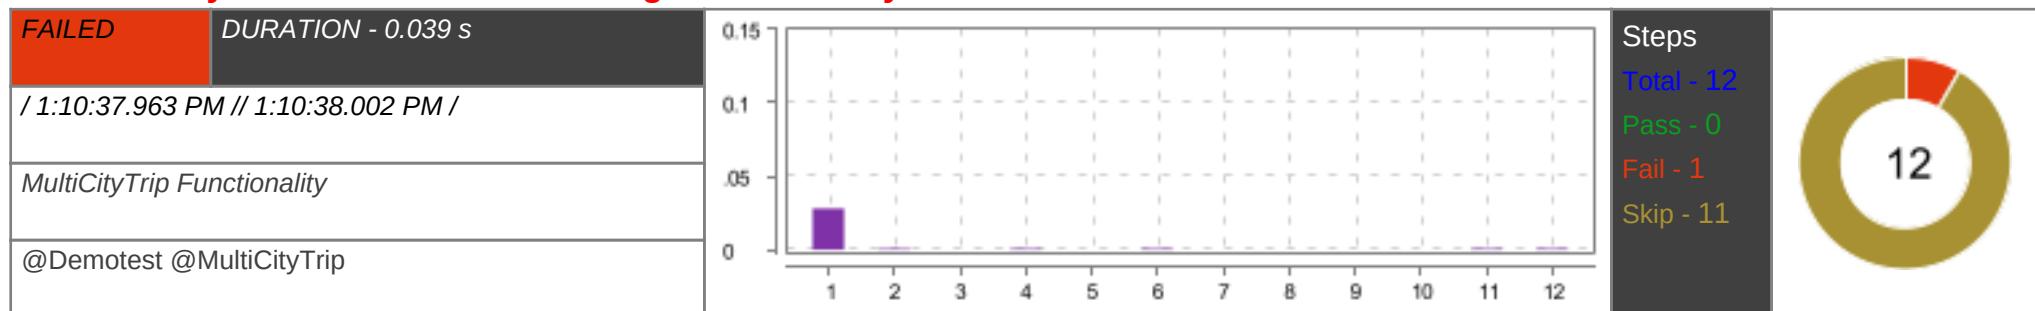


#	Step / Hook Details	Status	Duration
1	Given Launch the App and Login io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.MultiCityTrip	FAILED	0.028 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)		

#	Step / Hook Details	Status	Duration
	<pre> at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.MultiCityTrip.<init>(MultiCityTrip.java:22) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) </pre>		

#	Step / Hook Details	Status	Duration
2	Given user click on Bookflight	SKIPPED	0.001 s
3	And user click on MultiCity option	SKIPPED	0.000 s
4	When user click on Popup cross btn	SKIPPED	0.001 s
5	And user select first "MUM" city	SKIPPED	0.000 s
6	And user select Date for first flight	SKIPPED	0.001 s
7	And user select second "COK" city	SKIPPED	0.000 s
8	And user click on city search cross btn	SKIPPED	0.000 s
9	And user click on second "IXE" city	SKIPPED	0.000 s
10	And user select date for second flight	SKIPPED	0.000 s
11	And user search a flight	SKIPPED	0.001 s
12	Then user verify Searched flight page	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

To Verify that user can modify the MultiCity flight

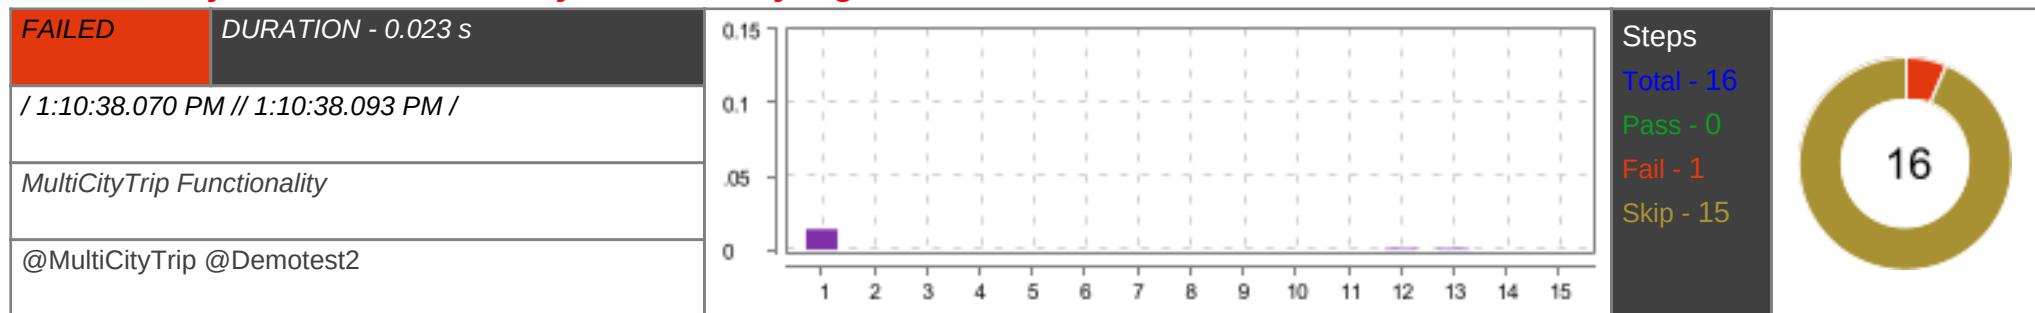


#	Step / Hook Details	Status	Duration
1	Given Launch the App and Login io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.MultiCityTrip at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)	FAILED	0.014 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) </pre>		

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.MultiCityTrip.<init>(MultiCityTrip.java:22) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given user click on Bookflight	SKIPPED	0.000 s
3	And user click on MultiCity option	SKIPPED	0.000 s
4	When user click on Popup cross btn	SKIPPED	0.000 s
5	And user select first "MUM" city	SKIPPED	0.000 s
6	And user select Date for first flight	SKIPPED	0.000 s
7	And user select second "COK" city	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
8	Then user click on city search cross btn	SKIPPED	0.000 s
9	And user click on second "IXE" city	SKIPPED	0.000 s
10	And user select date for second flight	SKIPPED	0.000 s
11	And user search a flights	SKIPPED	0.000 s
12	Then user verify Searched flight page	SKIPPED	0.001 s
13	And user continue with first flight	SKIPPED	0.001 s
14	Then user is on second flight page	SKIPPED	0.000 s
15	And user click on modify search flight	SKIPPED	0.000 s
16	Then user is on multicity Home page	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

To Verify that user can Make a MultiCity booking with special fares Armed Forces

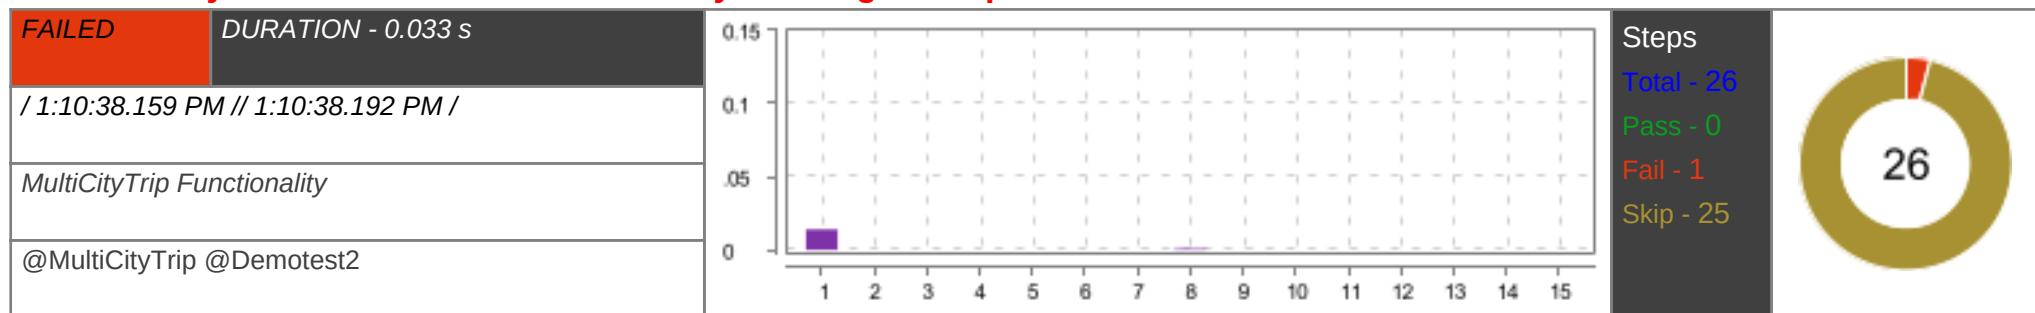


#	Step / Hook Details	Status	Duration
1	Given Launch the App and Login io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.MultiCityTrip at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57)	FAILED	0.014 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.MultiCityTrip.<init>(MultiCityTrip.java:22) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)</pre>		
2	Given user click on Bookflight	SKIPPED	0.000 s
3	And user click on MultiCity option	SKIPPED	0.000 s
4	When user click on Popup cross btn	SKIPPED	0.000 s
5	And user select first "MUM" city	SKIPPED	0.000 s
6	And user select Date for first flight	SKIPPED	0.000 s
7	And user select second "COK" city	SKIPPED	0.000 s
8	Then user click on city search cross btn	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
9	And user click on second "IXE" city	SKIPPED	0.000 s
10	And user select date for second flight	SKIPPED	0.000 s
11	And user scroll up to special fare	SKIPPED	0.000 s
12	And user click on Armed Force	SKIPPED	0.000 s
13	And user search a flight	SKIPPED	0.000 s
14	Then user verify result page with armedforce fare	SKIPPED	0.000 s
15	And user click on continue button with first flight	SKIPPED	0.000 s
16	And user can see searched results for MultiCity	SKIPPED	0.000 s
17	And user click on continue with second flight	SKIPPED	0.000 s
18	Then user is on step1 add passenger details page	SKIPPED	0.000 s
19	And user fill "harry" and "kane" the Passenger Details Form	SKIPPED	0.000 s
20	And user fill the Military id "1234" in form	SKIPPED	0.000 s
21	And user click on step1 continue button	SKIPPED	0.000 s
22	And user click on step 2 skip button	SKIPPED	0.000 s
23	And user click on Not Intrested button on travel assitance page	SKIPPED	0.002 s
24	And user skip step 3 select seat page	SKIPPED	0.000 s
25	And user click on continue on payment with upi "admin@sbi"	SKIPPED	0.000 s
26	Then user is verified payment completed	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

To Verify that Make a Multicity booking with Armed Force and SUPER 6E CAPITAL

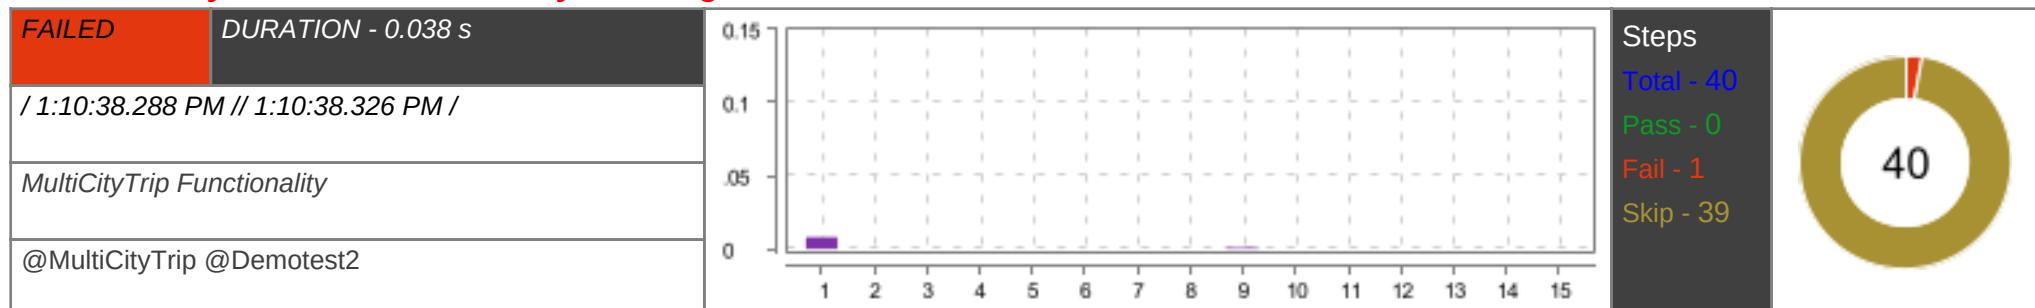


#	Step / Hook Details	Status	Duration
1	<p>Given Launch the App and Login</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.MultiCityTrip at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248)</pre>	FAILED	0.008 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.MultiCityTrip.<init>(MultiCityTrip.java:22) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) </pre>		

#	Step / Hook Details	Status	Duration
	at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given user click on Bookflight	SKIPPED	0.000 s
3	And user click on MultiCity option	SKIPPED	0.000 s
4	When user click on Popup cross btn	SKIPPED	0.000 s
5	And user select first "MUM" city	SKIPPED	0.000 s
6	And user select Date for first flight	SKIPPED	0.000 s
7	And user select second "MUM" city	SKIPPED	0.000 s
8	Then user click on city search cross btn	SKIPPED	0.000 s
9	And user click on second "DeL" city	SKIPPED	0.001 s
10	And user select date for second flight	SKIPPED	0.000 s
11	And user scroll up to special fare	SKIPPED	0.000 s
12	And user click on Armed Force	SKIPPED	0.000 s
13	And user search a flight	SKIPPED	0.000 s
14	Then user verify result page with armedforce fare	SKIPPED	0.000 s
15	And user select super 6E fare to First Flight	SKIPPED	0.000 s
16	And user click on continue button with first flight	SKIPPED	0.000 s
17	And user can see searched results for MultiCity	SKIPPED	0.000 s
18	And user select super 6E fare to Second Flight	SKIPPED	0.000 s
19	And user click on continue with second flight	SKIPPED	0.000 s
20	Then user is on step1 add passenger details page	SKIPPED	0.001 s
21	And user fill "harry" and "kane" the Passenger Details Form	SKIPPED	0.000 s
22	And user fill the Military id "1234" in form	SKIPPED	0.000 s
23	And user click on step1 continue button	SKIPPED	0.001 s
24	And user click on step2 6E tiffin	SKIPPED	0.000 s
25	And user click first passenger arrow button	SKIPPED	0.000 s
26	And user add food combo	SKIPPED	0.000 s
27	And user click on continue after confirm	SKIPPED	0.006 s
28	And user select second flight box	SKIPPED	0.000 s
29	And user click first passenger arrow button	SKIPPED	0.000 s
30	And user add food combo	SKIPPED	0.001 s
31	And user click on continue after confirm	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
32	And user click on 6Etiffin done button	SKIPPED	0.001 s
33	And user click on Step2 Addon continue Btn	SKIPPED	0.000 s
34	And user click on Not Interested button on travel assistance page	SKIPPED	0.000 s
35	Then user is on step 3 page	SKIPPED	0.000 s
36	And user select free seat for First Flight	SKIPPED	0.000 s
37	And user copy seat to Second Flight	SKIPPED	0.000 s
38	And user continue to Payment Page	SKIPPED	0.000 s
39	And user click on continue on payment with upi "admin@sbi"	SKIPPED	0.000 s
40	Then user is verified payment completed	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.001 s

In multi city we not choose back date for travel

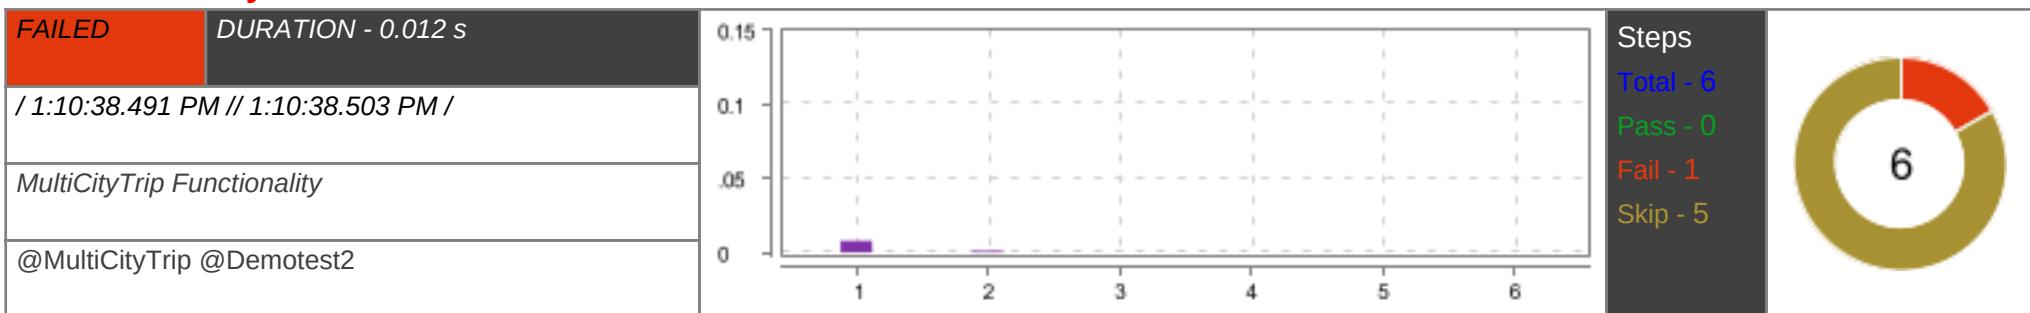

#	Step / Hook Details	Status	Duration
1	Given Launch the App and Login io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.MultiCityTrip at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57)	FAILED	0.008 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) </pre>		


#	Step / Hook Details	Status	Duration
	<pre> at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.MultiCityTrip.<init>(MultiCityTrip.java:22) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) </pre>		
2	Given user click on Bookflight	SKIPPED	0.001 s
3	And user click on MultiCity option	SKIPPED	0.000 s
4	When user click on Popup cross btn	SKIPPED	0.000 s
5	And user select first "MUM" city	SKIPPED	0.000 s
6	And user select back Date for first flight	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException		

#	Step / Hook Details	Status	Duration
	at testApp.Hooks.closeDriver(Hooks.java:53)		

UndoCheckin Functionality



To Verify User can Check the Undo Check In

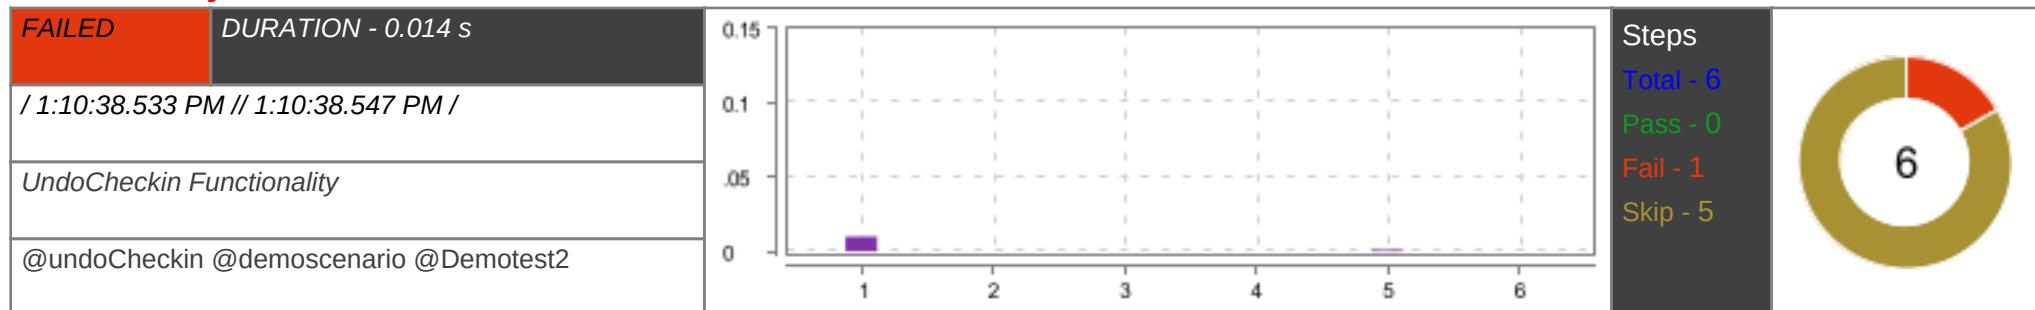

#	Step / Hook Details	Status	Duration
1	<p>Given launch the app and login</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.UndoCheckin at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109)</pre>	FAILED	0.010 s


#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELGGNLPTP1412', ip: '192.168.29.67' </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.UndoCheckin.<init>(UndoCheckin.java:15) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) </pre>		
2	And user can select Check In Now	SKIPPED	0.000 s
3	When User can click on Itinerary view page	SKIPPED	0.000 s
4	And User can select undo check in	SKIPPED	0.000 s
5	When User select the check Box	SKIPPED	0.001 s
6	Then User Select Final Undo Checkin	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Add-on Functionality



To select Six E Prime Add-on for Adult passangers

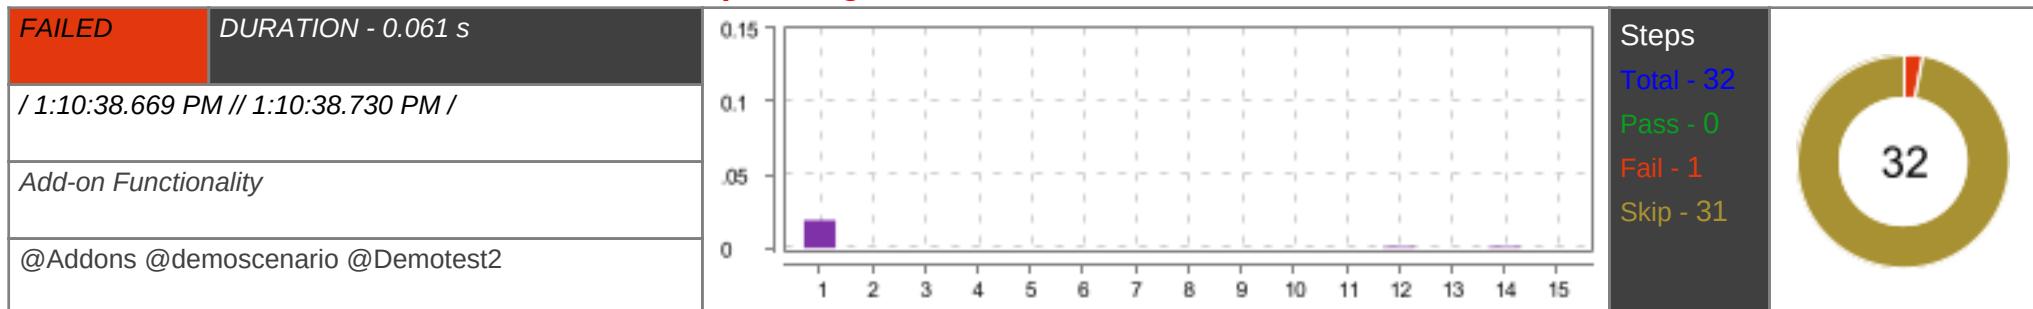


#	Step / Hook Details	Status	Duration
1	<p>Given Launch the app and IOgin</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Addons at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</pre>	FAILED	0.019 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Addons.<init>(Addons.java:23) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) </pre>		
2	And user click on BookFlight	SKIPPED	0.000 s
3	And user select "MUM" and "Del" cities	SKIPPED	0.000 s
4	And user select future Date	SKIPPED	0.000 s
5	Given user adds an Adult passenger from passenger list	SKIPPED	0.000 s
6	And user clicks on the search flight button	SKIPPED	0.000 s
7	And click on continue button	SKIPPED	0.000 s
8	And skip the upgrade flexi fare	SKIPPED	0.000 s
9	When user verify Passanger details page	SKIPPED	0.000 s
10	And select title of passanger	SKIPPED	0.000 s
11	And enter "Harry" and "jones" of Passanger	SKIPPED	0.000 s
12	And Continue with Passanger details	SKIPPED	0.001 s
13	Then visit and verify Six E Addons page	SKIPPED	0.000 s
14	And user select Six E Prime addon	SKIPPED	0.001 s
15	And verify six e prime page	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
16	And check the checkbox for selected flight	SKIPPED	0.000 s
17	And click on the Add6EPrime button	SKIPPED	0.000 s
18	And verify 6E Tiffin page	SKIPPED	0.000 s
19	And select meal for passenger	SKIPPED	0.000 s
20	And select veg meal type	SKIPPED	0.000 s
21	And select nonveg meal type	SKIPPED	0.000 s
22	And click on the continue	SKIPPED	0.000 s
23	And click on done button	SKIPPED	0.001 s
24	And user continue with SixE Prime addon	SKIPPED	0.000 s
25	And confirm with addon	SKIPPED	0.000 s
26	And user skip Seat selection page	SKIPPED	0.001 s
27	And user completes payment using Credit Card	SKIPPED	0.000 s
28	And enter valid credentials "4263982640269299" and "02/23" and "837" and "Visa" of Credit Card	SKIPPED	0.001 s
29	And user accept terms and click pay	SKIPPED	0.000 s
30	And user click on confirm Payment	SKIPPED	0.006 s
31	And user click on back to merchant page	SKIPPED	0.000 s
32	And booked ticket is confirmed	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

To select Fast Forward Add-on for Child

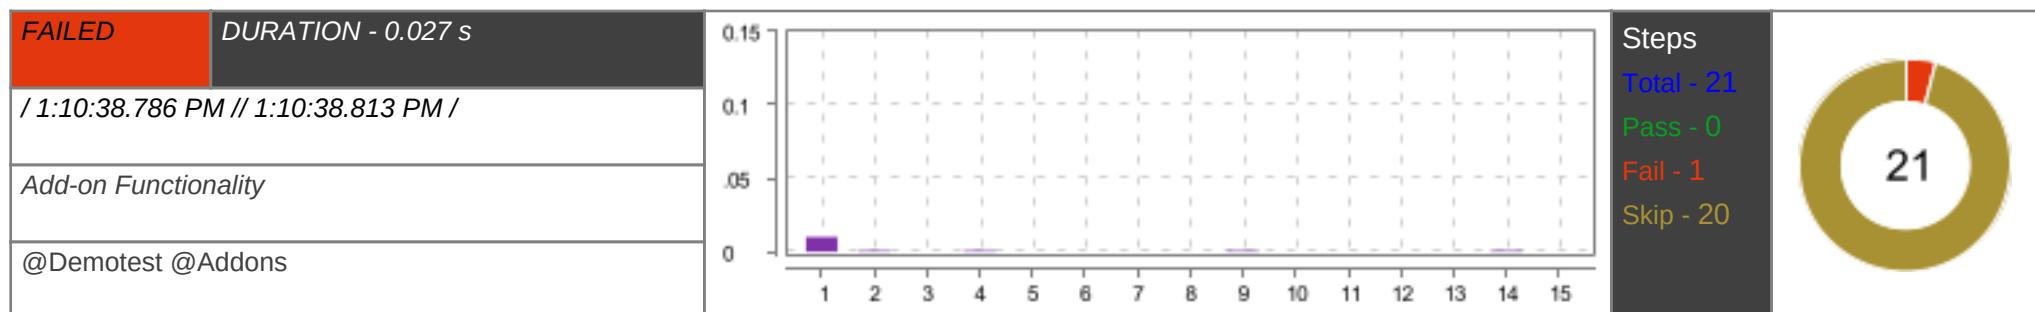


#	Step / Hook Details	Status	Duration
1	Given Launch the app and Login	FAILED	0.010 s

#	Step / Hook Details	Status	Duration
	<pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Addons at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</pre>		

#	Step / Hook Details	Status	Duration
	<pre> at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Addons.<init>(Addons.java:23) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) </pre>		

#	Step / Hook Details	Status	Duration
	at java.base/java.lang.Thread.run(Thread.java:834)		
2	And user click on BookFlight	SKIPPED	0.001 s
3	And user select "MUM" and "DeL" cities	SKIPPED	0.000 s
4	And user select future Date	SKIPPED	0.001 s
5	Given user adds a child from passenger list	SKIPPED	0.000 s
6	And user clicks on the search flight button	SKIPPED	0.000 s
7	And click on continue button	SKIPPED	0.000 s
8	And skip the upgrade flexi fare	SKIPPED	0.000 s
9	When user verify Passanger details page	SKIPPED	0.001 s
10	And select title of passanger	SKIPPED	0.000 s
11	And enter "wicky" and "jones" of Passanger	SKIPPED	0.000 s
12	And select gender of Child	SKIPPED	0.000 s
13	And enter "wick" and "kane" of Child	SKIPPED	0.000 s
14	And Continue with Passanger details	SKIPPED	0.001 s
15	Then visit and verify Six E Addons page	SKIPPED	0.000 s
16	And select Fast Forward addon	SKIPPED	0.000 s
17	And verify six Fast Forward page	SKIPPED	0.000 s
18	And check the checkbox for selected flight	SKIPPED	0.000 s
19	And click on the Add Fast Forward button	SKIPPED	0.000 s
20	And continue with Fast Forward	SKIPPED	0.000 s
21	And skip travel assistance	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

To select Excess Baggage Add-on

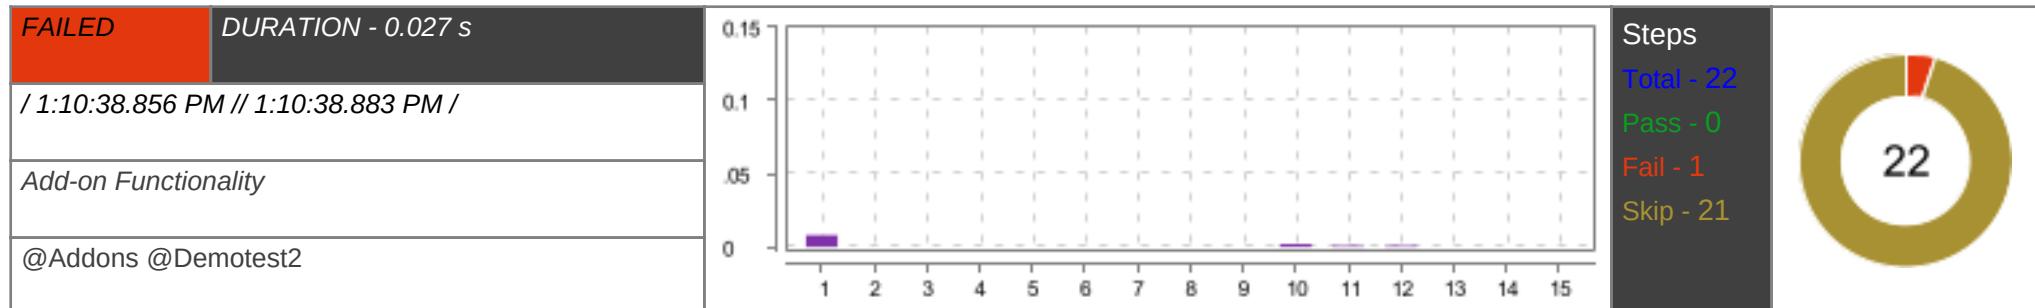


#	Step / Hook Details	Status	Duration
1	<p>Given Launch the app and IOgin</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Addons at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.008 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Addons.<init>(Addons.java:23) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	And user click on BookFlight	SKIPPED	0.000 s
3	And user select "MUM" and "DeL" cities	SKIPPED	0.000 s
4	And user select future Date	SKIPPED	0.000 s
5	Given user adds a infant from passenger list	SKIPPED	0.000 s
6	And user clicks on the search flight button	SKIPPED	0.000 s
7	And close infant notification	SKIPPED	0.000 s
8	And click on continue button	SKIPPED	0.000 s
9	When user verify Passanger details page	SKIPPED	0.000 s
10	And enter registerd user details	SKIPPED	0.002 s
11	And select gender of infant	SKIPPED	0.001 s
12	And enter "Harry" and "jones" of infant	SKIPPED	0.001 s
13	And select date of birth	SKIPPED	0.000 s
14	And done after DOB	SKIPPED	0.000 s
15	And click on continue details	SKIPPED	0.000 s
16	Then visit and verify Six E Addons page	SKIPPED	0.000 s
17	And select Excess Baggage addon	SKIPPED	0.000 s
18	And verify Excess Baggage page	SKIPPED	0.000 s
19	And add a weight of bag	SKIPPED	0.000 s
20	And click on the done button	SKIPPED	0.000 s
21	And continue with Excess baggage	SKIPPED	0.000 s
22	And skip the excess baggage	SKIPPED	0.001 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s

#	Step / Hook Details	Status	Duration
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

To select Sports Equipment Add-on

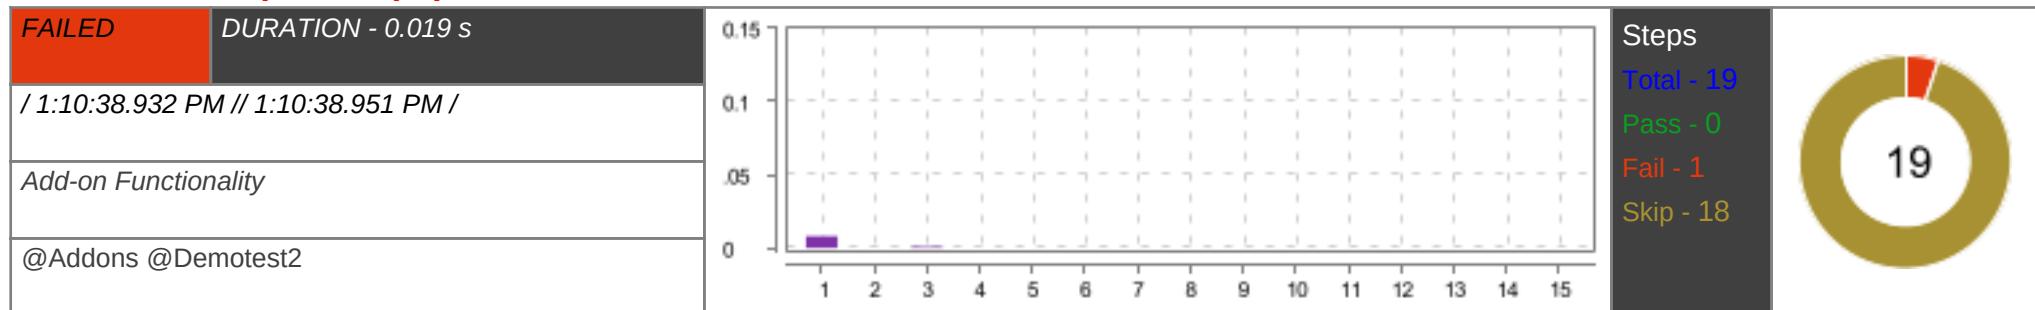


#	Step / Hook Details	Status	Duration
1	<p>Given Launch the app and IOgin</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Addons at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)</pre>	FAILED	0.008 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Addons.<init>(Addons.java:23) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', </pre>		

#	Step / Hook Details	Status	Duration
1	revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	And user click on BookFlight	SKIPPED	0.000 s
3	And user select "MUM" and "Del" cities	SKIPPED	0.001 s
4	And user select future Date	SKIPPED	0.000 s
5	Given user adds a registered user	SKIPPED	0.000 s
6	And user clicks on the search flight button	SKIPPED	0.000 s
7	And check the searched flight	SKIPPED	0.000 s
8	And click on continue button	SKIPPED	0.000 s
9	And skip the upgrade flexi fare	SKIPPED	0.000 s
10	When user verify Passanger details page	SKIPPED	0.000 s
11	And enter registerd user details	SKIPPED	0.000 s
12	And click on continue details	SKIPPED	0.000 s
13	Then visit and verify Six E Addons page	SKIPPED	0.000 s
14	And select sports equipment addon	SKIPPED	0.000 s
15	And verify sports equipment page	SKIPPED	0.000 s
16	And add a bagkit	SKIPPED	0.000 s
17	And click the done button	SKIPPED	0.000 s
18	And continue with sports equipment	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
19	And skip the sports equipment AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	SKIPPED FAILED	0.000 s 0.000 s

To select Delayed and Lost Baggage addon

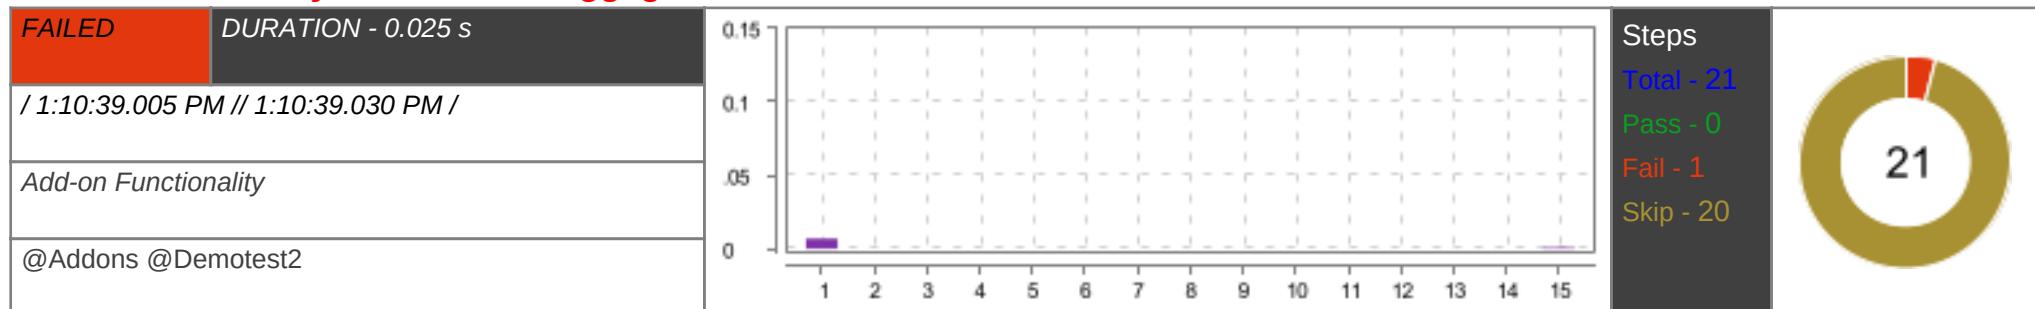


#	Step / Hook Details	Status	Duration
1	Given user select as guest login io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Addons at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)	FAILED	0.007 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) </pre>		

#	Step / Hook Details	Status	Duration
	at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Addons.<init>(Addons.java:23) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	And user click on BookFlight	SKIPPED	0.000 s
3	And user select "MUM" and "DeL" cities	SKIPPED	0.000 s
4	And user select future Date	SKIPPED	0.000 s
5	And user clicks on the search flight button	SKIPPED	0.000 s
6	And check the searched flight	SKIPPED	0.000 s
7	And click on continue button	SKIPPED	0.000 s
8	And skip the upgrade flexi fare	SKIPPED	0.000 s
9	When user verify Passanger details page	SKIPPED	0.000 s
10	And slect title of guest user	SKIPPED	0.000 s
11	And enter "Harry" and "jones" of guest user	SKIPPED	0.000 s
12	And enter "7620828139"	SKIPPED	0.000 s
13	And enter a "wickykul25@gmail.com"	SKIPPED	0.000 s
14	And click on continue details	SKIPPED	0.000 s
15	Then visit and verify Six E Addons page	SKIPPED	0.001 s
16	And select delayed and lost baggage addon	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
17	And verify delayed and lost baggage page	SKIPPED	0.000 s
18	And click on checkbox	SKIPPED	0.000 s
19	And click on add to trip	SKIPPED	0.001 s
20	And continue with delayed and lost baggage	SKIPPED	0.000 s
21	And skip travel assistance	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

To select 6E KickBoard Add-on

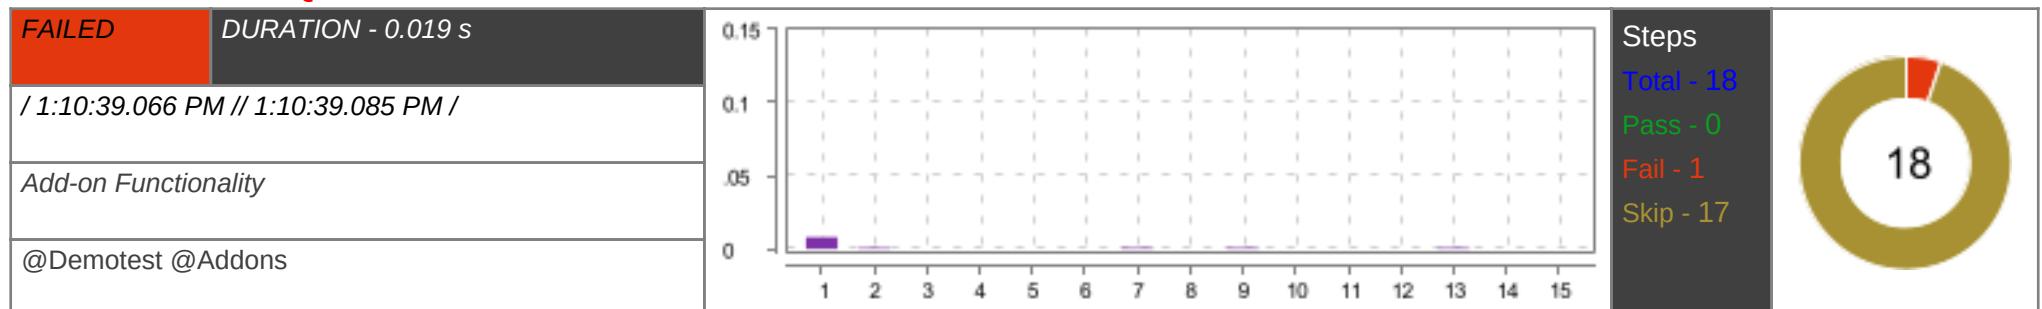


#	Step / Hook Details	Status	Duration
1	Given Launch the app and IOgin io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Addons at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129)	FAILED	0.008 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Addons.<init>(Addons.java:23) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) </pre>		
2	And user click on BookFlight	SKIPPED	0.001 s
3	And user select "MUM" and "DeL" cities	SKIPPED	0.000 s
4	And user select future Date	SKIPPED	0.000 s
5	Given user adds an armed forces from special fare options	SKIPPED	0.000 s
6	And user clicks on the search flight button	SKIPPED	0.000 s
7	And click on continue button	SKIPPED	0.001 s
8	When user verify Passanger details page	SKIPPED	0.000 s
9	And select title of passanger	SKIPPED	0.001 s
10	And enter "Harry" and "jones" and "123456" of Passanger	SKIPPED	0.000 s
11	And Continue with Passanger details	SKIPPED	0.000 s
12	Then visit and verify Six E Addons page	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
13	And select Six E quick board addon	SKIPPED	0.001 s
14	And verify six e quick board page	SKIPPED	0.000 s
15	And check the checkbox for selected flight	SKIPPED	0.000 s
16	And click on the Add6E qick board button	SKIPPED	0.000 s
17	And continue with SixE quick board addon	SKIPPED	0.001 s
18	And skip travel assistance	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

To select Lounge Add-on

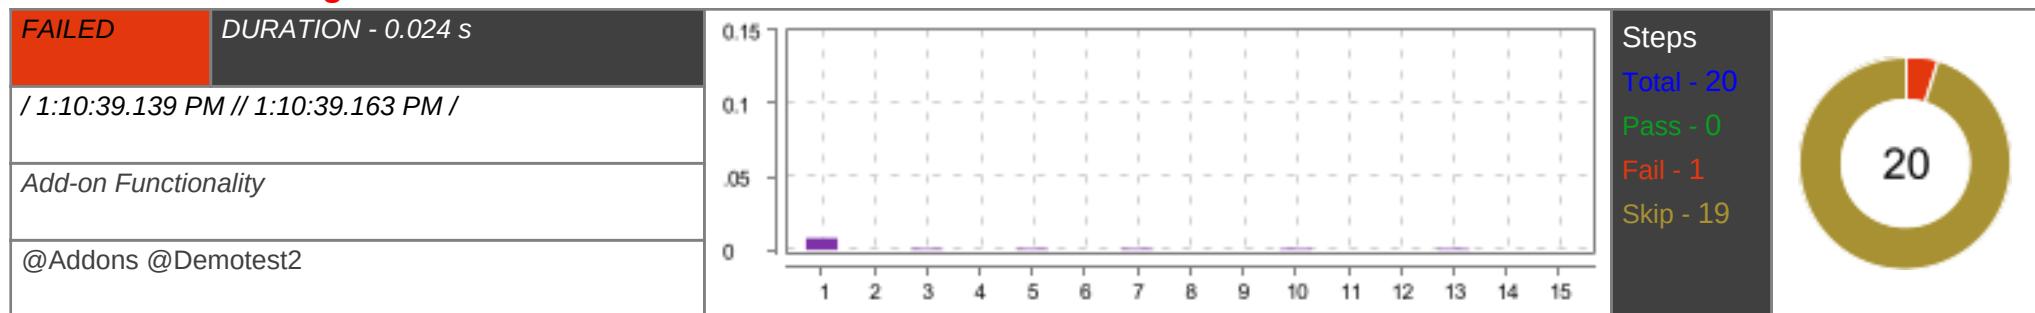


#	Step / Hook Details	Status	Duration
1	Given Launch the app and IOgin io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Addons at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109)	FAILED	0.008 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELGGNLPTP1412', ip: '192.168.29.67' </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Addons.<init>(Addons.java:23) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) </pre>		
2	And user click on BookFlight	SKIPPED	0.000 s
3	And user select "MUM" and "Del" cities	SKIPPED	0.001 s
4	And user select future Date	SKIPPED	0.000 s
5	Given user adds an "Unaccompanied Minor" from special fare options	SKIPPED	0.001 s
6	And user clicks on the search flight button	SKIPPED	0.000 s
7	And click on continue button	SKIPPED	0.001 s
8	When user verify Passanger details page	SKIPPED	0.000 s
9	And select gender of passanger	SKIPPED	0.000 s
10	And enter "Harry" and "jones" of Passanger	SKIPPED	0.001 s
11	And select date of birth	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
12	And done after DOB	SKIPPED	0.000 s
13	And Continue with Passanger details	SKIPPED	0.001 s
14	Then visit and verify Six E Addons page	SKIPPED	0.000 s
15	And select Lounge addon	SKIPPED	0.000 s
16	And verify lounge page	SKIPPED	0.000 s
17	And check the checkbox for passanger	SKIPPED	0.000 s
18	And click on the done button of lounge	SKIPPED	0.001 s
19	And continue lounge addon	SKIPPED	0.001 s
20	And skip travel assistance	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

To select Travel Assistance Add-on

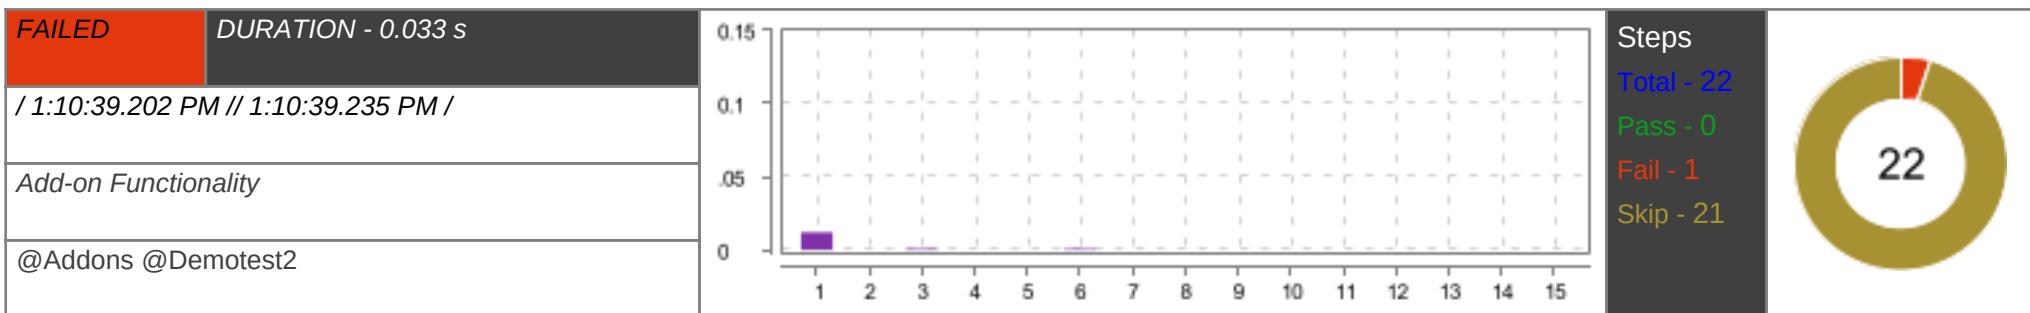


#	Step / Hook Details	Status	Duration
1	Given Launch the app and IOgin io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Addons at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57)	FAILED	0.012 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Addons.<init>(Addons.java:23) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) </pre>		
2	And user click on BookFlight	SKIPPED	0.000 s
3	And user select "MUM" and "Del" cities	SKIPPED	0.001 s
4	And user select future Date	SKIPPED	0.000 s
5	Given user adds an "Students" from special fare options	SKIPPED	0.000 s
6	And user clicks on the search flight button	SKIPPED	0.001 s
7	And click on continue button	SKIPPED	0.000 s
8	When user verify Passanger details page	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
9	And select title of passanger	SKIPPED	0.000 s
10	And enter "Harry" and "jones" of Passanger	SKIPPED	0.000 s
11	And enter studentid "2018bme024" of students	SKIPPED	0.000 s
12	And enter collegename "bharatvidyalay" of students	SKIPPED	0.000 s
13	And Continue with Passanger details	SKIPPED	0.000 s
14	Then visit and verify Six E Addons page	SKIPPED	0.000 s
15	And select travel assistance addon	SKIPPED	0.000 s
16	And verify travel assistance page	SKIPPED	0.000 s
17	And select date of birth of student	SKIPPED	0.000 s
18	And done after DOB	SKIPPED	0.000 s
19	And click on agree terms and conditions	SKIPPED	0.001 s
20	And add travel assistance addon	SKIPPED	0.000 s
21	And continue travel assistance addon	SKIPPED	0.000 s
22	And skip travel assistance	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

To select Indigo Promise Add-on

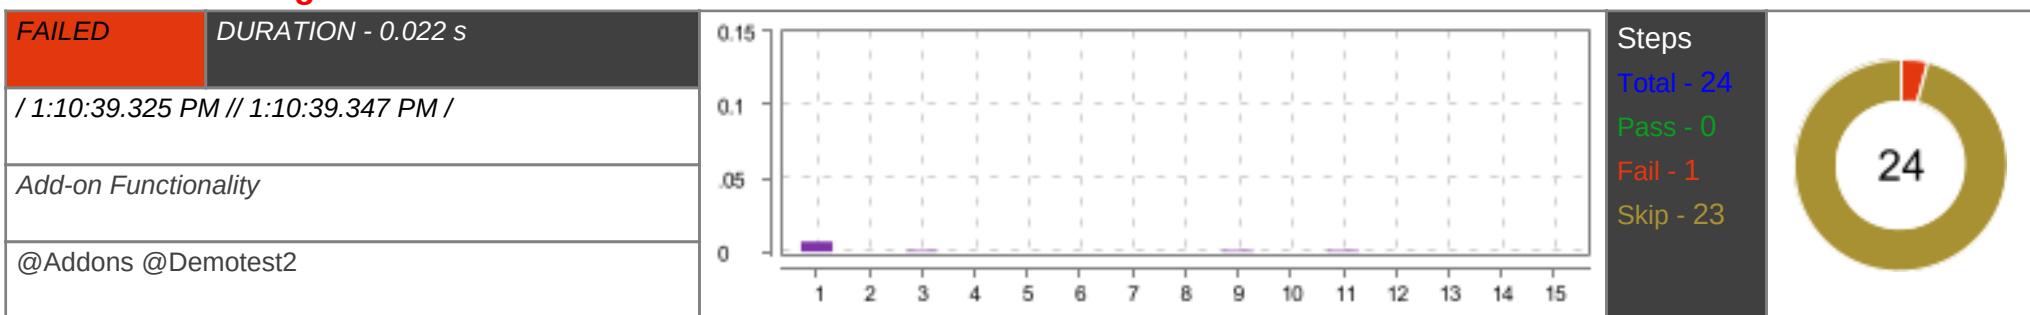


#	Step / Hook Details	Status	Duration
1	Given Launch the app and IOgin io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Addons at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)	FAILED	0.007 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)		

#	Step / Hook Details	Status	Duration
	<p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</p> <p>Caused by: java.lang.reflect.InvocationTargetException</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Addons.<init>(Addons.java:23) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)</p>		
2	And user click on BookFlight	SKIPPED	0.000 s
3	And user select "MUM" and "Del" cities	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
4	And user select future Date	SKIPPED	0.000 s
5	Given user adds an "Family & Friends" from special fare options	SKIPPED	0.000 s
6	And user clicks on the search flight button	SKIPPED	0.000 s
7	And click on continue button	SKIPPED	0.000 s
8	And skip the upgrade flexi fare	SKIPPED	0.000 s
9	When user verify Passanger details page	SKIPPED	0.001 s
10	And enter registered user details	SKIPPED	0.000 s
11	And select title of passanger	SKIPPED	0.001 s
12	And enter "admin" and "smith" of second Passanger	SKIPPED	0.000 s
13	And select title of passanger	SKIPPED	0.000 s
14	And enter "john" and "jack" of third Passanger	SKIPPED	0.000 s
15	And select title of passanger	SKIPPED	0.000 s
16	And enter "wick" and "admin" of fourth Passanger	SKIPPED	0.000 s
17	And click on continue details	SKIPPED	0.000 s
18	Then visit and verify Six E Addons page	SKIPPED	0.000 s
19	And select indigo promise addon	SKIPPED	0.000 s
20	And verify indigo promise page	SKIPPED	0.000 s
21	And check the checkbox for selected flight	SKIPPED	0.000 s
22	And add a Indigo promise	SKIPPED	0.001 s
23	And continue with sports equipment	SKIPPED	0.000 s
24	And skip the sports eqipment	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

To select SixE Seat and Eat Add-on for Senior Citizen passangers

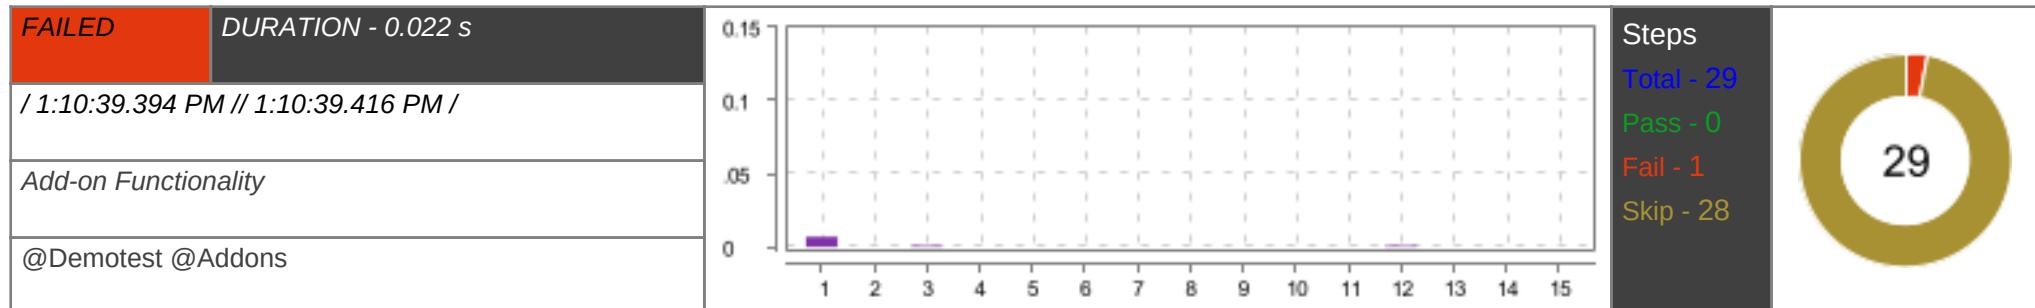


#	Step / Hook Details	Status	Duration
1	<p>Given Launch the app and IOgin</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Addons at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.007 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Addons.<init>(Addons.java:23) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	And user click on BookFlight	SKIPPED	0.000 s
3	And user select "MUM" and "DeL" cities	SKIPPED	0.001 s
4	And user select future Date	SKIPPED	0.000 s
5	Given user adds a Senior Citizen passenger from passenger list	SKIPPED	0.000 s
6	And user clicks on the search flight button	SKIPPED	0.000 s
7	And click on continue button	SKIPPED	0.000 s
8	And skip the upgrade flexi fare	SKIPPED	0.000 s
9	When user verify Passanger details page	SKIPPED	0.000 s
10	And select title of passanger	SKIPPED	0.000 s
11	And enter "Harry" and "jones" of Passanger	SKIPPED	0.000 s
12	And enter "sam" and "robin" of seniorCitizen	SKIPPED	0.001 s
13	And select date of birth	SKIPPED	0.000 s
14	And done after DOB	SKIPPED	0.000 s
15	And enter seniorcitizenID "5284"	SKIPPED	0.000 s
16	And Continue with Passanger details	SKIPPED	0.000 s
17	Then visit and verify Six E Addons page	SKIPPED	0.000 s
18	And user select 6E Seat & Eat Prime addon	SKIPPED	0.000 s
19	And verify six 6E Seat and Eat page	SKIPPED	0.000 s
20	And check the checkbox for selected flight	SKIPPED	0.000 s
21	And click on the Add Combo button	SKIPPED	0.000 s
22	And select meal for passanger	SKIPPED	0.000 s
23	And select veg meal type	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
24	And select meal for all passanger	SKIPPED	0.000 s
25	And click on confirm meal button	SKIPPED	0.000 s
26	And click on the continue	SKIPPED	0.000 s
27	And click on done button	SKIPPED	0.000 s
28	And continue with 6E Tiffin addon	SKIPPED	0.000 s
29	And confirm with addon	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

Verify For 6e prime fast forward ,meal and Normal seats are free and 50% discount on XL seats

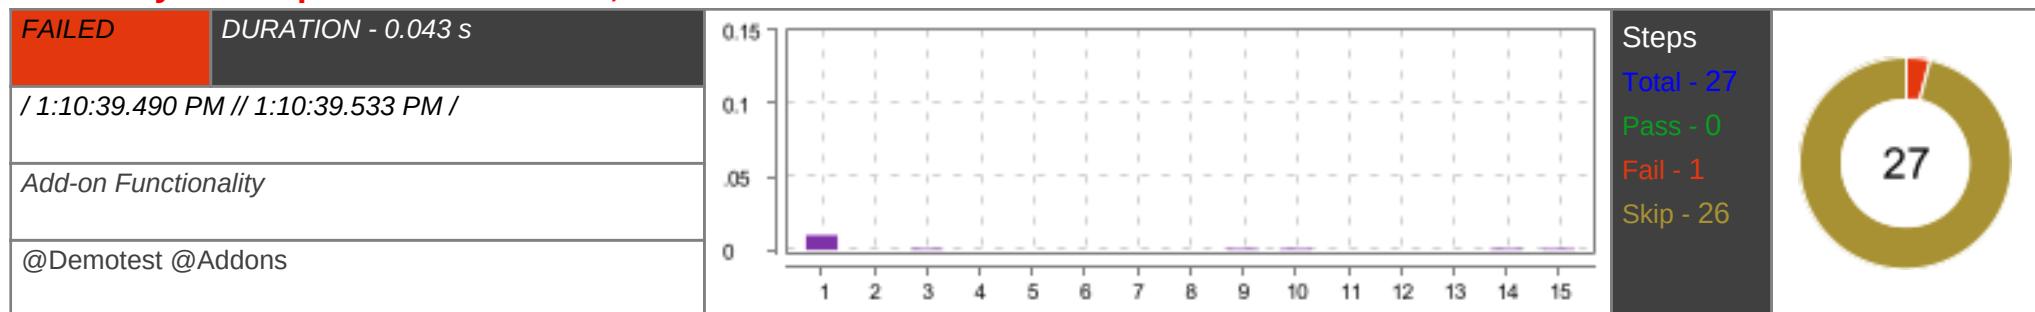


#	Step / Hook Details	Status	Duration
1	Given Launch the app and IOgin io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Addons at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109)	FAILED	0.010 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELGGNLPTP1412', ip: '192.168.29.67' </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Addons.<init>(Addons.java:23) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) </pre>		
2	And user click on BookFlight	SKIPPED	0.000 s
3	And user select "MUM" and "Del" cities	SKIPPED	0.001 s
4	And user select future Date	SKIPPED	0.000 s
5	Given user adds an Adult passenger from passenger list	SKIPPED	0.000 s
6	And user clicks on the search flight button	SKIPPED	0.000 s
7	And check the searched flight	SKIPPED	0.000 s
8	And click on continue button	SKIPPED	0.000 s
9	And skip the upgrade flexi fare	SKIPPED	0.001 s
10	When user verify Passanger details page	SKIPPED	0.001 s
11	And enter "Harry" and "jones" of Passanger	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
12	And select title of passanger	SKIPPED	0.000 s
13	And Continue with Passanger details	SKIPPED	0.000 s
14	Then visit and verify Six E Addons page	SKIPPED	0.001 s
15	And user select Six E Prime addon	SKIPPED	0.001 s
16	And verify six e prime page	SKIPPED	0.000 s
17	And check the checkbox for selected flight	SKIPPED	0.001 s
18	And click on the Add6EPrime button	SKIPPED	0.001 s
19	And verify meal is free	SKIPPED	0.001 s
20	And select meal for passanger	SKIPPED	0.001 s
21	And select veg meal type	SKIPPED	0.000 s
22	And select nonveg meal type	SKIPPED	0.000 s
23	And click on the continue	SKIPPED	0.001 s
24	And click on done button	SKIPPED	0.000 s
25	And verify fast forward is free	SKIPPED	0.000 s
26	And user continue with SixE Prime addon	SKIPPED	0.001 s
27	And confirm with addon	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.001 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

For flexi plus fare meal is free

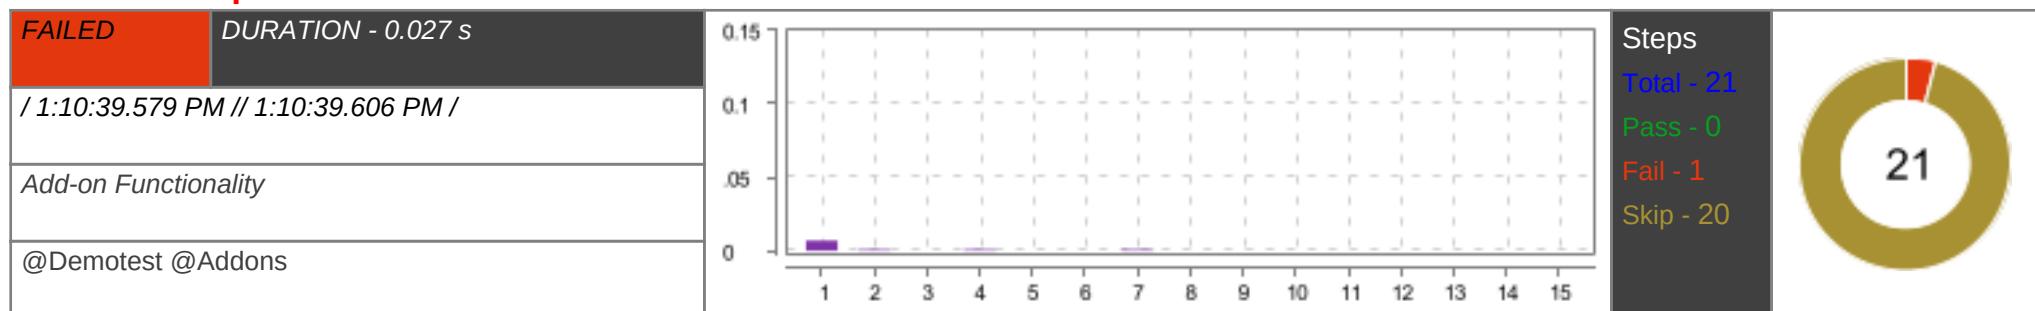

#	Step / Hook Details	Status	Duration
1	Given Launch the app and IOgin io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.Addons at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)	FAILED	0.007 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)		


#	Step / Hook Details	Status	Duration
	at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.Addons.<init>(Addons.java:23) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	And user click on BookFlight	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
3	And user select "MUM" and "DeL" cities	SKIPPED	0.000 s
4	And user select future Date	SKIPPED	0.001 s
5	Given user adds an Adult passenger from passenger list	SKIPPED	0.000 s
6	And user clicks on the search flight button	SKIPPED	0.000 s
7	And user select flexi plus fare	SKIPPED	0.001 s
8	And click on continue button	SKIPPED	0.000 s
9	When user verify Passanger details page	SKIPPED	0.000 s
10	And enter "Harry" and "jones" of Passanger	SKIPPED	0.000 s
11	And select title of passanger	SKIPPED	0.000 s
12	And Continue with Passanger details	SKIPPED	0.000 s
13	Then visit and verify Six E Addons page	SKIPPED	0.000 s
14	And verify meal is free with flexi plus	SKIPPED	0.000 s
15	And user select free meal	SKIPPED	0.000 s
16	And select meal for passanger	SKIPPED	0.000 s
17	And select veg meal type	SKIPPED	0.001 s
18	And click on the continue	SKIPPED	0.000 s
19	And click on done button	SKIPPED	0.000 s
20	And user continue with flexi fare	SKIPPED	0.001 s
21	And skip with six sixE tiffin	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Flight Status Functionality



To verify user can check the flight status by using PNR Number

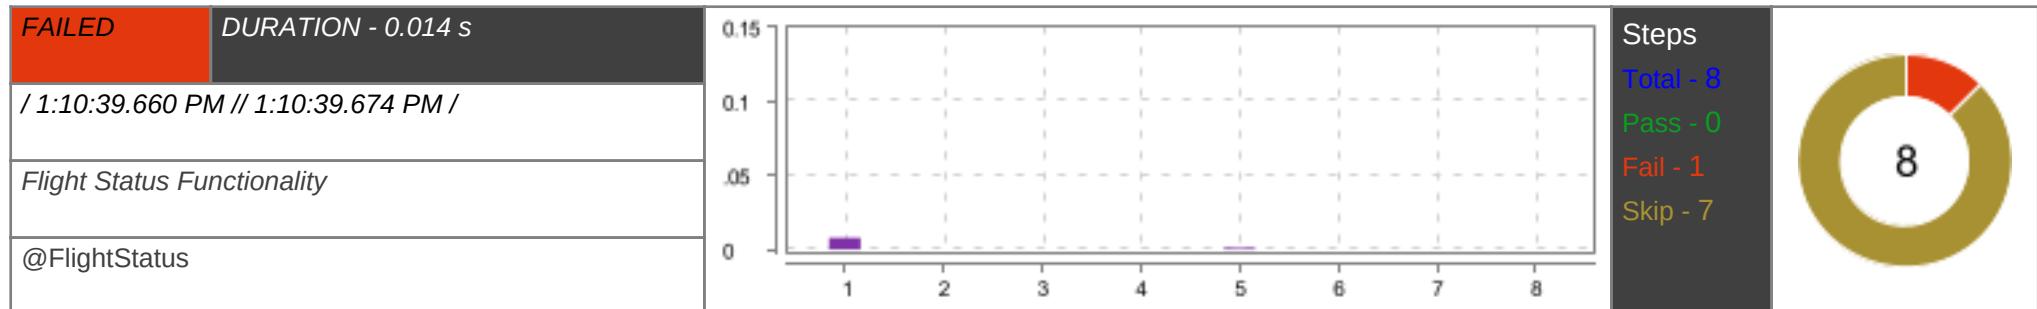


#	Step / Hook Details	Status	Duration
1	<p>Given Launch the App and login</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.FlightStatus at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.008 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.FlightStatus.<init>(FlightStatus.java:20) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given user is on Home Page and Click on the Flight Status	SKIPPED	0.000 s
3	And user click on continue to proceed	SKIPPED	0.000 s
4	When user click on Search Your Flight	SKIPPED	0.000 s
5	And user select PNR Option and Enter the pnr number	SKIPPED	0.001 s
6	And user click on Search	SKIPPED	0.000 s
7	And user click on the shceduled flight	SKIPPED	0.000 s
8	Then user select show on Map	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

To verifiy user can check the flight status By Route

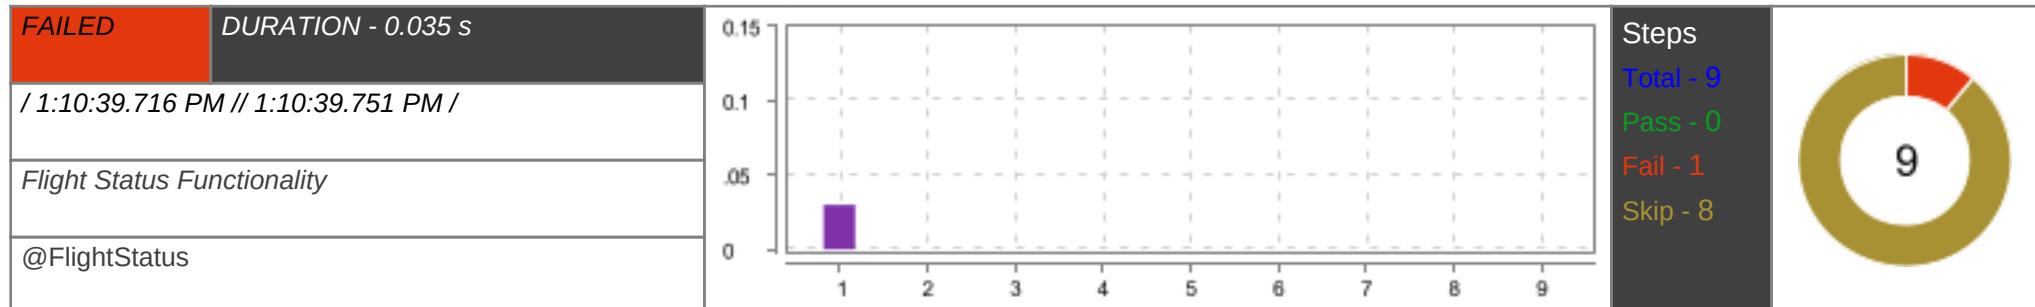


#	Step / Hook Details	Status	Duration
1	<p>Given Launch the App and login</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.FlightStatus at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248)</pre>	FAILED	0.030 s


#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.FlightStatus.<init>(FlightStatus.java:20) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) </pre>		

#	Step / Hook Details	Status	Duration
	at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given user is on Home Page and Click on the Flight Status	SKIPPED	0.000 s
3	When user click on continue to proceed	SKIPPED	0.000 s
4	And user click on Search Your Flight	SKIPPED	0.000 s
5	And user select By Route option for flight status	SKIPPED	0.000 s
6	And user selects "Delhi" and "Mumbai" cities	SKIPPED	0.000 s
7	And user click on Search	SKIPPED	0.000 s
8	And user click on the shceduled flight	SKIPPED	0.000 s
9	Then user select show on Map	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.001 s

My Booking Tab

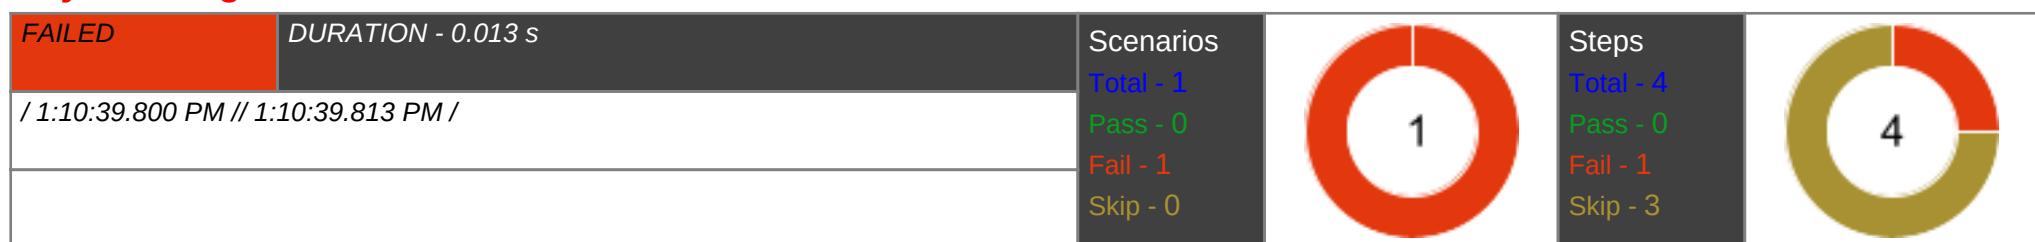

To verify user can check my booking tab

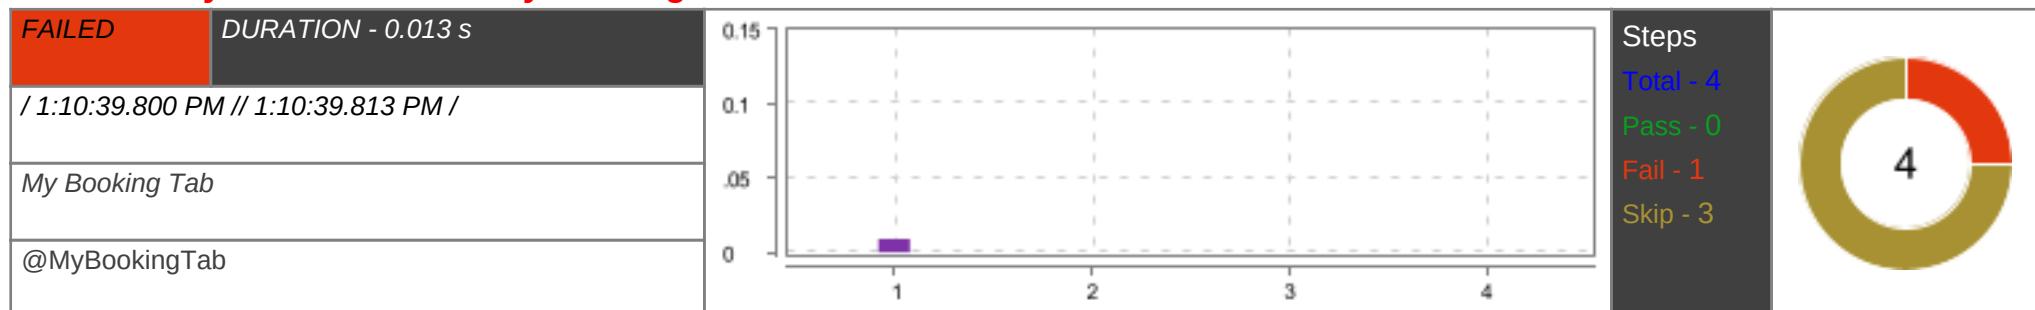

#	Step / Hook Details	Status	Duration
1	<p>Given launch the application and login</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.MyBookingTab at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248)</pre>	FAILED	0.009 s


#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.MyBookingTab.<init>(MyBookingTab.java:19) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) </pre>		

#	Step / Hook Details	Status	Duration
	at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	And User is on home page and click on my bookings	SKIPPED	0.000 s
3	When User is on my booking page and current booking is displayed	SKIPPED	0.000 s
4	Then user click on completed booking	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

Update Contact Details



To Verify user can Update Contact

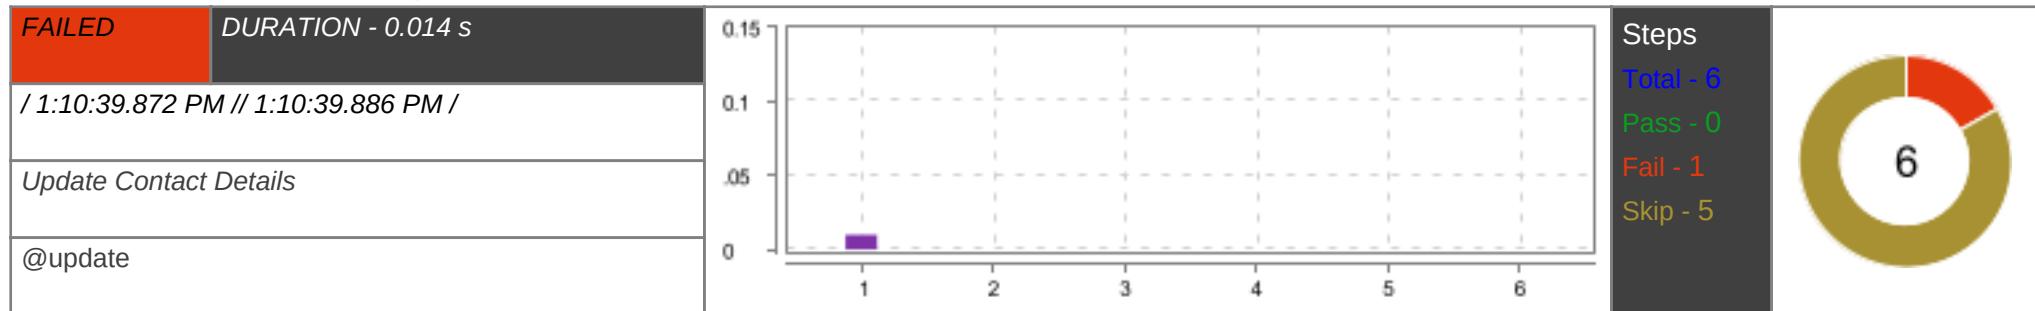


#	Step / Hook Details	Status	Duration
1	Given launch the application and login io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.UpdateContactDetails at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)	FAILED	0.010 s

#	Step / Hook Details	Status	Duration
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)		

#	Step / Hook Details	Status	Duration
	<p>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</p> <p>Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.UpdateContactDetails.<init>(UpdateContactDetails.java:15) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)</p>		
2	Given User is on home page and click on View Modify	SKIPPED	0.000 s
3	And User click on update contact details	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
4	When User Change contact "9766940710"	SKIPPED	0.000 s
5	And User click on Update button	SKIPPED	0.000 s
6	Then Update details successfully	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

To Verify user can Update Email id

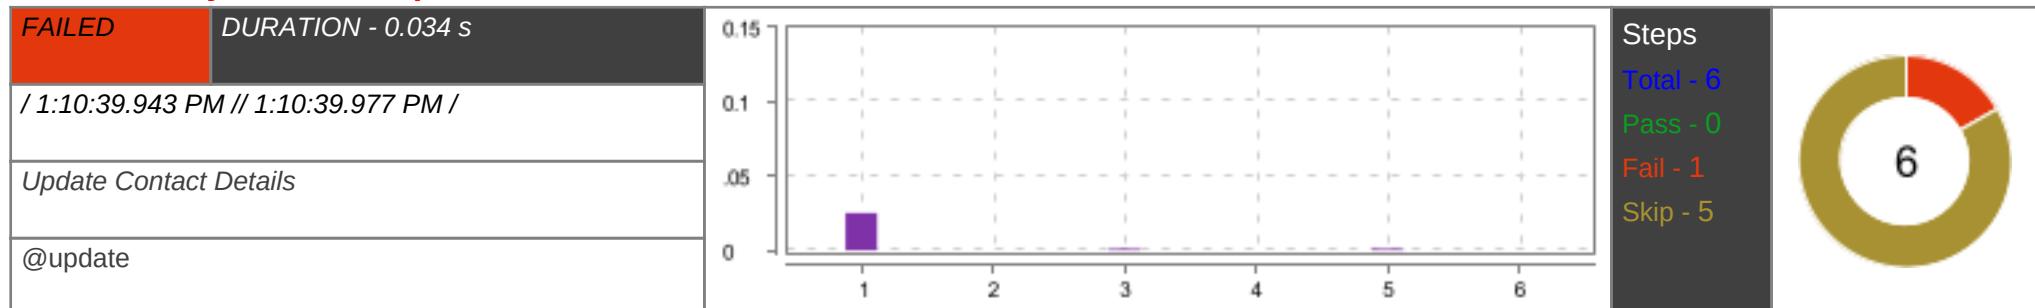


#	Step / Hook Details	Status	Duration
1	Given launch the application and login io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.UpdateContactDetails at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestCase.run(TestCase.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106)	FAILED	0.025 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.UpdateContactDetails.<init>(UpdateContactDetails.java:15) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) ... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834) </pre>		
2	Given User is on home page and click on View Modify	SKIPPED	0.000 s
3	And User click on update contact details	SKIPPED	0.001 s
4	When User Changes emailID "mk@gmail.com"	SKIPPED	0.000 s
5	And User click on Update button	SKIPPED	0.001 s
6	Then Update details successfully	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

To Verify user can Update Contact and EmailId

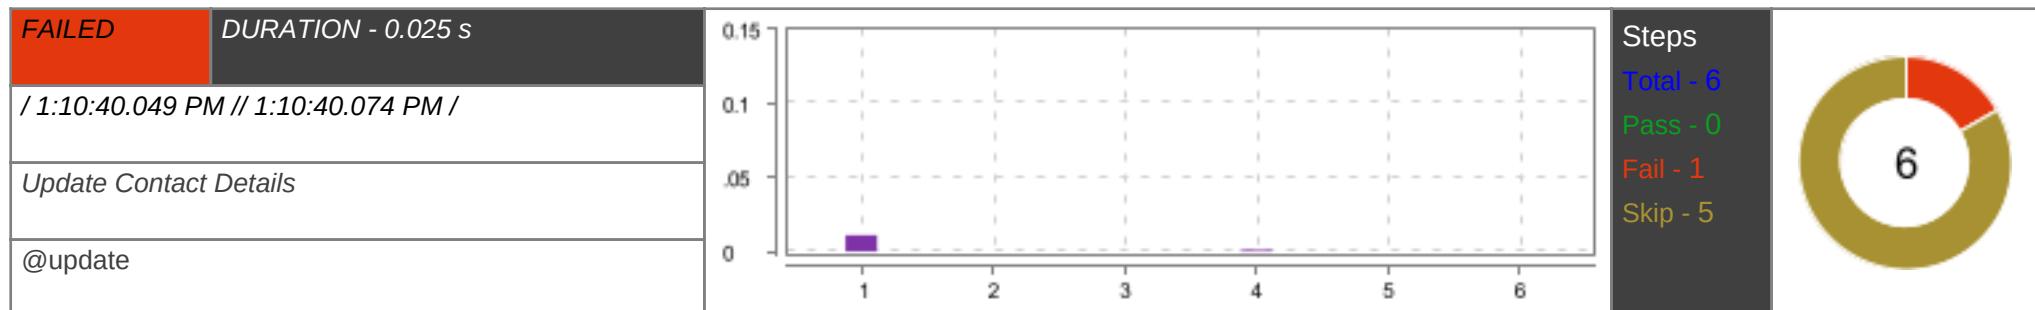

#	Step / Hook Details	Status	Duration
1	<p>Given launch the application and login</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.UpdateContactDetails at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.011 s


#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.UpdateContactDetails.<init>(UpdateContactDetails.java:15) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	Given User is on home page and click on View Modify	SKIPPED	0.000 s
3	And User click on update contact details	SKIPPED	0.000 s
4	When User Changes contact "9766940710" and Email ID "mk@gmail.com"	SKIPPED	0.001 s
5	And User click on Update button	SKIPPED	0.000 s
6	Then Update details successfully	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.000 s

Cancel Flight Booking



To Verify User Can cancel our flight booking

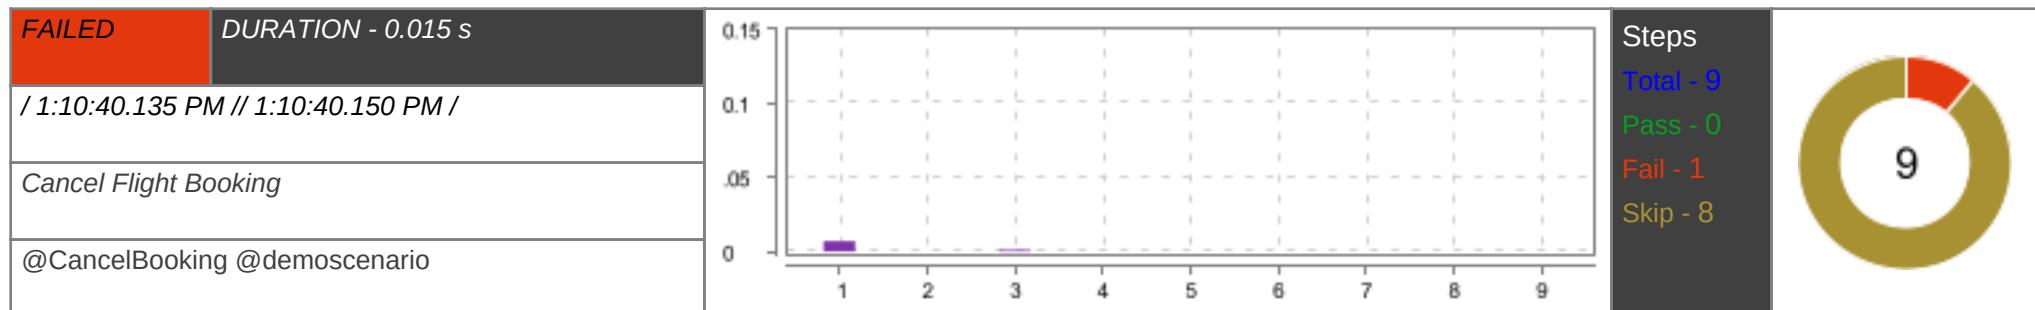

#	Step / Hook Details	Status	Duration
1	<p>Given Launch and login into the Application</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.CancelBooking at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.007 s


#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.CancelBooking.<init>(CancelBooking.java:22) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	And User is on home page and click on modify button	SKIPPED	0.000 s
3	When User click on modify booking option	SKIPPED	0.001 s
4	And User click on cancel booking	SKIPPED	0.000 s
5	And User select Bank Account for refund	SKIPPED	0.000 s
6	And User click on Cancel booking tab	SKIPPED	0.000 s
7	And User select yes for cancel booking	SKIPPED	0.000 s
8	And User click on confirm cancel booking option	SKIPPED	0.000 s
9	Then User validate booking has been cancelled	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver()	FAILED	0.000 s
	java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)		

Forgot Password



To test forgot password functionality

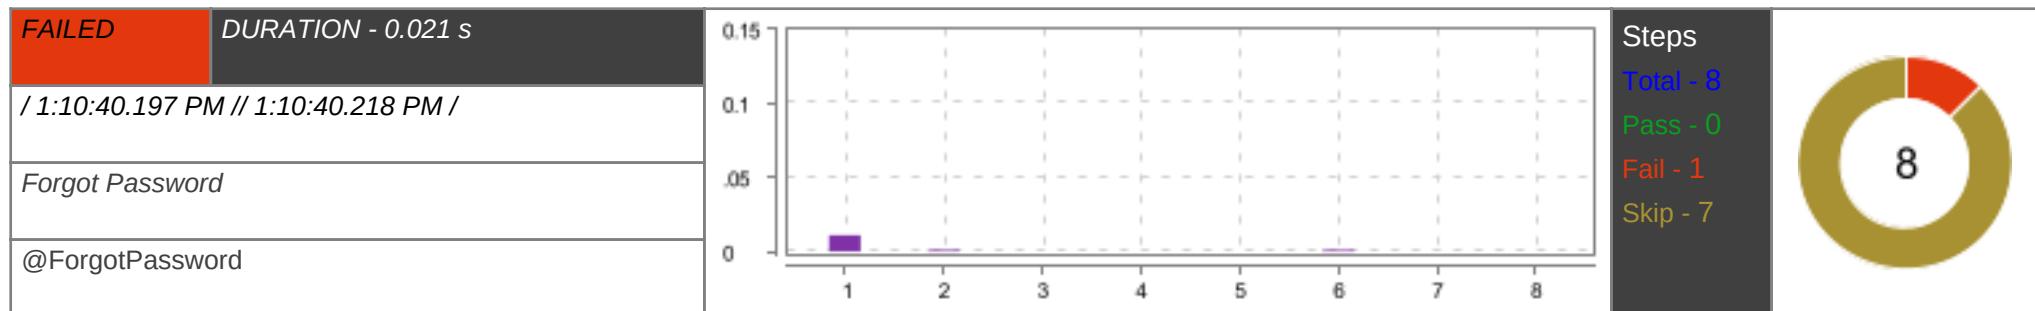

#	Step / Hook Details	Status	Duration
1	<p>Given User is on Login Page</p> <pre>io.cucumber.core.exception.CucumberException: Failed to instantiate class testApp.ForgotPassword at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</pre>	FAILED	0.011 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'KELLGGNLPTP1412', ip: '192.168.29.67' at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:553) at io.appium.java_client.AppiumDriver.startSession(AppiumDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:156) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:80) at io.appium.java_client.AppiumDriver.<init>(AppiumDriver.java:92) at io.appium.java_client.android.AndroidDriver.<init>(AndroidDriver.java:117) at testBase.AndroidBaseTest.ConfigureAppium(AndroidBaseTest.java:64) at testApp.ForgotPassword.<init>(ForgotPassword.java:26) ... 50 more Caused by: org.openqa.selenium.WebDriverException: Connection refused: no further information Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '11.0.16' Driver info: driver. version: AndroidDriver at io.appium.java_client.remote.AppiumCommandExecutor.lambda\$execute\$4(AppiumCommandExecutor.java:274) at java.base/java.util.Optional.orElseGet(Optional.java:369) at io.appium.java_client.remote.AppiumCommandExecutor.execute(AppiumCommandExecutor.java:273) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) </pre>		

#	Step / Hook Details	Status	Duration
	... 57 more Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.SocketChannelImpl.checkConnect(Native Method) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:779) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:337) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:776) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:724) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:650) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:562) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:997) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:834)		
2	When User selects Password option	SKIPPED	0.001 s
3	And User enter Mobile Number "9766940710"	SKIPPED	0.000 s
4	And User click on Forgot Password link	SKIPPED	0.000 s
5	And User click on Send OTP button and waits for OTP	SKIPPED	0.000 s
6	And User enter "Mangeshk@123" and "Mangeshk@123"	SKIPPED	0.001 s
7	Then User click on change my password button	SKIPPED	0.000 s
8	And Password change successfull	SKIPPED	0.000 s
	AFTER - testApp.Hooks.closeDriver() java.lang.NullPointerException at testApp.Hooks.closeDriver(Hooks.java:53)	FAILED	0.001 s