

13-ReactJS-HOL

Create a React App named “bloggerapp” in with 3 components.

1. Book Details
2. Blog Details
3. Course Details

```
import { useState } from "react";
import BookDetails from "./BookDetails";
import BlogDetails from "./BlogDetails";
import CourseDetails from "./CourseDetails";
import "./App.css";
function App() {
  const [activeTab, setActiveTab] = useState("books");
  const renderComponent = (tab) => {
    switch (tab) {
      case "books":
        return <BookDetails />;
      case "blogs":
        return <BlogDetails />;
      case "courses":
        return <CourseDetails />;
      default:
        return <BookDetails />;
    }
  };
  return (
    <div
      style={{
        minHeight: "100vh",
        backgroundColor: "#ecf0f1",
```

```

padding: "20px",
}} >
<div
  style={{
    backgroundColor: "#2c3e50",
    color: "white",
    padding: "30px",
    borderRadius: "10px",
    textAlign: "center",
    marginBottom: "30px",
  }} >
<h1 style={{ margin: "0", fontSize: "32px" }}> 📖 Blogger App</h1>
<p style={{ margin: "10px 0 0 0", fontSize: "14px", color: "#bdc3c7" }}>
  Conditional Rendering | Map() Function | Component Keys | Multiple
  Rendering Methods
</p>
</div>
<div
  style={{
    display: "flex",
    justifyContent: "center",
    gap: "10px",
    marginBottom: "30px",
    flexWrap: "wrap",
  }} >
  {[
    { id: "books", label: " 📖 Books", color: "#3498db" },
    { id: "blogs", label: " 📝 Blogs", color: "#e67e22" },
    { id: "courses", label: " 🎓 Courses", color: "#9b59b6" },
  ].map((tab) => (

```

```

<button
  key={tab.id}
  onClick={() => setActiveTab(tab.id)}
  style={{
    padding: "12px 25px",
    fontSize: "14px",
    backgroundColor: activeTab === tab.id ? tab.color : "#bdc3c7",
    color: "white",
    border: "none",
    borderRadius: "5px",
    cursor: "pointer",
    fontWeight: "bold",
    transition: "background-color 0.3s",
    transform: activeTab === tab.id ? "scale(1.05)" : "scale(1)",
  }}
  onMouseEnter={(e) => {
    if (activeTab !== tab.id) {
      e.target.style.backgroundColor = "#95a5a6";
    }
  }}
  onMouseLeave={(e) => {
    if (activeTab !== tab.id) {
      e.target.style.backgroundColor = "#bdc3c7";
    }
  }}
  >
  {tab.label}
</button>
  )})
</div>

```

```

<div
  style={{
    maxWidth: "1200px",
    margin: "0 auto",
  }} >
  {renderComponent(activeTab)}
</div>

<div
  style={{
    backgroundColor: "#34495e",
    color: "white",
    padding: "20px",
    textAlign: "center",
    marginTop: "40px",
    borderRadius: "10px",
    fontSize: "12px",
  }} >
  <p style={{ margin: "0" }}>
    🎓 Exercise 13 | Conditional Rendering Methods | Map() with Keys |
    Component Extraction
  </p>
  <p style={{ margin: "10px 0 0 0", color: "#bdc3c7" }}>
    Rendering Methods Used: Ternary (?:) | AND (&&) | Switch Statement |
    Element Variables
  </p>
</div>


</div>

);
}


export default App;

```

Books :

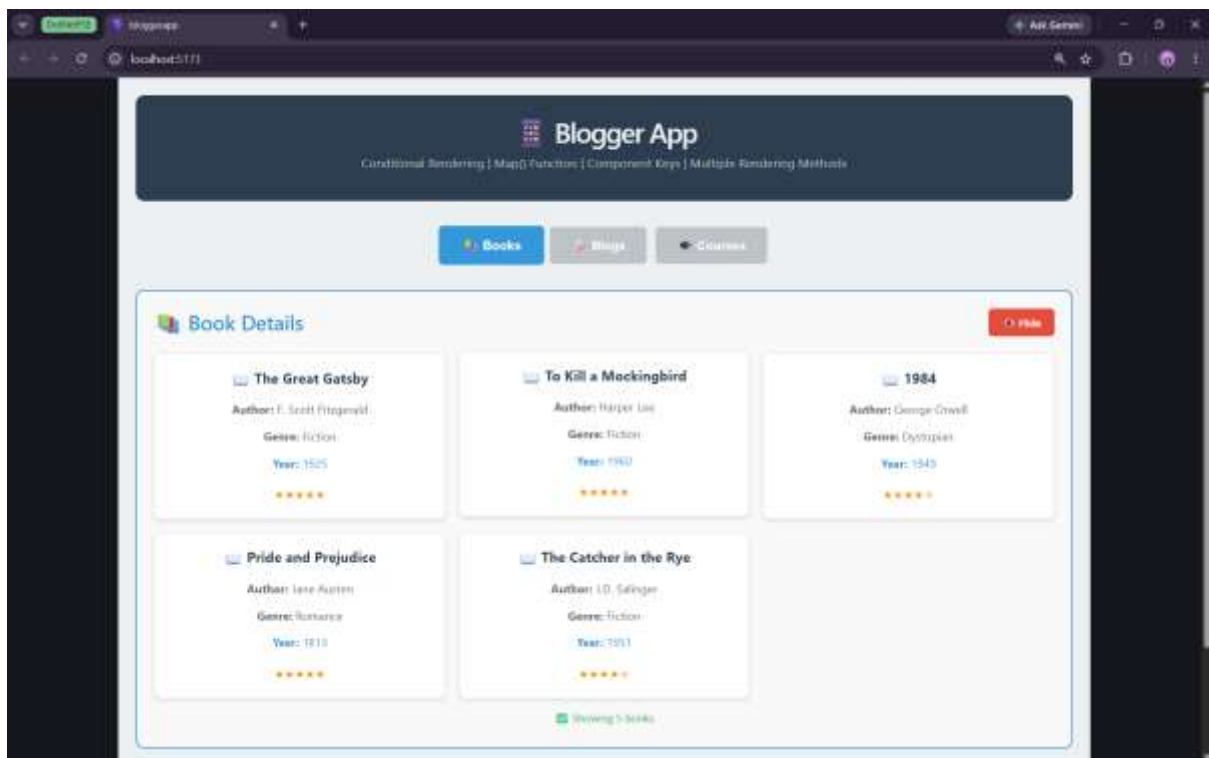

Blogs :

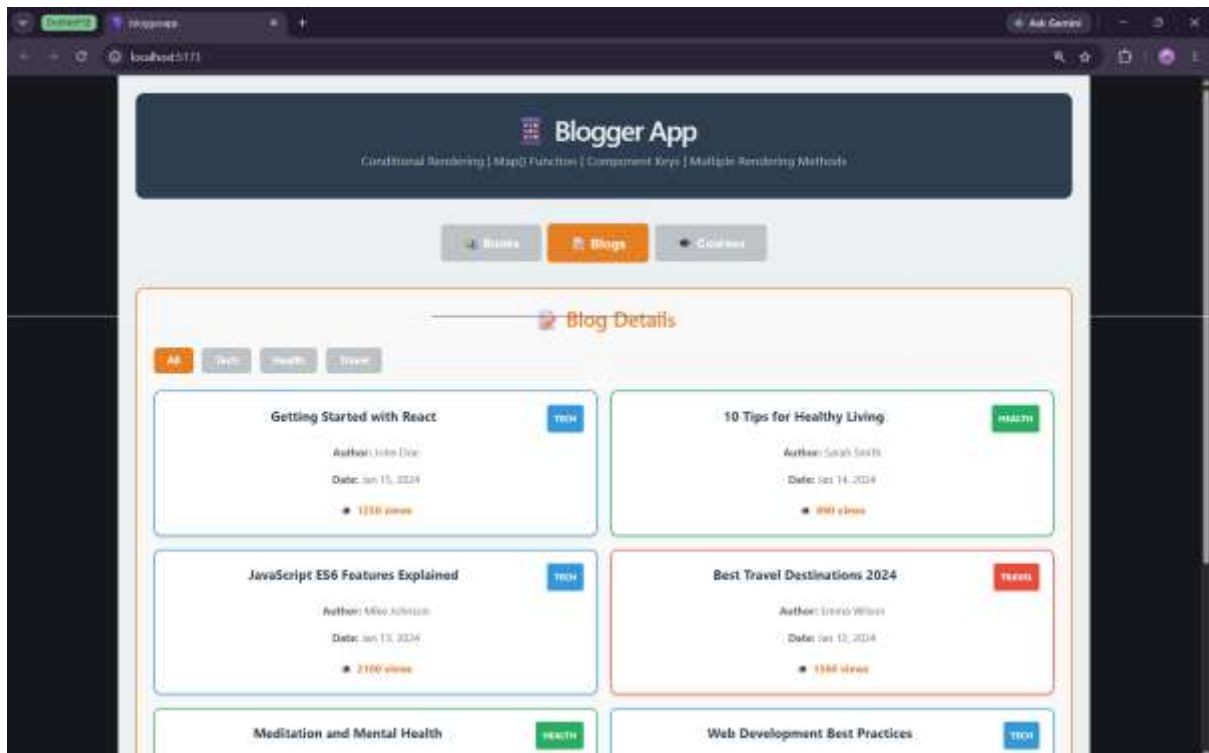

Courses :

