

Asp.net 8.0 Web API

1. First Web Api using .Net core

ValuesController.cs -

```
using Microsoft.AspNetCore.Http;
using Microsoft.AspNetCore.Mvc;

namespace FirstWebApi.Controllers
{
    [Route("api/[controller]")]
    [ApiController]
    public class ValuesController : ControllerBase
    {
        private static List<String> _values = new List<String> {
            "Value1", "Value2", "Value3"
        };

        // GET: api/values
        [HttpGet]
        public ActionResult<IEnumerable<string>> Get()
        {
            return Ok(_values);
        }

        // GET: api/values/1
        [HttpGet("{id}")]
        public ActionResult<string> Get(int id)
        {
            if (id < 0 || id >= _values.Count)
                return NotFound();

            return Ok(_values[id]);
        }

        // POST: api/values
        [HttpPost]
        public ActionResult Post([FromBody] string value)
        {
            _values.Add(value);
            return CreatedAtAction(nameof(Get), new { id = _values.Count - 1 }, value);
        }

        // PUT: api/values/1
        [HttpPut("{id}")]
```

```

public ActionResult Put(int id, [FromBody] string value)
{
    if (id < 0 || id >= _values.Count)
        return NotFound();


    _values[id] = value;
    return NoContent();
}

// DELETE: api/values/1
[HttpDelete("{id}")]
public ActionResult Delete(int id)
{
    if (id < 0 || id >= _values.Count)
        return NotFound();

    _values.RemoveAt(id);
    return NoContent();
}
}
}
}

```

Output :

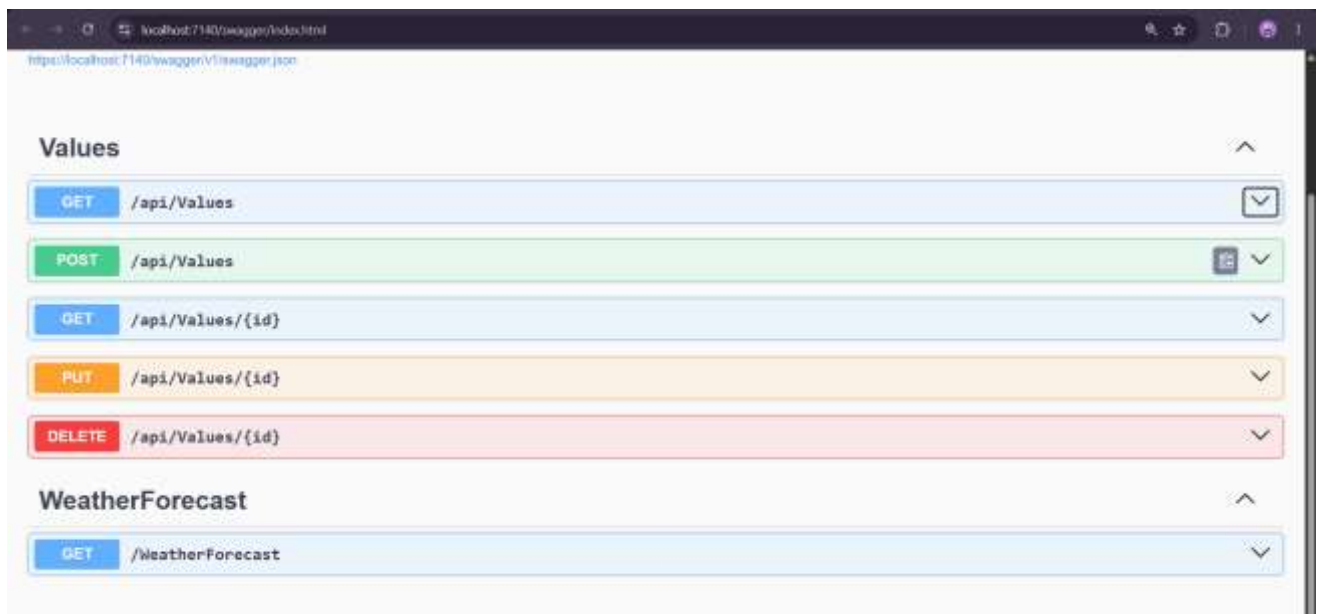

Testing the GET Action Method :\

The screenshot shows the Swagger UI for the 'Values' API. The 'GET /api/Values' endpoint is selected. The 'Parameters' section is empty. The 'Responses' section shows a 200 status code with a response body containing an array of three objects: `{ "Value1": "Value1", "Value2": "Value2", "Value3": "Value3" }`. The response headers are: `content-type: application/json; charset=utf-8`, `date: Wed, 01 Jul 2026 17:42:07 GMT`, and `server: Kestrel`.

The screenshot shows the Swagger UI for the 'Values' API, specifically the 'Responses' section for the 'GET /api/Values/{id}' endpoint. The response body is an array of one object: `{ "string": "string" }`. The response headers are: `content-type: application/json; charset=utf-8`, `date: Wed, 01 Jul 2026 17:42:07 GMT`, and `server: Kestrel`. Below the response details, there is a table with columns 'Code', 'Description', and 'Links'. The table contains one row with a 200 status code, the description 'OK', and a link to 'No links'. Below the table, there is a dropdown menu for 'Media type' with 'text/plain' selected. Below the dropdown, there is a text input field for 'Example Value' with the value 'string'.