

Web Api using .Net core with Swagger

```
builder.Services.AddSwaggerGen(c => {  
    c.SwaggerDoc("v1", new OpenApiInfo  
    {  
        Title = "Swagger Demo",  
        Version = "v1",  
        Description = "TBD",  
        TermsOfService = new Uri("https://www.example.com"),  
        Contact = new OpenApiContact()  
        {  
            Name = "John Doe",  
            Email = "john@xyzmail.com",  
            Url = new Uri("https://www.example.com")  
        },  
  
        License = new OpenApiLicense()  
        {  
            Name = "License Terms",  
            Url = new Uri("https://www.example.com")  
        }  
    });  
});
```

ValuesController.cs :

```
using Microsoft.AspNetCore.Http;
using Microsoft.AspNetCore.Mvc;

namespace SwaggerDemoApi.Controllers
{
    [Route("api/[controller]")]
    [ApiController]
    public class ValuesController : ControllerBase
    {
        private static List<string> _values = new List<string>
        {
            "Value1", "Value2", "Value3"
        };

        [HttpGet]
        public ActionResult<IEnumerable<string>> Get()
        {
            return Ok(_values);
        }

        [HttpGet("{id}")]
        public ActionResult<string> Get(int id)
        {
            if(id < 0 || id >= _values.Count)
            {
                return NotFound();
            }

            return Ok(_values[id]);
        }
    }
}
```

[HttpPost]

public ActionResult Post([FromBody] string value)

```
{
    _values.Add(value);
    return CreatedAtAction(nameof(Get), new {id = _values.Count - 1}, value);
}
```

[HttpPut("{id}")]

public ActionResult Put(int id, [FromBody] string value)

```
{
    if (id < 0 || id >= _values.Count)
    {
        return NotFound();
    }
```

 _values[id] = value;

 return NoContent();

```
}
```

[HttpDelete("{id}")]

public ActionResult Delete(int id)

```
{
    if(id < 0 || id >= _values.Count)
    {
        return NotFound();
    }
```



 _values.RemoveAt(id);

 return NoContent();

```
}
```

```
}
```

```
}
```

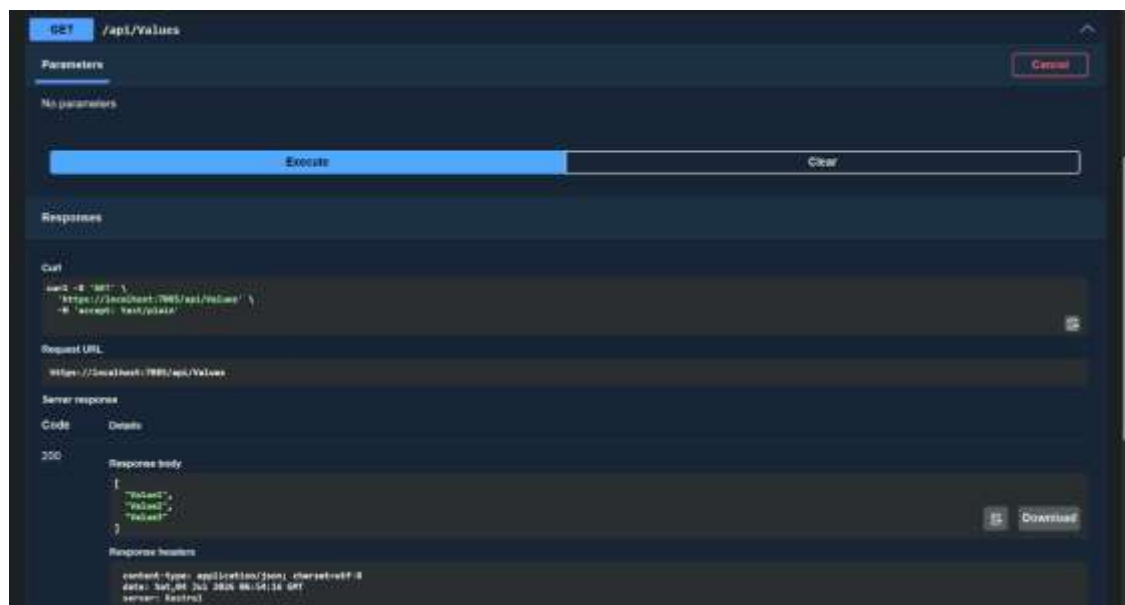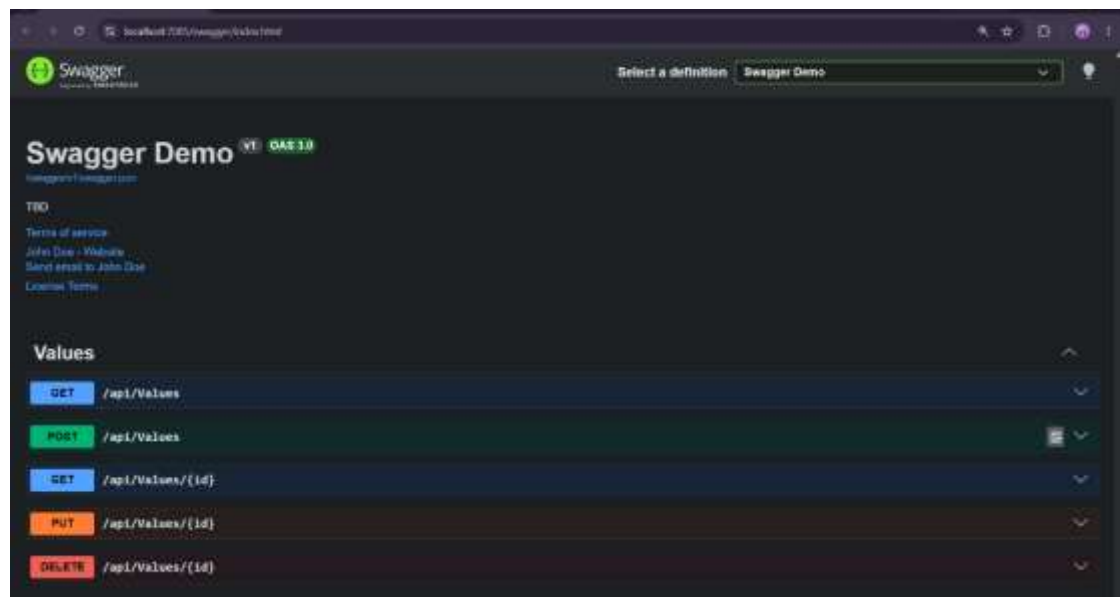

Employee.cs :

```
namespace SwaggerDemoApi.Models
{
    public class Employee
    {
        public int Id { get; set; }
        public string Name { get; set; } = string.Empty;
        public string Department { get; set; } = string.Empty;
        public decimal Salary { get; set; }
    }
}
```

EmployeeController.cs :

```
using Microsoft.AspNetCore.Http;
using Microsoft.AspNetCore.Mvc;
using SwaggerDemoApi.Models;

namespace SwaggerDemoApi.Controllers
{
    [Route("api/emp")]
    [ApiController]
    public class EmployeeController : ControllerBase
    {
        public static List<Employee> _employees = new List<Employee>
        {
            new Employee { Id = 1, Name = "Alice", Department = "IT", Salary = 55000 },
            new Employee { Id = 2, Name = "Bob", Department = "HR", Salary = 48000 },
            new Employee { Id = 3, Name = "Charlie", Department = "Finance", Salary = 60000 }
        };
    }
}
```

[HttpGet]

```
public ActionResult<IEnumerable<Employee>> Get()
```

```
{
```

```
    return Ok(_employees);
```

```
}
```

[HttpGet("{id}")]

```
public ActionResult<Employee> Get(int id)
```

```
{
```

```
    var emp = _employees.FirstOrDefault(e => e.Id == id);
```

```
    if(emp == null)
```

```
    {
```

```
        return NotFound();
```

```
    }
```

```
    return Ok(emp);
```

```
}
```

```
}
```

```
}
```

Using Postman :

