

**Don Bosco Institute of Technology, Kurla(W)**  
**Department of Electronics and Tele-Communication Engineering**  
**ECL304 - Skill Lab: C++ and Java Programming**  
**Sem III**  
**2021-22**

<b>Lab Number:</b>	<b>5</b>
<b>Student Name:</b>	<b>Rohit Gupta</b>
<b>Roll No :</b>	<b>30</b>

**Title:**

To perform Operator Overloading using C++ for

- Multiplying 2 complex numbers
- adding matrices

**Learning Objective:**

- Students will be able to perform user-defined overloading of built-in operators.

**Learning Outcome:**

- Understanding the overloading concept on built-in operators.

**Course Outcome:**

<b>ECL304.2</b>	Comprehend building blocks of OOPs language, inheritance, package and interfaces
-----------------	--

**Theory:**

Explain about operator overloading with respect to:

- **Constructor :** Constructor overloading is a concept in which one class can have multiple constructors with different parameters. The main thing to note here is that the constructors will run according to the arguments for example if a program consists of 3 constructors with 0, 1, and 2 arguments, so if we pass 1 argument to the constructor the compiler will automatically run the constructor which is taking 1 argument.
- **methods :** Method overloading is the process of overloading the method that has the same name but different parameters. C++ provides this method of overloading features. Method overloading allows users to use the same name to another method, but the parameters passed to the methods should be different. The return type of methods can be the same or different.
- **Operators :** In C++, it can add special features to the functionality and behaviour of already existing operators like arithmetic and other operations. The mechanism of giving special meaning to an operator is known as operator overloading. For example, we can overload an operator '+' in a class like string to concatenate two strings by just using +.

**Don Bosco Institute of Technology, Kurla(W)**  
**Department of Electronics and Tele-Communication Engineering**  
**ECL304 - Skill Lab: C++ and Java Programming**  
**Sem III**  
**2021-22**

<b>Algorithm 1 :</b>	<b>1-Start</b> <b>2-Creating class of name complex</b> <b>3-Declaring attributes- real , img</b> <b>4-Declaring methods- 1)get_elements()-to take input from user</b> <b>2)display()- to print the result</b> <b>5-Operator overloading function to overload “*”“+”----for performing operation</b> <b>6-Defining methods outside the class</b> <b>7-Creating an objects of class in main function</b> <b>8-Calling the methods using object of class</b> <b>9-Displaying the result</b> <b>10-End</b>
<b>Program 1:</b>	<pre> # include&lt;iostream&gt; using namespace std; class complex {     float real;     float img;     public:         void get_elements();           //take numbers from user         complex operator *(complex c1); //operator overloading         void display();                //print the result };  void complex::get_elements() {     cout&lt;&lt;"Enter the real and img of complex no.\n";     cout&lt;&lt;"Real :"; </pre>

**Don Bosco Institute of Technology, Kurla(W)**  
**Department of Electronics and Tele-Communication Engineering**  
**ECL304 - Skill Lab: C++ and Java Programming**  
**Sem III**  
**2021-22**

```
cin>>real;

cout<<"Img :";

cin>>img;

}

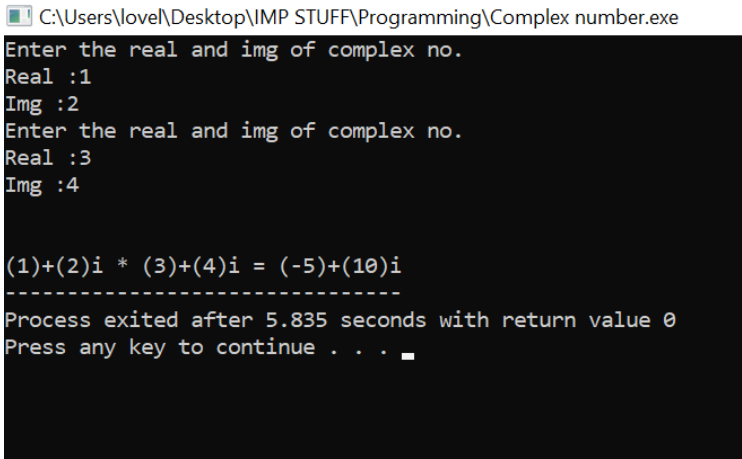
void complex::display()
{
cout<<"("<<real<<")"<<"+"<<"("<<img<<")"<<"i";
}

complex complex::operator*(complex c1)
{
complex mul;
mul.real = ((real*c1.real)-(img*c1.img));
mul.img = ((real*c1.img)+(c1.real*img));
return(mul);
}

int main()
{
complex obj1,obj2,obj3;
obj1.get_elements();
obj2.get_elements();
obj3= obj1*obj2;

cout<<"\n\n";
obj1.display();
```

**Don Bosco Institute of Technology, Kurla(W)**  
**Department of Electronics and Tele-Communication Engineering**  
**ECL304 - Skill Lab: C++ and Java Programming**  
**Sem III**  
**2021-22**

	<pre> cout&lt;&lt;" * ";  obj2.display();  cout&lt;&lt;" = ";  obj3.display();  } </pre>
<b>Input given 1:</b>	<p><b>1 number = 1+2i</b></p> <p><b>2 number = 3+4i</b></p>
<b>Output Screenshot 1:</b>	 <pre> C:\Users\love\Desktop\IMP STUFF\Programming\Complex number.exe Enter the real and img of complex no. Real :1 Img :2 Enter the real and img of complex no. Real :3 Img :4  (1)+(2)i * (3)+(4)i = (-5)+(10)i ----- Process exited after 5.835 seconds with return value 0 Press any key to continue . . . </pre>

<b>Algorithm 2:</b>	<p><b>1-Start</b></p> <p><b>2-Creating class of name matrices</b></p> <p><b>3-Declaring a[2][2],b[2][2],c[2][2]</b></p> <p><b>4-Declaring methods- 1)get_elements()-to take input from user</b></p> <p style="text-align: center;"><b>2)display()- to print the result</b></p> <p><b>5-Operator overloading function to overload "+"----for performing operation</b></p> <p><b>7-Creating an objects of class in main function</b></p> <p><b>8-Calling the methods using object of class</b></p>
---------------------	--

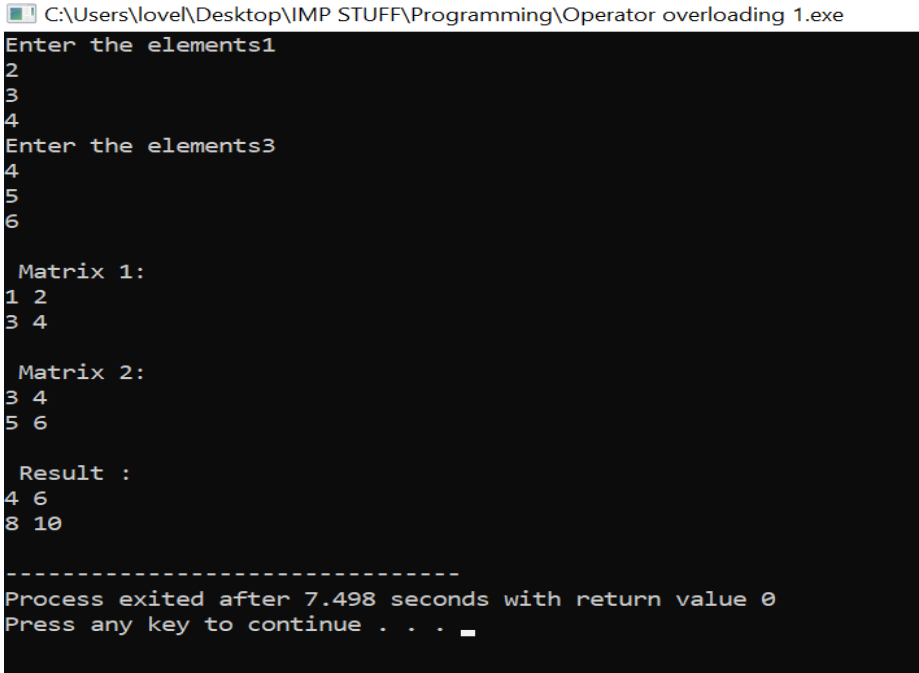
**Don Bosco Institute of Technology, Kurla(W)**  
**Department of Electronics and Tele-Communication Engineering**  
**ECL304 - Skill Lab: C++ and Java Programming**  
**Sem III**  
**2021-22**

	<b>9-Displaying the result</b> <b>10-End</b>
<b>Program 2:</b>	<pre>#include&lt;iostream&gt;  using namespace std;  class matrices {     public:     //Declaring attributes     int a[2][2];     int b[2][2];     int c[2][2];     //Declaring Methods     void get_elements()          //To take input from user     {         cout&lt;&lt;"Enter the elements";         for(int i=0;i&lt;2;i++)         {             for(int j=0;j&lt;2;j++)             {                 cin&gt;&gt;a[i][j];             }         }     }      matrices operator +(matrices m2)    //To overload '+'     {         matrices m3;</pre>

**Don Bosco Institute of Technology, Kurla(W)**  
**Department of Electronics and Tele-Communication Engineering**  
**ECL304 - Skill Lab: C++ and Java Programming**  
**Sem III**  
**2021-22**

	<pre>        for(int i=0;i&lt;2;i++)         {             for(int j=0;j&lt;2;j++)                 m3.a[i][j]=a[i][j]+m2.a[i][j];         }         return(m3);     }     void display()                //To print the result     {         for(int i=0;i&lt;2;i++)         {             for(int j=0;j&lt;2;j++)             {                 cout&lt;&lt;a[i][j]&lt;&lt;" ";             }             cout&lt;&lt;endl;         }     }  };  int main() {     matrices ob1,ob2;            //Creating object     ob1.get_elements();          //Calling method     ob2.get_elements();          //Calling method</pre>
--	--

**Don Bosco Institute of Technology, Kurla(W)**  
**Department of Electronics and Tele-Communication Engineering**  
**ECL304 - Skill Lab: C++ and Java Programming**  
**Sem III**  
**2021-22**

	<pre> cout&lt;&lt;"\n Matrix 1:\n";  ob1.display();  cout&lt;&lt;"\n Matrix 2:\n";  ob2.display();  ob1=ob1+ob2;  cout&lt;&lt;"\n Result : \n";  ob1.display();  } </pre>
<b>Input given 2:</b>	<pre> 1 Matrix : 1  2            3  4 2 Matrix : 3  4            5  6 </pre>
<b>Output Screenshot 2:</b>	 <p>The screenshot shows the execution of a C++ program titled "Operator overloading 1.exe". It prompts the user to enter elements for two matrices. Matrix 1 is entered as 1, 2, 3, 4 and Matrix 2 as 3, 4, 5, 6. The program then displays the result of the addition, which is a 2x2 matrix with values 4, 6, 8, and 10. The program exits after 7.498 seconds.</p>