

# Data Types in Java

Data types specify the different sizes and values that can be stored in the variable. There are two types of data types in Java:

1. **Primitive data types:** The primitive data types include boolean, char, byte, short, int, long, float and double.
2. **Non-primitive data types:** The non-primitive data types include [Classes](#), [Interfaces](#), and [Arrays](#).

## Java Primitive Data Types


In Java language, primitive data types are the building blocks of data manipulation. These are the most basic data types available in [Java language](#).

Java is a statically-typed programming language. It means, all [variables](#) must be declared before its use. That is why we need to declare variable's type and name.

There are 8 types of primitive data types:

- boolean data type
- byte data type
- char data type
- short data type
- int data type
- long data type
- float data type
- double data type



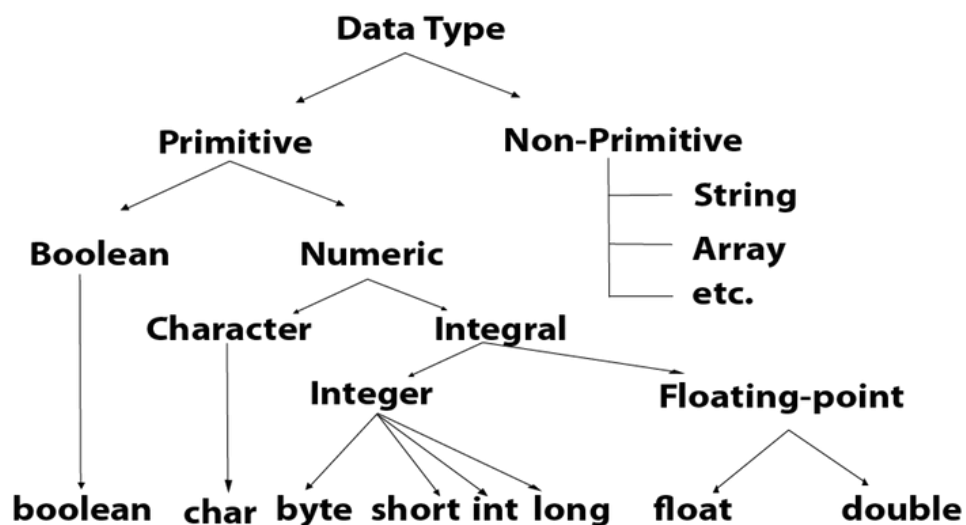

Data Type	Default Value	Default size
boolean	false	1 bit
char	'\u0000'	2 byte
byte	0	1 byte
short	0	2 byte
int	0	4 byte
long	0L	8 byte
float	0.0f	4 byte
double	0.0d	8 byte

## Boolean Data Type

The Boolean data type is used to store only two possible values: true and false. This data type is used for simple flags that track true/false conditions.

The Boolean data type specifies one bit of information, but its "size" can't be defined precisely.

**Example:** Boolean one = false

## Byte Data Type



The byte data type is an example of primitive data type. It is an 8-bit signed two's complement integer. Its value-range lies between -128 to 127 (inclusive). Its minimum value is -128 and maximum value is 127. Its default value is 0.

The byte data type is used to save memory in large arrays where the memory savings is most required. It saves space because a byte is 4 times smaller than an integer. It can also be used in place of "int" data type.

**Example:** byte a = 10, byte b = -20

## Short Data Type

The short data type is a 16-bit signed two's complement integer. Its value-range lies between -32,768 to 32,767 (inclusive). Its minimum value is -32,768 and maximum value is 32,767. Its default value is 0.

The short data type can also be used to save memory just like byte data type. A short data type is 2 times smaller than an integer.

**Example:** short s = 10000, short r = -5000

## Int Data Type

The int data type is a 32-bit signed two's complement integer. Its value-range lies between - 2,147,483,648 ( $-2^{31}$ ) to 2,147,483,647 ( $2^{31} - 1$ ) (inclusive). Its minimum value is - 2,147,483,648 and maximum value is 2,147,483,647. Its default value is 0.

The int data type is generally used as a default data type for integral values unless if there is no problem about memory.

**Example:** int a = 100000, int b = -200000

## Long Data Type



The long data type is a 64-bit two's complement integer. Its value-range lies between  $-9,223,372,036,854,775,808(-2^{63})$  to  $9,223,372,036,854,775,807(2^{63} - 1)$ (inclusive). Its minimum value is  $-9,223,372,036,854,775,808$  and maximum value is  $9,223,372,036,854,775,807$ . Its default value is 0. The long data type is used when you need a range of values more than those provided by int.

**Example:** long a = 100000L, long b = -200000L

## Float Data Type

The float data type is a single-precision 32-bit IEEE 754 floating point. Its value range is unlimited. It is recommended to use a float (instead of double) if you need to save memory in large arrays of floating point numbers. The float data type should never be used for precise values, such as currency. Its default value is 0.0F.

**Example:** float f1 = 234.5f

## Double Data Type

The double data type is a double-precision 64-bit IEEE 754 floating point. Its value range is unlimited. The double data type is generally used for decimal values just like float. The double data type also should never be used for precise values, such as currency. Its default value is 0.0d.

**Example:** double d1 = 12.3

## Char Data Type

The char data type is a single 16-bit Unicode character. Its value-range lies between '\u0000' (or 0) to '\uffff' (or 65,535 inclusive). The char data type is used to store characters.

**Example:** char letterA = 'A'



# Why char uses 2 byte in java and what is \u0000 ?

It is because java uses Unicode system not ASCII code system.  
The \u0000 is the lowest range of Unicode system. To get detail explanation about Unicode visit next page.

[< Prev](#)[Next >](#)

For Videos Join Our Youtube Channel: [Join Now](#)

## Help Others, Please Share



## Learn Latest Tutorials



SoapUI



RPA



Manual T.



Cucumber



Appium



PostgreSQL



Solr



MongoDB



Gimp



Verilog

Verilog

teradata

Teradata



PhoneGap

## Preparation



Aptitude

Logical  
Reasoning  
ReasoningVerbal Ability  
Verbal A.Interview  
Questions  
InterviewCompany  
Interview  
Questions  
Company

## Trending Technologies

Artificial  
Intelligence  
Tutorial  
AIAWS Tutorial  
AWSSelenium  
tutorial  
SeleniumCloud tutorial  
CloudHadoop  
tutorial  
HadoopReactJS  
Tutorial  
ReactJSData Science  
Tutorial  
D. ScienceAngular 7  
Tutorial  
Angular 7Blockchain  
Tutorial  
Blockchain

Git Tutorial



Git

 Machine  
Learning Tutorial

ML

 DevOps  
Tutorial

DevOps

## B.Tech / MCA

 DBMS tutorial


DBMS

 Data  
Structures  
tutorial


DS

 DAA tutorial

DAA

 Operating  
System tutorial

OS

 Computer  
Network tutorial


C. Network

 Compiler  
Design tutorial

Compiler D.

 Computer  
Organization and  
Architecture

COA

 Discrete  
Mathematics  
Tutorial

D. Math.

 Ethical  
Hacking Tutorial

E. Hacking

 Computer  
Graphics Tutorial

C. Graphics

 Software  
Engineering  
Tutorial

Software E.

 html tutorial

Web Tech.

 Cyber  
Security tutorial


Cyber Sec.

 Automata  
Tutorial


Automata

 C Language  
tutorial

C

 C++ tutorial

C++


 Java tutorial

Java


 .Net  
Framework  
tutorial

.Net






Python tutorial  
Python



List of  
Programs  
Programs



Control  
Systems tutorial  
Control S.



Data Mining  
Tutorial  
Data Mining

