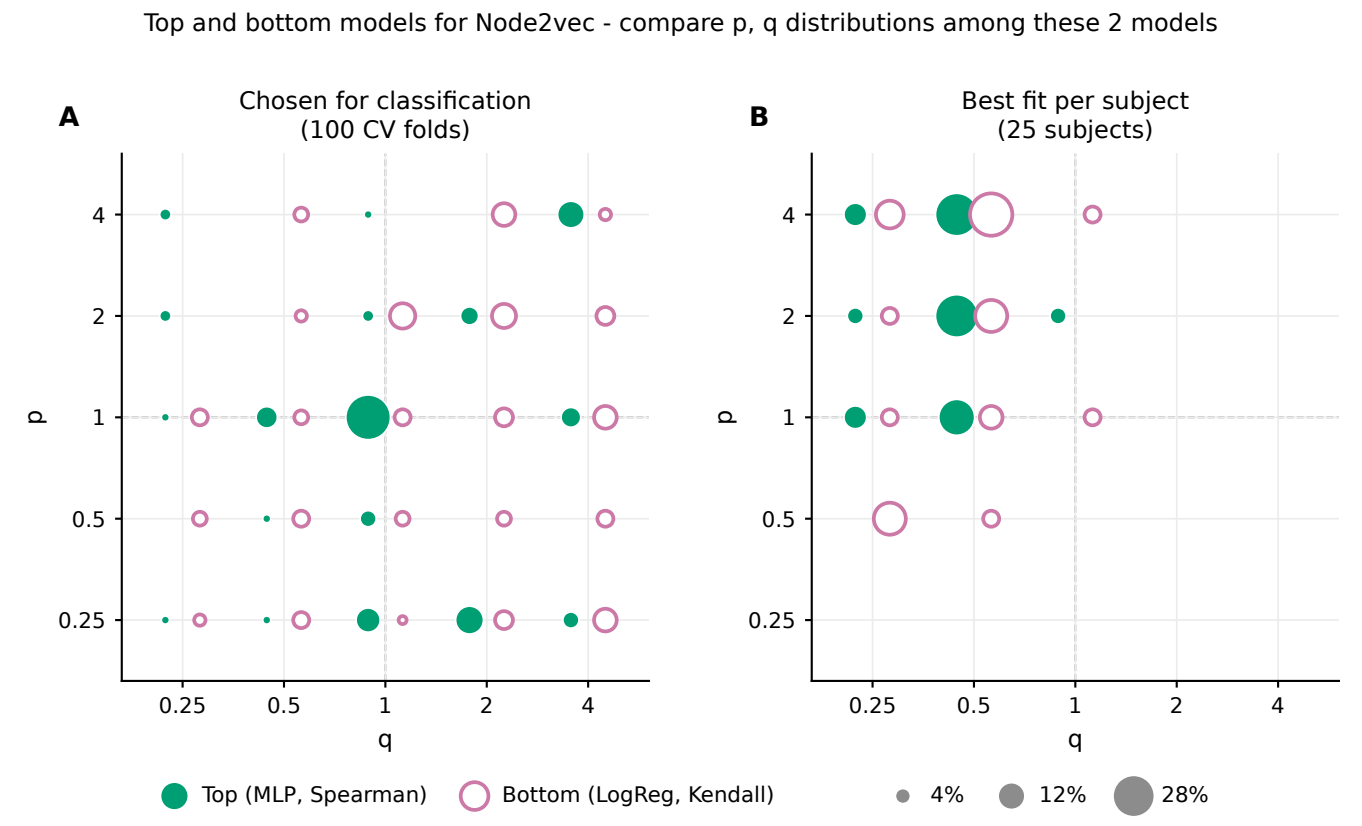
Top and bottom models for Node2vec - compare p, q distributions among these 2 models
A
Chosen for classification
(100 CV folds)
B
Best fit per subject
(25 subjects)
p
q
4
2
1
0.5
0.25
Top (MLP, Spearman)
Bottom (LogReg, Kendall)
4%
12%
28%